TECHNICAL REFERENCE LIBRARY

Master Electrical Distribution Hardware Catalogue

Panelboards · Switchboards · Circuit Breakers · Mounting & Connection Hardware

Identification · Compatibility · Supersession · OEM Documentation

Edition 0.1

Generated 2026-10-21 from database build e22940e

1877 hardware entries · 68 equipment families · 161 breaker families · 176 sources

Manufacturer lineages covered

EAT — Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant
SQD — Square D, Schneider Electric, Federal Pioneer (Canada)
GEA — General Electric Industrial Solutions; ABB from 2018; ReliaGear
SIE — Siemens, ITE, ITE Imperial, Gould, Murray
FPE — Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)
ZIN — Zinsco, GTE-Sylvania
OTH — Other / unassigned

Independent research reference. Not affiliated with or endorsed by any manufacturer named. Trademarks belong to their owners. Compatibility statements carry evidence classes A–D; only class A is manufacturer-documented. Verify before installation.

Document Control

Item	Value
Edition	0.1
Generated	2026-10-21
Database build (git)	e22940e
Hardware entries	1877
Equipment families	68
Breaker families	161
Sources registered	176
Documents preserved in library	61
Open research leads	83

Revision history (research batches merged)

Batch	Research date	Merged	New parts	Updated	New sources
B0001-eaton-prl-panelboards	2026-10-21	2026-10-21	422	0	12
B0002-eaton-switchboards-legacy	2026-10-21	2026-10-21	38	89	13
B0004-squared-switchboards	2026-10-21	2026-10-21	176	1	49
B0005-ge-abb	2026-10-21	2026-10-21	280	0	22
B0006-siemens-ite	2026-10-21	2026-10-21	244	0	15
B0007-breaker-terminal-kits-eaton-squared	2026-10-21	2026-10-21	381	8	18
B0008-breaker-terminal-kits-ge-siemens	2026-10-21	2026-10-21	184	0	8
B0009-legacy-other-manufacturers	2026-10-21	2026-10-21	152	1	39

This catalogue is generated automatically from the structured parts database (*data/ → build/edh_catalogue.sqlite*). Corrections must be made in the database, never in this PDF. Catalogue identifiers (EDH-…, FAM-…, BRK-…, SRC-…) are permanent and are never reused.

Table of Contents

Document Control 2

1 How to Use This Catalogue 7

2 Hardware Identification Guide 8

2.1 Anatomy of a panelboard interior . . . 8

2.2 Breaker mounting styles . . . 8

2.3 Branch connector straps — what to measure . . . 9

2.4 Terminal lug types . . . 9

3 Eaton lineage 16

3.1 BR — Type BR loadcenter . . . 18

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box) . . . 21

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard . . . 54

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b) . . . 81

3.5 FDP — Westinghouse FDP fusible distribution panelboard . . . 88

3.6 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards . . . 94

3.7 NLAB — Westinghouse NLAB lighting panelboard . . . 95

3.8 PRC — Pow-R-Command lighting control panelboard . . . 95

3.9 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX) . . . 95

3.10 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage) . . . 96

3.11 PRL1A — Pow-R-Line 1a . . . 103

3.12 PRL1X — Pow-R-Line Xpert 1X . . . 178

3.13 PRL2A — Pow-R-Line 2a . . . 191

3.14 PRL2X — Pow-R-Line Xpert 2X . . . 192

3.15 PRL3 — Westinghouse Pow-R-Line 3 (vintage) . . . 193

3.16 PRL3A — Pow-R-Line 3a . . . 195

3.17 PRL3E — Pow-R-Line 3E . . . 216

3.18 PRL3X — Pow-R-Line Xpert 3X . . . 217

3.19 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout) . . . 227

3.20 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F) . . . 258

3.21 PRL5P — Pow-R-Line 5P plug-on distribution panelboard . . . 258

3.22 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards . . . 266

3.23 ES — Cutler-Hammer Type ES switchboard . . . 266

3.24 IFS — Integrated Facility System switchboard . . . 267

3.25 PRLC — Pow-R-Line C switchboard . . . 267

3.26 PRLCS — Pow-R-Line CS switchboard . . . 268

3.27 PRLi — Pow-R-Line i switchboard . . . 268

3.28 WF/WRP — Westinghouse WF/WRP switchboard . . . 268

3.29 Breaker-mounted terminal kits and accessories . . . 268

Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) . . . 269

Breaker family Series C G-Frame (GD/GHC/GHB) . . . 284
Breaker family Series C J-Frame (JD/HJD/JDC/JDB) . . . 285
Breaker family Series C K-Frame (KD/HKD/KDC/KDB) . . . 292
Breaker family Series C L-Frame (LD/HLD/LDC/LDB) . . . 310
Breaker family Series C M-Frame (MDL/HMDL/MDLB) . . . 320
Breaker family Series C N-Frame (ND/HND/NDC/NB) . . . 327
Breaker family Series C R-Frame (RD/RDC) . . . 332
Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) . . . 334
Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC) . . . 340
Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC) . . . 344
Breaker family Series G NG-Frame . . . 352

4 Square D / Schneider Electric 353

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section . . . 353
4.2 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1) . . . 363
4.3 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors) . . . 408
4.4 QED-2 — Power-Style QED-2 Switchboard . . . 414
4.5 SPEED-D — Speed-D Merchandised Service Section Switchboard . . . 423
4.6 Breaker-mounted terminal kits and accessories . . . 423
Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A) . . . 424
Breaker family Square D KA/KH/KC/KI (K-frame 250 A) . . . 429
Breaker family Square D LA/LH (L-frame 400 A) . . . 431
Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A) . . . 435
Breaker family Square D MA/MH/MX/ME (M-frame 1000 A) . . . 440
Breaker family Square D NA/NC/NX/NE (N-frame 1200 A) . . . 440
Breaker family Square D PowerPact D-Frame (DG/DJ/DL) . . . 441
Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) . . . 443
Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) . . . 449
Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) . . . 455
Breaker family Square D PowerPact M-Frame (MG/MJ) . . . 468
Breaker family Square D PowerPact P-Frame (PG/PJ/PL) . . . 470
Breaker family Square D PowerPact R-Frame (RG/RJ/RL) . . . 471
4.7 General / family not yet assigned . . . 472

5 GE / ABB lineage 473

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU) 473
5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC) . . . 490
5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N') . . . 490
5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts) . . . 503
5.5 NHB — NAB / NHB bolt-on panelboards (legacy) . . . 508
5.6 RG-NEXT — ReliaGear neXT Power Panelboards . . . 509
5.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards . . . 509
5.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB) . . . 514
5.9 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches . . . 574

5.10 AV-LINE — AV-Line switchboards (legacy) . . . 574
5.11 Breaker-mounted terminal kits and accessories . . . 574
Breaker family E150 line (TEB, TED, THED, TEC) . . . 574
Breaker family F225 line (TFJ, TFK, THFK, TFC) . . . 578
Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) . . . 581
Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) . . . 584
Breaker family Record Plus FB 100 . . . 597
Breaker family Record Plus FE 250 . . . 599
Breaker family Record Plus FG 600 . . . 602
Breaker family Spectra RMS SE150 . . . 603
Breaker family Spectra RMS SF250 . . . 606
Breaker family Spectra RMS SG600 . . . 609
Breaker family Spectra RMS SK1200 . . . 613
Breaker family TQD / THQD (Q-Line 225A) . . . 617

6 Siemens lineage 618

6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens) . . . 618
6.2 P1 — Type P1 (original) . . . 619
6.3 P2 — Type P2 panelboard . . . 628
6.4 P3 — Type P3 panelboard . . . 640
6.5 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard . . . 645
6.6 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard . . . 660
6.7 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions) . . . 678
6.8 RP1 — Type P1 (Revised P1) . . . 678
6.9 S1/S2 — Type S1 / S2 lighting panelboards . . . 712
6.10 SE — Type SE panelboard . . . 714
6.11 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage) . . . 714
6.12 SB — Type SB1 / SB2 / SB3 distribution switchboards . . . 727
6.13 Breaker-mounted terminal kits and accessories . . . 732
Breaker family BQ / BQH / HBQ / BQXD bolt-on . . . 733
Breaker family NGG / HGG / LGG (G-frame bolt-on/lug) . . . 734
Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) . . . 736
Breaker family QR2 / QRH2 / HQR2 (250A frame) . . . 736
Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) . . . 737
Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) . . . 741
Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) . . . 743
Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) . . . 747
Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) . . . 748
Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) . . . 750
Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) . . . 756
Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) . . . 757
Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6) . . . 758

7 Federal Pacific Electric 759

7.1 BDP — FPE BDP distribution panelboard (double-hole bus) . . . 759
7.2 CDP — FPE CDP distribution panelboard (single-hole bus) . . . 762
7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard . . . 766
7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards . . . 773
7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards . . . 775
7.6 NDP — FPE NDP panelboard . . . 775
7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic) . . . 776

8 Zinsco / Sylvania 779

8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus) . 779
8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip) . . . 784

9 Other manufacturers 787

9.1 COMMANDER — Commander / CEB panels (Zinsco-type) . . . 787
9.2 FA — Frank Adam Electric panelboards . . . 787
9.3 KINNEY — Kinney panelboards . . . 788
9.4 WADSWORTH — Wadsworth panelboards and breakers . . . 788

10 Breaker Family Register 789

11 Cross-Reference Tables 815

11.1 Supersession and alternate numbers . . . 815
11.2 Replacement and successor statements . . . 823
11.3 Companion parts required for installation . . . 824

12 Indexes 827

12.1 Manufacturer index . . . 827
12.2 Equipment family index (including aliases) . . . 827
12.3 Part-number index (primary and alternate numbers) . . . 838
12.4 Breaker compatibility index . . . 896
12.5 Component-type index . . . 953
12.6 Rating and pole index . . . 959
12.7 Physical dimension and hole-pattern index . . . 979

Appendix A Documentation Library 993

Appendix B Bibliography and Source Register 998

Appendix C Research Status and Open Questions 1006

1 How to Use This Catalogue

The catalogue is organised by **manufacturer lineage**, then **equipment family** (panelboard, switchboard or loadcenter series), then **component type**. Every hardware item has a permanent catalogue identifier of the form **EDH-<MFR>-nnnnn**.

To identify an unknown part: (1) establish the manufacturer and equipment family from the enclosure nameplate, interior label or breaker type; (2) use Section 2 to decide the component type from its function and mounting style; (3) look up any stamped number in the Part-Number Index (partial numbers are listed in normalised alphanumeric order); (4) if no number is legible, use the Breaker Compatibility Index and the identification-feature table to narrow candidates, then compare dimensions and hole patterns against the part entry.

Claims, not records, carry confidence. Each line in a part entry shows the evidence class of that specific statement and the sources supporting it (S-numbers link to the Source Register in Appendix B). A part may have an OEM-verified part number (A) and only a tentative breaker compatibility (C).

Class	Meaning	Typical evidence
A	**OEM Verified**	Explicitly documented in a manufacturer catalogue, instruction leaflet, drawing or bulletin (page cited).
B	**Strongly Corroborated**	Multiple independent credible sources agree (e.g. two distributors plus a photo of the label).
C	**Tentative**	Single non-OEM source, or plausible but incomplete evidence. Distributor compatibility claims are never above C on their own.
D	**Unverified**	Lead, hearsay or inference requiring investigation.

Evidence basis codes

Code	Meaning
oem_spec	Manufacturer specification text or table
oem_drawing	Manufacturer drawing
distributor	Distributor catalogue / listing
surplus_listing	Surplus / used-equipment listing
photo	Photograph of an actual part or label
field_measurement	Measured from a physical sample (record instrument and date)
inference	Engineering inference — never sufficient for compatibility


Safety and interchangeability notice

Matching dimensions do not establish electrical interchangeability. Panelboard and switchboard assemblies are listed as systems; substituting non-OEM or cross-manufacturer components may void the listing and short-circuit rating. Nothing in this catalogue states that a reproduced or aftermarket part is approved, listed or electrically equivalent unless an explicit, cited source says so. Distinguish OEM specifications from field measurements and manufacturing assumptions at all times.

2 Hardware Identification Guide

The drawings in this section are generic schematics prepared for this catalogue to illustrate terminology and measurement practice. They are not reproductions of manufacturer drawings and do not depict any specific OEM part.


2.1 Anatomy of a panelboard interior

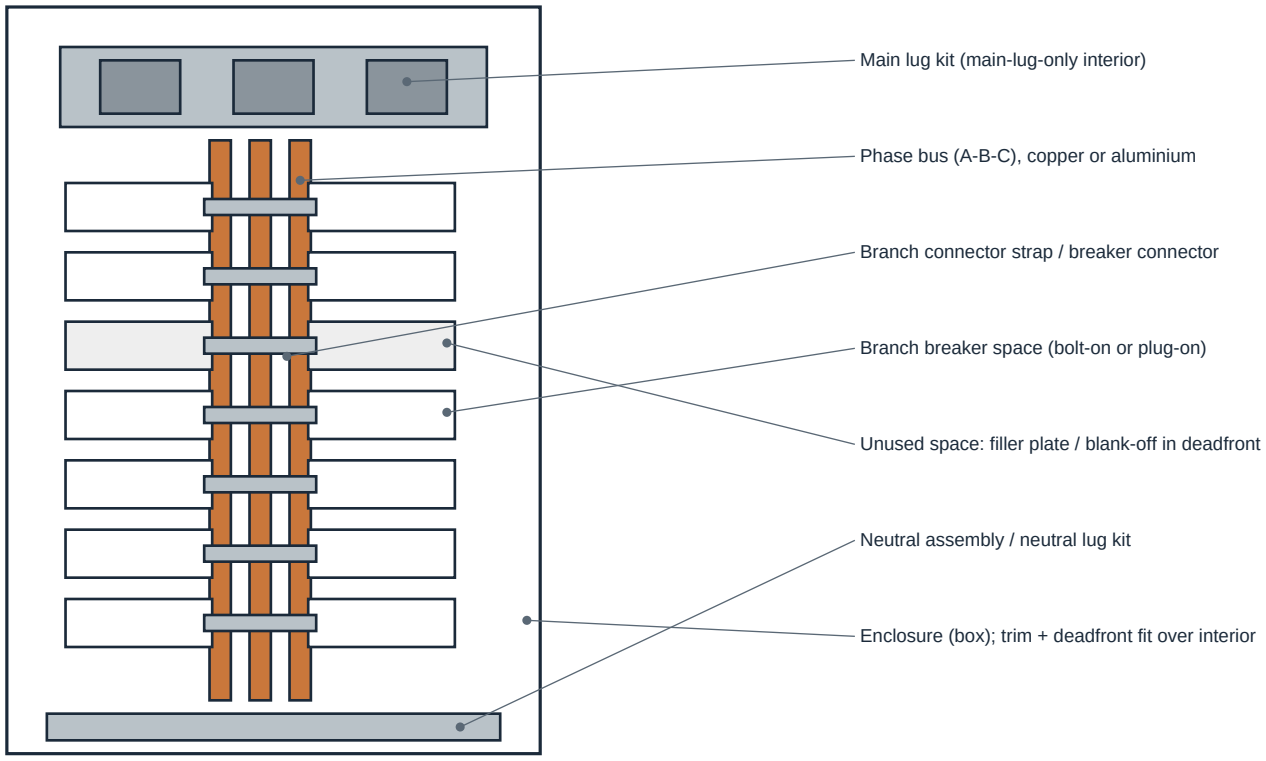

Generic schematic for orientation only — not an OEM drawing, not to scale

Figure 2-1. Generic panelboard interior showing where each component type installs.

2.2 Breaker mounting styles

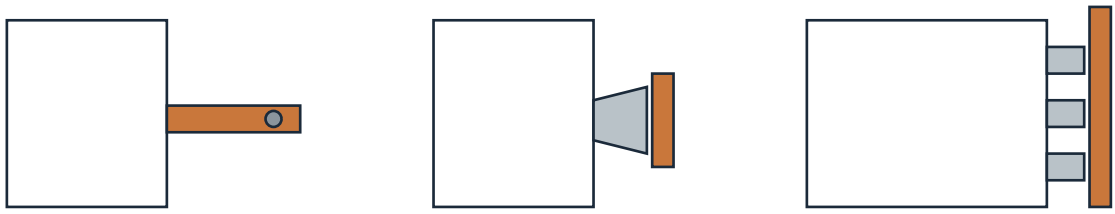

Bolt-on: line terminal screws to bus / connector strap

Plug-on: jaw/clip engages bus stab

Plug-on panel/switchboard unit: jaws onto vertical bus stack

Generic schematics — mounting style is a first-level identification key

Figure 2-2. Bolt-on, plug-on and panel/switchboard plug-on unit mounting.

2.3 Branch connector straps — what to measure

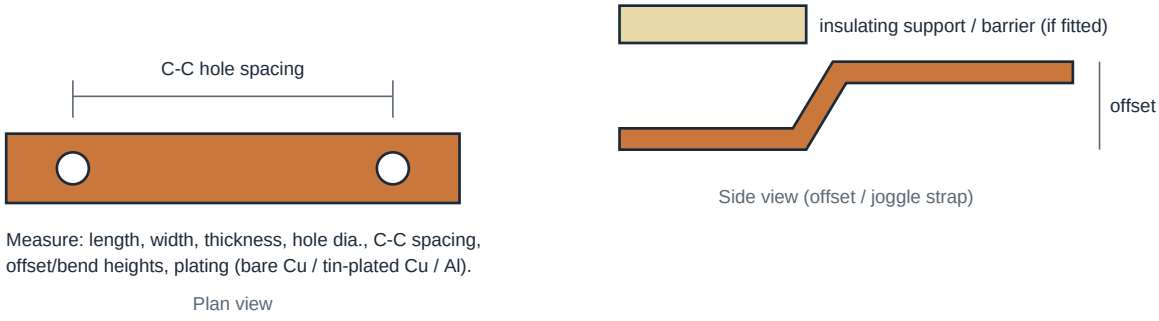


Figure 2-3. Measurement practice for connector straps and bus links.

2.4 Terminal lug types

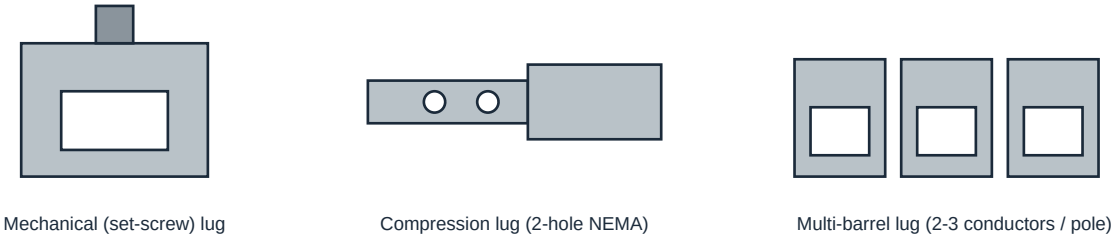


Figure 2-4. Common lug constructions found in main, sub-feed and feed-through lug kits.

2.5 Component-type key

Component type	Function / recognition	Entries
main-breaker-kit	Converts a main-lug interior to main-breaker; includes breaker mounting, connectors to bus.	111
main-lug-kit	Incoming-cable lugs bolted to bus top/bottom; ampere rating set by lug and bus.	136
sub-feed-lug-kit	Second set of lugs to feed a downstream panel from the same bus.	34
through-feed-lug-kit	Lugs at opposite bus end for feeding through to another panel.	2
lug-kit	Lug sets for breakers or assemblies.	267
lug		96
branch-connector-kit	Straps/connectors joining branch breakers to phase bus; series-specific.	279
breaker-mounting-kit	Hardware to mount a breaker frame in a panel/switchboard space.	92
connector-strap	Individual copper/aluminium link between bus and device terminal.	60
bus-assembly		1
neutral-assembly	Neutral bar/lug assembly, incl. 200% neutral options.	49
ground-bar	Equipment grounding bar kit.	23
interior		5
mounting-bracket		15
insulator	Insulating support or standoff for bus or connectors.	2
barrier	Insulating barrier between phases or sections.	88
deadfront	Inner cover exposing only breaker handles.	46
filler-plate	Closes unused breaker space in the deadfront.	130

Component type	Function / recognition	Entries
trim	Front cover/door assembly (surface or flush).	11
box/enclosure		5
hardware-kit		44
fastener		36
conversion-kit	Adapts later breakers or interiors into legacy equipment.	108
spd-kit	Surge-protective-device mounting/connection kit.	6
switch-unit		51
breaker-accessory		149
handle-lock		4
padlock-attachment		2
other		25

2.6 Identification by physical feature

Parts for which distinguishing physical features are recorded. Use with the dimensions and hole-pattern fields of the entry.

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00340	KCDPFB100	Kit name retains Westinghouse FB-frame designation; 100 A max (note a) **C**	61
EDH-EAT-00344	KCDPKB	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference) **C**	62
EDH-EAT-00347	KCDPLA600	Kit name retains Westinghouse LA-frame designation **C**	63
EDH-EAT-00345	KCDPLB	Kit name retains Westinghouse LB-frame designation **C**	64
EDH-EAT-00349	KCDPMC	Kit name retains Westinghouse MC-frame designation **C**	65
EDH-EAT-00350	KCDPNC	Note b: connector kits are not rated for 100 percent breakers **A**	66
EDH-EAT-00748	RABR12B3XXX	Main/feed lug wire range #4-1/0 **A**	26
EDH-EAT-00749	RABR12H3XXX	Main/feed lug wire range #4-1/0 **A**	27
EDH-EAT-00756	RABR12L3125	Main/feed lug wire range #8-2/0 **A**	27
EDH-EAT-00737	RABR20BXXX	Main/feed lug wire range #4-2/0 **A**	28
EDH-EAT-00738	RABR20HXXX	Main/feed lug wire range #4-2/0 **A**	28
EDH-EAT-00744	RABR20L125	Main/feed lug wire range #14-2/0 **A**	29
EDH-EAT-00722	RACH18B3XXX	Main/feed lug wire range #2-1/0 **A**	29
EDH-EAT-00706	RACH22BXXX	Main/feed lug wire range #2-1/0 **A**	30
EDH-EAT-00712	RACH24L125	Main/feed lug wire range #4-2/0 **A**	30
EDH-EAT-00725	RACH24L3125	Main/feed lug wire range #6-2/0 **A**	31
EDH-EAT-00726	RACH30L3125	Main/feed lug wire range #4-#1 **A**	31
EDH-EAT-00727	RACH30L3225	Main/feed lug wire range #4-4/0 **A**	32
EDH-EAT-00741	RBBR20BXXX	Main/feed lug wire range #2-300 kcmil **A**	32
EDH-EAT-00758	RBBR24L3150	Main/feed lug wire range #4-4/0 **A**	33
EDH-EAT-00739	RBBR30BCXXX	Main/feed lug wire range #4-1/0 **A**	33
EDH-EAT-00750	RBBR30BXXX	Main/feed lug wire range #4-1/0 **A**	33
EDH-EAT-00751	RBBR30H3XXX	Main/feed lug wire range #4-1/0 **A**	34
EDH-EAT-00740	RBBR30HCXXX	Main/feed lug wire range #4-1/0 **A**	35
EDH-EAT-00745	RBBR30L200	Main/feed lug wire range #1-300 kcmil **A**	35
EDH-EAT-00757	RBBR30L3100	Main/feed lug wire range #8-2/0 **A**	36
EDH-EAT-00708	RBCH24BXXX	Main/feed lug wire range #2-300 kcmil **A**	36
EDH-EAT-00718	RBCH24D225	Main/feed lug wire range #6-300 kcmil **A**	37
EDH-EAT-00733	RBCH24D3225	Main/feed lug wire range #6-300 kcmil **A**	37
EDH-EAT-00707	RBCH30BXXX	Main/feed lug wire range #2-1/0 **A**	38
EDH-EAT-00734	RBCH30D3225	Main/feed lug wire range #6-300 kcmil **A**	38
EDH-EAT-00728	RBCH30L3225	Main/feed lug wire range #4-300 kcmil **A**	39
EDH-EAT-00719	RBCH32D225	Main/feed lug wire range #6-300 kcmil **A**	39
EDH-EAT-00714	RBCH32L225	Main/feed lug wire range #1-300 kcmil **A**	40
EDH-EAT-00713	RBCH42L125	Main/feed lug wire range #4-1/0 **A**	40
EDH-EAT-00715	RBCH42L225	Main/feed lug wire range #4-4/0 **A**	41

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00729	RBCH42L3125	Main/feed lug wire range #4-#1 **A**	41
EDH-EAT-00730	RBCH42L3225	Main/feed lug wire range #4-4/0 **A**	42
EDH-EAT-00742	RCBR30BXXX	Main/feed lug wire range #2-300 kcmil **A**	42
EDH-EAT-00759	RCBR30L3200	Main/feed lug wire range #4-300 kcmil **A**	43
EDH-EAT-00746	RCBR40L200	Main/feed lug wire range #1-300 kcmil **A**	43
EDH-EAT-00735	RCCH30D3225	Main/feed lug wire range #6-300 kcmil **A**	44
EDH-EAT-00709	RCCH32BXXX	Main/feed lug wire range #2-300 kcmil **A**	44
EDH-EAT-00720	RCCH32D225	Main/feed lug wire range #6-300 kcmil **A**	45
EDH-EAT-00716	RCCH42L225	Main/feed lug wire range #1-300 kcmil **A**	45
EDH-EAT-00731	RCCH42L3225	Main/feed lug wire range #4-300 kcmil **A**	46
EDH-EAT-00752	RDBR30B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	46
EDH-EAT-00753	RDBR30H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	47
EDH-EAT-00743	RDBR40BXXX	Main/feed lug wire range #2-300 kcmil **A**	47
EDH-EAT-00747	RDBR42L225	Main/feed lug wire range #1-300 kcmil **A**	48
EDH-EAT-00760	RDBR42L3225	Main/feed lug wire range #4-300 kcmil **A**	48
EDH-EAT-00723	RDCH42B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	49
EDH-EAT-00710	RDCH42BXXX	Main/feed lug wire range #2-300 kcmil **A**	49
EDH-EAT-00721	RDCH42D225	Main/feed lug wire range #6-300 kcmil **A**	50
EDH-EAT-00736	RDCH42D3225	Main/feed lug wire range #6-300 kcmil **A**	50
EDH-EAT-00724	RDCH42H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	51
EDH-EAT-00711	RDCH42HXXX	Main/feed lug wire range #4-300 kcmil **A**	51
EDH-EAT-00717	RDCH42L225	Main/feed lug wire range #1-300 kcmil **A**	52
EDH-EAT-00732	RDCH42L3225	Main/feed lug wire range #4-300 kcmil **A**	52
EDH-EAT-00754	REBR42B3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	53
EDH-EAT-00755	REBR42H3XXX	Main/feed lug wire range 2/0-300 kcmil **A**	53
EDH-EAT-00761	REBR42L3225	Main/feed lug wire range #4-300 kcmil **A**	54
EDH-FPE-00006	KCDP-1A	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown) **C**	774
EDH-GEA-00102	AMCB4QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	529
EDH-GEA-00108	AMCB6QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	534
EDH-GEA-00009	ASPP6EY12D	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc). **A**	491
EDH-GEA-00008	ASPP6EY6D	Crossbar gap 0.06 in **A**	491
EDH-GEA-00005	ASPP6FB6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in **A**	492
EDH-GEA-00007	ASPP6QB12D	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in. **A**	492
EDH-GEA-00006	ASPP6QB6D	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in **A**	493
EDH-GEA-00001	ASPP6QD6D	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in **A**	493
EDH-GEA-00002	ASPP6SE6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in **A**	494
EDH-GEA-00003	ASPP6SF3S	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting. **A**	494
EDH-GEA-00004	ASPP6SG3S	Crossbar gap 0.002 in **A**	495
EDH-GEA-00182	AMC2GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	539
EDH-GEA-00163	AMC3GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	543
EDH-GEA-00244	AMCB6TEDL	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler **A**	566
EDH-GEA-00303	TC041	Not UL listed (per table footnote) **B**	590
EDH-SIE-00231	SEBKP1P2P3V1	Drawing ref 11-A-1157-01 / 11-D-2740-01 **A**	702
EDH-SIE-00232	SEBKP2V1	Drawing ref 11-D-2733-01 **A**	633
EDH-SIE-00233	SEBKP2V2	Drawing ref 11-D-2734-01 **A**	634
EDH-SIE-00234	SEBKP2V3	Drawing ref 11-D-2735-01 **A**	634
EDH-SIE-00235	SEBKP2V4	Drawing ref 11-D-2736-01 **A**	634
EDH-SIE-00236	SEBKP2V5	Drawing ref 11-D-2738-01 **A**	635
EDH-SIE-00237	SEBKP2V6	Drawing ref 11-D-2739-01 **A**	635

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00238	SEBKP2V7	Drawing ref 11-D-2898-01 **A**	635
EDH-SIE-00239	SEBKP3V1	Drawing ref (p.11-67) **A**	642
EDH-SIE-00224	SEBKRP1V1	Drawing ref 11-A-1148-01 **A**	702
EDH-SIE-00225	SEBKRP1V2	Drawing ref 11-A-1148-01 **A**	703
EDH-SIE-00226	SEBKRP1V3	Drawing ref 11-A-1149-01 **A**	703
EDH-SIE-00227	SEBKRP1V4	Drawing ref 11-A-1149-01 **A**	703
EDH-SIE-00228	SEBKRP1V5	Drawing ref 11-A-1165-01 **A**	704
EDH-SIE-00229	SEBKRP1V6	Drawing ref 11-A-1194-01 **A**	704
EDH-SIE-00230	SEBKRP1V7	Drawing ref 11-B-1060-01 **A**	704
EDH-SIE-00155	6CLE2	2005 list price $845.00 **A**	661
EDH-SIE-00191	6CLF1	2005 list price $1553.00 **A**	717
EDH-SIE-00194	6CLJ1	2005 list price $2122.00 **A**	718
EDH-SIE-00198	6CLL1	2005 list price $2525.00 **A**	719
EDH-SIE-00188	6E62	2005 list price $845.00 **A**	720
EDH-SIE-00190	6F62	2005 list price $1529.00 **A**	720
EDH-SIE-00192	6JJ61	2005 list price $2122.00 **A**	721
EDH-SIE-00193	6JJ62	2005 list price $2349.00 **A**	721
EDH-SIE-00197	6LL61	2005 list price $2525.00 **A**	722
EDH-SIE-00189	6QJ2	2005 list price $1529.00 **A**	724
EDH-SIE-00196	6SCJ1	2005 list price $2122.00 **A**	724
EDH-SIE-00200	6SCL1	2005 list price $2525.00 **A**	725
EDH-SIE-00195	6SJL1	2005 list price $2122.00 **A**	726
EDH-SIE-00199	6SLL1	2005 list price $2525.00 **A**	726
EDH-SIE-00102	BBKB32	Drawing ref 11-D-2267-01 **A**	629
EDH-SIE-00108	BBKQR1	Drawing ref 11-D-2636-01 **A**	631
EDH-SIE-00103	BBKVA4P2P3	Drawing ref 13-D-2011-13 **A**	631
EDH-SIE-00112	BBKVA5262P2S	Drawing ref 11-D-2894-01 **A**	632
EDH-SIE-00175	MG1D	2005 list price $2938.00 **A**	663
EDH-SIE-00179	NG1D	2005 list price $3489.00 **A**	663
EDH-SIE-00150	SBLBD	2005 list price $768.00 **A**	667
EDH-SIE-00176	SLM1D	2005 list price $2938.00 **A**	674
EDH-SIE-00177	SMND	2005 list price $3489.00 **A**	675
EDH-SIE-00178	SSMND	2005 list price $3489.00 **A**	676
EDH-SIE-00088	P1CONACPHCU	Drawing ref 11-D-2572-02 **A**	693
EDH-SIE-00089	P1CONBPHAL	Drawing ref 11-D-2573-01 **A**	694
EDH-SIE-00090	P1CONBPHCU	Drawing ref 11-D-2573-02 **A**	694
EDH-SIE-00080	BBKQRP1FK	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01) **A**	639
EDH-SIE-00081	BBKQRP2FK	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34 **A**	644
EDH-SIE-00086	DFK07	Eng./drawing ref 11-D-3018-67 **A**	636
EDH-SIE-00087	DFK08	Eng./drawing ref 11-D-3018-68 **A**	636
EDH-SIE-00085	DFK1	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07) **A**	636
EDH-SIE-00091	P1SCRWS	Drawing ref 11-A-2010-01 **A**	711
EDH-SIE-00211	6FPB01	Series 6 blank plate; 2005 list price $154.00 **A**	657
EDH-SIE-00212	6FPB02	Series 6 blank plate; 2005 list price $175.00 **A**	658
EDH-SIE-00213	6FPB03	Series 6 blank plate; 2005 list price $175.00 **A**	658
EDH-SIE-00214	6FPB05	Series 6 blank plate; 2005 list price $175.00 **A**	658
EDH-SIE-00215	6FPB10	Series 6 blank plate; 2005 list price $239.00 **A**	659
EDH-SIE-00064	DFFP01B	Eng./drawing ref 11-D-4612-01 **A**	705
EDH-SIE-00065	DFFP01C	Eng./drawing ref 11-D-4600-01 **A**	705
EDH-SIE-00062	DFFP1A	Eng. ref 11-D-4613-01; snap-in with small spring side tabs **A**	706
EDH-SIE-00076	DFFP3	Eng./drawing ref 11-D-2269-01 **A**	637
EDH-SIE-00077	DFFP6	Eng./drawing ref 11-D-2270-01 **A**	637

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00069	DFFPED01	Eng./drawing ref 12-A-1802-61 A	627
EDH-SIE-00070	DFFPFD01	Eng./drawing ref 12-A-1803-61 A	706
EDH-SIE-00071	DFFPJD01	Eng./drawing ref 11-D-4522-61 A	707
EDH-SIE-00072	DFFPJD02	Eng./drawing ref 11-D-4598-01 A	707
EDH-SIE-00073	DFFPQJ01	Eng./drawing ref 12-A-1804-61 A	707
EDH-SIE-00074	DFFPQJ02	Eng./drawing ref 12-A-1804-62 A	708
EDH-SIE-00066	DFFPVA41A	Eng./drawing ref 11-D-4604-01 A	708
EDH-SIE-00067	DFFPVA5262A	Eng./drawing ref 11-D-4617-01 A	708
EDH-SIE-00078	DFFPVA5262P2A	Eng./drawing ref 11-D-4610-01 A	637
EDH-SIE-00079	DFFPVA5262P2B	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01 A	637
EDH-SIE-00068	DFFPVA5363A	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20) A	709
EDH-SIE-00084	DFP3AP01	Eng./drawing ref 11-D-3033-61 (11-D-3033-01) A	638
EDH-SIE-00083	EBF1	Eng./drawing ref 11-D-4529-01 A	643
EDH-SIE-00075	MBKQRFK	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23) A	709
EDH-SIE-00082	P2QRFP01	Eng./drawing ref 11-D-4564-01 A	638
EDH-SIE-00113	BBKVA5262P2HW	Drawing ref 11-D-2895-61 A	638
EDH-SIE-00096	BK1A	Drawing ref 11-A-2024-01 A	710
EDH-SIE-00095	IMK1	Drawing ref 11-A-2024-01 A	710
EDH-SIE-00120	P2BK1	Drawing ref 11-D-2068-01 A	639
EDH-SIE-00121	P2BK2	Drawing ref 11-D-2068-02 A	639
EDH-SIE-00122	P2BK3	Drawing ref 11-D-2068-03 A	639
EDH-SIE-00123	P3BK1	Drawing ref (p.11-67) A	644
EDH-SIE-00117	BNK350N	Drawing ref 11-A-1869-61 A	628
EDH-SIE-00029	4MLKA1	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	624
EDH-SIE-00019	4MLKA1A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	688
EDH-SIE-00023	4MLKA1B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] A	688
EDH-SIE-00030	4MLKA3	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	625
EDH-SIE-00020	4MLKA3A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil A	689
EDH-SIE-00024	4MLKA3B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] A	689
EDH-SIE-00031	4MLKC1	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil A	625
EDH-SIE-00021	4MLKC1A	Wire range (1) 1/0-600 kcmil, CU cable only A	690
EDH-SIE-00032	4MLKC3	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil A	625
EDH-SIE-00022	4MLKC3A	Wire range (1) 1/0-600 kcmil, CU cable only A	690
EDH-SIE-00025	MLKA1	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	626
EDH-SIE-00015	MLKA1A	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	691
EDH-SIE-00026	MLKA3	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	626
EDH-SIE-00016	MLKA3A	Wire range (1) #6 AWG-350 kcmil (CU or AL) A	691
EDH-SIE-00027	MLKC1	Wire range (1) #6 AWG-350 kcmil (CU) A	626
EDH-SIE-00017	MLKC1A	Wire range (1) #6 AWG-350 kcmil (CU) A	692
EDH-SIE-00028	MLKC3	Wire range (1) #6 AWG-350 kcmil (CU) A	627
EDH-SIE-00018	MLKC3A	Wire range (1) #6 AWG-350 kcmil (CU) A	692
EDH-SIE-00092	P1DFS250AFT	Drawing ref 11-D-3323 A	701
EDH-SIE-00093	P1DFS250ANFT	Drawing ref 11-D-3323 A	701
EDH-SIE-00094	P1DFS400A	Drawing ref 11-D-3315 A	702
EDH-SIE-00116	BNK2	Drawing ref 11-A-1862 A	632
EDH-SIE-00119	BNKP2EX1	Drawing ref 11-1850-01 / 11-C-2011-01 A	633
EDH-SIE-00118	LPP2NB01	Drawing ref 15-A-1800-61 A	633
EDH-SQD-00143	HLW4BL	Surface-mount plate approx. 6.35 in. W x 4.5 in. H C	360
EDH-SQD-00176	CF16RJ63C36	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	419
EDH-SQD-00172	CF20R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> D	420

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00174	CF20RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	420
EDH-SQD-00173	CF25R63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	420
EDH-SQD-00175	CF30RJ63C	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix> **D**	420
EDH-SQD-00083	AL175JD	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569 **A**	415
EDH-SQD-00221	AL400L61K3	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug **A**	456
EDH-SQD-00002	QMB221HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	378
EDH-SQD-00001	QMB221TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	378
EDH-SQD-00004	QMB222HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	379
EDH-SQD-00003	QMB222TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	379
EDH-SQD-00006	QMB223HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	380
EDH-SQD-00005	QMB223TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	380
EDH-SQD-00007	QMB224W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	381
EDH-SQD-00008	QMB225W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	381
EDH-SQD-00009	QMB225WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	382
EDH-SQD-00023	QMB261HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	382
EDH-SQD-00022	QMB261TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	383
EDH-SQD-00025	QMB262HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	383
EDH-SQD-00024	QMB262TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	384
EDH-SQD-00027	QMB263HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	384
EDH-SQD-00026	QMB263TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	385
EDH-SQD-00028	QMB264W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	385
EDH-SQD-00011	QMB321HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	386
EDH-SQD-00010	QMB321TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	386
EDH-SQD-00013	QMB322HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	387
EDH-SQD-00012	QMB322TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	387
EDH-SQD-00015	QMB323HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	388
EDH-SQD-00014	QMB323TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	388
EDH-SQD-00016	QMB324W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	389
EDH-SQD-00017	QMB325W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	389
EDH-SQD-00018	QMB325WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	390

Catalogue ID	OEM PN	Features	Pg
EDH-SQD-00019	QMB326W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	390
EDH-SQD-00020	QMB326WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	391
EDH-SQD-00021	QMB327WT3	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	391
EDH-SQD-00030	QMB361HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	392
EDH-SQD-00029	QMB361TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	392
EDH-SQD-00032	QMB362HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	393
EDH-SQD-00033	QMB362T21W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	393
EDH-SQD-00031	QMB362TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	394
EDH-SQD-00035	QMB363HW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	394
EDH-SQD-00036	QMB363T31W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	395
EDH-SQD-00037	QMB363T32W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	395
EDH-SQD-00034	QMB363TW	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	396
EDH-SQD-00038	QMB364W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	396
EDH-SQD-00039	QMB365W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	397
EDH-SQD-00040	QMB365WT6	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	397
EDH-SQD-00041	QMB366W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	398
EDH-SQD-00042	QMB367W	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A) **A**	398

3 Eaton lineage

Lineage / brand markings: Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

Family	Type	Status	Era	Entries	Pg
BR Type BR loadcenter	loadcenter	current (Eaton Type BR)	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	13	18
CH-BR-RETRO Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	other	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	60	21
CDP Westinghouse CDP / HCDP distribution panelboard	panelboard	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	42	54
CHA-PM4 Challenger distribution panelboards (PM4a / PM4b)	panelboard	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	—	23	81
FDP Westinghouse FDP fusible distribution panelboard	panelboard	Obsolete; switch retrofit/connector kits available	Vintage Westinghouse	29	88
NAB Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	panelboard	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	—	0	94
NLAB Westinghouse NLAB lighting panelboard	panelboard	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	Westinghouse panelboards manufactured between 1937 and 1988	1	95
PRC Pow-R-Command lighting control panelboard	panelboard	Current (Pow-R-Command E series in 2020 catalog)	Introduced March 1996	22	95
PRL-LX Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	panelboard	Legacy (a) / current (X)	PRL1a/2a-LX introduced December 1997	0	95
PRL1/PRL2 Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	panelboard	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	27	96
PRL1A Pow-R-Line 1a	panelboard	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	183	103

Family	Type	Status	Era	Entries	Pg
PRL1X Pow-R-Line Xpert 1X	panelboard	Current	Introduced 2020 (time line: May 2020)	165	178
PRL2A Pow-R-Line 2a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL2X	Introduced October 1996	179	191
PRL2X Pow-R-Line Xpert 2X	panelboard	Current	Introduced 2020	164	192
PRL3 Westinghouse Pow-R-Line 3 (vintage)	panelboard	Obsolete; limited renewal parts	Pre-1994 Westinghouse	15	193
PRL3A Pow-R-Line 3a	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	Introduced March 1994	74	195
PRL3E Pow-R-Line 3E	panelboard	Current in June 2020 catalog	Shown in January 2018 and June 2020 catalogs	0	216
PRL3X Pow-R-Line Xpert 3X	panelboard	Current	Introduced 2020	48	217
PRL4 Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	panelboard	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	PRL4B/F introduced October 1987	54	227
PRL4X Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	panelboard	Current	Introduced 2020	41	258
PRL5P Pow-R-Line 5P plug-on distribution panelboard	panelboard	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	Introduced August 1995	29	258
WEB Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	panelboard	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	—	3	266
ES Cutler-Hammer Type ES switchboard	switchboard	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	0	266
IFS Integrated Facility System switchboard	switchboard	current (2018 consulting guide)	—	0	267
PRLC Pow-R-Line C switchboard	switchboard	current (listed in April 2018 consulting guide)	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	0	267
PRLCS Pow-R-Line CS switchboard	switchboard	current (Canadian market; manual IB015002EN effective Nov 2021)	—	0	268
PRLi Pow-R-Line i switchboard	switchboard	current (2018 consulting guide)	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	0	268
WF/WRP Westinghouse WF/WRP switchboard	switchboard	discontinued (superseded by Pow-R-Line C)	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	7	268

3.1 BR — Type BR loadcenter

FAM-EAT-026 · loadcenter · aka BR, Type BR, Bryant BR, Challenger BR · markings: Westinghouse, Bryant, Challenger, Cutler-Hammer, Eaton

1-in-per-pole plug-on residential/light-commercial loadcenter family with Westinghouse/Bryant/Challenger lineage. Vol 12 Tab 5 lists replacement main/subfeed lug blocks, filler plates, interlocks and handle accessories.

Attribute	Value	Cl.	Sources
Status	current (Eaton Type BR)	A	S20 p. V12-T5-2; oem_spec
Era of manufacture	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	A	same as above

Breaker families associated: BR
Key documents: S20 CA08100014E Tab 5 Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00453	**BRL200**	Type BR loadcenter main lugs (BRL200)	—	listed October 2016

EDH-EAT-00453 **BRL200** Eaton main-lug-kit **LISTED OCTOBER 2016**

Type BR loadcenter main lugs (BRL200)

OEM part number	BRL200	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main lugs, two-pole 200 A stud mounted (includes deadfront filler plate), #1-300 kcmil	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00452	**3BRS225**	Type BR loadcenter main and subfeed lug block (3BRS225)	—	listed October 2016
EDH-EAT-00451	**3BRSF150**	Type BR loadcenter main and subfeed lug block (3BRSF150)	—	listed October 2016
EDH-EAT-00450	**BRS225**	Type BR loadcenter main and subfeed lug block (BRS225)	—	listed October 2016
EDH-EAT-00448	**BRSF125**	Type BR loadcenter main and subfeed lug block (BRSF125)	—	listed October 2016
EDH-EAT-00449	**BRSF150**	Type BR loadcenter main and subfeed lug block (BRSF150)	—	listed October 2016

EDH-EAT-00452 **3BRS225** Eaton sub-feed-lug-kit **LISTED OCTOBER 2016**

Type BR loadcenter main and subfeed lug block (3BRS225)

OEM part number	3BRS225	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 225 A, 6 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00451	3BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRSF150)

OEM part number	3BRSF150	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 150 A, 3 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00450	BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRS225)

OEM part number	BRS225	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 225 A, 4 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00448	BRSF125	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF125)

OEM part number	BRSF125	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 125 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00449	BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF150)

OEM part number	BRSF150	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 150 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00457	**NL300**	Type BR loadcenter add-on neutral/ground lug (NL300)	—	listed October 2016

EDH-EAT-00457	NL300	Eaton	lug	LISTED OCTOBER 2016

Type BR loadcenter add-on neutral/ground lug (NL300)

OEM part number	NL300	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Add-on neutral/ground lug, 300 kcmil maximum	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00456	**BINA**	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	—	listed October 2016

EDH-EAT-00456	BINA	Eaton	neutral-assembly	LISTED OCTOBER 2016

Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)

OEM part number	BINA	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Isolated neutral assembly (computer circuits)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00454	**BRFP**	Type BR loadcenter filler plate (BRFP)	—	listed October 2016
EDH-EAT-00455	**BWFP**	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)	—	listed October 2016

EDH-EAT-00454	BRFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate (BRFP)

OEM part number	BRFP	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate, 1.00 in circuit breaker space; ordering quantity 25	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00455	BWFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)

OEM part number	BWFP	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate for BW main circuit breaker space (with hardware)	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00458	**BHT**	Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)	—	listed October 2016

EDH-EAT-00458	BHT	Eaton	handle-lock	LISTED OCTOBER 2016

Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)

OEM part number	BHT	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Handle tie bar joining two adjacent single-pole Type BR breakers (metal cylinder pin type); qty 10	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00459	**BRLW**	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	—	listed October 2016
EDH-EAT-00460	**BRLW1**	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)	—	listed October 2016

EDH-EAT-00459 **BRLW** Eaton padlock-attachment **LISTED OCTOBER 2016**

Type BR loadcenter padlockable handle lockoff for 1- (BRLW)

OEM part number	BRLW	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for 1-, 2- or 3-pole Type BR (escutcheon mounted); qty 10	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00460 **BRLW1** Eaton padlock-attachment **LISTED OCTOBER 2016**

Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)

OEM part number	BRLW1	A	S20 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for single-pole Type BR (handle mounted, set screw); qty 10	A	same as above
Status	listed October 2016	A	S20 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

3.2 CH-BR-RETRO — Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)

FAM-EAT-027 · other · aka Retro Size A-E, RA/RB/RC/RD/RE/RAA retrofit kits, Lincoln Flex Center retrofit · markings: Cutler-Hammer, Eaton

Eaton/Cutler-Hammer standardized retrofit kits for re-using an existing (any-manufacturer, e.g. FPE or Zinsco) flush panel box: a cover assembly (field-drilled picture frame + trim) and a field-adjustable interior assembly with riser accommodating 4-6 in box depth (3.5-5.25 in for size AA). Kits are selected by existing box height into Retro Size groups A (21-30 in, cover 33x24), B (29-36, 40x24), C (34-41, 43x24), D (37-45, 47x24), E (45-54, 56x24), plus AA for boxes 14.5-20.5 in high (covers 19x13 or 21x16). Interiors are 'UL recognized under UL67'; whether the installed assembly in a foreign box is listed is debated (forum), so AHJ/field evaluation may be required. Hosted by InspectAPedia as an FPE Stab-Lok replacement option.

Attribute	Value	Cl.	Sources
Status	Unknown whether still offered as standard kits; Eaton continues custom retrofit interiors via Flex Centers	D	S162, S148 inference
Era of manufacture	Introduced as 'new' offering in undated Eaton Electrical guide (Eaton Electrical brand used c.2003-2008)	D	S162 inference
Voltage rating	240 V max class (loadcenter-based plug-on CH 3/4 in and BR 1 in breakers); 120/240 1-ph and 240 V 3-ph	A	S162 pp. 1, 3-4; oem_spec
Main ampacity	MLO 100-225 A; main breaker 60-225 A (XXX = amp rating); AIC options 10K/22K/25K/35K/100K	A	S162 pp. 6-10, charts 1-11; oem_spec
Branch breakers accepted	Type CH (3/4 in per pole, CH110-CH3100 etc.) or Type BR (1 in per pole, BR/BRH/BJ/BD/BQ/GFCB/GFEP)	A	S162 pp. 3-4; oem_spec
box_range	Standard kits A-E: box widths 14.5-22 in, depths 4 in (BR) / 4.25 in (CH) to 6 in, heights 21-45 in (54 in for E)	A	S162 p. 5; oem_spec
bus	CH 3-ph and SFL: copper bus with tin-plated copper stabs; CH 1-ph: one-piece copper bus; BR: tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
listing_debate	Components listed but field assembly into existing box may need field evaluation per AHJ	D	S163 inference

Key documents: S148 Retrofit kit for Federal Pacific (forum thread); S162 Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (; S163 Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00764	**RAABR10BXXX**	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00765	**RAABR10BXXXA**	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00762	**RAABR12L125**	Cutler-Hammer compact BR retrofit kit RAABR12L125	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00763	**RAABR12L125A**	Cutler-Hammer compact BR retrofit kit RAABR12L125A	Cutler-Hammer Type BR **A**	unknown
EDH-EAT-00748	**RABR12B3XXX**	Cutler-Hammer BR retrofit kit RABR12B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00749	**RABR12H3XXX**	Cutler-Hammer BR retrofit kit RABR12H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00756	**RABR12L3125**	Cutler-Hammer BR retrofit kit RABR12L3125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00737	**RABR20BXXX**	Cutler-Hammer BR retrofit kit RABR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00738	**RABR20HXXX**	Cutler-Hammer BR retrofit kit RABR20HXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00744	**RABR20L125**	Cutler-Hammer BR retrofit kit RABR20L125	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00722	**RACH18B3XXX**	Cutler-Hammer CH retrofit kit RACH18B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00706	**RACH22BXXX**	Cutler-Hammer CH retrofit kit RACH22BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00712	**RACH24L125**	Cutler-Hammer CH retrofit kit RACH24L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00725	**RACH24L3125**	Cutler-Hammer CH retrofit kit RACH24L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00726	**RACH30L3125**	Cutler-Hammer CH retrofit kit RACH30L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00727	**RACH30L3225**	Cutler-Hammer CH retrofit kit RACH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00741	**RBBR20BXXX**	Cutler-Hammer BR retrofit kit RBBR20BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00758	**RBBR24L3150**	Cutler-Hammer BR retrofit kit RBBR24L3150	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00739	**RBBR30BCXXX**	Cutler-Hammer BR retrofit kit RBBR30BCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00750	**RBBR30BXXX**	Cutler-Hammer BR retrofit kit RBBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00751	**RBBR30H3XXX**	Cutler-Hammer BR retrofit kit RBBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00740	**RBBR30HCXXX**	Cutler-Hammer BR retrofit kit RBBR30HCXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00745	**RBBR30L200**	Cutler-Hammer BR retrofit kit RBBR30L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00757	**RBBR30L3100**	Cutler-Hammer BR retrofit kit RBBR30L3100	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00708	**RBCH24BXXX**	Cutler-Hammer CH retrofit kit RBCH24BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00718	**RBCH24D225**	Cutler-Hammer CH retrofit kit RBCH24D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00733	**RBCH24D3225**	Cutler-Hammer CH retrofit kit RBCH24D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00707	**RBCH30BXXX**	Cutler-Hammer CH retrofit kit RBCH30BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00734	**RBCH30D3225**	Cutler-Hammer CH retrofit kit RBCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00728	**RBCH30L3225**	Cutler-Hammer CH retrofit kit RBCH30L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00719	**RBCH32D225**	Cutler-Hammer CH retrofit kit RBCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00714	**RBCH32L225**	Cutler-Hammer CH retrofit kit RBCH32L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00713	**RBCH42L125**	Cutler-Hammer CH retrofit kit RBCH42L125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00715	**RBCH42L225**	Cutler-Hammer CH retrofit kit RBCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00729	**RBCH42L3125**	Cutler-Hammer CH retrofit kit RBCH42L3125	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00730	**RBCH42L3225**	Cutler-Hammer CH retrofit kit RBCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00742	**RCBR30BXXX**	Cutler-Hammer BR retrofit kit RCBR30BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00759	**RCBR30L3200**	Cutler-Hammer BR retrofit kit RCBR30L3200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00746	**RCBR40L200**	Cutler-Hammer BR retrofit kit RCBR40L200	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00735	**RCCH30D3225**	Cutler-Hammer CH retrofit kit RCCH30D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00709	**RCCH32BXXX**	Cutler-Hammer CH retrofit kit RCCH32BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00720	**RCCH32D225**	Cutler-Hammer CH retrofit kit RCCH32D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00716	**RCCH42L225**	Cutler-Hammer CH retrofit kit RCCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00731	**RCCH42L3225**	Cutler-Hammer CH retrofit kit RCCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00752	**RDBR30B3XXX**	Cutler-Hammer BR retrofit kit RDBR30B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00753	**RDBR30H3XXX**	Cutler-Hammer BR retrofit kit RDBR30H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00743	**RDBR40BXXX**	Cutler-Hammer BR retrofit kit RDBR40BXXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00747	**RDBR42L225**	Cutler-Hammer BR retrofit kit RDBR42L225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00760	**RDBR42L3225**	Cutler-Hammer BR retrofit kit RDBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00723	**RDCH42B3XXX**	Cutler-Hammer CH retrofit kit RDCH42B3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00710	**RDCH42BXXX**	Cutler-Hammer CH retrofit kit RDCH42BXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00721	**RDCH42D225**	Cutler-Hammer CH retrofit kit RDCH42D225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00736	**RDCH42D3225**	Cutler-Hammer CH retrofit kit RDCH42D3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00724	**RDCH42H3XXX**	Cutler-Hammer CH retrofit kit RDCH42H3XXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00711	**RDCH42HXXX**	Cutler-Hammer CH retrofit kit RDCH42HXXX	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00717	**RDCH42L225**	Cutler-Hammer CH retrofit kit RDCH42L225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00732	**RDCH42L3225**	Cutler-Hammer CH retrofit kit RDCH42L3225	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers **A**	unknown
EDH-EAT-00754	**REBR42B3XXX**	Cutler-Hammer BR retrofit kit REBR42B3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00755	**REBR42H3XXX**	Cutler-Hammer BR retrofit kit REBR42H3XXX	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown
EDH-EAT-00761	**REBR42L3225**	Cutler-Hammer BR retrofit kit REBR42L3225	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ **A**	unknown

EDH-EAT-00764	RAABR10BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR10BXXX

OEM part number	RAABR10BXXX	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 19 x 13 in	A	same as above
Application	main breaker	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	60-125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00765	RAABR10BXXXA	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR10BXXXA

OEM part number	RAABR10BXXXA	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main breaker, 10 spaces / 20 circuits, #6-1/0 wire, cover 21 x 16 in	A	same as above
Application	main breaker	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	60-125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00762	RAABR12L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR12L125

OEM part number	RAABR12L125	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 19 x 13 in	A	same as above
Application	main lugs	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00763	RAABR12L125A	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer compact BR retrofit kit RAABR12L125A

OEM part number	RAABR12L125A	A	S162 p. 10, Selection Chart 11; oem_spec
Description	Compact Type BR retrofit kit (Retro Size AA), main lugs, 12 spaces / 24 circuits, #6-1/0 wire, cover 21 x 16 in	A	same as above
Application	main lugs	A	same as above
Breaker compatibility	Cutler-Hammer Type BR	A	same as above
Current rating	125 A	A	same as above
Kit contents	Picture frame + trim cover assembly; interior with field-adjustable riser (3.5-5.25 in depth)	A	same as above
Dimensions	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall	A	same as above
Status	unknown	D	S162 inference
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Mounting-hole pattern, Material, Torque values		

EDH-EAT-00748	RABR12B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12B3XXX

OEM part number	RABR12B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00749	RABR12H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12H3XXX

OEM part number	RABR12H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00756	RABR12L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR12L3125

OEM part number	RABR12L3125	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 12 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #8-2/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00737	RABR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20BXXX

OEM part number	RABR20BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00738	RABR20HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20HXXX

OEM part number	RABR20HXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00744	RABR20L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RABR20L125

OEM part number	RABR20L125	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 20 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #14-2/0	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00722	RACH18B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH18B3XXX

OEM part number	RACH18B3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 18 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00706	RACH22BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH22BXXX

OEM part number	RACH22BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 22 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00712	RACH24L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L125

OEM part number	RACH24L125	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-2/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00725	RACH24L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH24L3125

OEM part number	RACH24L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-2/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00726	RACH30L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3125

OEM part number	RACH30L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-#1	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00727	RACH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RACH30L3225

OEM part number	RACH30L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size A: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00741	RBBR20BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR20BXXX

OEM part number	RBBR20BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 20 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00758	RBBR24L3150	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR24L3150

OEM part number	RBBR24L3150	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	150 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00739	RBBR30BCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BCXXX

OEM part number	RBBR30BCXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00750	RBBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30BXXX

OEM part number	RBBR30BXXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec

Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart 9 prints 'RBBR30BXXX' for the 3-phase 10K kit, lacking the '3' phase marker used by the other 3-phase numbers (e.g., RBBR30H3XXX) - possibly a typo for RBBR30B3XXX.*		

EDH-EAT-00751 **RBBR30H3XXX** Cutler-Hammer conversion-kit **UNKNOWN**

Cutler-Hammer BR retrofit kit RBBR30H3XXX

OEM part number	RBBR30H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	60-100 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00740	RBBR30HCXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30HCXXX

OEM part number	RBBR30HCXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	60-125 A, 22K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00745	RBBR30L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L200

OEM part number	RBBR30L200	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00757	RBBR30L3100	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RBBR30L3100

OEM part number	RBBR30L3100	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	100 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #8-2/0	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00708	RBCH24BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24BXXX

OEM part number	RBCH24BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-200 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00718	RBCH24D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D225

OEM part number	RBCH24D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00733	RBCH24D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH24D3225

OEM part number	RBCH24D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 24 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00707	RBCH30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30BXXX

OEM part number	RBCH30BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	60-125 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-1/0	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00734	RBCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30D3225

OEM part number	RBCH30D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00728	RBCH30L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH30L3225

OEM part number	RBCH30L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00719	RBCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH32D225

OEM part number	RBCH32D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 30 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		
Open question	*Chart lists 30 circuits but part number implies 32.*		

EDH-EAT-00714	RBCH32L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH32L225

OEM part number	RBCH32L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 32 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00713	RBCH42L125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L125

OEM part number	RBCH42L125	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-1/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00715	RBCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L225

OEM part number	RBCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00729	RBCH42L3125	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3125

OEM part number	RBCH42L3125	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	125 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-#1	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00730	RBCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RBCH42L3225

OEM part number	RBCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size B: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-4/0	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00742	RCBR30BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30BXXX

OEM part number	RCBR30BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00759	RCBR30L3200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR30L3200

OEM part number	RCBR30L3200	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00746	RCBR40L200	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RCBR40L200

OEM part number	RCBR40L200	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 40 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	200 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00735	RCCH30D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH30D3225

OEM part number	RCCH30D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 30 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00709	RCCH32BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32BXXX

OEM part number	RCCH32BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00720	RCCH32D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH32D225

OEM part number	RCCH32D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 32 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00716	RCCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L225

OEM part number	RCCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00731	RCCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RCCH42L3225

OEM part number	RCCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size C: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00752	RDBR30B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30B3XXX

OEM part number	RDBR30B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00753	RDBR30H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR30H3XXX

OEM part number	RDBR30H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 30 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-200 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00743	RDBR40BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR40BXXX

OEM part number	RDBR40BXXX (XXX = main breaker amp rating)	A	S162 p. 8, Selection Chart 7; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main breaker, 40 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 7; oem_spec
Current rating	100-200 A, 25K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 7; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 8, Selection Chart 7; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00747	RDBR42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L225

OEM part number	RDBR42L225	A	S162 p. 8, Selection Chart 8; oem_spec
Description	Type BR retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 8, Selection Chart 8; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 8, Selection Chart 8; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 8, Selection Chart 8; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00760	RDBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit RDBR42L3225

OEM part number	RDBR42L3225	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00723	RDCH42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42B3XXX

OEM part number	RDCH42B3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00710	RDCH42BXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42BXXX

OEM part number	RDCH42BXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 35K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #2-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00721	RDCH42D225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D225

OEM part number	RDCH42D225	A	S162 p. 6, Selection Chart 3; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 3; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 3; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 6, Selection Chart 3; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00736	RDCH42D3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42D3225

OEM part number	RDCH42D3225	A	S162 p. 7, Selection Chart 6; oem_spec
Description	Type CH retrofit kit, 3-ph 240, sub-feed lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	sub-feed lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 6; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 6; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #6-300 kcmil	A	S162 p. 7, Selection Chart 6; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00724	RDCH42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42H3XXX

OEM part number	RDCH42H3XXX (XXX = main breaker amp rating)	A	S162 p. 7, Selection Chart 4; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 4; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 4; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 7, Selection Chart 4; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00711	RDCH42HXXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42HXXX

OEM part number	RDCH42HXXX (XXX = main breaker amp rating)	A	S162 p. 6, Selection Chart 1; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main breaker, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 1; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 1; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 6, Selection Chart 1; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00717	RDCH42L225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L225

OEM part number	RDCH42L225	A	S162 p. 6, Selection Chart 2; oem_spec
Description	Type CH retrofit kit, 1-ph 120/240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	1-ph 120/240	A	S162 p. 6, Selection Chart 2; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 6, Selection Chart 2; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #1-300 kcmil	A	S162 p. 6, Selection Chart 2; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00732	RDCH42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer CH retrofit kit RDCH42L3225

OEM part number	RDCH42L3225	A	S162 p. 7, Selection Chart 5; oem_spec
Description	Type CH retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size D: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type CH (3/4 in per pole) plug-on branch breakers	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 7, Selection Chart 5; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	CH 3-ph/SFL: copper bus, tin-plated copper stabs; CH 1-ph: one-piece copper bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 7, Selection Chart 5; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 7, Selection Chart 5; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00754	REBR42B3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42B3XXX

OEM part number	REBR42B3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 10K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00755	REBR42H3XXX	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42H3XXX

OEM part number	REBR42H3XXX (XXX = main breaker amp rating)	A	S162 p. 9, Selection Chart 9; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main breaker, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main breaker	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 9; oem_spec
Current rating	100-225 A, 100K AIC	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 9; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range 2/0-300 kcmil	A	S162 p. 9, Selection Chart 9; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

EDH-EAT-00761	REBR42L3225	Cutler-Hammer	conversion-kit	UNKNOWN

Cutler-Hammer BR retrofit kit REBR42L3225

OEM part number	REBR42L3225	A	S162 p. 9, Selection Chart 10; oem_spec
Description	Type BR retrofit kit, 3-ph 240, main lugs, 42 circuits, Retro Size E: cover assembly (picture frame + trim) and field-adjustable interior with riser	A	same as above
Application	main lugs	A	same as above
Installation location	Installed inside an existing (any manufacturer, e.g., FPE Stab-Lok or Zinsco) flush panel box after removing old interior	B	S162 oem_spec
Breaker compatibility	Cutler-Hammer Type BR (1 in per pole) plug-on branch breakers incl. BJ/BD/BQ/GFCB/GFEP	A	S162 p. 3-4; oem_spec
Voltage rating	3-ph 240	A	S162 p. 9, Selection Chart 10; oem_spec
Current rating	225 A	A	same as above
Kit contents	Cover assembly (picture frame drilled in field to existing box flange + trim) and interior assembly with field-adjustable riser (existing box drilled to mount riser)	A	S162 p. 2; oem_spec
Material	Tin-plated aluminum bus	A	S162 pp. 3-4; oem_spec
Dimensions	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in	A	S162 p. 9, Selection Chart 10; p. 2,5; oem_spec
Status	unknown	D	S162 inference
Identification features	Main/feed lug wire range #4-300 kcmil	A	S162 p. 9, Selection Chart 10; oem_spec
Cross-links	Families: CH-BR-RETRO		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Torque values		
Open question	*Still orderable from Eaton (Lincoln NE Flex Center) and current catalog numbers?*		

3.3 CDP — Westinghouse CDP / HCDP distribution panelboard

FAM-EAT-013 · panelboard · aka CDP, CDP/HCDP, CPD, HCDP, Westinghouse CDP · markings: Cutler-Hammer, Westinghouse

Westinghouse distribution panelboard in 30-50 in wide boxes with chassis rails and vertical chassis bus, 3.50 in phase-to-phase bus centre-lines (switch kits). Series C retrofit kits (KCDP+breaker catalog no.) use same X space as original breakers; KD onto LB connectors requires TAD3 adapter.

Westinghouse distribution (circuit-breaker) panelboard on a chassis with vertical phase busbars at 3.50 in centers and mounting rails 19.50 in apart; X unit = 1.38 in. Boxes 30, 38, 42, 48 and 50 in wide; neutral in side gutter. Branch breakers mount on breaker mounting brackets with copper connectors to the chassis bus; unused space closed by filler covers (KCDP_X). Sumter supplies KCDP connector kits (connectors+brackets+covers+hardware), KCDP retrofit kits (breaker + connector kit) and -H hardware-only kits. Older 'LB' style connectors accept Series C K-frame with TAD3 adapter.

Attribute	Value	Cl.	Sources
Status	Obsolete; retrofit and connector kits available from Sumter Plant Aftermarket	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	A	S13 pp. V12-T4-4, V12-T4-7, V12-T4-9; oem_spec
Era of manufacture	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	A	S13 pp. V12-T4-2, V12-T4-3; oem_spec
	Vintage Westinghouse (pre-Pow-R-Line 4)	C	S5 inference
Successor	PRL4B (Pow-R-Line 4B)	A	S13 p. V12-T4-7; oem_spec
	PRL4B (functional)	D	S5 inference
Main ampacity	1600 A maximum	A	S13 p. V12-T4-9; oem_spec
Branch breakers accepted	Original EB/EHB/FB/HFB/KA/KB/JA/JB/DA/LA/LB/LC/MA/MC/NB/NC frames; retrofit with Series C EHD..ND via KCDP kits	A	S5 pp.12-14; oem_spec

Attribute	Value	Cl.	Sources
	Westinghouse E, EA, EH, F, FA (pre-1974), EB, EHB, FB, HFB, CA, JA/KA/HKA, JB/KB/HKB, DA, LA/HLA/LAB, LB/LBB/HLB, LC/HLC, MA/HMA, MC/HMC, NB/HNB, NC/HNC, Tri-Pac FB-P/LA-P/NB-P, LCL; Series C upgrades EHD, FDB, FD, HFD, FDC, ED, JD, DK, KD, LD, MDL, ND	A	S13, S14 p. V12-T4-7; RP01400002E pp. 12-14; oem_spec
bus_spacing	Vertical bus 3.50 in (88.9 mm) phase-to-phase; mounting rails 19.50 in; if 4.25 in spacing, switches will not fit	A	S5 p.17 Figure 2; oem_spec
x_unit	One X = 1.38 in (35.1 mm) of panel height; blank fillers required for unused X space	A	S13 p. V12-T4-9; oem_spec
bus_geometry	Vertical busbars 1.38 in typ, phase centers 3.50 in, mounting rails 19.50 in (applies to CDP and FDP chassis)	A	S14, S13 RP01400002E p. 17 Fig. 2; V12-T4-10; oem_spec
box_widths	CDP and FDP standard widths 30.00, 38.00, 42.00, 48.00 and 50.00 in; neutral located in side gutter	A	S14 p. 2; oem_spec
layout	Main lug top gutter 7-1/2 in; main lug section 5X 225 A, 7X 250-400 A, 9X 600 A, 12X/13X 800-1600 A; thru-feed lugs 10X 225 A, 13X 250-400 A, 17X 600-800 A; 30 in box branch: 1P EB/EHB/HFB 1X, 2P EB/EHB/FB 2X, 3P 3X, CA/CAH 2X-3X, JB/KB/HKB 3X (5 in), DA/LB/LBB/HLB 4X, LA/LC/HLC 6X, MC/HMC/NC/HNC/LCL 6X (48 in box)	A	S13 p. V12-T4-9; oem_spec
breaker_mix_rule	Only breakers of the same frame size can be installed across from each other (same horizontal plane); KD breakers can be mounted across from LB breakers if a TAD3 line side adapter is used	A	S13 p. V12-T4-7 notes 4,6; oem_spec
single_pole_note	When only one EB, EHB or HFB single-pole breaker is required with other frame size breakers, the space required changes from 1X to 2X	A	S13 p. V12-T4-9 note 1; oem_spec
renewal_doc	Renewal parts data RP01400002E; pricing PL01400002E	A	S13 pp. V12-T4-9, V12-T4-23; oem_spec
subchassis_note	If the CDP panelboard has a subchassis lighting panel, contact Sumter Plant Aftermarket Center (803-481-6677) for breaker selection	A	S14 p. 11; oem_spec

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), DA, E, EB, ED, EHB, EHD, F, FB, FD, HFB, JA, JB, JD, KA, KB, KD, LA, LB, LC, LD, MA, MC, MDL, NB, NC, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac, Westinghouse pre-Series C industrial MCCBs

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S15 RP01400002E (2009) Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)

Also fits this family (entry printed elsewhere): TAD3, 5155C81G01, K80522, 8450C62H39, K80429, 114C247G01, 3457B16G01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00366	**KFDP4XT**	Westinghouse FDP switch connector kit KFDP4XT	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin sw A	Listed Feb 2013
EDH-EAT-00367	**KFDP5XT**	Westinghouse FDP switch connector kit KFDP5XT	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in A	Listed Feb 2013
EDH-EAT-00368	**KFDPB6X-2**	Westinghouse FDP switch connector kit KFDPB6X-2	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phas A	Listed Feb 2013
EDH-EAT-00370	**KFDPW11X-6**	Westinghouse FDP switch connector kit KFDPW11X-6	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013
EDH-EAT-00371	**KFDPW11X-8**	Westinghouse FDP switch connector kit KFDPW11X-8	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00372	**KFDPW15X-12**	Westinghouse FDP switch connector kit KFDPW15X-12	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not A	Listed Feb 2013
EDH-EAT-00369	**KFDPW9X-4**	Westinghouse FDP switch connector kit KFDPW9X-4	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phas A	Listed Feb 2013

EDH-EAT-00366 **KFDP4XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP4XT

OEM part number	KFDP4XT	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPWT 30-30, 60-60, 100-100 A (240 V) / 30-30, 60-60 A (600 V) twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin switches: FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	4X space	A	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00367 **KFDP5XT** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDP5XT

OEM part number	KFDP5XT	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPWT3633R 600 V 100-100 A twin switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 100 A 600 V FDPWT3633R	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	5X space	A	S5 oem_spec
	Occupies 6.88 in (174.8 mm) = 5X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00368 **KFDPB6X-2** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPB6X-2

OEM part number	KFDPB6X-2	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPBS324R / FDPBS364R 200 A switch	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPBS324R / FDPBS364R 200 A switch; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	6X space	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00370 KFDPW11X-6 Westinghouse branch-connector-kit LISTED FEB 2013

Westinghouse FDP switch connector kit KFDPW11X-6

OEM part number	KFDPW11X-6	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW326R / FDPW366R 600 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW326R / FDPW366R 600 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00371 KFDPW11X-8 Westinghouse branch-connector-kit LISTED FEB 2013

Westinghouse FDP switch connector kit KFDPW11X-8

OEM part number	KFDPW11X-8	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW367 800 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW367 800 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V column, apparent truncation)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	11X space	A	S5 oem_spec
	Occupies 15.13 in (384.3 mm) = 11X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00372 **KFDPW15X-12** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW15X-12

OEM part number	KFDPW15X-12	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW368 1200 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW368 1200 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 1200 A FDPW368	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	15X space	A	S5 oem_spec
	Occupies 20.63 in (524.0 mm) = 15X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00369 **KFDPW9X-4** Westinghouse branch-connector-kit **LISTED FEB 2013**

Westinghouse FDP switch connector kit KFDPW9X-4

OEM part number	KFDPW9X-4	A	S5, S14, S15 p.18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit for vintage Westinghouse FDP panelboards/switchboards: FDPW325R / FDPW365R 400 A	A	S5 p.18; oem_spec
	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S14 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S14 p. 17; oem_spec
Breaker compatibility	FDPW325R / FDPW365R 400 A; requires vertical bus 3.50 in phase-to-phase (will not fit 4.25 in spacing)	A	S5 pp.17-18; oem_spec
	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V)	A	S14 p. 18 Table 21; oem_spec
Poles	3	A	S14 p. 18; oem_spec
Kit contents	Copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions	A	S5 p.18; oem_spec
Dimensions	9X space	A	S5 oem_spec
	Occupies 12.38 in (314.5 mm) = 9X	A	S14 p. 18 Table 21; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
	listed 2013	B	S14, S15 p. 18; oem_spec
Cross-links	Families: CDP, FDP, WF/WRP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00343	**KCDPCA**	Westinghouse CDP breaker connector kit KCDPCA (CA...)	CA, CAH, HCA 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00341	**KCDPED225**	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00340	**KCDPFB100**	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EHD, FDB, FD, HFD, FDC 3-pole (100 A max) A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00342	**KCDPFBP**	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	FB-P, FCL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00344	**KCDPKB**	Westinghouse CDP breaker connector kit KCDPKB (JD...)	JD, JDB, HJD, JDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00346	**KCDPLA400**	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	LA-P 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00347	**KCDPLA600**	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	LD, HLD, LDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00345	**KCDPLB**	Westinghouse CDP breaker connector kit KCDPLB (DK...)	DK, KD, KDB, HKD, KDC 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00348	**KCDPLCL**	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	LCL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00349	**KCDPMC**	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	MDL, HMDL 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00351	**KCDPNBP**	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	NB-P 3-pole A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00350	**KCDPNC**	Westinghouse CDP breaker connector kit KCDPNC (ND...)	ND, HND 3-pole (not rated for 100% breakers) A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00343	KCDPCA	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPCA (CA...)

OEM part number	KCDPCA	A	S5, S14, S15 p.14 Table 19; oem_spec

Description	CDP panelboard breaker connector kit for CA, CAH, HCA 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	CA, CAH, HCA 3-pole	A	S5 p.14 Table 19; oem_spec
	CA, CAH, HCA	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: CA/CAH/HCA 225 A frame, Westinghouse pre-Series C industrial MCCBs, CA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00341	KCDPED225	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPED225 (FD...)

OEM part number	KCDPED225	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FD, FDB, HFD, FDC, ED, EDH, EDC 3-pole	A	S5 p.14 Table 19; oem_spec
	FD, FDB, HFD, FDC, ED, EDH, EDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	225 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec

	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Westinghouse pre-Series C industrial MCCBs, FD, ED		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00340	KCDPFB100	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)

OEM part number	KCDPFB100	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC 3-pole (100 A max)	A	S5 p.14 Table 19; oem_spec
	EHD, FDB, FD, HFD, FDC (100 A maximum)	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A maximum	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse FB-frame designation; 100 A max (note a)	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, FB, HFB, EHD, FD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00342	KCDPFBP	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)

OEM part number	KCDPFBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for FB-P, FCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec

	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	FB-P, FCL 3-pole	A	S5 p.14 Table 19; oem_spec
	FB-P, FCL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A (FB-P 15-100 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00344	KCDPKB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPKB (JD...)

OEM part number	KCDPKB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for JD, JDB, HJD, JDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	JD, JDB, HJD, JDC 3-pole	A	S5 p.14 Table 19; oem_spec
	JD, JDB, HJD, JDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	250 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference)	C	S14 p. 14; inference

Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JB, JD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00346	KCDPLA400	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)

OEM part number	KCDPLA400	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LA-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LA-P 3-pole	A	S5 p.14 Table 19; oem_spec
	LA-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A (LA-P 70-400 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00347	KCDPLA600	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLA600 (LD...)

OEM part number	KCDPLA600	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LD, HLD, LDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec

Breaker compatibility	LD, HLD, LDC 3-pole	A	S5 p.14 Table 19; oem_spec
	LD, HLD, LDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	600 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LA-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00345	KCDPLB	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLB (DK...)

OEM part number	KCDPLB	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	DK, KD, KDB, HKD, KDC 3-pole	A	S5 p.14 Table 19; oem_spec
	DK, KD, KDB, HKD, KDC	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	4X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LB-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, DA, LB, KD		

Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Connector-kit naming (KCDPKB, KCDPLB, KCDPLA, KCDPMC, KCDPNC) mirrors original Westinghouse frames KB/LB/LA/MC/NC - confirm these are the same connector geometries as original CDP straps.*		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00348	KCDPLCL	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)

OEM part number	KCDPLCL	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for LCL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	LCL 3-pole	A	S5 p.14 Table 19; oem_spec
	LCL	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	LCL 125-400 A	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Current-limiting FCL / LCL (and FDB+LFB), Westinghouse pre-Series C industrial MCCBs		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00349	KCDPMC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPMC (MDL...)

OEM part number	KCDPMC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for MDL, HMDL 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	MDL, HMDL 3-pole	A	S5 p.14 Table 19; oem_spec
	MDL, HMDL	A	S14 p. 14 Table 19; oem_spec

Poles	3	A	same as above
Current rating	800 A frame	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse MC-frame designation	C	S14 p. 14; inference
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00351	KCDPNBP	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)

OEM part number	KCDPNBP	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for NB-P 3-pole	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	NB-P 3-pole	A	S5 p.14 Table 19; oem_spec
	NB-P	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A (NB-P 300-800 A)	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Westinghouse pre-Series C industrial MCCBs, Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00350	KCDPNC	Westinghouse	breaker-mounting-kit	LISTED FEB 2013 (SUMTE

Westinghouse CDP breaker connector kit KCDPNC (ND...)

OEM part number	KCDPNC	A	S5, S14, S15 p.14 Table 19; oem_spec
Description	CDP panelboard breaker connector kit for ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14; oem_spec
	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; CDP chassis	A	S5 oem_spec
	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S14 pp. 10, 14, 17; oem_spec
Breaker compatibility	ND, HND 3-pole (not rated for 100% breakers)	A	S5 p.14 Table 19; oem_spec
	ND, HND	A	S14 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	1200 A frame; not rated for 100 percent breakers	A	S14 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (mounting brackets, filler plates, hardware), e.g. KCDPFB100-H	A	S5 p.14; oem_spec
	Copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 14; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S5 oem_spec
	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S14 p. 14 Table 19; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S14, S15 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S14 pp. 12, 14; oem_spec
Identification features	Note b: connector kits are not rated for 100 percent breakers	A	S14 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00352	**KCDP_X**	CDP filler cover (any X increment)	—	Listed Feb 2013

EDH-EAT-00352	KCDP_X	Westinghouse	filler-plate	LISTED FEB 2013

CDP filler cover (any X increment)

OEM part number	KCDP_X	A	S5 p.14; oem_spec
	KCDP_X (fill in number of X, e.g. KCDP3X) (pattern; example KCDP3X is constructed, not printed)	A	S14 p. 14 'CDP filler covers'; oem_spec
Description	CDP filler covers available in any 1X (1.38 in) increment; catalog KCDP_X with blank = size (e.g. KCDP3X); includes cover, mounting brackets and hardware	A	S5 p.14; oem_spec
	CDP filler cover available in any increment of 1X = 1.38 in (35.1 mm); includes cover, mounting brackets and hardware	A	S14 p. 14; oem_spec
Installation location	Closes unused X space on CDP chassis; blank fillers are required for unused X space	A	S13 p. V12-T4-9; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S14 p. 14; oem_spec
Dimensions	Height = n x 1.38 in (35.1 mm)	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: CDP		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00445	**0080429**	Panelboard trim lock — T-handle lock	—	listed 2013; contact Sumter for price

EDH-EAT-00445	0080429	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — T-handle lock

OEM part number	0080429	A	S14 p. 19 Table 22; oem_spec
Description	T-handle lock; once used on all panels over 48.00 in high and on outdoor (N3R) panels	A	same as above
Dimensions	approx. 2.50 in (63.5 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00420	**414A380G02**	Trim clamp for CDP, FDP and NQB	—	Shown as 'No Longer Available' in RP01400002E figure
EDH-EAT-00423	**KCDPFB100-H**	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix	—	listed 2013

EDH-EAT-00420	414A380G02	Cutler-Hammer	hardware-kit	SHOWN AS 'NO LONGER AV

Trim clamp for CDP, FDP and NQB

OEM part number	414A380G02	A	S5, S14 oem_spec
Description	Trim clamp for CDP, FDP and NQB (2.50 in long) - marked 'No Longer Available'	A	S5 oem_spec
	Trim clamp used to mount Fastrims (concealed trim-mounting hardware); bag of six; some larger panels need more than one bag	A	S14 p. 19; oem_spec
Application	accessory	A	same as above
Installation location	Used on CDP, FDP and NQB	A	same as above
Kit contents	Bag of six clamps	A	same as above
Dimensions	Overall length 2.50 in (63.5 mm)	A	same as above
Status	Shown as 'No Longer Available' in RP01400002E figure (Placement of 'No Longer Available' label in figure is ambiguous between 414A380G02 and neighbouring item)	B	S5 p.19; oem_spec
Cross-links	Families: CDP, FDP, NLAB		
Not yet documented	Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00423	KCDPFB100-H	Cutler-Hammer	hardware-kit	LISTED 2013

CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix

OEM part number	KCDPFB100-H	A	S14 p. 14 (Hardware kit example); oem_spec
Alternate / superseded numbers	KCDPFD100H (2009 edition prints the example as KCDPFD100H; 2013 prints KCDPFB100-H. Likely a typo/format change, not a separate part)	C	S15 alias; RP01400002E (2009) p. 14; oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY. Formed by adding '-H' to the appropriate CDP connector kit catalog number	A	S14 p. 14; oem_spec
Application	branch	A	same as above
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no copper connectors)	A	same as above
Status	listed 2013	B	S14, S15 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the -H suffix valid for every KCDP connector kit (e.g. KCDPLB-H, KCDPNC-H)?*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00361	**KCDPDK**	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00353	**KCDPEHD**	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00355	**KCDPFD**	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00354	**KCDPFDB**	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00357	**KCDPHKD**	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the A	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00358	**KCDPJD**	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses A	Listed Feb 2013 (Sumter Plant Aftermarket Center)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00360	**KCDPJDB**	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00356	**KCDPKD**	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125- **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00359	**KCDPKDB**	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00362	**KCDPLD**	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00363	**KCDPMDL**	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Se **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)
EDH-EAT-00364	**KCDPND**	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 **A**	Listed Feb 2013 (Sumter Plant Aftermarket Center)

EDH-EAT-00361	KCDPDK	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)

OEM part number	KCDPDK	**A**	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPDK (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	**A**	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse DA breaker (existing breaker superseded by this Series C retrofit)	**A**	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	**A**	S5 p.12; oem_spec
	CDP retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	**A**	S14 pp. 12-13; oem_spec
Application	branch	**A**	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse DA (250-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	**A**	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse DA (250-400 A) with Series C DK	**A**	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	**A**	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	**A**	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	**B**	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, DA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00353	KCDPEHD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)

OEM part number	KCDPEHD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPEHD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse EB, EHB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse EB, EHB (15-100 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, EB, EHB, EHD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00355	KCDPFD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)

OEM part number	KCDPFD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HFB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HFB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HFB (15-150 A) with Series C FD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, HFB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00354	KCDPFDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)

OEM part number	KCDPFDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPFDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse FB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse FB (15-150 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse FB (15-150 A) with Series C FDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Westinghouse pre-Series C industrial MCCBs, FB, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00357	KCDPHKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)

OEM part number	KCDPHKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPHKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HKA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HKA (70-225 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00358	KCDPJD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)

OEM part number	KCDPJD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KB, HKB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KB, HKB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, KB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00360	KCDPJDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)

OEM part number	KCDPJDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPJDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JB (70-250 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JB (70-250 A) with Series C JDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C J-frame (JD/JDB/HJD/JDC), Westinghouse pre-Series C industrial MCCBs, JB, JD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00356	KCDPKD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)

OEM part number	KCDPKD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A) with Series C KD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, KA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00359	KCDPKDB	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)

OEM part number	KCDPKDB	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPKDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Series C KDB	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*KD onto existing LB connectors requires TAD3 adapter (included in KD retrofit kits).*		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00362	KCDPLD	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)

OEM part number	KCDPLD	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPLD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse LA, HLA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A) with Series C LD	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Westinghouse pre-Series C industrial MCCBs, LA, LC, LD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00363	KCDPMDL	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)

OEM part number	KCDPMDL	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPMDL (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse MA, HMA breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) with Series C MDL	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Westinghouse pre-Series C industrial MCCBs, MA, MC, MDL		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00364	KCDPND	Westinghouse	conversion-kit	LISTED FEB 2013 (SUMTE

CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)

OEM part number	KCDPND	A	S5 p.13 Table 18; p.12 Tables 16-17; oem_spec
	KCDPND (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S14 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse NB, HNB breaker (existing breaker superseded by this Series C retrofit)	A	S14 supersedes; p. 13 Table 18; oem_spec
Description	Retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions for a CDP chassis. Full catalog number = KCDP + breaker catalog number (e.g. KCDPKD3400 = 3-pole 400 A KD); one breaker per kit even for twin mounting	A	S5 p.12; oem_spec
	CDP retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S14 pp. 12-13; oem_spec
Application	branch	A	S14 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A); Series C frame uses the same X space as the older breaker (no filler covers needed)	A	S5 p.13 Table 18; oem_spec
	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A) with Series C ND	A	S14 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S14 p. 12; oem_spec
Status	Listed Feb 2013 (Sumter Plant Aftermarket Center)	A	S5 oem_spec
	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S14, S15 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Westinghouse pre-Series C industrial MCCBs, NB, NC, ND		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

3.4 CHA-PM4 — Challenger distribution panelboards (PM4a / PM4b)

FAM-EAT-028 · panelboard · aka PM4a, PM4b, Challenger panelboard · markings: Challenger

Challenger Electrical Equipment (formed c.1981 from GTE-Sylvania's distribution business, Jackson MS) built distribution panelboards annotated 'PM4a' and 'PM4b' in relectric's catalogue. Mounting kits follow the pattern C<frame>D<n>K (twin) / C<frame>DS<n>K (single), with 'B' variants (e.g., CED4BK) annotated PM4b. Eaton-numbered KPRL4C*/KPRL4AC*/KPRL4BC* kits appear to adapt Challenger breakers into Pow-R-Line 4 style interiors. Coded EAT per lineage table.

Attribute	Value	Cl.	Sources
Status	Obsolete (Challenger acquired by Westinghouse late 1980s/1994; Eaton from 1994); kits available as surplus	C	S166, S156, S151 surplus
Branch breakers accepted	Challenger CA, CE?, CF, CJ, CK, CL, CM, CN frames (inferred from kit names CCA4K, CED*, CFD*, CJD*, CKD*, CLD*, CMD4K 800 A, CND4K 1200 A)	D	S166 inference

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)
Key documents: S151 Zinsco; S156 Challenger / GTE / Zinsco ownership discussion; S166 Challenger Breaker Parts & Accessories Catalog

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00766	**CCA4K**	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00767	**CED3K**	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00769	**CED4BK**	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00768	**CED4K**	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	—	discontinued; recertified/new-surplus
EDH-EAT-00770	**CFD3K**	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00772	**CFD4BK**	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00771	**CFD4K**	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00773	**CJD4K**	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00775	**CJDS4BK**	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00774	**CJDS4K**	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00776	**CKD4K**	Challenger PM4a (no further description) mounting hardware kit CKD4K	—	discontinued; recertified/new-surplus
EDH-EAT-00778	**CKDS4BK**	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00777	**CKDS4K**	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00779	**CLD4K**	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00780	**CLDS4BK**	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00781	**CMD4K**	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00782	**CND4K**	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	—	discontinued; recertified/new-surplus
EDH-EAT-00788	**KPRL3CF3**	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00784	**KPRL4CD**	Challenger twin mounting hardware kit KPRL4CD, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00783	**KPRL4CED**	Challenger twin mounting hardware kit KPRL4CED, 225 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00785	**KPRL4CSL**	Challenger single mounting hardware kit KPRL4CSL, 600 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00786	**KPRL4CSM**	Challenger single mounting hardware kit KPRL4CSM, 800 A max	—	discontinued; recertified/new-surplus
EDH-EAT-00787	**KPRL4CSN**	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	—	discontinued; recertified/new-surplus

EDH-EAT-00766	CCA4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V

OEM part number	CCA4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00767	CED3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED3K, 225 A max, 600 V

OEM part number	CED3K	C	S166 surplus
Description	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00769	CED4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V

OEM part number	CED4BK	C	S166 surplus
Description	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	C	same as above
Current rating	225 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00768	CED4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CED4K, 225 A max, 240 V

OEM part number	CED4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	C	same as above
Current rating	225 A max, 240 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00770	CFD3K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V

OEM part number	CFD3K	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00772	CFD4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V

OEM part number	CFD4BK	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00771	CFD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V

OEM part number	CFD4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	C	same as above
Current rating	150 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00773	CJD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V

OEM part number	CJD4K	C	S166 surplus
Description	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00775	CJDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V

OEM part number	CJDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00774	CJDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V

OEM part number	CJDS4K	C	S166 surplus
Description	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 250 A max, 600 V	C	same as above
Current rating	250 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00776	CKD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger PM4a (no further description) mounting hardware kit CKD4K

OEM part number	CKD4K	C	S166 surplus
Description	Challenger PM4a (no further description) mounting hardware kit CKD4K	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00778	CKDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V

OEM part number	CKDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00777	CKDS4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V

OEM part number	CKDS4K	C	S166 surplus
Description	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	C	same as above
Current rating	400 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00779	CLD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLD4K, 600 A max, 600 V

OEM part number	CLD4K	C	S166 surplus
Description	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00780	CLDS4BK	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V

OEM part number	CLDS4BK	C	S166 surplus
Description	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	C	same as above
Current rating	600 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00781	CMD4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CMD4K, 800 A max, 600 V

OEM part number	CMD4K	C	S166, S175 surplus
Description	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	C	same as above
Current rating	800 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00782	CND4K	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit CND4K, 1200 A max, 600 V

OEM part number	CND4K	C	S166 surplus
Description	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	C	same as above
Current rating	1200 A max, 600 V	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00788	KPRL3CF3	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL3CF3, 150 A max

OEM part number	KPRL3CF3	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	C	same as above
Current rating	150 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00784	KPRL4CD	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CD, 225 A max

OEM part number	KPRL4CD	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL4CD, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00783	KPRL4CED	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger twin mounting hardware kit KPRL4CED, 225 A max

OEM part number	KPRL4CED	C	S166 surplus
Description	Challenger twin mounting hardware kit KPRL4CED, 225 A max	C	same as above
Current rating	225 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00785	KPRL4CSL	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSL, 600 A max

OEM part number	KPRL4CSL	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSL, 600 A max	C	same as above
Current rating	600 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00786	KPRL4CSM	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSM, 800 A max

OEM part number	KPRL4CSM	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSM, 800 A max	C	same as above
Current rating	800 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

EDH-EAT-00787	KPRL4CSN	Challenger	branch-connector-kit	DISCONTINUED; RECERTIF

Challenger single mounting hardware kit KPRL4CSN, 1200 A max

OEM part number	KPRL4CSN	C	S166 surplus
Description	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	C	same as above
Current rating	1200 A max	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: CHA-PM4		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which Challenger breaker frame and panelboard (PM4a/PM4b) does this kit serve?*		

3.5 FDP — Westinghouse FDP fusible distribution panelboard

FAM-EAT-014 · panelboard · aka FDP, Westinghouse FDP · markings: Westinghouse

Westinghouse fusible distribution panelboard (30-50 in wide). FDPW/FDPB switch connector kits KFDP* require 3.50 in bus spacing.

Westinghouse fusible distribution panelboard sharing CDP chassis geometry (3.50 in phase centers, 19.50 in rails). FDPW/FDPB switch connector kits fit only 3.50 in bus spacing; if bus spacing is 4.25 in no parts are available. Circuit breakers can be added to an FDP via a 'picture frame' transition (+2X).

Attribute	Value	Cl.	Sources
Status	Obsolete; switch retrofit/connector kits available	A	S5 oem_spec
	discontinued; replacement panelboard type PRL4F	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Vintage Westinghouse	C	S5 inference
Successor	PRL4F	A	S13 p. V12-T4-7; oem_spec
	PRL4F (functional)	D	S5 inference
Main ampacity	1600 A maximum	A	S13 p. V12-T4-10; oem_spec
Branch breakers accepted	FDPW / FDPB fusible switches 30-1200 A (retrofit); breakers via 'picture frame' adapter (+2X)	A	S5 pp.17-18; oem_spec
	FDP fusible switches 30-1200 A; current replacements FDPW (30-100 A twin, 400-1200 A) and FDPB (200 A) switches via KFDP connector/retrofit kits	A	S14 pp. 17-18; oem_spec
bus_spacing_limit	Vertical bus bars must be 3.50 in center-line phase to phase; if 4.25 in, switches will not fit and no parts are available	A	S14 p. 17; oem_spec
breaker_in_fdp	To install circuit breakers in an FDP panel a 'picture frame' is required; add 2X to breaker size for the transition (contact Sumter)	A	S14 p. 18; oem_spec
layout	Main lug section 5X 225 A, 8X 250-400 A, 9X 600 A, 12X 800-1600 A; switches 30/60/100 A 4X, 100 A 600 V 5X, 200 A 6X, 400/600 A 11X, 800/1200 A 16X horizontal or 21X vertical	A	S13 p. V12-T4-10; oem_spec

Key documents: S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 414A380G02, 0080429

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00373	**KFDP_X**	FDP filler cover (any X increment)	—	Listed Feb 2013

EDH-EAT-00373 **KFDP_X** Westinghouse filler-plate **LISTED FEB 2013**

FDP filler cover (any X increment)

OEM part number	KFDP_X	**A**	S5 p.17; oem_spec
	KFDP_X (fill in size)	**A**	S14 p. 17 'FDP filler covers'; oem_spec
Description	FDP filler covers in any 1X (1.38 in) increment; catalog KFDP_X; includes cover, mounting brackets and hardware	**A**	S5 oem_spec
	FDP filler cover available in any 1X (1.38 in / 35.1 mm) increment; includes cover, mounting brackets and hardware	**A**	S14 p. 17; oem_spec
Kit contents	Cover, mounting brackets, hardware	**A**	same as above
Status	Listed Feb 2013	**A**	S5 oem_spec
Cross-links	Families: FDP		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00430	**KFDPBS324R**	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00431	**KFDPBS364R**	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00432	**KFDPW325R**	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00434	**KFDPW326R**	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00433	**KFDPW365R**	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00435	**KFDPW366R**	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00436	**KFDPW367**	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00437	**KFDPW368**	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00424	**KFDPWT3211R**	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00426	**KFDPWT3222R**	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00428	**KFDPWT3233R**	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00425	**KFDPWT3611R**	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00427	**KFDPWT3622R**	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00429	**KFDPWT3633R**	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	—	unknown

EDH-EAT-00430	KFDPBS324R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)

OEM part number	KFDPBS324R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00431	KFDPBS364R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)

OEM part number	KFDPBS364R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	6X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00432	KFDPW325R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)

OEM part number	KFDPW325R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00434	KFDPW326R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)

OEM part number	KFDPW326R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00433	KFDPW365R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)

OEM part number	KFDPW365R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	9X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00435	KFDPW366R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)

OEM part number	KFDPW366R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00436	KFDPW367	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)

OEM part number	KFDPW367	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	11X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00437	KFDPW368	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)

OEM part number	KFDPW368	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	15X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00424	KFDPWT3211R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)

OEM part number	KFDPWT3211R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00426	KFDPWT3222R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)

OEM part number	KFDPWT3222R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00428	KFDPWT3233R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)

OEM part number	KFDPWT3233R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00425	KFDPWT3611R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)

OEM part number	KFDPWT3611R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00427	KFDPWT3622R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)

OEM part number	KFDPWT3622R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	4X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00429	KFDPWT3633R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)

OEM part number	KFDPWT3633R	A	S14 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S14 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S14 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S14 p. 17; oem_spec
Dimensions	5X of chassis height	A	S14 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

3.6 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards

FAM-EAT-025 · panelboard · aka NAB, NA1B, NH1B, NHB, NDP, NHDP, NEB, NHEB, ABH, A2B · markings: Westinghouse

Westinghouse 1937-1988 lighting/appliance and distribution panelboards using E-family plug/bolt breakers. Branch breakers replaced by 'panelboard only' R-prefix breakers (REH, RHF, RHFA) supplied with mounting hardware; connector kits not available. The scope term 'NHB' is not used in Vol 12; nearest OEM designations are NH1B and NHEB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	A	S13 p. V12-T4-7; oem_spec
Branch breakers accepted	E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	A	same as above

Breaker families associated: E, F

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.7 NLAB — Westinghouse NLAB lighting panelboard

FAM-EAT-024 · panelboard · aka NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQP, NQC · markings: Westinghouse

Westinghouse plug-in/bolt-on lighting panelboards for Quicklag-type Q breakers. Vol 12 flags 'connectors not available' for this group; replacement is a new PRL1a/PRL3a interior. CDP/FDP/NQB trim clamp 414A380G02 still applies to NQB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	A	S13 p. V12-T4-7; oem_spec
Era of manufacture	Westinghouse panelboards manufactured between 1937 and 1988	A	same as above
Branch breakers accepted	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	A	same as above
connectors	Connectors not available (note 2) for NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQC, NQP	A	same as above

Breaker families associated: BAB
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions
Also fits this family (entry printed elsewhere): 414A380G02

3.8 PRC — Pow-R-Command lighting control panelboard

FAM-EAT-016 · panelboard · aka Pow-R-Command, PRCE · markings: Cutler-Hammer, Eaton

Lighting control panelboard based on PRL3a/3X chassis; renewal parts (connector kits, grounds, SE kits, deadfronts, trim locks) are per PRL3X/PRL3a section.

Attribute	Value	Cl.	Sources
Status	Current (Pow-R-Command E series in 2020 catalog)	A	S6 oem_spec
Era of manufacture	Introduced March 1996	A	S1, S2 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac	A	S6 p.V2-T3-3; oem_spec
Main ampacity	400 A max MLO/main	A	S6 oem_spec
Branch breakers accepted	Bolt-on breakers 225 A max incl. remote-operated breakers	A	same as above

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control
Also fits this family (entry printed elsewhere): KPRL3ABA06, KPRL3ABA06-1, KPRL3ABA12, KPRL3ABA12-1, KPRL3ABA18, KPRL3ABA18-1, KPRL3ABA24, KPRL3ABA24-1, KPRL3AGB06, KPRL3AGB06-1, KPRL3AGB12, KPRL3AGB12-1, KPRL3AGB18, KPRL3AGB18-1, KPRL3AGB24, KPRL3AGB24-1, 5078A98, 5158C05, 2C11296, 6559C59, 4176B72, 4180B91

3.9 PRL-LX — Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)

FAM-EAT-010 · panelboard · aka PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX, column panelboard · markings: Cutler-Hammer, Eaton

Narrow column-width lighting panels (box YSC969-YSC990, trims LTC/LTCD). Renewal parts listed are boxes and trims only.

Attribute	Value	Cl.	Sources
Status	Legacy (a) / current (X)	A	S1, S6 oem_spec
Era of manufacture	PRL1a/2a-LX introduced December 1997	A	S1, S2 p.2; oem_spec
Successor	PRL1X-LX / PRL2X-LX	A	S6 oem_spec
Voltage rating	PRL1a-LX 240 Vac; PRL2a-LX 480Y/277 Vac, 125/250 Vdc	A	S7 p.22.0-5; oem_spec
Main ampacity	225 A max MLO or main	A	same as above
Branch breakers accepted	Bolt-on breakers 15-30 A (a-LX per s7) / 15-100 A (X-LX per s6)	A	S6, S7 oem_spec

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.10 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)

FAM-EAT-011 · panelboard · aka POW-R-LINE, PRL1, PRL1-LX, PRL2, Pow-R-Line 1, Pow-R-Line 2 · markings: Westinghouse

Original Westinghouse Pow-R-Line lighting panelboards on 20 in wide boxes (YS20xx, 5.75 in deep) with gutter neutral; trims LT20xxS/F. Branch connector kits hold two sets of A/B/C connectors for 12 poles, silver-plated copper suitable for Cu or Al bus, max 140 A per connector. Branch deadfronts 5156C10 (PRL1) / 5156C09 (PRL2).

Vintage Westinghouse lighting (PRL1) and 480Y/277 V (PRL2) panelboards, 20 in wide boxes, neutral at top. Replacement connector kits KPRL1BAB / KPRL2GHB mount up to 12 poles.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts (Sumter Aftermarket Center) per Feb 2013 guide	A	S5 oem_spec
	discontinued; replaced by PRL1a / PRL2a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	A	S13 pp. V12-T4-2, V12-T4-8; oem_spec
	Pre-1993 Westinghouse (pre-'Pow-R-Line C'); surplus example PRL1 dated 9/88 (Era bracket from s1 statement that Pow-R-Line C introduced 1993; date of first PRL1 not found)	C	S5 inference
Successor	PRL1a / PRL2a (functional successor)	C	S1, S5 inference
Voltage rating	PRL1 240 V class (BAB); PRL2 480Y/277 (GHB) - inferred from replacement connector kits	C	S5 inference
Main ampacity	600 A maximum	A	S13 p. V12-T4-15; oem_spec
Branch breakers accepted	PRL1: BAB-family QUICKLAG; PRL2: GHB-family (from replacement connector kits KPRL1BAB / KPRL2GHB)	A	S5 p.3 Table 1; oem_spec
	PRL1: BAB, QBHW, HQP, QPHW; PRL2: GB, GHB, GHBS	A	S13 p. V12-T4-8; oem_spec
box	20.00 in wide x 5.75 in deep boxes YS2021-YS2090 (21-90 in high)	A	S5 p.3 Table 2; oem_spec
box_width	Standard width 20.00 in; box depth 5.75 in	A	S14 pp. 2-3; oem_spec

Breaker families associated: BAB, GB, GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 0080429

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00166	**KPRL1BAB**	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	BAB-family QUICKLAG (inferred from catalog number; table names panel t C	Listed in RP01400002E (Feb 2013)
EDH-EAT-00167	**KPRL2GHB**	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	GHB-family (inferred from catalog number; table names panel type only) C	Listed in RP01400002E (Feb 2013)

EDH-EAT-00166	KPRL1BAB	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)

OEM part number	KPRL1BAB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL1: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL1: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	BAB-family QUICKLAG (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum amperes connected to any one connector cannot exceed 140 A	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family), BAB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00167	KPRL2GHB	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)

OEM part number	KPRL2GHB	A	S5, S14 p.3 Table 1; oem_spec
Description	Replacement connectors for PRL2: two sets of A, B, C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S5 p.3; oem_spec
	Replacement connectors for vintage PRL2: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S14 p. 3; oem_spec
Application	branch	A	same as above
Breaker compatibility	GHB-family (inferred from catalog number; table names panel type only)	C	S5 inference
Current rating	Max 140 A connected to any one connector	A	S5 p.3; oem_spec
	Maximum 140 A connected to any one connector	A	S14 p. 3; oem_spec
Material	Silver-plated copper; suitable for copper or aluminum bus	A	S5 p.3; oem_spec
	Silver-plated copper connectors, suitable for copper or aluminum bus	A	S14 p. 3; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on), GB		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00239	**5158C03**	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	—	Listed Feb 2013
EDH-EAT-00439	**5158C03G01**	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00438	**5158C03G02**	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00441	**5158C03G03**	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00440	**5158C03G04**	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00240	**5158C04G01**	Vintage PRL1/PRL2 400/600 A neutral bar	—	Listed Feb 2013

EDH-EAT-00239	5158C03	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 neutral bar, 100 A and 225 A

OEM part number	5158C03	A	S5 p.4 Table 3; oem_spec
Description	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A (G02 100 A >=30 in box; G01 100 A <30 in; G04 225 A >=30 in; G03 225 A <30 in)	A	same as above
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00439	5158C03G01	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G01	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes less than 30.00 in high	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00438	5158C03G02	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G02	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes 30.00 in and above	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00441	5158C03G03	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G03	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes less than 30.00 in high	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00440	5158C03G04	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G04	A	S14 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes 30.00 in and above	A	S14 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00240	5158C04G01	Westinghouse	neutral-assembly	LISTED FEB 2013

Vintage PRL1/PRL2 400/600 A neutral bar

OEM part number	5158C04G01	A	S5, S14 p.4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S14 style_number; p. 2 item 3; oem_spec
Description	Vintage PRL1/PRL2 400/600 A neutral bar	A	S5 p.4 Table 3; oem_spec
	400/600 A neutral bar	A	S14 p. 4 Table 3; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug_count, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00443	**5158C05G01**	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00442	**5158C05G02**	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	—	unknown
EDH-EAT-00237	**5158C05G05**	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	—	Listed Feb 2013
EDH-EAT-00444	**5158C05G06**	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	—	unknown

EDH-EAT-00443	5158C05G01	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G01	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00442	5158C05G02	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G02	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00237	5158C05G05	Westinghouse	ground-bar	LISTED FEB 2013

Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in

OEM part number	5158C05G05	A	S5, S14 p.5 Table 5; oem_spec
Alternate / superseded numbers	5158C05G06 (boxes 30 in and above)	A	S5 style_number; p.5; oem_spec
Description	Isolated ground bar for vintage PRL1/PRL2, boxes less than 30 in high (G06 for 30 in and above)	A	S5 p.5 Table 5; oem_spec
	isolated ground bar, boxes less than 30.00 in high	A	S14 p. 5 Table 5; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00444	5158C05G06	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G06	A	S14 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes 30.00 in and above	A	S14 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00290	**5156C09**	Vintage PRL2 branch section deadfront cover	—	Listed Feb 2013
EDH-EAT-00289	**5156C10**	Vintage PRL1 branch section deadfront cover	—	Listed Feb 2013

EDH-EAT-00290	5156C09	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL2 branch section deadfront cover

OEM part number	5156C09	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	A	S5 style_number; oem_spec
Description	PRL2 branch section deadfront cover	A	same as above
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00289	5156C10	Westinghouse	deadfront	LISTED FEB 2013

Vintage PRL1 branch section deadfront cover

OEM part number	5156C10	A	S5 p.5 Table 6; oem_spec
Alternate / superseded numbers	H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	A	S5 style_number; p.5; oem_spec
Description	PRL1 branch section deadfront cover by max number of circuits	A	S5 oem_spec
Status	Listed Feb 2013	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00292	**3456B35H01**	Vintage PRL1/PRL2 blank cover 6.00 in	—	Listed Feb 2013
EDH-EAT-00291	**3456B99H01**	Vintage PRL1/PRL2 blank cover 3.00 in	—	Listed Feb 2013
EDH-EAT-00293	**3456B99H05**	Vintage PRL1/PRL2 blank cover 15.00 in	—	Listed Feb 2013

EDH-EAT-00292	3456B35H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 6.00 in

OEM part number	3456B35H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 6.00 in (152.4 mm)	A	S5, S14 oem_spec
Dimensions	Height 6.00 in (152.4 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00291	3456B99H01	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 3.00 in

OEM part number	3456B99H01	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 3.00 in (76.2 mm)	A	S5, S14 oem_spec
Dimensions	Height 3.00 in (76.2 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

EDH-EAT-00293	3456B99H05	Westinghouse	filler-plate	LISTED FEB 2013

Vintage PRL1/PRL2 blank cover 15.00 in

OEM part number	3456B99H05	A	S5, S14 p.4 Table 4; oem_spec
Description	Blank cover, height 15.00 in (381.0 mm)	A	S5, S14 oem_spec
Dimensions	Height 15.00 in (381.0 mm)	A	S5, S14 p.4; oem_spec
Status	Listed Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00411	**114C247G01**	Vintage lighting/small power panel trim lock	—	Listed in renewal parts guide(s) s5
EDH-EAT-00412	**3457B16G01**	Vintage lighting and small panel standard trim lock	—	Listed in renewal parts guide(s) s5

EDH-EAT-00411	114C247G01	Eaton	trim	LISTED IN RENEWAL PART

Vintage lighting/small power panel trim lock

OEM part number	114C247G01	A	S5, S14 oem_spec
Description	Vintage lighting/small power panel trim lock (replacement uses WEM-3 key)	A	S5 oem_spec
	Lock used on lighting and small power panels as standard; replacement lock uses WEM-3 key	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00412	3457B16G01	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Vintage lighting and small panel standard trim lock

OEM part number	3457B16G01	A	S5, S14 oem_spec
Description	Vintage lighting and small panel standard trim lock	A	S5 oem_spec
	Lock used on lighting and small panels as standard	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s5	A	S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00419	**7494A11G02**	Vintage Fastrim trim clamps for B10B and PRL1/2/3	—	Listed in s5

EDH-EAT-00419	7494A11G02	Cutler-Hammer	hardware-kit	LISTED IN S5

Vintage Fastrim trim clamps for B10B and PRL1/2/3

OEM part number	7494A11G02	A	S5 oem_spec
Description	Vintage Fastrim trim clamps for B10B and PRL1/2/3 (bag of 6, 3.13 in long)	A	same as above
Status	Listed in s5	A	same as above
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00446	**414A380G01**	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	—	unknown
EDH-EAT-00447	**8712C73H01**	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	—	unknown

EDH-EAT-00446	414A380G01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)

OEM part number	414A380G01	A	S14 p. 8 Fastrim; oem_spec
Description	Flush Fastrim uses Style Number 414A380G01 trim clamps (supplied with the trim)	A	S14 p. 8; oem_spec
Dimensions	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 (p.19 shows a 3.13 in clamp for B10B/PRL1-3 next to 414A380G02; association with G01 inferred from layout and p.8)	C	S14 p. 19; oem_drawing
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Material		

EDH-EAT-00447	8712C73H01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3

OEM part number	8712C73H01	A	S14 p. 8 Fastrim; oem_spec
Description	Surface Fastrim uses Style Number 8712C73H01 trim clamps; clamps included and shipped with the trim	A	S14 p. 8; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

3.11 PRL1A — Pow-R-Line 1a

FAM-EAT-001 · panelboard · aka PRL1a, PRL-1A, Pow-R-Line 1a, POW-R-LINE 1A · markings: Cutler-Hammer, Eaton

Cutler-Hammer/Eaton 240 Vac lighting & appliance panelboard on a 20 in wide box, neutral located in the side gutter. Branch QUICKLAG breakers mount horizontally on factory connector strips (bolt-on 1C96608 or plug-on 2C11642 assemblies); mains, sub-feed breakers and main/sub-feed/through-feed lugs mount vertically on KB/KL connector kits. Fully rated 10/22 kA, series rated to 200 kA at 240 Vac. Suitable for service entrance when specified (PRLSEB barrier kits, 4180B62 bonding jumper). Note: Eaton literature also uses the umbrella name 'Pow-R-Line C' for Series C breaker panelboards; that name is not unique to PRL1a and is also the name of the PRLC switchboard.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts still listed April 2021. Superseded by PRL1X (Pow-R-Line Xpert, introduced 2020; time line shows PRL1X/2X/3X/4X from May 2020)	A	S1 p.2 Table 1; oem_spec
Era of manufacture	Introduced October 1996 (Cutler-Hammer); part of 'Pow-R-Line C' line introduced 1993	A	S1, S2 s1 p.2 Table 1; s2 p.2 Table 1; oem_spec
Successor	PRL1X	A	S1, S6 s1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S7 p.22.0-5 Table 22.0-2; p.22.1-1; oem_spec
Main ampacity	Main lugs 100, 225, 400, 600 A; main breakers 100-600 A (MLO and main device 600 A max)	A	S7 p.22.1-1; oem_spec
Branch breakers accepted	Bolt-on QUICKLAG BAB/QBHW (incl. GF/AFCI/RP variants) or plug-on HQP/QPHW chassis, 15-100 A, 1-3 pole. Mains: BAB/QBHW (100 A, horizontal), EHD, FDB, FD/FDE, HFD/HFDE, FDC/FDCE, EDB, EDS, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LGE/LGS/LGH/LGC/LGU	A	S7 p.22.1-1 Tables 22.1-1, 22.1-2; oem_spec
box_width	20.00 in (508.0 mm) standard width	A	S1 p.2; oem_spec
Identification features	Neutral bar in side gutter (Figure 1); same position as PRL1X/2X/2a	A	S1 p.2 Figure 1; oem_spec
branch_connector_limit	Sum of horizontally twin-mounted plug-on breakers shall not exceed 140 A; CTL panels max 42 circuits per enclosure	A	S1 p.9 Table 9 notes; oem_spec

Breaker families associated: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00006	**KB11AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00005	**KB11AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00008	**KB11SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00007	**KB11SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00002	**KB13AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00001	**KB13AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00004	**KB13SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00003	**KB13SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector	EHD, FD, HFD, FDC A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00014	**KB21AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00013	**KB21AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00016	**KB21SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00015	**KB21SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00010	**KB23AFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00009	**KB23AFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00012	**KB23SFB**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00011	**KB23SFT**	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector	FD, HFD, FDC, ED, EDH, EDC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00022	**KB41AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00021	**KB41AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00030	**KB41AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00029	**KB41AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00024	**KB41SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00023	**KB41SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00032	**KB41SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00031	**KB41SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00018	**KB43AJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00017	**KB43AJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00026	**KB43AKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00025	**KB43AKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00020	**KB43SJB**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00019	**KB43SJT**	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector	JD family (J-Frame) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00028	**KB43SKB**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00027	**KB43SKT**	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector	K-Frame (DK/KD family) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00006 **KB11AFB** Cutler-Hammer main-breaker-kit **LISTED AS STOCK RENEWA**

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11AFB	**A**	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	**A**	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	**A**	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	**A**	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	**A**	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	**A**	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	**C**	S1 inference
Current rating	100 A max	**A**	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	**A**	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	**A**	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00005	KB11AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00008	KB11SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00007	KB11SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00002	KB13AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00001	KB13AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00004	KB13SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00003	KB13SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (100 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	EHD, FD, HFD, FDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (100 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	100 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00014	KB21AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00013	KB21AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00016	KB21SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00015	KB21SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00010	KB23AFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23AFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00009	KB23AFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23AFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00012	KB23SFB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23SFB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00011	KB23SFT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23SFT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for F-Frame (225 A maximum) main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC	A	S1, S2 s1 p.5 Table 3 notes b/c; oem_spec
Breaker frame	F-Frame (225 A maximum)	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	225 A max	A	S1 oem_spec
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00022	KB41AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00021	KB41AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00030	KB41AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00029	KB41AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00024	KB41SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00023	KB41SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00032	KB41SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00031	KB41SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silver-plated copper connector

OEM part number	KB41SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, single-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	2-pole (single-phase A/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00018	KB43AJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00017	KB43AJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00026	KB43AKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43AKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00025	KB43AKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43AKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, tin-plated aluminum connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00020	KB43SJB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SJB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00019	KB43SJT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SJT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for J-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	JD family (J-Frame)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	J-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00028	KB43SKB	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43SKB	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, bottom fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at bottom end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00027	KB43SKT	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silver-plated copper connector

OEM part number	KB43SKT	A	S1, S2 s1 p.5 Table 3; s2 p.5 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for K-Frame main or sub-feed breaker, three-phase, top fed, silver-plated copper connector	A	S1, S2 s1 p.5 Table 3; oem_spec
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.5 Table 3 note a; oem_spec
Installation location	Main/sub-feed position at top end of PRL1a/2a interior	A	S1 p.5; oem_spec
Breaker compatibility	K-Frame (DK/KD family)	A	S1, S2 s1 p.5 Table 3; oem_spec
Breaker frame	K-Frame	A	S1 p.5; oem_spec
Poles	3-pole (A/B/C) (Inferred from three-/single-phase column)	C	S1 inference
Current rating	400 A class (frame)	C	same as above
Kit contents	Connector kit only - order main or sub-feed breaker separately	A	S1 p.5 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.5 column heading; oem_spec
OEM instruction document	Eaton RP01400001E p.5; matching vertical deadfront cover per p.18 Table 23	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.5; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00071	**KL11AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00063	**KL11AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00083	**KL11AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00075	**KL11AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00090	**KL11SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00086	**KL11SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00072	**KL11SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00064	**KL11SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00084	**KL11SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00076	**KL11SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00069	**KL13AMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00061	**KL13AMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00081	**KL13AVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00073	**KL13AVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00089	**KL13SCO**	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00085	**KL13SCS**	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00070	**KL13SMO**	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00062	**KL13SMS**	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00082	**KL13SVO**	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00074	**KL13SVS**	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00101	**KL21AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00093	**KL21AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00113	**KL21AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00105	**KL21AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00120	**KL21SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00116	**KL21SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00102	**KL21SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00094	**KL21SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00114	**KL21SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00106	**KL21SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00099	**KL23AMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00091	**KL23AMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00111	**KL23AVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00103	**KL23AVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00119	**KL23SCO**	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00115	**KL23SCS**	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00100	**KL23SMO**	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00092	**KL23SMS**	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00112	**KL23SVO**	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00104	**KL23SVS**	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00127	**KL41AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00123	**KL41AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00135	**KL41AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00131	**KL41AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00138	**KL41SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00128	**KL41SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00124	**KL41SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00136	**KL41SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00132	**KL41SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00125	**KL43AMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00121	**KL43AMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00133	**KL43AVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00129	**KL43AVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00137	**KL43SCO**	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00126	**KL43SMO**	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00122	**KL43SMS**	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00134	**KL43SVO**	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00130	**KL43SVS**	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00148	**KL61CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00142	**KL61CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00160	**KL61CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00154	**KL61CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00149	**KL61SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00143	**KL61SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00161	**KL61SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00155	**KL61SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00150	**KL61TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00144	**KL61TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00162	**KL61TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00156	**KL61TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00145	**KL63CMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00139	**KL63CMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00157	**KL63CVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00151	**KL63CVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00146	**KL63SMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00140	**KL63SMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00158	**KL63SVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00152	**KL63SVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00147	**KL63TMO**	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00141	**KL63TMS**	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00159	**KL63TVO**	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00153	**KL63TVS**	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00071 **KL11AMO** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00063 **KL11AMS** Cutler-Hammer main-lug-kit **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00083	KL11AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00075	KL11AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00090	KL11SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00086	KL11SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00072	KL11SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00064	KL11SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00084	KL11SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00076	KL11SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00069	KL13AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00061	KL13AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00081	KL13AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00073	KL13AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00089	KL13SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00085	KL13SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00070	KL13SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00062	KL13SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00082	KL13SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVO	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00074	KL13SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVS	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00101	KL21AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00093	KL21AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00113	KL21AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00105	KL21AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00120	KL21SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00116	KL21SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00102	KL21SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00094	KL21SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00114	KL21SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00106	KL21SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00099	KL23AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00091	KL23AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00111	KL23AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00103	KL23AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00119	KL23SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00115	KL23SCS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00100	KL23SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00092	KL23SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00112	KL23SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVO	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00104	KL23SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVS	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00127	KL41AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00123	KL41AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL41AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00135	KL41AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00131	KL41AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL41AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00138	KL41SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00128	KL41SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00124	KL41SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL41SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00136	KL41SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00132	KL41SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL41SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00125	KL43AMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00121	KL43AMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL43AMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00133	KL43AVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00129	KL43AVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL43AVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated aluminum connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00137	KL43SCO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SCO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 1 lug(s) per phase, wire range 1/0-600 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00126	KL43SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00122	KL43SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL43SMS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00134	KL43SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVO	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00130	KL43SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL43SVS	A	S1 p.7 Table 6; oem_spec
Description	400 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 6 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	400 A	A	S1 p.7 Table 6; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil (Feb 2009 edition (s2) gives wire range 2/0-500 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00148	KL61CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00142	KL61CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare copper connector

OEM part number	KL61CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00160	KL61CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00154	KL61CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper connector

OEM part number	KL61CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00149	KL61SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00143	KL61SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL61SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00161	KL61SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00155	KL61SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL61SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00150	KL61TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00144	KL61TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-plated copper connector

OEM part number	KL61TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00162	KL61TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00156	KL61TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated copper connector

OEM part number	KL61TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), single-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00145	KL63CMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00139	KL63CMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare copper connector

OEM part number	KL63CMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00157	KL63CVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00151	KL63CVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper connector

OEM part number	KL63CVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, bare copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Bare copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00146	KL63SMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00140	KL63SMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL63SMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00158	KL63SVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00152	KL63SVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL63SVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, silver-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00147	KL63TMO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 3/0-750 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00141	KL63TMS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-plated copper connector

OEM part number	KL63TMS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, aluminum/copper mechanical lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00159	KL63TVO	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVO	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, OVS (oversize lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 500-750 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00153	KL63TVS	Cutler-Hammer	main-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated copper connector

OEM part number	KL63TVS	A	S1 p.7 Table 7; oem_spec
Description	600 A lug assembly, crimp (compression) lugs, STD (standard lugs - main or through-feed), three-phase, tin-plated copper connector	A	same as above
Application	main or through-feed	A	S1 p.7 Table 7 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	600 A	A	S1 p.7 Table 7; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 4/0-500 kcmil	A	same as above
Material	Tin-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00067	**KL11AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00079	**KL11AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00088	**KL11SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00068	**KL11SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00080	**KL11SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00065	**KL13AMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00077	**KL13AVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00087	**KL13SCF**	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00066	**KL13SMF**	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00078	**KL13SVF**	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00097	**KL21AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00109	**KL21AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00118	**KL21SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00098	**KL21SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00110	**KL21SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00095	**KL23AMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00107	**KL23AVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00117	**KL23SCF**	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00096	**KL23SMF**	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00108	**KL23SVF**	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00067	**KL11AMF**	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL11AMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00079	KL11AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL11AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00088	KL11SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00068	KL11SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL11SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00080	KL11SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL11SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00065	KL13AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL13AMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00077	KL13AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL13AVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00087	KL13SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SCF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00066	KL13SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL13SMF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #14-1/0	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00078	KL13SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL13SVF	A	S1 p.5 Table 4; oem_spec
Description	100 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.5 Table 4 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	100 A	A	S1 p.5 Table 4; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #1-1/0 (Feb 2009 edition (s2) gives wire range #8-1/0 for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00097	KL21AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-plated aluminum connector

OEM part number	KL21AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00109	KL21AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated aluminum connector

OEM part number	KL21AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00118	KL21SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00098	KL21SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silver-plated copper connector

OEM part number	KL21SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00110	KL21SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plated copper connector

OEM part number	KL21SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), single-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00095	KL23AMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-plated aluminum connector

OEM part number	KL23AMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Tin-plated aluminum connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00107	KL23AVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated aluminum connector

OEM part number	KL23AVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, tin-plated aluminum connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Tin-plated aluminum connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00117	KL23SCF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SCF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-250 kcmil	A	same as above
Material	Silver-plated copper connector; copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00096	KL23SMF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silver-plated copper connector

OEM part number	KL23SMF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, aluminum/copper mechanical lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range #6-300 kcmil	A	same as above
Material	Silver-plated copper connector; aluminum/copper mechanical lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00108	KL23SVF	Cutler-Hammer	sub-feed-lug-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plated copper connector

OEM part number	KL23SVF	A	S1 p.6 Table 5; oem_spec
Description	225 A lug assembly, crimp (compression) lugs, SFL (sub-feed lugs), three-phase, silver-plated copper connector	A	same as above
Application	sub-feed	A	S1 p.6 Table 5 note a; oem_spec
Installation location	Main/sub-feed/through-feed lug position at end of PRL1a/2a/1X/2X interior	C	S1 inference
Current rating	225 A	A	S1 p.6 Table 5; oem_spec
Kit contents	Lug assembly: 2 lug(s) per phase, wire range 2/0-300 kcmil (Feb 2009 edition (s2) gives wire range #4-300 kcmil for this crimp lug - range changed between editions (likely lug vendor change))	A	same as above
Material	Silver-plated copper connector; crimp (compression) lugs	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00163	**1C96608**	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip n A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00164	**2C11642**	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP A	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00163	1C96608	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96608	A	S1, S2, S3 s1 p.8 Table 8; oem_spec
Alternate / superseded numbers	1C96608G01..G63 (odd item numbers)	A	S1 style_number; p.8 Table 8; oem_spec
Description	Horizontally mounted branch connector kit assembly for bolt-on QUICKLAG breakers; order drawing number + G item: 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	A	S1, S2 s1 p.8; oem_spec
Application	branch	A	S1 oem_spec
Installation location	Branch section, PRL1a/1X interior	A	same as above
Breaker compatibility	BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP (QUICKLAG with shunt trip needs one extra circuit)	A	S1, S2 p.8; oem_spec
Kit contents	Connector assembly only; order breakers separately	A	S1 p.8 note 4; oem_spec
Material	Tin-plated aluminum or silver-plated copper connectors (bare copper bus: use silver-plated groups)	A	S1 p.8 note 3; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.8; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Physical difference between 12-circuit and 96-circuit groups (strap length / number of straps) not documented.*		

EDH-EAT-00164	2C11642	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuits)

OEM part number	2C11642	A	S1, S2 s1 p.9 Table 9; oem_spec
Alternate / superseded numbers	2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	A	S1 style_number; p.9; oem_spec
Description	Plug-in QUICKLAG breaker connector assembly; only silver-plated copper groups (G03/G11/.. 3-ph; G07/G15/.. 1-ph) offered	A	S1, S2 p.9 Table 9; oem_spec
Application	branch	A	S1 oem_spec
Breaker compatibility	HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP	A	S1, S2 p.9; oem_spec
Current rating	Sum of horizontally twin-mounted breakers shall not exceed 140 A	A	S1 p.9 note 4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.9; oem_spec
Cross-links	Families: PRL1A, PRL1X · Breakers: QUICKLAG plug-on (HQP/QPHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00233	**1C96645**	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00221	**1C96646**	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00223	**1C96647**	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00224	**1C96648**	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00225	**1C96649**	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00227	**1C96650**	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00228	**1C96651**	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00229	**1C96652**	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00231	**1C96653**	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)	—	Listed Feb 2009; replaced by 42C405x crimp neutral drawings
EDH-EAT-00232	**1C96654**	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00234	**1C97022**	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00222	**42C4050**	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00226	**42C4051**	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00230	**42C4052**	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00233	1C96645	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C96645	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 100% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00221	1C96646	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures)

OEM part number	1C96646	A	S1, S2, S4 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 style_number; s1 p.11 Table 11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, mechanical lugs (30-90 in enclosures). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00223	1C96647	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96647	A	S2 s2 p.12 Table 9; oem_spec
Alternate / superseded numbers	STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	A	S2 s2 p.12 Table 9; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00224	1C96648	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical lugs

OEM part number	1C96648	A	S1, S2 s1 p.11; oem_spec
Alternate / superseded numbers	STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 style_number; s1 p.11; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	A	S1 s1 p.11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00225	1C96649	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs

OEM part number	1C96649	A	S1, S2, S4 s1 pp.11-12 Tables 11-12; oem_spec
Alternate / superseded numbers	STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12 Tables 11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral / 225 A main 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12 Tables 11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00227	1C96650	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing)

OEM part number	1C96650	A	S2 s2 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	A	S2 s2 pp.12-13; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00228	1C96651	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mechanical lugs

OEM part number	1C96651	A	S1, S2 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00229	1C96652	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs

OEM part number	1C96652	A	S1, S2, S4 s1 pp.12-13 Tables 12-14; oem_spec
Alternate / superseded numbers	225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 style_number; s1 pp.12-13 Tables 12-14; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% / 600 A 100% neutral, mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: 225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	A	S1 s1 pp.12-13 Tables 12-14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00231	1C96653	Cutler-Hammer	neutral-assembly	LISTED FEB 2009; REPLA

PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing)

OEM part number	1C96653	A	S2 s2 p.13 Table 10; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2 [style_number]	A	same as above
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% neutral, crimp lugs (2009 drawing). Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	A	S2 s2 p.13 Table 10; oem_spec
Status	Listed Feb 2009; replaced by 42C405x crimp neutral drawings by Oct 2017 edition (Same table positions; wire ranges differ)	B	S2, S3, S1 inference
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00232	1C96654	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mechanical lugs

OEM part number	1C96654	A	S1, S2 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 style_number; s1 pp.12-13; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral, copper mechanical lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00234	1C97022	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 in high enclosures only

OEM part number	1C97022	A	S1, S2 s1 p.14 Table 15; oem_spec
Alternate / superseded numbers	STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 style_number; s1 p.14 Table 15; oem_spec
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main 200% neutral, mechanical, 21-27 in high enclosures only. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	same as above
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	A	S1 s1 p.14 Table 15; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00222	42C4050	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs

OEM part number	42C4050	A	S1, S3 s1 p.11 Table 11; oem_spec
Alternate / superseded numbers	STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 style_number; s1 p.11 Table 11; oem_spec
	1C96647 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A main, 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 p.11 Table 11; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	A	S1 s1 p.11 Table 11; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00226	42C4051	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs

OEM part number	42C4051	A	S1, S3 s1 pp.11-12; oem_spec
Alternate / superseded numbers	STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 style_number; s1 pp.11-12; oem_spec
	1C96650 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 100 A 200% / 225 A 100% neutral, crimp lugs. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.11-12; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	A	S1 s1 pp.11-12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00230	42C4052	Cutler-Hammer	neutral-assembly	LISTED AS STOCK RENEWA

PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral

OEM part number	42C4052	A	S1, S3 s1 pp.12-13; oem_spec
Alternate / superseded numbers	STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 style_number; s1 pp.12-13; oem_spec
	1C96653 (Same table position in Feb 2009 edition; crimp lug ranges differ)	B	S2, S1 supersedes; inference
Description	PRL1a/2a/1X/2X neutral assembly: 225 A 200% / 400 A 100% neutral crimp; 600 A Burndy neutral. Order drawing number + G item (G odd/even per tin-plated Al vs silver-plated Cu connector column)	A	S1 s1 pp.12-13; oem_spec
Application	neutral (with standard, sub-feed/through-feed or oversize neutral lugs)	A	same as above
Installation location	Side-gutter neutral, PRL1a/2a/1X/2X	A	S1 p.2 Figure 1; oem_spec
Kit contents	Items/wire ranges: STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	A	S1 s1 pp.12-13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00236	**2C11296**	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00235	**5158C05**	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00236	2C11296	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)

OEM part number	2C11296	**A**	S1, S2, S4 s1 p.15 Table 17; p.24 Table 33; oem_spec
Alternate / superseded numbers	G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	**A**	S1 style_number; p.15; oem_spec
Description	Isolated ground bar; PRL3a/3X catalog numbers 2C11296G02 (Al/Cu) and 2C11296G04 (Cu) (Table 17 (G02 = 24 in copper) conflicts with Table 33 (G02 = Al/Cu for PRL3a); s4 Pow-R-Kit lists isolated ground bar as 2C11296G03)	**A**	S1 p.24 Table 33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Resolve 2C11296 G-number conflict between Table 17 and Table 33 / Pow-R-Kit (G03).*		

EDH-EAT-00235	5158C05	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)

OEM part number	5158C05	**A**	S1, S2, S4, S5 s1 p.15 Table 16; s1 p.24 Table 33; s5 pp.5-6; oem_spec
Alternate / superseded numbers	G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	**A**	S1, S5 style_number; s1 p.15; s5 p.5 Table 5; oem_spec
Description	Standard equipment ground bar; PRL3a/3X catalog numbers 5158C05G02 (Al/Cu) and 5158C05G04 (Cu only)	**A**	S1 p.15, p.24; oem_spec
Material	Aluminum/copper-rated or copper bar per G item	**A**	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00215	**PRLSEBFD**	Service entrance barrier kit for FD main breaker	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00216	**PRLSEBGHB**	Service entrance barrier kit for GHB main breaker	GHB **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00214	**PRLSEBJD**	Service entrance barrier kit for JD main breaker	JD **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00213	**PRLSEBLGKD**	Service entrance barrier kit for LG and KD main breaker	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00215	PRLSEBFD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for FD main breaker

OEM part number	PRLSEBFD	A	S1, S3 s1 p.16 Tables 19-20, p.25; oem_spec
Description	Service entrance barrier for FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	FD (PRL1a/2a/3a); PDG2 (PRL1X/2X/3a table)	A	S1 s1 p.16 Tables 19-20, p.25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00216	PRLSEBGHB	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for GHB main breaker

OEM part number	PRLSEBGHB	A	S1, S3 s1 p.16, p.25; oem_spec
Description	Service entrance barrier for GHB main breaker (service entrance main breaker kit)	A	S1 s1 p.16, p.25; oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	GHB	A	S1 s1 p.16, p.25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00214	PRLSEBJD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for JD main breaker

OEM part number	PRLSEBJD	A	S1, S3 s1 p.16 Table 20, p.25 Table 36; oem_spec
Description	Service entrance barrier for JD main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	JD	A	S1 s1 p.16 Table 20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00213	PRLSEBLGKD	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for LG and KD main breaker

OEM part number	PRLSEBLGKD	A	S1, S3 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Description	Service entrance barrier for LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X) main breaker (service entrance main breaker kit)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	LG and KD (PRL1a/2a/3a); PDG3 (PRL1X/2X)	A	S1 s1 p.16 Tables 19-20, p.25 Table 36; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00250	**1C96619**	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00251	**1C96620**	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00241	**1C96638**	PRL1a/2a/1X/2X deadfront cover assembly	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00245	**4180B03**	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00248	**4180B04**	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00247	**4180B05**	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00246	**4180B61**	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)	—	Listed Feb 2009 and Oct 2017; not in April 2021 edition
EDH-EAT-00244	**42C7982**	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00242	**42C8072**	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00243	**42C8073**	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00250	1C96619	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)

OEM part number	1C96619	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted BA, BAB, QBH, QBGF, QBHGF, QBGFEP, QBHGFEP branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00251	1C96620	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)

OEM part number	1C96620	A	S1, S2 s1 p.19 Table 24; oem_spec
Alternate / superseded numbers	12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	A	S1 style_number; p.19; oem_spec
Description	Deadfront cover for horizontally mounted GB, GHB, GHQ, GHBS branch section; item and quantity by branch circuit count	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00241	1C96638	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X deadfront cover assembly

OEM part number	1C96638	A	S1, S2, S4 s1 p.17 Table 21; oem_spec
Alternate / superseded numbers	Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	A	S1 style_number; p.17; oem_spec
Description	Deadfront cover assembly by standard enclosure height; does not apply to PRL4 sub-chassis	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00245	4180B03	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B03	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8072	C	S1, S2, S3 superseded_by; inference
Description	100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00248	4180B04	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover

OEM part number	4180B04	A	S1, S2 s1 p.18 Table 23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.18; oem_spec
Description	Deadfront cover, vertical 400 A MLO/SFL/TFL or J-Frame device	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.18; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00247	4180B05	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)

OEM part number	4180B05	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S2 style_number; p.17; oem_spec
	42C7982	C	S1, S2, S3 superseded_by; inference
Description	400 A MLO/TFL or K-Frame vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00246	4180B61	Cutler-Hammer	deadfront	LISTED FEB 2009 AND OC

PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-2021 drawing)

OEM part number	4180B61	A	S2, S3 s2 p.17 Table 17; s3 p.16 Table 20; oem_spec
Alternate / superseded numbers	H01 (top and bottom)	A	S2 style_number; p.17; oem_spec
	42C8073	C	S1, S2, S3 superseded_by; inference
Description	225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover	A	S2, S3 oem_spec
Status	Listed Feb 2009 and Oct 2017; not in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00244	42C7982	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover

OEM part number	42C7982	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B05 (4180B05 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C7982 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00242	42C8072	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover

OEM part number	42C8072	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B03 (4180B03 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8072 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00243	42C8073	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover

OEM part number	42C8073	A	S1 s1 pp.17-18 Tables 22-23; oem_spec
Alternate / superseded numbers	H01 top, H04 bottom	A	S1 style_number; p.17-18; oem_spec
	4180B61 (4180B61 occupies the same table row in Feb 2009 and Oct 2017 editions; replaced by 42C8073 in April 2021 edition)	C	S2, S3, S1 supersedes; inference
Description	Deadfront cover for vertically mounted device: 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device cover	A	S1 p.17-18; oem_spec
Installation location	Main/sub-feed end of deadfront	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00249	**4180B08**	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00252	**4180B52H01**	PRL1a/2a filler cover for F, J, K frame vertical device spaces	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00253	**5155C62H01**	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00249 **4180B08** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a/1X/2X deadfront blank covers 1-16 in

OEM part number	4180B08	A	S1, S2 s1 pp.17-18; oem_spec
Alternate / superseded numbers	H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	A	S1 style_number; p.17 Table 22; oem_spec
Description	Blank deadfront covers in 1 in height increments, H01-H16	A	S1, S2 oem_spec
Dimensions	Height 1.00-16.00 in by H number; width not stated	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.17; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00252 **4180B52H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

PRL1a/2a filler cover for F, J, K frame vertical device spaces

OEM part number	4180B52H01	A	S1, S2, S3 s1 p.19 Table 25; oem_spec
Description	Filler cover, F/J/K frame; required in addition to deadfront cover whenever MLO, SFL or TFL are specified	A	S1 p.19 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00253 **5155C62H01** Cutler-Hammer filler-plate **LISTED AS STOCK RENEWA**

QUICKLAG / GB / GHB 1-pole filler (branch space filler)

OEM part number	5155C62H01	A	S1, S2, S3, S4 s1 p.19 Table 25; p.30 Tables 42-43; oem_spec
Description	Filler cover for QUICKLAG, GB, GHB, GHBS branch spaces (1, 2 or 3 poles per PRL3 tables); required in addition to deadfront cover whenever a branch provision is specified. Pow-R-Kit lists it as 'BAB/GHB 1-Pole Fillers'	A	S1, S4 s1 p.19, p.30; s4 p.12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family), GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00410	**1A85194G01**	EZ Trim lock keyed WEM-2	—	Listed in renewal parts guide(s) s4
EDH-EAT-00403	**5155C81G01**	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	—	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00409	**5155C81G03**	EZ Trim lock, 24-48 in	—	Listed in renewal parts guide(s) s1, s3
EDH-EAT-00407	**8450C62H39**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s4, s5

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00406	**K80133**	Trim lock for right-handed door	—	Listed in renewal parts guide(s) s1, s2
EDH-EAT-00408	**K80429**	T-handle lock	—	Listed in renewal parts guide(s) s1, s2, s4, s5
EDH-EAT-00405	**K80522**	Trim lock for left-handed door	—	Listed in renewal parts guide(s) s1, s2, s5

EDH-EAT-00410 **1A85194G01** Eaton trim **LISTED IN RENEWAL PART**

EZ Trim lock keyed WEM-2

OEM part number	1A85194G01	**A**	S4 oem_spec
Description	EZ Trim lock keyed WEM-2 (standard); G03 GE75, G05 Corbin WEM-1, G09 Corbin TEU 1, G10 CAT 60	**A**	same as above
Status	Listed in renewal parts guide(s) s4	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00403 **5155C81G01** Cutler-Hammer trim **LISTED IN RENEWAL PART**

Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels

OEM part number	5155C81G01	**A**	S1, S2, S4, S5, S14 oem_spec
Description	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels (LT trims), WEM 2 key	**A**	S1, S2, S4, S5 oem_spec
	Present-day lock used on standard PRL1, 2 and 3; WEM 2 key — No Longer Available	**A**	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	**B**	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	**A**	S1, S2, S4, S5 oem_spec
	No Longer Available	**A**	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00409 **5155C81G03** Cutler-Hammer trim **LISTED IN RENEWAL PART**

EZ Trim lock, 24-48 in

OEM part number	5155C81G03	**A**	S1, S3 oem_spec
Description	EZ Trim lock, 24-48 in (54-60 in: lock 5155C81G03 + latch 5155C81G05; 72-90 in: 5155C81G04 + 5155C81G06)	**A**	same as above
Status	Listed in renewal parts guide(s) s1, s3	**A**	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00407	8450C62H39	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	8450C62H39	A	S4, S5, S14 oem_spec
Description	Trim lock for right-handed door (vintage / 2011 listing)	A	S4, S5 oem_spec
	Trim lock for right-handed door (hinged on right side)	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s4, s5	A	S4, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

EDH-EAT-00406	K80133	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for right-handed door

OEM part number	K80133	A	S1, S2 oem_spec
Alternate / superseded numbers	8450C62H39 (Right-hand door lock listed as K80133 (2009/2021) and 8450C62H39 (2011/2013))	C	S1, S4, S5 equivalent; inference
Description	Trim lock for right-handed door (hinged on right)	A	S1, S2 oem_spec
Status	Listed in renewal parts guide(s) s1, s2	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00408	K80429	Cutler-Hammer	trim	LISTED IN RENEWAL PART

T-handle lock

OEM part number	K80429	A	S1, S2, S4, S5 oem_spec
Alternate / superseded numbers	0080429	B	S4, S5 alias; oem_spec
Description	T-handle lock (trims over 48 in; NEMA 12/3R trims); listed as 0080429 in 2011/2013 docs	A	S1, S2, S4, S5 oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
Status	Listed in renewal parts guide(s) s1, s2, s4, s5	A	S1, S2, S4, S5 oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, CDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00405	K80522	Cutler-Hammer	trim	LISTED IN RENEWAL PART

Trim lock for left-handed door

OEM part number	K80522	A	S1, S2, S5, S14 oem_spec
Description	Trim lock for left-handed door (hinged on left)	A	S1, S2, S5 oem_spec
	Trim lock for left-handed door (hinged on left side)	A	S14 p. 19 Table 22; oem_spec
Dimensions	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) (Dimensions read from figure; verify)	B	S5 p.19; oem_spec
	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S14 p. 19 drawing; oem_drawing
Status	Listed in renewal parts guide(s) s1, s2, s5	A	S1, S2, S5 oem_spec
	listed 2013; contact Sumter for price	A	S14 p. 19; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL4, PRL1/PRL2, PRL3, CDP, FDP		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, key_code, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00413	**2C11641G02**	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	—	Listed in s1, s2, s4
EDH-EAT-00219	**4180B62**	PRL1a/2a/1X/2X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00413	2C11641G02	Cutler-Hammer	hardware-kit	LISTED IN S1, S2, S4

Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X

OEM part number	2C11641G02	A	S1, S2, S4 oem_spec
Description	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X (6 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00219	4180B62	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL1a/2a/1X/2X service entrance bonding jumper kit

OEM part number	4180B62	A	S1, S2, S4 s1 p.15 Table 18; oem_spec
Alternate / superseded numbers	Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	A	S1 style_number; p.15 Table 18; oem_spec
Description	Service entrance bonding jumper kit, neutral-to-ground; order 4180B62 + G item by main ampere rating, lug type and connector plating	A	S1, S2 s1 p.15; oem_spec
Application	accessory (service entrance)	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.15; oem_spec
Cross-links	Families: PRL1A, PRL2A, PRL1X, PRL2X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*2009 edition lists 400 A row as '400'; 2021 lists '400-600' - same G numbers.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00416	**42C1129H02**	Chassis mounting hardware, PRL1a/2a/3a	—	Listed in s4
EDH-EAT-00414	**5157C83G06**	Trim screws	—	Listed in s1, s2, s4
EDH-EAT-00415	**7499A48G04**	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	—	Listed in s1, s2, s4

EDH-EAT-00416	42C1129H02	Cutler-Hammer	fastener	LISTED IN S4

Chassis mounting hardware, PRL1a/2a/3a

OEM part number	42C1129H02	A	S4 oem_spec
Description	Chassis mounting hardware, PRL1a/2a/3a (Pow-R-Kit)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00414	5157C83G06	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Trim screws

OEM part number	5157C83G06	A	S1, S2, S4 oem_spec
Description	Trim screws (and captive nuts) for PRL1a/2a/3a/1X/2X/3X and PRL4B standard trim (10 per bag)	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X, PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00415	7499A48G04	Cutler-Hammer	fastener	LISTED IN S1, S2, S4

Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X

OEM part number	7499A48G04	A	S1, S2, S4 oem_spec
Description	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	A	same as above
Status	Listed in s1, s2, s4	A	same as above
Cross-links	Families: PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00422	**1256C42G01**	BAB 2- and 3-pole lock-off	—	Listed in s4
EDH-EAT-00421	**1256C42G02**	BAB 1-pole lock-off	—	Listed in s4

EDH-EAT-00422	1256C42G01	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 2- and 3-pole lock-off

OEM part number	1256C42G01	A	S4 oem_spec
Description	BAB 2- and 3-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00421	1256C42G02	Cutler-Hammer	handle-lock	LISTED IN S4

BAB 1-pole lock-off

OEM part number	1256C42G02	A	S4 oem_spec
Description	BAB 1-pole lock-off (non-padlockable)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL1A, PRL3A · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.12 PRL1X — Pow-R-Line Xpert 1X

FAM-EAT-006 · panelboard · aka PRL1x, Pow-R-Line 1X, Pow-R-Line Xpert · markings: Eaton

Pow-R-Line Xpert successor to PRL1a. Shares PRL1a horizontal branch assemblies (1C96608/2C11642/1C96609), lug kits (KL*), neutral/ground assemblies and deadfronts, but vertical main/sub-feed connector kits are for Power Defense frames (KB..2T/B, KB..34, KB..36). Each branch connector rated up to 140 A total by breaker rating.

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020 (time line: May 2020)	A	S1 p.2; oem_spec
Voltage rating	240 Vac maximum	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 600 A max; main device 600 A max; sub-feed breaker 600 A	A	same as above
Branch breakers accepted	Bolt-on or plug-on QUICKLAG (BAB, QBHW, HQP, QPHW, GF/AF/EP variants) 15-100 A; mains/sub-feeds PDG2 (Power Defense 225 A frame), PDG3, GHB	A	S1, S6 s1 pp.4,16; s6 p.V2-T3-33; oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family), QUICKLAG plug-on (HQP/QPHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96608, 2C11642, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00038	**KB11A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00037	**KB11A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00040	**KB11S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00039	**KB11S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00034	**KB13A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00033	**KB13A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00036	**KB13S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00035	**KB13S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (100 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00046	**KB21A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00045	**KB21A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00048	**KB21S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00047	**KB21S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00042	**KB23A2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00041	**KB23A2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00044	**KB23S2B**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00043	**KB23S2T**	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector	PDG2 (225 A maximum) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00054	**KB41A14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00053	**KB41A14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00056	**KB41S14B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00055	**KB41S14T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00050	**KB43A34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00049	**KB43A34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00052	**KB43S34B**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00051	**KB43S34T**	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector	PDG3A (400 A, adjustable) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00060	**KB61S16B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00059	**KB61S16T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00058	**KB63S36B**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00057	**KB63S36T**	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector	PDG3B (600 A, electronic trip unit) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00038	KB11A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB11A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00037	KB11A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB11A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00040	KB11S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB11S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00039	KB11S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB11S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00034	KB13A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB13A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00033	KB13A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB13A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00036	KB13S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB13S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00035	KB13S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB13S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (100 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (100 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00046	KB21A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB21A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00045	KB21A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB21A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00048	KB21S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB21S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00047	KB21S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase, top fed, silver-plated copper connector

OEM part number	KB21S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00042	KB23A2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB23A2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00041	KB23A2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB23A2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00044	KB23S2B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB23S2B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00043	KB23S2T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, top fed, silver-plated copper connector

OEM part number	KB23S2T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG2 (225 A maximum) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG2 (225 A maximum)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-EAT-00054	KB41A14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB41A14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00053	KB41A14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, tin-plated aluminum connector

OEM part number	KB41A14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00056	KB41S14B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB41S14B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00055	KB41S14T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-phase, top fed, silver-plated copper connector

OEM part number	KB41S14T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00050	KB43A34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, tin-plated aluminum connector

OEM part number	KB43A34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00049	KB43A34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, tin-plated aluminum connector

OEM part number	KB43A34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Tin-plated aluminum connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00052	KB43S34B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB43S34B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00051	KB43S34T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-phase, top fed, silver-plated copper connector

OEM part number	KB43S34T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3A (400 A, adjustable) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3A (400 A, adjustable)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00060	KB61S16B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, bottom fed, silver-plated copper connector

OEM part number	KB61S16B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00059	KB61S16T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), single-phase, top fed, silver-plated copper connector

OEM part number	KB61S16T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, single-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00058	KB63S36B	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, bottom fed, silver-plated copper connector

OEM part number	KB63S36B	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, bottom fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Bottom-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

EDH-EAT-00057	KB63S36T	Cutler-Hammer	main-breaker-kit	LISTED AS STOCK RENEWA

PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit), three-phase, top fed, silver-plated copper connector

OEM part number	KB63S36T	A	S1 p.4 Table 2; oem_spec
Description	Vertical breaker assembly connector kit for PDG3B (600 A, electronic trip unit) main or sub-feed breaker, three-phase, top fed	A	same as above
Application	main or sub-feed breaker (vertically mounted)	A	S1 p.4 note a; oem_spec
Installation location	Top-end main/sub-feed position, PRL1X/PRL2X	A	S1 oem_spec
Breaker compatibility	PDG3B (600 A, electronic trip unit)	A	S1 p.4 Table 2; oem_spec
Kit contents	Connector kit only - order breaker separately	A	S1 p.4 note a; oem_spec
Material	Silver-plated copper connector	A	S1 p.4; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL1X, PRL2X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Single-phase PDG3 kits use '14'/'16' suffix vs '34'/'36' three-phase - confirm suffix encodes phase count.*		

3.13 PRL2A — Pow-R-Line 2a

FAM-EAT-002 · panelboard · aka PRL2a, PRL-2A, Pow-R-Line 2a · markings: Cutler-Hammer, Eaton

480Y/277 Vac lighting panelboard sharing the PRL1a chassis architecture (20 in box, gutter neutral, KB vertical kits, KL lug kits, 1C96638 deadfront). Branch breakers are GHB-family bolt-ons on 1C96609 horizontal connector assemblies. GHB main breaker is horizontally mounted; all other mains vertical. Fully rated 14 kA at 480Y/277, series rated 22-150 kA.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL2X	A	S1 p.2; oem_spec
Era of manufacture	Introduced October 1996	A	S1, S2 p.2 Table 1; oem_spec
Successor	PRL2X	A	S1, S6 oem_spec
Voltage rating	240 Vac or 480Y/277 Vac maximum; 250 Vdc. Not for 480 V delta (use PRL3a); 3-phase 3-wire only when derived from 480Y/277 4-wire service	A	S7 p.22.2-1; oem_spec
Main ampacity	Main lugs 100, 225, 400 A (selection guide shows 600 A MLO/main at 240/480Y; 400 A dc); main breakers 100-600 A (Text on p.22.2-1 says MLO ampere ratings 100, 225 and 400 but 'Main Lugs 100-600 A' in ratings box)	A	S7 p.22.0-5, 22.2-1; oem_spec
Branch breakers accepted	Bolt-on GHB (480Y/277 only), GHQ, HGHB, GHQRSP, GHBGFEP 15-100 A; mains GHB (horizontal), EHD, FDB, FD, HFD, FDC, ED, EDH, EDC, JD/HJD/JDC, DK/KD/HKD/KDC, LHH, LG-family	A	S7 p.22.2-1 Tables 22.2-1, 22.2-2; oem_spec
box_width	20.00 in (508.0 mm)	A	S1 p.2; oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

Also fits this family (entry printed elsewhere): KB13AFT, KB13AFB, KB13SFT, KB13SFB, KB11AFT, KB11AFB, KB11SFT, KB11SFB, KB23AFT, KB23AFB, KB23SFT, KB23SFB, KB21AFT, KB21AFB, KB21SFT, KB21SFB, KB43AJT, KB43AJB, KB43SJT, KB43SJB, KB41AJT, KB41AJB, KB41SJT, KB41SJB, KB43AKT, KB43AKB, KB43SKT, KB43SKB, KB41AKT, KB41AKB, KB41SKT, KB41SKB, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B03, 4180B61, 4180B05, 4180B04, 4180B08, 1C96619, 1C96620, 4180B52H01, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00165	**1C96609**	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	GB, GHB, GHQ, GHBS **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00165	1C96609	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)

OEM part number	1C96609	**A**	S1, S2 s1 p.10 Table 10; oem_spec
Alternate / superseded numbers	1C96609G01..G63 (same G scheme as 1C96608)	**A**	S1 style_number; p.10; oem_spec
Description	GB/GHB/GHQ/GHBS breaker connector assembly; 12/18/30/42/48/54/72/96 circuits = G01/G09/G17/G25/G33/G41/G49/G57 (3-ph tin Al); +2 = 3-ph silver Cu; +4 = 1-ph tin Al; +6 = 1-ph silver Cu	**A**	S1, S2 p.10; oem_spec
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS	**A**	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.10; oem_spec
Cross-links	Families: PRL2A, PRL2X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) places table under 'PRL1X, PRL1a horizontally mounted' heading while s2 (2009) titles it 'PRL2a Horizontally Mounted' - confirm PRL2a/2X use.*		

3.14 PRL2X — Pow-R-Line Xpert 2X

FAM-EAT-007 · panelboard · aka PRL2x, Pow-R-Line 2X · markings: Eaton

Pow-R-Line Xpert successor to PRL2a; parts tables shared with PRL1X/PRL1a/PRL2a in RP01400001E.

Attribute	Value	Cl.	Sources
Status	Current	**A**	S6 oem_spec
Era of manufacture	Introduced 2020	**A**	S1 p.2; oem_spec
Voltage rating	240 or 480Y/277 Vac; 125/250 Vdc	**A**	S6 p.V2-T3-2; oem_spec
Main ampacity	MLO 600 A; main breaker 600 A	**A**	S6 p.V2-T3-11; oem_spec
Branch breakers accepted	Bolt-on GHB-family 15-100 A; mains PDG2/PDG3/GHB	**A**	S1, S6 oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control
Also fits this family (entry printed elsewhere): KB13A2T, KB13A2B, KB13S2T, KB13S2B, KB11A2T, KB11A2B, KB11S2T, KB11S2B, KB23A2T, KB23A2B, KB23S2T, KB23S2B, KB21A2T, KB21A2B, KB21S2T, KB21S2B, KB43A34T, KB43A34B, KB43S34T, KB43S34B, KB41A14T, KB41A14B, KB41S14T, KB41S14B, KB63S36T, KB63S36B, KB61S16T, KB61S16B, KL13AMS, KL13SMS, KL11AMS, KL11SMS, KL13AMF, KL13SMF, KL11AMF, KL11SMF, KL13AMO, KL13SMO, KL11AMO, KL11SMO, KL13AVS, KL13SVS, KL11AVS, KL11SVS, KL13AVF, KL13SVF, KL11AVF, KL11SVF, KL13AVO, KL13SVO, KL11AVO, KL11SVO, KL13SCS, KL11SCS, KL13SCF, KL11SCF, KL13SCO, KL11SCO, KL23AMS, KL23SMS, KL21AMS, KL21SMS, KL23AMF, KL23SMF, KL21AMF, KL21SMF, KL23AMO, KL23SMO, KL21AMO, KL21SMO, KL23AVS, KL23SVS, KL21AVS, KL21SVS, KL23AVF, KL23SVF, KL21AVF, KL21SVF, KL23AVO, KL23SVO, KL21AVO, KL21SVO, KL23SCS, KL21SCS, KL23SCF, KL21SCF, KL23SCO, KL21SCO, KL43AMS, KL43SMS, KL41AMS, KL41SMS, KL43AMO, KL43SMO, KL41AMO, KL41SMO, KL43AVS, KL43SVS, KL41AVS, KL41SVS, KL43AVO, KL43SVO, KL41AVO, KL41SVO, KL43SCO, KL41SCO, KL63CMS, KL63SMS, KL63TMS, KL61CMS, KL61SMS, KL61TMS, KL63CMO, KL63SMO, KL63TMO, KL61CMO, KL61SMO, KL61TMO, KL63CVS, KL63SVS, KL63TVS, KL61CVS, KL61SVS, KL61TVS, KL63CVO, KL63SVO, KL63TVO, KL61CVO, KL61SVO, KL61TVO, 1C96609, PRLSEBLGKD, PRLSEBFD, PRLSEBGHB, 4180B62, 1C96646, 42C4050, 1C96647, 1C96648, 1C96649, 42C4051, 1C96650, 1C96651, 1C96652, 42C4052, 1C96653, 1C96654, 1C96645, 1C97022, 5158C05, 2C11296, 1C96638, 42C8072, 42C8073, 42C7982, 4180B08, 1C96619, 1C96620, 5155C62H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

3.15 PRL3 — Westinghouse Pow-R-Line 3 (vintage)

FAM-EAT-012 · panelboard · aka PRL3, PRL3-LX, Pow-R-Line 3 · markings: Westinghouse

Westinghouse distribution panelboard, 20 in box, main-gutter neutral, trims LTT20xxS/F. Eaton notes the PRL3 connector kits also fit Westinghouse panelboards WEB, WCA, WEHB, WFB and HWFB.

Vintage Westinghouse power panelboard with lighting subchassis and vertical-bus branch area, 20 in wide. KPRL3FD/KPRL3ED/KPRL3CA connector kits; the PRL3 kits also fit WEB, WCA, WEHB, WFB and HWFB panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; limited renewal parts	A	S5 oem_spec
	discontinued; replaced by PRL3a	A	S13 p. V12-T4-8; oem_spec
Era of manufacture	Pre-1994 Westinghouse	C	S1, S5 inference
Successor	PRL3a	C	S5 inference
Voltage rating	240/480/600 V class (F-frame kits rated 240/480/600 V; ED kit 240 V max)	A	S5 p.7; oem_spec
Main ampacity	600 A maximum (400 A max bus rating for subchassis)	A	S13 p. V12-T4-16; oem_spec
Branch breakers accepted	EHD/FDB/FD/HFD/FDC twin-mounted (KPRL3FD), ED/EDH/EDC (KPRL3ED), CA/CAH/HCA (KPRL3CA); BAB space on subchassis	A	S5 p.7; oem_spec
	BAB/QBH subchassis, GB/GHB, EHD, FDB, FD, HFD, FDC, ED, CA/CAH/HCA; mains up to JD, KD, LC/LA, LCL, LA-P	A	S13 pp. V12-T4-8, V12-T4-16; oem_spec
cross_fit	PRL3 connector kits fit WEB, WCA, WEHB, WFB, HWFB panelboards	A	S5 p.7 note; oem_spec

Breaker families associated: BAB, CA, CA/CAH/HCA 225 A frame, ED, EHD, FD, GB, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S5 RP01400002E (Z13209) Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, P; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): 5158C05, 5155C81G01, K80522, 8450C62H39, 114C247G01, 3457B16G01, 7494A11G02, 5158C05G02, 5158C05G01, 0080429, 414A380G01, 8712C73H01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00212	**KPRL3CA**	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit W A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00211	**KPRL3ED**	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also A	Listed in RP01400002E (Feb 2013)
EDH-EAT-00210	**KPRL3FD**	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers A	Listed in RP01400002E (Feb 2013)

EDH-EAT-00212	KPRL3CA	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)

OEM part number	KPRL3CA	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for CA, CAH, HCA; one 2- or 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one two- or three-pole CA-frame breaker	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	CA, CAH, HCA; one 2- or 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	CA, CAH, HCA	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00211	KPRL3ED	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)

OEM part number	KPRL3ED	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for ED, EDH, EDC (240 V max); one 3-pole breaker	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware, cover and instructions to mount one three-pole breaker (single-mount only)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	ED, EDH, EDC (240 V max); one 3-pole breaker. PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	ED, EDH, EDC (240 V max)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, cover, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00210	KPRL3FD	Westinghouse	branch-connector-kit	LISTED IN RP01400002E

Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD, FDC)

OEM part number	KPRL3FD	A	S5, S14 p.7 Tables 9-11; oem_spec
Description	Replacement connectors for EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A)	A	S5 p.7; oem_spec
	A, B and C phase connectors, hardware and instructions to twin-mount two three-pole breakers; max 150 A per breaker and 200 A per connector (50-150 A)	A	S14 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S14 p. 7 note; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (240/480/600 V); twin-mount two 3-pole breakers, max 150 A per breaker, max 200 A per connector (50-150 A). PRL3 connector kits also fit Westinghouse WEB, WCA, WEHB, WFB and HWFB panelboards.	A	S5 p.7; oem_spec
	EHD, FDB, FD, HFD, FDC (240/480/600 V)	A	S14 p. 7; oem_spec
Kit contents	A, B, C phase connectors, hardware, instructions	A	S5 p.7; oem_spec
Status	Listed in RP01400002E (Feb 2013)	A	S5 oem_spec
Cross-links	Families: PRL3, WEB · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.16 PRL3A — Pow-R-Line 3a

FAM-EAT-003 · panelboard · aka PRL3a, PRL-3A, Pow-R-Line 3a · markings: Cutler-Hammer, Eaton

Power distribution panelboard on a 20 in wide box with the neutral in the main (top/bottom) gutter. Chassis height measured in X units (1X = 1.38 in); deadfront is a rail-and-end-cover frame (6559C59) with individual device covers. Branch devices are horizontally mounted on bus-stab connector kits that ship with their own device deadfront cover. Max 200 A on any one connector.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL3X. Deadfront/filler hardware changed for panels built after April 2019 (distributor wording)	B	S1, S8, S9 oem_spec
Era of manufacture	Introduced March 1994	A	S1, S2 p.2 Table 1; oem_spec
Successor	PRL3X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac maximum; 250 Vdc	A	S7 p.22.0-5; 22.3-1; oem_spec
Main ampacity	Main lugs 100, 250, 400, 600, 800 A; main breakers 100-600 A	A	S7 p.22.3-1; oem_spec
Branch breakers accepted	Branch 15-225 A bolt-on: BAB/QBHW family and GHB family (on KPRL3ABA/KPRL3AGB 6-24 circuit kits), EHD/FDB/FD/HFD/FDC twin-mounted to 150 A (KPRL3AFD*), FD/HFD/FDC/ED/EDH/EDC single-mounted 175-225 A (KPRL3AED*), CA/CAH/HCA; vertical mains/sub-feeds J, K, L, FB-P, LA-P, FCL, LCL, PT363/PT364 bolt switches	A	S1, S7 s1 pp.22-29; s7 p.22.3-2; oem_spec
x_unit	1X = 1.38 in (35.1 mm); 1X blank cover fills 1 3/8 in, 13 in wide	A	S4 p.7 Table 12; oem_spec
Identification features	Neutral located in main gutter (end), not side gutter (Figure 1)	A	S1 p.2 Figure 1; oem_spec

Breaker families associated: CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), GHB family (480Y/277 bolt-on), QUICKLAG bolt-on (BAB/QBHW family), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S8 Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019; S9 Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B0

Also fits this family (entry printed elsewhere): PRLSEBLGKD, PRLSEBJD, PRLSEBFD, PRLSEBGHB, 5158C05, 2C11296, 5155C62H01, 5155C81G01, K80522, K80133, K80429, 5155C81G03, 1A85194G01, 2C11641G02, 5157C83G06, 7499A48G04, 42C1129H02, 1256C42G02, 1256C42G01

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00184	**KPRL3ABA06**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00185	**KPRL3ABA06-1**	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00186	**KPRL3ABA12**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00187	**KPRL3ABA12-1**	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00188	**KPRL3ABA18**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00189	**KPRL3ABA18-1**	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00190	**KPRL3ABA24**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00191	**KPRL3ABA24-1**	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00209	**KPRL3AED2**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame device **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00208	**KPRL3AED3**	PRL3a horizontal F-frame breaker connector kit (FD...)	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A ma **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00207	**KPRL3AFD1**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices abo **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00206	**KPRL3AFD2**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices abo **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00205	**KPRL3AFD3**	PRL3a horizontal F-frame breaker connector kit (EHD...)	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00192	**KPRL3AGB06**	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00193	**KPRL3AGB06-1**	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00194	**KPRL3AGB12**	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00195	**KPRL3AGB12-1**	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00196	**KPRL3AGB18**	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00197	**KPRL3AGB18-1**	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00198	**KPRL3AGB24**	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00199	**KPRL3AGB24-1**	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00184	KPRL3ABA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA06	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	**A**	same as above
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00185	KPRL3ABA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA06-1	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	**A**	same as above
Application	branch	**A**	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	**A**	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00186	KPRL3ABA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00187	KPRL3ABA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00188	KPRL3ABA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00189	KPRL3ABA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00190	KPRL3ABA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3ABA24	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00191	KPRL3ABA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3ABA24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00209	KPRL3AED2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 2-pole single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00208	KPRL3AED3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (FD...)

OEM part number	KPRL3AED3	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	FD, HFD, FDC, ED, EDH, EDC 3-pole single mount 175-225 A, (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00207	KPRL3AFD1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD1	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00206	KPRL3AFD2	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD2	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00205	KPRL3AFD3	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal F-frame breaker connector kit (EHD...)

OEM part number	KPRL3AFD3	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Description	Horizontally mounted connector kit: EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1, S2, S4 s1 p.23 Table 32; s2 p.22 Table 23; s4 p.7; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00192	KPRL3AGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB06	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00193	KPRL3AGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB06-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00194	KPRL3AGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB12	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00195	KPRL3AGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB12-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00196	KPRL3AGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB18	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00197	KPRL3AGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB18-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00198	KPRL3AGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3AGB24	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00199	KPRL3AGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3a horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3AGB24-1	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1, S2, S4 s1 p.22 Table 30; s2 p.21 Table 22; s4 p.7 Table 12; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3A, PRC · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*s1 (2021) Table 30 prints 'KPRL3XGB24-1' in the PRL3a row - treated as typo; s2/s4 give KPRL3AGB24-1.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00261	**4176B51**	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00264	**4176B56**	PRL3a/3X deadfront device cover: LCL vertical cover 21X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00263	**4176B57**	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00259	**4176B60**	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00260	**4176B61**	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00275	**4176B66**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00277	**4176B67**	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00267	**4176B68**	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00278	**4176B69**	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00262	**4176B70**	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00265	**4176B79**	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00276	**4176B80**	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00280	**4178B08**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00281	**4179B39**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00282	**4179B40**	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00283	**4179B41**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00284	**4179B42**	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00266	**4180B79**	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00279	**4180B91**	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00268	**4180B93**	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	—	Listed 2009 and Oct 2017; replaced in April 2021 edition
EDH-EAT-00255	**42C8076**	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00256	**42C8077**	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00270	**42C8078**	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00271	**42C8079**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00272	**42C8080**	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00273	**42C8081**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00274	**42C8082**	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00254	**6559C59**	PRL3a/3X deadfront assembly frame (rails and end covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00261	4176B51	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)

OEM part number	4176B51	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: L-Frame vertical cover 17X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00264	4176B56	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LCL vertical cover 21X

OEM part number	4176B56	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01/H02 top; H03/H04 bottom (without/with lock-offs)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LCL vertical cover 21X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00263	4176B57	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only

OEM part number	4176B57	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: LA-P vertical cover 21X, top only	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00259	4176B60	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)

OEM part number	4176B60	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame vertical cover 14X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00260	4176B61	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)

OEM part number	4176B61	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: K-Frame vertical cover 15X (PRL3a)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00275	4176B66	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a)

OEM part number	4176B66	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00277	4176B67	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover

OEM part number	4176B67	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00267	4176B68	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)

OEM part number	4176B68	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8076	C	S1, S2 superseded_by; inference
Description	EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00278	4176B69	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover

OEM part number	4176B69	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00262	4176B70	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X

OEM part number	4176B70	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 FCL; H02 FB-P	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: FCL (H01) and FB-P top-only (H02) vertical cover 9X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Current-limiting FCL / LCL (and FDB+LFB), TRI-PAC integrally fused (FB-P, LA-P, NB-P)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00265	4176B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X

OEM part number	4176B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: J-Frame sub-feed twin cover 20X	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A · Breakers: Series C J-frame (JD/JDB/HJD/JDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00276	4176B80	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a)

OEM part number	4176B80	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3a). Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00280	4178B08	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)

OEM part number	4178B08	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8078	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-3 pole horizontal cover, 6-48 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00281	4179B39	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)

OEM part number	4179B39	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8079	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-2 pole horizontal cover, 4-32 ckt (H01-H08)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00282	4179B40	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	4179B40	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8080	C	S1, S2 superseded_by; inference
Description	F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00283	4179B41	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X

OEM part number	4179B41	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8082	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 3-pole cover 3X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00284	4179B42	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X

OEM part number	4179B42	A	S2, S3 s2 p.25 Table 28; oem_spec
Alternate / superseded numbers	42C8081	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH/EDC single-mounted 2-pole cover 2X	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00266	4180B79	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover

OEM part number	4180B79	A	S1, S2 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PT363 (100 A) / PT364 (200 A) pullout bolt switch vertical cover	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00279	4180B91	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover

OEM part number	4180B91	A	S1, S2 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	Controller 5X H01; Expansion 7X H02, 16X H03	A	S1 style_number; pp.28-29; oem_spec
Description	Horizontal device deadfront cover: Pow-R-Command controller / expansion cover. Note: connector kits ship with their own deadfront cover.	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00268	4180B93	Cutler-Hammer	deadfront	LISTED 2009 AND OCT 20

PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)

OEM part number	4180B93	A	S2, S3 s2 p.24 Table 27; oem_spec
Alternate / superseded numbers	H01/H03 top; H04/H05 bottom (without / with lock-offs)	A	S2 style_number; p.24; oem_spec
	42C8077	C	S1, S2 superseded_by; inference
Description	FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2021)	A	S2, S3 oem_spec
Status	Listed 2009 and Oct 2017; replaced in April 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00255	42C8076	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal

OEM part number	42C8076	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom (same with/without lock-offs)	A	S1 style_number; pp.26-27; oem_spec
	4176B68 (4176B68 (H01 top/H03 top w lock-off; H04 bottom/H05 bottom w lock-off) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH, EDC (PRL3a) vertical cover, 7X, 4/0 max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00256	42C8077	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal

OEM part number	42C8077	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
	4180B93 (4180B93 (H01/H03 top; H04/H05 bottom) in same PRL3a table row in 2009/2017 editions)	C	S1, S2, S3 supersedes; inference
Description	Vertical device deadfront cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL3a) vertical cover, 10X, 300 kcmil max terminal	A	S1 pp.26-27; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00270	42C8078	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover

OEM part number	42C8078	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	A	S1 style_number; pp.28-29; oem_spec
	4178B08 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00271	42C8079	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover

OEM part number	42C8079	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	4 ckt 2X H01; 8/4X H02; ... 32/16X H08	A	S1 style_number; pp.28-29; oem_spec
	4179B39 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizontal cover. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00272	42C8080	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X

OEM part number	42C8080	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B40 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizontal cover, 2 ckt 1X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00273	42C8081	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X

OEM part number	42C8081	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B42 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 2-pole cover 2X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00274	42C8082	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X

OEM part number	42C8082	A	S1 s1 pp.28-29 Tables 40-41; oem_spec
Alternate / superseded numbers	H01	A	S1 style_number; pp.28-29; oem_spec
	4179B41 (Same row in 2009/2017 PRL3a table (Table 28/33))	C	S1, S2, S3 supersedes; inference
Description	Horizontal device deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted 3-pole cover 3X. Note: connector kits ship with their own deadfront cover.	A	S1 pp.28-29; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.28; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00254	6559C59	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront assembly frame (rails and end covers)

OEM part number	6559C59	A	S1, S2 s1 p.25 Table 37; oem_spec
Alternate / superseded numbers	Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	A	S1 style_number; p.25; oem_spec
Description	Assembly includes frame only (two rails and two end covers); device covers ordered separately; all connector kits ship with a deadfront cover for that device	A	S1 p.25 note a; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.25; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00269	**4176B72**	PRL3a/3X neutral / blank cover 1X-12X	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00286	**4178B06H01**	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	—	Listed through Oct 2017 edition; replaced by 42C8083H01 in A
EDH-EAT-00285	**42C8083H01**	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00287	**6555C40H01**	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00288	**6555C41H01**	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00269	4176B72	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/3X neutral / blank cover 1X-12X

OEM part number	4176B72	A	S1, S2, S4 s1 pp.26-27; s4 p.7 Table 12; oem_spec
Alternate / superseded numbers	H01 = 1X ... H12 = 12X	A	S1, S4 style_number; oem_spec
Description	Neutral/blank deadfront cover in X increments	A	S1 oem_spec
Dimensions	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes)	A	S4 p.7 Table 12; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00286	4178B06H01	Cutler-Hammer	filler-plate	LISTED THROUGH OCT 201

PRL3a F-frame 1-pole provision filler (panels built before April 2019)

OEM part number	4178B06H01	A	S2, S3, S4, S9 s2 p.25 Table 29; s4 p.12; oem_spec
Alternate / superseded numbers	42C8083H01	B	S1, S8, S9 superseded_by; oem_spec
Description	PRL3a deadfront cover blank filler, F-Frame, 1, 2 or 3 poles (Pow-R-Kit: 'PRL 3a F-Frame 1-Pole Provision Fillers')	A	S2, S4 oem_spec
Application	Panels built prior to April 2019	C	S9 distributor
Finish / plating	Black	C	same as above
Status	Listed through Oct 2017 edition; replaced by 42C8083H01 in April 2021 edition; still listed by Rexel (UPC 786685467672)	B	S1, S3, S9 oem_spec
Cross-links	Families: PRL3A · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00285	42C8083H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019)

OEM part number	42C8083H01	A	S1, S8 s1 p.30 Tables 42-43; oem_spec
Alternate / superseded numbers	4178B06H01 (Same table row (F-Frame blank filler) in 2017 edition; distributors describe 4178B06H01 as for panels built prior to April 2019 and 42C8083H01 as after April 2019 - not interchangeable across build dates)	B	S1, S3, S8, S9 supersedes; oem_spec
Description	Deadfront cover blank filler, F-Frame (PRL3a) / PDG2 (PRL3X), 1, 2 or 3 poles	A	S1 p.30; oem_spec
Application	Panels built after April 2019	C	S8 distributor
Dimensions	Length 4.220 in	C	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A, PRL3X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00287	6555C40H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler

OEM part number	6555C40H01	A	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 2-pole	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00288	6555C41H01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler

OEM part number	6555C41H01	A	S1, S2 s1 p.30 Table 43; oem_spec
Description	Deadfront cover blank filler, C-Frame, 3-pole	A	S1, S2 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.30; oem_spec
Cross-links	Families: PRL3A · Breakers: CA/CAH/HCA 225 A frame		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00220	**5078A98**	PRL3a/PRL3X service entrance bonding jumper kit	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00220	5078A98	Cutler-Hammer	hardware-kit	LISTED AS STOCK RENEWA

PRL3a/PRL3X service entrance bonding jumper kit

OEM part number	5078A98	A	S1, S2, S4 s1 p.24 Table 34; oem_spec
Alternate / superseded numbers	Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	A	S1 style_number; p.24; oem_spec
Description	Service entrance bonding jumper kit; example 100 A tin-plated aluminum = 5078A98G01	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3A, PRL3X, PRC		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.17 PRL3E — Pow-R-Line 3E

FAM-EAT-004 · panelboard · aka PRL3e, Pow-R-Line 3E · markings: Cutler-Hammer, Eaton

Compact distribution panelboard variant built around Eaton EG-frame (Series G E-frame) bolt-on branch breakers up to 125 A. Not covered by the renewal-parts guides found; no PRL3E connector kits identified.

Attribute	Value	Cl.	Sources
Status	Current in June 2020 catalog	A	S6 p.V2-T3-2; oem_spec
Era of manufacture	Shown in January 2018 and June 2020 catalogs	A	S6, S7 oem_spec
Voltage rating	240, 480Y/277 or 480 Vac; 250 Vdc	A	S6, S7 s6 p.V2-T3-11; oem_spec
Main ampacity	MLO 100, 250, 400, 600 A; main breakers 100-600 A	A	S7 p.22.3-5; oem_spec
Branch breakers accepted	EGB/EGS/EGH (E-frame) 15-125 A, 1-3 pole; mains EG (horizontal), EDB/EDS/ED/EDH/EDC, FD/HFD/FDC, DK/KD/HKD/KDC, LHH, LGE/LGH	A	S7 p.22.3-5 Tables 22.3-8, 22.3-9; oem_spec

Breaker families associated: Series G E-frame (EGB/EGS/EGH)
Key documents: S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/

3.18 PRL3X — Pow-R-Line Xpert 3X

FAM-EAT-008 · panelboard · aka PRL3x, Pow-R-Line 3X · markings: Eaton

Successor to PRL3a; same 20 in box and X-unit chassis concept. Uses KPRL3X* connector kits and 42C80xx deadfront covers (PDG2 replaces F-frame).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 250 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 800 A; main device 600 A	A	same as above
Branch breakers accepted	Bolt-on 15-225 A: BAB/QBH family, GHB family, PDG2 (twin to 150 A, single 175-225 A); vertical PDG2/PDG3 mains	A	S1, S6 oem_spec

Breaker families associated: GHB family (480Y/277 bolt-on), Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), QUICKLAG bolt-on (BAB/QBHW family)

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control

Also fits this family (entry printed elsewhere): PRLSEBGHB, 5078A98, 5158C05, 2C11296, 5155C62H01, 6559C59, 42C8076, 42C8077, 4176B72, 42C8078, 42C8079, 42C8080, 42C8081, 42C8082, 4176B67, 4176B69, 4180B91, 42C8083H01, 5155C81G01, 5155C81G03, 2C11641G02, 5157C83G06, 7499A48G04

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00204	**KPRL3X21T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be s A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00201	**KPRL3X22**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00203	**KPRL3X22T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be s A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00200	**KPRL3X23**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00202	**KPRL3X23T**	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00168	**KPRL3XBA06**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00169	**KPRL3XBA06-1**	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00170	**KPRL3XBA12**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00171	**KPRL3XBA12-1**	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00172	**KPRL3XBA18**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00173	**KPRL3XBA18-1**	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00174	**KPRL3XBA24**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00175	**KPRL3XBA24-1**	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00176	**KPRL3XGB06**	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00177	**KPRL3XGB06-1**	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00178	**KPRL3XGB12**	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00179	**KPRL3XGB12-1**	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00180	**KPRL3XGB18**	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00181	**KPRL3XGB18-1**	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00182	**KPRL3XGB24**	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00183	**KPRL3XGB24-1**	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00204 KPRL3X21T Cutler-Hammer branch-connector-kit LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)

OEM part number	KPRL3X21T	**A**	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 1-pole twin mount, 150 A max; phases A/C	**A**	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S7 p.22.3-1; inference
Breaker compatibility	PDG2 1-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00201 KPRL3X22 Cutler-Hammer branch-connector-kit LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)

OEM part number	KPRL3X22	**A**	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole, single mount 175-225 A; phases A/C	**A**	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	**C**	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole, single mount 175-225 A. Frame devices above 150 A must be single mounted; no twin mounting.	**A**	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	**A**	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00203	KPRL3X22T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)

OEM part number	KPRL3X22T	A	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 2-pole twin mount, 150 A max; phases A/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 2-pole twin mount, 150 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00200	KPRL3X23	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)

OEM part number	KPRL3X23	A	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole, single mount 175-225 A (1) 225 A max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole, single mount 175-225 A (1) 225 A max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00202	KPRL3X23T	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)

OEM part number	KPRL3X23T	A	S1 s1 p.23 Table 31; oem_spec
Description	Horizontally mounted connector kit: PDG2 3-pole twin mount, (2) 150 A devices max; phases A/B/C	A	same as above
Application	branch (also sub-feed/main when horizontally mounted) (s7: 100-225 A F-frame mains may be horizontally mounted same as branch breakers)	C	S7 p.22.3-1; inference
Breaker compatibility	PDG2 3-pole twin mount, (2) 150 A devices max. Frame devices above 150 A must be single mounted; no twin mounting.	A	S1 s1 p.23 Table 31; oem_spec
Kit contents	Phase connectors, deadfront cover, hardware and instructions; breakers ordered separately	A	S1 p.23; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00168	KPRL3XBA06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA06	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00169	KPRL3XBA06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA06-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00170	KPRL3XBA12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA12	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00171	KPRL3XBA12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA12-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00172	KPRL3XBA18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA18	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00173	KPRL3XBA18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA18-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00174	KPRL3XBA24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase

OEM part number	KPRL3XBA24	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00175	KPRL3XBA24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase

OEM part number	KPRL3XBA24-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	BA, BAB, QBGF, QBH, QBHGF, QBGFEP, QBHGFEP; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: QUICKLAG bolt-on (BAB/QBHW family)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00176	KPRL3XGB06	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB06	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00177	KPRL3XGB06-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 6-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB06-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 6 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00178	KPRL3XGB12	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB12	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00179	KPRL3XGB12-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 12-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB12-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 12 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00180	KPRL3XGB18	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB18	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00181	KPRL3XGB18-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 18-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB18-1	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 18 circuits/poles, single-phase (A/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00182	KPRL3XGB24	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 3-phase

OEM part number	KPRL3XGB24	A	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, three-phase (A/B/C connectors)	A	same as above
Application	branch	A	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	A	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	A	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	A	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00183	KPRL3XGB24-1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL3X horizontal 24-circuit GHB connector kit, 1-phase

OEM part number	KPRL3XGB24-1	**A**	S1 s1 p.22 Table 29; oem_spec
Description	Horizontally mounted connector kit, 24 circuits/poles, single-phase (A/C connectors)	**A**	same as above
Application	branch	**A**	S1 oem_spec
Breaker compatibility	GB, GHB, GHQ, GHBS; (2) 100 A devices maximum	**A**	S1 s1 p.22 Table 29; oem_spec
Current rating	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	**A**	S1, S4 s1 p.22 intro; s4 p.7; oem_spec
Kit contents	Phase connectors (A,B,C or A,C), deadfront cover, hardware and instructions to twin-mount breakers across from each other	**A**	S1, S2 s1 p.22; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.22; oem_spec
Cross-links	Families: PRL3X · Breakers: GHB family (480Y/277 bolt-on)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00218	**PRLSEBPD2**	Service entrance barrier kit for PDG2 main breaker	PDG2 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00217	**PRLSEBPD3**	Service entrance barrier kit for PDF3/PDG3 main breaker	PDF3/PDG3 **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00218	PRLSEBPD2	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDG2 main breaker

OEM part number	PRLSEBPD2	**A**	S1, S3 s1 p.25 Table 35; oem_spec
Description	Service entrance barrier for PDG2 main breaker (service entrance main breaker kit)	**A**	S1 s1 p.25 Table 35; oem_spec
Application	main (service entrance)	**A**	S1 oem_spec
Breaker compatibility	PDG2	**A**	S1 s1 p.25 Table 35; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

EDH-EAT-00217	PRLSEBPD3	Cutler-Hammer	barrier	LISTED AS STOCK RENEWA

Service entrance barrier kit for PDF3/PDG3 main breaker

OEM part number	PRLSEBPD3	A	S1, S3 s1 p.25 Table 35; oem_spec
Description	Service entrance barrier for PDF3/PDG3 main breaker (service entrance main breaker kit)	A	S1 s1 p.25 Table 35; oem_spec
Application	main (service entrance)	A	S1 oem_spec
Breaker compatibility	PDF3/PDG3	A	S1 s1 p.25 Table 35; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Kit contents (barrier material, hardware) not stated in renewal parts guide.*		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00257	**42C7980**	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00258	**42C8055**	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00257	42C7980	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)

OEM part number	42C7980	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top (thermal-magnetic), H02 bottom (PXR)	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 400 A vertical cover, 15X (PRL3X)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00258	42C8055	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version

OEM part number	42C8055	A	S1 s1 pp.26-27 Tables 38-39; oem_spec
Alternate / superseded numbers	H01 top, H02 bottom	A	S1 style_number; pp.26-27; oem_spec
Description	Vertical device deadfront cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock-off version	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.26; oem_spec
Cross-links	Families: PRL3X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.19 PRL4 — Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)

FAM-EAT-005 · panelboard · aka PRL-4, PRL4, PRL4B, PRL4D, PRL4F, PRL4X, Pow-R-Line 4, Pow-R-Line 4B, Pow-R-Line 4D, Pow-R-Line 4F · markings: Cutler-Hammer, Eaton, Westinghouse

Heavy distribution panelboard in 24, 36 or 44 in wide boxes (BX2457..BX4490), neutral in main gutter, vertical bus with branch devices horizontally mounted single or twin on KPRL4* connector kits measured in X units (1X = 1.38 in). Front is a vented cover assembly (two side rails, top/bottom vented covers, 6574C74) plus individual device covers and blank covers (6554C01/6554C02). Density-rated bus option required for some 100% rated breaker kits.

Westinghouse-origin power distribution panelboard (24, 36, 44 in box widths) that replaced CDP (PRL4B) and FDP (PRL4F). Its KPRL4 breaker connector kits (copper connectors, brackets, covers, hardware) are the most completely documented group-mount kits for Series C FD/JD/KD/LD/MDL/ND frames; included here because the same device X-spacing is used in Pow-R-Line C switchboard distribution chassis.

Attribute	Value	Cl.	Sources
Status	Legacy; renewal parts listed April 2021; superseded by PRL4X/PRL4DX (PRL4F continues in Xpert catalog)	A	S1, S6 oem_spec
	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	A	S3 p. 32; oem_spec
Era of manufacture	PRL4B/F introduced October 1987	A	S1, S2 p.2 Table 1; oem_spec
	PRL4B/F introduced October 1987 (originally a Westinghouse product)	A	S16, S13 RP01400001E (2017) p. 2 Table 1; V12-T4-18; oem_spec
Successor	PRL4X	A	S1, S6 oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc maximum	A	S7 p.22.4-1; oem_spec
Main ampacity	MLO 250, 400, 600, 800, 1200 A; main breakers 250-1200 A; main switches 200-1200 A	A	same as above
	1200 A maximum	A	S13 p. V12-T4-18; oem_spec
Branch breakers accepted	Bolt-on breakers 15-1200 A (EHD..FDC, ED, JD, DK/KD, CKD, LD, LG, LHH, MDL, ND, NHH, CA, FCL, LCL, FB-P, LA-P, NB-P); drawout 20-600 A (PRL4D); fusible switches FDPW/FDPB 30-1200 A (PRL4F)	A	S1, S7 s1 pp.32-34; s7 p.22.4-1; oem_spec
box_width	24.00, 36.00, 44.00 in (609.6, 914.4, 1117.6 mm)	A	S1 p.2; oem_spec
bus	250-1200 A tin-plated aluminum standard, copper optional, density-rated bus optional	A	S7 p.22.4-1; oem_spec
box_widths	PRL4 standard widths 24.00, 36.00 and 44.00 in	A	S16 p. 2; oem_spec

Breaker families associated: CA, CA/CAH/HCA 225 A frame, Current-limiting FCL / LCL (and FDB+LFB), ED, EHD, FD, JD, KD, LD, MDL, ND, Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C J-frame (JD/JDB/HJD/JDC), Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac

Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S3 RP01400001E Renewal Parts RP01400001E - Current Eaton panelboards; S4 RP01414001E Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control; S7 CA08104001E (Tab 22) Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/; S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F,

Also fits this family (entry printed elsewhere): K80522, K80133, K80429, 5157C83G06

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00331	**KPRL44X**	PRL4F fusible switch connector kit KPRL44X	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00333	**KPRL45X**	PRL4F fusible switch connector kit KPRL45X	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, no A	Listed in 2009/2011 editions only
EDH-EAT-00332	**KPRL45X1**	PRL4F fusible switch connector kit KPRL45X1	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switc A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00334	**KPRL45XS**	PRL4F fusible switch connector kit KPRL45XS	FDPW 100 A single-mount switch (three-pole switch, not included) A	Listed in 2009/2011 editions only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00335	**KPRL4B6XS**	PRL4F fusible switch connector kit KPRL4B6XS	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not incl **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00336	**KPRL4B6XT**	PRL4F fusible switch connector kit KPRL4B6XT	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (thr **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00338	**KPRL4W11X**	PRL4F fusible switch connector kit KPRL4W11X	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (**A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00339	**KPRL4W15X**	PRL4F fusible switch connector kit KPRL4W15X	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not i **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00337	**KPRL4W9X**	PRL4F fusible switch connector kit KPRL4W9X	FDPW325R / FDPW365R 400 A (three-pole switch, not included) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00331 KPRL44X — Cutler-Hammer — branch-connector-kit — LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL44X

OEM part number	KPRL44X	**A**	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches	**A**	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S16 p. 25; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	FDPWT3222R (240 V) / FDPWT3622R (600 V) 60-60 A twin switch; fits FDP and FDPW switches (three-pole switch, not included)	**A**	S1, S2, S3, S4 oem_spec
	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches)	**A**	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S1 oem_spec
Dimensions	Switch space 4X (5.50 in)	**A**	same as above
	4X switch height	**A**	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	**A**	S1 p.34; oem_spec
	listed 2017 and 2022	**A**	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00333 KPRL45X — Cutler-Hammer — branch-connector-kit — LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45X

OEM part number	KPRL45X	**A**	S2, S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	KPRL45X1	**C**	S1, S2, S3 superseded_by; inference
Description	PRL4F fusible switch connector kit for FDPW 100-100 A twin switch, 600 V (2009 number)	**A**	S2, S4 oem_spec
Breaker compatibility	FDPW 100-100 A twin switch, 600 V (2009 number) (three-pole switch, not included)	**A**	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	**A**	S2 oem_spec
Dimensions	Switch space 5X (6.88 in)	**A**	same as above
Status	Listed in 2009/2011 editions only	**B**	S2, S4 inference
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00332	KPRL45X1	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL45X1

OEM part number	KPRL45X1	A	S1, S3, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Alternate / superseded numbers	KPRL45X (Same table row; 2009 KPRL45X, 2017/2021 KPRL45X1)	C	S1, S2, S3 supersedes; inference
Description	PRL4F fusible switch connector kit for FDPWT3633R 600 V 100-100 A twin switch (2021 number)	A	S1, S3 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPWT3633R 600 V 100-100 A twin switch (2021 number) (three-pole switch, not included)	A	S1, S3 oem_spec
	100 A 600 V FDPWT3633R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 5X (6.88 in)	A	same as above
	5X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00334	KPRL45XS	Cutler-Hammer	branch-connector-kit	LISTED IN 2009/2011 ED

PRL4F fusible switch connector kit KPRL45XS

OEM part number	KPRL45XS	A	S4 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW 100 A single-mount switch	A	S4 oem_spec
Breaker compatibility	FDPW 100 A single-mount switch (three-pole switch, not included)	A	same as above
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	same as above
Dimensions	Switch space unknown	D	same as above
Status	Listed in 2009/2011 editions only	B	S4 inference
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00335	KPRL4B6XS	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XS

OEM part number	KPRL4B6XS	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBS324R / FDPBS364R 200 A single switch	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPBS324R / FDPBS364R 200 A single switch (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	200 A FDPBS324R/FDPBS364R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	A	same as above
	6X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00336	KPRL4B6XT	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4B6XT

OEM part number	KPRL4B6XT	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPBT3244R / FDPBT3644R 200-200 A twin switch; 44 in box required (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	200 A FDPBT3244R/FDPBT3644R (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 6X (8.25 in)	A	same as above
	6X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00338	KPRL4W11X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W11X

OEM part number	KPRL4W11X	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box)	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPW326R/FDPW366R 600 A and FDPW327/FDPW367 800 A (800 A: 44 in box) (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 11X (15.13 in)	A	same as above
	11X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00339	KPRL4W15X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W15X

OEM part number	KPRL4W15X	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW328 / FDPW368 1200 A; 44 in box required	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPW328 / FDPW368 1200 A; 44 in box required (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	1200 A FDPW328/FDPW368 (44 in box)	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 15X (20.63 in)	A	same as above
	15X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00337	KPRL4W9X	Cutler-Hammer	branch-connector-kit	LISTED AS STOCK RENEWA

PRL4F fusible switch connector kit KPRL4W9X

OEM part number	KPRL4W9X	A	S1, S2, S3, S4, S16 s1 p.34 Table 48; s2 p.29 Table 33; s4 p.9 Table 15; oem_spec
Description	PRL4F fusible switch connector kit for FDPW325R / FDPW365R 400 A	A	S1, S2, S3, S4 oem_spec
	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S16 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	FDPW325R / FDPW365R 400 A (three-pole switch, not included)	A	S1, S2, S3, S4 oem_spec
	400 A FDPW325R/FDPW365R	A	S16 p. 25 Table 38; oem_spec
Kit contents	Copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch	A	S1 oem_spec
Dimensions	Switch space 9X (12.38 in)	A	same as above
	9X switch height	A	S16 p. 25; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.34; oem_spec
	listed 2017 and 2022	A	S16, S3 oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00308	**KPRL4CA**	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	CA/CAH/HCA 2-pole (2X) or 3-pole (3X) A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00322	**KPRL4CKD**	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	100% rated CKD/CHKD/CKDC 3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00324	**KPRL4CND**	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00329	**KPRL4ED**	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	ED, EDH, EDC 3-pole A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00327	**KPRL4ED2**	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	ED, EDH, EDC 2-pole A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00311	**KPRL4FBP**	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	FCL, FB-P, FD/LFD 3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00328	**KPRL4FD**	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00325	**KPRL4FD1**	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole) A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00326	**KPRL4FD2**	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EHD, FD, FDB, HFD, FDC 2-pole A	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00307	**KPRL4FDCL**	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	FD current limiter, 3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00309	**KPRL4JDS**	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00310	**KPRL4JDT**	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	JD, JDB, HJD, JDC 2-/3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00312	**KPRL4KDS**	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole A	Listed as stock renewal part in Eaton RP01400001E (April 202

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00313	**KPRL4KDT**	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	DK, KD, KDB, HKD, KDC 2-/3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00317	**KPRL4LAP**	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	LA-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00314	**KPRL4LC**	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/ **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00318	**KPRL4LCL**	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	LCL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00330	**KPRL4LD**	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A **A**	In Feb 2009 and Oct 2017 renewal-parts editions; not in Apri
EDH-EAT-00315	**KPRL4LG**	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	LHH 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00316	**KPRL4MC**	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00323	**KPRL4MD**	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00319	**KPRL4NBP**	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	NB-P 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00320	**KPRL4NC**	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	NC/NCY/HNC [NB/HNB] 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00321	**KPRL4ND**	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011) **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00299	**KPRL4X12**	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-po **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00300	**KPRL4X22**	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00301	**KPRL4X32**	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00302	**KPRL4X334S**	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)	PDG3 400 A frame, 3-pole, single mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00303	**KPRL4X334T**	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)	PDG3 400 A frame, 3-pole, twin mounting **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00304	**KPRL4X336**	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00305	**KPRL4X34**	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	PDG4; MDL/HMDL 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00306	**KPRL4X35**	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole **A**	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00308	KPRL4CA	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))

OEM part number	KPRL4CA	**A**	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	**A**	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	**A**	S3 p. 32; oem_spec

Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin (2-pole: 36 in min box)	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	CA/CAH/HCA 2-pole (2X) or 3-pole (3X)	A	S1 s1 pp.32-33; oem_spec
	CA/CAH/HCA	A	S3 pp. 32-33; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 2X/3X (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: CA/CAH/HCA 225 A frame, CA		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00322 **KPRL4CKD** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)

OEM part number	KPRL4CKD	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for 100% rated CKD/CHKD/CKDC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CKD/CHKD/CKDC 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CKD, CHKD (100% rated)	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width; requires density rated bus in existing chassis	A	S16 p. 24 Table 37 notes b-d; oem_spec

Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00324	KPRL4CND	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole)

OEM part number	KPRL4CND	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for 100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	100% rated CND/CHND/CNDC/NGS-C/NGH-C/NGC-C 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	CND, CHND (100% rated)	A	S16 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width; requires density rated bus	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00329	KPRL4ED	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)

OEM part number	KPRL4ED	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4ED is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for ED, EDH, EDC 3-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec

Application	branch	A	same as above
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 3-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S3 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Cross-links	Families: PRL4 · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00327	KPRL4ED2	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)

OEM part number	KPRL4ED2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4ED2 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for ED, EDH, EDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	ED, EDH, EDC	A	S16 p. 24 Table 37; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S3 inference

Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Cross-links	Families: PRL4 · Breakers: Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00311	KPRL4FBP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)

OEM part number	KPRL4FBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for FCL, FB-P, FD/LFD 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	FCL, FB-P, FD/LFD 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	FCL, FB-P, FD/LFD	A	S16 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), TRI-PAC integrally fused (FB-P, LA-P, NB-P), Current-limiting FCL / LCL (and FDB+LFB), FD, Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00328	KPRL4FD	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)

OEM part number	KPRL4FD	A	S2, S3, S4, S10, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4FD is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above

Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 3-pole, 225 A (single- and twin-mount per 2011 supplement)	A	S2, S3, S4 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	S4 p.9 Table 15; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	3X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S16, S3 inference
Replacement / successor	KPRL4X32 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Aftermarket / reproduction	Still stocked by Elliott Electric (UPC 782114795941, UL 67, 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR')	C	S10 distributor
	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S24 distributor
Cross-links	Families: PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00325	KPRL4FD1	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)

OEM part number	KPRL4FD1	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4X12 (Same breaker frames/space listed under KPRL4X12 in May 2022 RP01400001E while KPRL4FD1 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, HFD 1-pole (two sets twin-mounted 1-pole)	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, HFD	A	S16 p. 24 Table 37; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec

	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X12)	C	S16, S3 inference
Replacement / successor	KPRL4X12 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Cross-links	Families: PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00326	KPRL4FD2	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)

OEM part number	KPRL4FD2	A	S2, S3, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4FD2 is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Twin	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC 2-pole	A	S2, S3 s2 p.28; oem_spec
	EHD, FD, FDB, HFD, FDC	A	S16 p. 24 Table 37; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	2X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S16, S3 inference
Replacement / successor	KPRL4X22 covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
Cross-links	Families: PRL4 · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00307	KPRL4FDCL	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)

OEM part number	KPRL4FDCL	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for FD current limiter, 3-pole	A	S1 pp.32-33; oem_spec

	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single only	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	FD current limiter, 3-pole	A	S1 s1 pp.32-33; oem_spec
	FD current limiter (single mounting only)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Current-limiting FCL / LCL (and FDB+LFB), FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00309	KPRL4JDS	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec

Cross-links	Families: PRL4, PRL4X · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00310	KPRL4JDT	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)

OEM part number	KPRL4JDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for JD, JDB, HJD, JDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	JD, JDB, HJD, JDC	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C J-frame (JD/JDB/HJD/JDC), JD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00312	KPRL4KDS	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDS	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114795996	A	S18 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference

Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X)	A	S18, S16 spec sheet; p. 24; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S23 surplus_listing
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00313 **KPRL4KDT** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)

OEM part number	KPRL4KDT	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	UPC 782114796412	A	S19 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit for DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC 2-/3-pole	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	DK, KD, KDB, HKD, KDC	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Finish / plating	Spec sheet weight 9.85 lb; certification UL 67	B	S19 spec sheet; oem_spec

Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), KD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00317	KPRL4LAP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)

OEM part number	KPRL4LAP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for LA-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LA-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LA-P	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00314	KPRL4LC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])

OEM part number	KPRL4LC	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4LD (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box (44 in for 100% rated)	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; also 100% rated CLD/CHLD/CLDC and LCC/HLCC (density-rated bus required for 100%)	A	S1 s1 pp.32-33; oem_spec
	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LA, LC, LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00318	KPRL4LCL	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)

OEM part number	KPRL4LCL	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for LCL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LCL 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	LCL	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec

Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Current-limiting FCL / LCL (and FDB+LFB)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00330	KPRL4LD	Cutler-Hammer	breaker-mounting-kit	IN FEB 2009 AND OCT 20

PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)

OEM part number	KPRL4LD	A	S2, S3, S4, S16 s2 p.28 Table 32; s3 p.24; oem_spec
Alternate / superseded numbers	KPRL4LC (Same breaker frames/space listed under KPRL4LC in May 2022 RP01400001E while KPRL4LD is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3 oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
Installation location	Mounting: Single; 36 in min box	A	S2 oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LD, LDB, HLD, LDC, CLD, LC 2-/3-pole, 600 A	A	S2, S3, S4 s2 p.28; oem_spec
	LD, LDB, HLD, LDC, CLD, LC	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, covers, hardware and instructions; '-H' suffix = hardware only (example KPRL4FD-H)	A	S2 p.28; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	6X space (1X = 1.38 in)	A	S2 p.28; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	In Feb 2009 and Oct 2017 renewal-parts editions; not in April 2021 edition	B	S1, S2, S3 inference
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4LC)	C	S16, S3 inference
Replacement / successor	KPRL4LC covers the same frames in the April 2021 table (Not stated as a supersession by Eaton; verify connector geometry/bus compatibility for older PRL4B chassis)	D	S1 inference
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC), LD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00315	KPRL4LG	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)

OEM part number	KPRL4LG	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for LHH 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	LHH 3-pole	A	S1 s1 pp.32-33; oem_spec
	LHH	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00316 **KPRL4MC** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])

OEM part number	KPRL4MC	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4X34 (Same breaker frames/space listed under KPRL4X34 in May 2022 RP01400001E while KPRL4MC is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	MDS/MC/MCY/HMC [MA/HMA]; 100% MCC/HMCC, MDSC	A	S1, S2, S3 s1 pp.32-33; oem_spec
	MDL, HMDL	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec

Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X34)	C	S16, S3 inference
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00323	KPRL4MD	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))

OEM part number	KPRL4MD	A	S1, S4, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for 100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 44 in box; density-rated bus required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	100% rated CMDL/CHMDL 3-pole (2021); 3-pole M-frame 800 A (2011)	A	S1, S4 s1 pp.32-33; oem_spec
	CMDL/CHMDL (100% rated; density rated bus)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*2011 supplement lists KPRL4MD as standard 3-pole M-frame 800 A kit; 2021 lists it only for 100% rated CMDL/CHMDL (MDL/HMDL now KPRL4X34).*		

EDH-EAT-00319	KPRL4NBP	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)

OEM part number	KPRL4NBP	A	S1, S2, S3, S16 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for NB-P 3-pole	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec

Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NB-P 3-pole	A	S1, S2, S3 s1 pp.32-33; oem_spec
	NB-P	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	listed in both 2017 and May 2022 RP01400001E	A	S16, S3 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width required	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: TRI-PAC integrally fused (FB-P, LA-P, NB-P), Tri-Pac		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00320	KPRL4NC	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)

OEM part number	KPRL4NC	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for NC/NCY/HNC [NB/HNB] 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	NC/NCY/HNC [NB/HNB] 3-pole	A	S1 s1 pp.32-33; oem_spec
	NC/NCY/HNC [NB/HNB]	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec

	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), NB, NC		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		

EDH-EAT-00321	KPRL4ND	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))

OEM part number	KPRL4ND	A	S1, S2, S3, S4, S16 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4X35 (Same breaker frames/space listed under KPRL4X35 in May 2022 RP01400001E while KPRL4ND is no longer listed for them; supersession inferred, not stated)	C	S16, S3 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit for NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1 pp.32-33; oem_spec
	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S16 p. 24; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S16, S17 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NHH 3-pole (2021); ND/HND 2-/3-pole (2009/2011)	A	S1, S2, S3, S4 s1 pp.32-33; oem_spec
	ND, HND	A	S16 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S16 pp. 24-25; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S16 p. 24 Table 37; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X35)	C	S16, S3 inference
install_constraint	36.00 in minimum box width	A	S16 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00299	KPRL4X12	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted 1-pole))

OEM part number	KPRL4X12	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD1 (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 pp.32-33; oem_spec

	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 1-pole (two sets of twin-mounted 1-pole); EHD/FDB/FD/HFD/FDC 1-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC (PD2)	A	S3 pp. 32-33; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00300	KPRL4X22	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)

OEM part number	KPRL4X22	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD2 (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED2 [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 2-pole; EHD/FDB/FD/HFD/FDC/ED/EDH/EDC 2-pole	A	S1 s1 pp.32-33; oem_spec
	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	A	S3 pp. 32-33; oem_spec
Poles	2	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 2X (2.75 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	2.75 in (69.9 mm) = 2X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec

	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), EHD, FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00301 **KPRL4X32** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)

OEM part number	KPRL4X32	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4 breaker connector kit for PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG2 3-pole; ED/EDH/EDC/FDE/HFDE/FDCE and ED/EDH/EDC/EDB/EDS 3-pole	A	S1 s1 pp.32-33; oem_spec
	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 3X (4.13 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	4.13 in (104.9 mm) = 3X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC), Power Defense frame 2 (PDG2 / PDD2), FD, ED		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00302 **KPRL4X334S** Cutler-Hammer breaker-mounting-kit **LISTED AS STOCK RENEWA**

PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mounting)

OEM part number	KPRL4X334S	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, single mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec

Breaker compatibility	PDG3 400 A frame, 3-pole, single mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00303	KPRL4X334T	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin mounting)

OEM part number	KPRL4X334T	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Description	PRL4 breaker connector kit for PDG3 400 A frame, 3-pole, twin mounting	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Twin; 44 in box required	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 400 A frame, 3-pole, twin mounting	A	S1 s1 pp.32-33; oem_spec
	PD3 400 A frame	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 4X (5.50 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) = 4X; twin mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00304	KPRL4X336	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)

OEM part number	KPRL4X336	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec

Description	PRL4 breaker connector kit for PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG3 600 A frame; LGE/LGS/LGH/LGC/LGU, 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH, Power Defense frame 3 (PDG3 / PDF3 / PDD3)		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*Table 46 gives 4X for PDG3 600 A but Table 47 gives 6X for LG-frame with the same kit number - confirm space requirement.*		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00305	KPRL4X34	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)

OEM part number	KPRL4X34	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4MC (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG4; MDL/HMDL 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG4; MDL/HMDL 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD4; MDL/HMDL	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec

Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), MDL		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00306	**KPRL4X35**	Cutler-Hammer	breaker-mounting-kit	LISTED AS STOCK RENEWA

PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)

OEM part number	KPRL4X35	A	S1, S3 s1 pp.32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4ND (earlier number for same frames/space; supersession inferred)	C	S16, S3 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4 breaker connector kit for PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 pp.32-33; oem_spec
	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S3 p. 32; oem_spec
Application	branch	A	same as above
	branch (horizontally mounted) or sub-feed	C	S1 inference
Installation location	Mounting: Single; 36 in min box	A	S1 pp.32-33 notes b/c/d; oem_spec
Breaker compatibility	PDG5; ND/HND/NDC/NGS/NGH/NGC 3-pole	A	S1 s1 pp.32-33; oem_spec
	PD5; ND/HND/NDC/NGS/NGH/NGC	A	S3 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Each kit includes copper connectors, mounting brackets, covers, hardware and instructions; breakers not included. Hardware-only kit = catalog number + '-H' (mounting brackets and hardware only).	A	S1 pp.32-33; oem_spec
	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	S3 pp. 32-33; oem_spec
Dimensions	Space required 6X (8.25 in) (1X = 1.38 in)	A	S1 pp.32-33; oem_spec
	8.25 in (209.6 mm) = 6X; single mounting	A	S3 pp. 32-33; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
	current (May 2022)	A	S3 p. 33; oem_spec
Cross-links	Families: PRL4, PRL4X · Breakers: Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), ND		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00238	**6572C746G01**	PRL4 standard ground bus	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00238	6572C746G01	Cutler-Hammer	ground-bar	LISTED AS STOCK RENEWA

PRL4 standard ground bus

OEM part number	6572C746G01	A	S1, S2 s1 p.33; oem_spec
Description	Copper bus with (3) 6-300 kcmil lugs plus a 24-circuit terminal bar with #14-1/0 wire range	A	same as above
Material	Copper	A	S1 oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.33; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00298	**6574C74**	PRL4 vented cover assembly (side rails + top/bottom vented covers)	—	Listed as stock renewal part in Eaton RP01400001E (April 202

EDH-EAT-00298	6574C74	Cutler-Hammer	deadfront	LISTED AS STOCK RENEWA

PRL4 vented cover assembly (side rails + top/bottom vented covers)

OEM part number	6574C74	A	S1, S2 s1 p.31 Table 44; oem_spec
Alternate / superseded numbers	BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	A	S1 style_number; p.31; oem_spec
Description	Vented cover assembly: two side rails, top and bottom vented covers; device covers and blanks ordered separately; covers add 0.90 in to 10.40 in box depth (11.30 in overall)	A	same as above
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00294	**6554C01**	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00295	**6554C02**	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	—	Listed as stock renewal part in Eaton RP01400001E (April 202
EDH-EAT-00296	**P41X25**	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	—	Distributor-listed

EDH-EAT-00294	6554C01	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL4/PRL4X blank cover for 24 in wide box (1X-20X)

OEM part number	6554C01	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 13; oem_spec
Alternate / superseded numbers	1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	A	S1, S4 style_number; oem_spec
Description	Blank cover for unused chassis space, 24 in wide box	A	S1 oem_spec
Dimensions	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in	A	S4 p.8 Table 13; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00295	6554C02	Cutler-Hammer	filler-plate	LISTED AS STOCK RENEWA

PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)

OEM part number	6554C02	A	S1, S2, S4 s1 p.32 Table 45; s4 p.8 Table 14; oem_spec
Alternate / superseded numbers	Same H scheme as 6554C01 (4X = H13, 5X = H14)	A	S1, S4 style_number; oem_spec
Description	Blank cover, 36.00 and 44.00 in wide boxes	A	S1 oem_spec
Dimensions	Width 25 in; height in X units (1X = 1.38 in)	A	S4 p.8 Table 14; oem_spec
Status	Listed as stock renewal part in Eaton RP01400001E (April 2021) (Guide states listed parts are 'most frequently ordered and readily available from stock'; current availability not re-verified)	A	S1 p.32; oem_spec
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00296	P41X25	Cutler-Hammer	filler-plate	DISTRIBUTOR-LISTED

PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)

OEM part number	P41X25	A	S12 oem_spec
Description	SWBD/PRL4 1X filler 1.375 in H x 25 in W, fits 36, 44, 45 in enclosures ('Eaton, PRL4- 1X Blank Cover')	C	S12 distributor
Dimensions	1.375 in H x 25 in W	C	same as above
Status	Distributor-listed	C	same as above
Cross-links	Families: PRL4		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Relationship between P41X25 and OEM renewal part 6554C02H01 (both 1X, 25 in wide) - possibly switchboard-channel catalog equivalent; not confirmed.*		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00404	**1A32258H03**	Standard trim lock for PRL4X and PRL4 lighting and power panels	—	Listed in renewal parts guide(s) s1, s2, s4

EDH-EAT-00404	1A32258H03	Eaton	trim	LISTED IN RENEWAL PART

Standard trim lock for PRL4X and PRL4 lighting and power panels

OEM part number	1A32258H03	A	S1, S2, S4 oem_spec
Description	Standard trim lock for PRL4X and PRL4 lighting and power panels	A	same as above
Status	Listed in renewal parts guide(s) s1, s2, s4	A	same as above
Cross-links	Families: PRL4, PRL4X		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00417	**5081A08G02**	PRL4 chassis mounting hardware	—	Listed in s4
EDH-EAT-00418	**5081A09G02**	PRL4 gutter cover mounting hardware	—	Listed in s4

EDH-EAT-00417	5081A08G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 chassis mounting hardware

OEM part number	5081A08G02	A	S4 oem_spec
Description	PRL4 chassis mounting hardware (nuts and washers)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00418	5081A09G02	Cutler-Hammer	fastener	LISTED IN S4

PRL4 gutter cover mounting hardware

OEM part number	5081A09G02	A	S4 oem_spec
Description	PRL4 gutter cover mounting hardware (screws and captive nuts)	A	same as above
Status	Listed in s4	A	same as above
Cross-links	Families: PRL4		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00365	**TAD3**	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA **A**	Referenced Feb 2013

EDH-EAT-00365	TAD3	Westinghouse	conversion-kit	REFERENCED FEB 2013

TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors

OEM part number	TAD3	A	S5, S14, S13, S116 p.13 note; oem_spec
Description	Adapter kit required when mounting a Series C KD frame breaker onto existing LB frame connectors; included with KD retrofit or connector kits, may be purchased separately	A	S5 p.13; oem_spec
	Adapter kit required when mounting a Series C KD-frame breaker onto existing LB-frame connectors; included in orders for KD retrofit kits or connector kits, also sold separately	A	S14 p. 13 note; oem_spec
	K-frame terminal adapter for use in replacing LB/DA breakers	A	S116 p.12-244, Table 12-451; oem_spec
Application	branch (line-side adapter)	A	S13 p. V12-T4-7 note 6; oem_spec
	accessory	A	S116 p.12-244, Table 12-451; oem_spec
Installation location	Line side of K-frame breaker on CDP chassis existing LB connectors; allows KD opposite LB breakers	A	S13 p. V12-T4-7 note 6; oem_spec
Breaker compatibility	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA in panelboard applications	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
	K-frame (replacing Westinghouse LB/DA breakers)	A	S116 p.12-244, Table 12-451; oem_spec
Status	Referenced Feb 2013	A	S5 oem_spec
Cross-links	Families: PRL4, CDP · Breakers: Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%), Westinghouse pre-Series C industrial MCCBs, JA, LB, KD, Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, OEM instruction document, Kit contents, Material, Torque values		
Open question	*Exact contents of TAD3 (spacer blocks vs. extended line straps)?*		
Open question	*Is TAD3 also used on WF/WRP switchboard LB provisions?*		
Open question	*Which legacy LB/DA conductor geometry does TAD3 adapt to; quantity per package?*		

3.20 PRL4X — Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)

FAM-EAT-009 · panelboard · aka PRL4x, Pow-R-Line 4X, PRL4DX, Pow-R-Xpress PRL4X · markings: Eaton
Successor to PRL4B; renewal parts (blank covers, vented covers, KPRL4X/KPRL4* connector kits, retrofit kits) are listed jointly for PRL4X and PRL4 in RP01400001E (2021).

Attribute	Value	Cl.	Sources
Status	Current	A	S6 oem_spec
Era of manufacture	Introduced 2020	A	S1 p.2; oem_spec
Voltage rating	240, 480 or 600 Vac; 600 Vdc	A	S6 p.V2-T3-11; oem_spec
Main ampacity	MLO 1200 A; main device 1200 A	A	same as above
Branch breakers accepted	Breakers 15-1200 A (Power Defense PDG2-PDG5 plus legacy Series C/G frames via KPRL4 kits); fusible switches 30-1200 A (PRL4F)	A	S1, S6 oem_spec

Breaker families associated: Power Defense frame 2 (PDG2 / PDD2), Power Defense frame 3 (PDG3 / PDF3 / PDD3), Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5), Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S6 CA08100003E Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control
Also fits this family (entry printed elsewhere): 6572C746G01, 6554C01, 6554C02, 6574C74, KPRL4X12, KPRL4X22, KPRL4X32, KPRL4X334S, KPRL4X334T, KPRL4X336, KPRL4X34, KPRL4X35, KPRL4FDCL, KPRL4CA, KPRL4JDS, KPRL4JDT, KPRL4FBP, KPRL4KDS, KPRL4KDT, KPRL4LC, KPRL4LG, KPRL4MC, KPRL4LAP, KPRL4LCL, KPRL4NBP, KPRL4NC, KPRL4ND, KPRL4CKD, KPRL4MD, KPRL4CND, KPRL44X, KPRL45X1, KPRL45X, KPRL45XS, KPRL4B6XS, KPRL4B6XT, KPRL4W9X, KPRL4W11X, KPRL4W15X, 1A32258H03

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00297	**PRXP4PD2FILL1**	Pow-R-Xpress PRL4X PD2 1-pole filler	—	Distributor-listed (UPC 786689814915)

EDH-EAT-00297 **PRXP4PD2FILL1** Eaton filler-plate **DISTRIBUTOR-LISTED (UP**

Pow-R-Xpress PRL4X PD2 1-pole filler

OEM part number	PRXP4PD2FILL1	A	S11 oem_spec
Description	PRL4X PD2 1 pole filler (Pow-R-Xpress unassembled PRL4X panelboard)	C	S11 distributor
Poles	1	C	same as above
Status	Distributor-listed (UPC 786689814915)	C	same as above
Cross-links	Families: PRL4X · Breakers: Power Defense frame 2 (PDG2 / PDD2)		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.21 PRL5P — Pow-R-Line 5P plug-on distribution panelboard

FAM-EAT-015 · panelboard · aka 5P, Pow-R-Line 5P · markings: Cutler-Hammer, Eaton
Plug-on distribution panelboard with single-bus (30 in box) or double-bus (48 in box) chassis; breakers supplied as complete adapter units (catalog 5P...).

Attribute	Value	Cl.	Sources
Status	Discontinued (dropped from 2021 renewal parts; in 2009 and 2017 editions)	B	S1, S2, S3 inference
Era of manufacture	Introduced August 1995	A	S2 p.2 Table 1; oem_spec
Main ampacity	Up to 1200 A (lug units 400/600/800 A single bus, 1200 A double bus)	A	S2 p.38; oem_spec
Branch breakers accepted	Plug-on adapter units with EHD..FDC, ED, JD, DK/KD, LD, MDL, ND (no 100% rated)	A	S2 p.37; oem_spec

Breaker families associated: Series C F-frame (EHD/FDB/FD/HFD/FDC), Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS), Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC)
Key documents: S1 RP01400001E (Z25020) Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a; S2 RP01400001E Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F,; S3 RP01400001E Renewal Parts RP01400001E - Current Eaton panelboards

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00377	**5PLUG31200TC**	PRL5P 600-1200 A lug unit, double-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00374	**5PLUG3400SC**	PRL5P 400 A main/through-feed lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00375	**5PLUG3600SC**	PRL5P 600 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition
EDH-EAT-00376	**5PLUG3800SC**	PRL5P 800 A lug unit, single-bus chassis	—	Listed 2009 and 2017; PRL5P absent from 2021 edition

EDH-EAT-00377 — 5PLUG31200TC — Cutler-Hammer — main-lug-kit — LISTED 2009 AND 2017;

PRL5P 600-1200 A lug unit, double-bus chassis

OEM part number	5PLUG31200TC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600-1200 A lug unit, double-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (4) #4-750 kcmil	A	same as above
Dimensions	7X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00374 — 5PLUG3400SC — Cutler-Hammer — main-lug-kit — LISTED 2009 AND 2017;

PRL5P 400 A main/through-feed lug unit, single-bus chassis

OEM part number	5PLUG3400SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	400 A main/through-feed lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (1) 1/0-500 or (2) 1/0-250 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00375 — 5PLUG3600SC — Cutler-Hammer — main-lug-kit — LISTED 2009 AND 2017;

PRL5P 600 A lug unit, single-bus chassis

OEM part number	5PLUG3600SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	600 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) 1/0-500 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00376	5PLUG3800SC	Cutler-Hammer	main-lug-kit	LISTED 2009 AND 2017;

PRL5P 800 A lug unit, single-bus chassis

OEM part number	5PLUG3800SC	A	S2, S3 s2 p.38 Table 47; oem_spec
Description	800 A lug unit, single-bus chassis	A	S2 oem_spec
Application	main or through-feed	A	same as above
Kit contents	Wire range (2) #2-500 or (3) #2-400 kcmil	A	same as above
Dimensions	8X space	A	same as above
Status	Listed 2009 and 2017; PRL5P absent from 2021 edition	B	S1, S2, S3 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00380	**5PN1200A**	PRL5P 1200 A neutral assembly, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00381	**5PN1200C**	PRL5P 1200 A neutral assembly, copper	—	PRL5P dropped from 2021 edition
EDH-EAT-00378	**5PN800A**	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition
EDH-EAT-00379	**5PN800C**	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	—	PRL5P dropped from 2021 edition

EDH-EAT-00380	5PN1200A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, Al/Cu

OEM part number	5PN1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00381	5PN1200C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 1200 A neutral assembly, copper

OEM part number	5PN1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A neutral assembly, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00378	5PN800A	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil

OEM part number	5PN800A	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00379	5PN800C	Cutler-Hammer	neutral-assembly	PRL5P DROPPED FROM 202

PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil

OEM part number	5PN800C	A	S2 p.39 Table 48; oem_spec
Description	800 A neutral assembly, copper, (4) 250-500 kcmil	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00382	**5PG1200A**	PRL5P 1200 A ground bar, Al/Cu	—	PRL5P dropped from 2021 edition
EDH-EAT-00383	**5PG1200C**	PRL5P 1200 A ground bar, copper	—	PRL5P dropped from 2021 edition

EDH-EAT-00382	5PG1200A	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, Al/Cu

OEM part number	5PG1200A	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, Al/Cu	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00383	5PG1200C	Cutler-Hammer	ground-bar	PRL5P DROPPED FROM 202

PRL5P 1200 A ground bar, copper

OEM part number	5PG1200C	A	S2 p.39 Table 48; oem_spec
Description	1200 A ground bar, copper	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00384	**5PFP1S**	PRL5P 1X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00385	**5PFP1T**	PRL5P 1X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00386	**5PFP2S**	PRL5P 2X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00387	**5PFP2T**	PRL5P 2X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00388	**5PFP3S**	PRL5P 3X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00389	**5PFP3T**	PRL5P 3X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00390	**5PFP4S**	PRL5P 4X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00391	**5PFP4T**	PRL5P 4X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00392	**5PFP5S**	PRL5P 5X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00393	**5PFP5T**	PRL5P 5X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition
EDH-EAT-00394	**5PFP6S**	PRL5P 6X deadfront filler plate, single-bus chassis	—	PRL5P dropped from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00395	**5PFP6T**	PRL5P 6X deadfront filler plate, double-bus chassis	—	PRL5P dropped from 2021 edition

EDH-EAT-00384	5PFP1S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, single-bus chassis

OEM part number	5PFP1S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00385	5PFP1T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 1X deadfront filler plate, double-bus chassis

OEM part number	5PFP1T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 1X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	1X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00386	5PFP2S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, single-bus chassis

OEM part number	5PFP2S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00387	5PFP2T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 2X deadfront filler plate, double-bus chassis

OEM part number	5PFP2T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 2X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	2X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00388	5PFP3S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, single-bus chassis

OEM part number	5PFP3S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00389	5PFP3T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 3X deadfront filler plate, double-bus chassis

OEM part number	5PFP3T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 3X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	3X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00390	5PFP4S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, single-bus chassis

OEM part number	5PFP4S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00391	5PFP4T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 4X deadfront filler plate, double-bus chassis

OEM part number	5PFP4T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 4X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	4X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00392	5PFP5S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, single-bus chassis

OEM part number	5PFP5S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00393	5PFP5T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 5X deadfront filler plate, double-bus chassis

OEM part number	5PFP5T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 5X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	5X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00394	5PFP6S	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, single-bus chassis

OEM part number	5PFP6S	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, single-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

EDH-EAT-00395	5PFP6T	Cutler-Hammer	filler-plate	PRL5P DROPPED FROM 202

PRL5P 6X deadfront filler plate, double-bus chassis

OEM part number	5PFP6T	A	S2 p.40 Table 52; oem_spec
Description	Deadfront filler plate, 6X vertical increment, double-bus chassis; also used across from a breaker unit in a double-bus chassis	A	S2 p.40; oem_spec
Dimensions	6X height (1X = 1.38 in)	A	S2 oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Fasteners, Mounting-hole pattern, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00398	**5PCGBLD600S**	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00401	**5PCGBLUG1200T**	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00396	**5PCGBLUG400S**	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00397	**5PCGBLUG600S**	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	—	PRL5P dropped from 2021 edition

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00399	**5PCGBLUG800S**	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00400	**5PCGBMD800T**	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	—	PRL5P dropped from 2021 edition
EDH-EAT-00402	**5PCGBND1200T**	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	—	PRL5P dropped from 2021 edition

EDH-EAT-00398 — 5PCGBLD600S — Cutler-Hammer — conversion-kit — PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus

OEM part number	5PCGBLD600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A LD main breaker, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00401 — 5PCGBLUG1200T — Cutler-Hammer — conversion-kit — PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus

OEM part number	5PCGBLUG1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A main lugs, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00396 — 5PCGBLUG400S — Cutler-Hammer — conversion-kit — PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus

OEM part number	5PCGBLUG400S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 400 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00397 — 5PCGBLUG600S — Cutler-Hammer — conversion-kit — PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus

OEM part number	5PCGBLUG600S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 600 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00399 — 5PCGBLUG800S — Cutler-Hammer — conversion-kit — PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus

OEM part number	5PCGBLUG800S	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A main lugs, single bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00400	5PCGBMD800T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus

OEM part number	5PCGBMD800T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 800 A MD main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-EAT-00402	5PCGBND1200T	Cutler-Hammer	conversion-kit	PRL5P DROPPED FROM 202

PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus

OEM part number	5PCGBND1200T	A	S2 p.39 Table 50; oem_spec
Description	Grounded 'B' phase adapter kit, 1200 A ND main breaker, double bus	A	S2 p.39; oem_spec
Status	PRL5P dropped from 2021 edition	B	S1, S2 inference
Cross-links	Families: PRL5P		
Not yet documented	Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

3.22 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards

FAM-EAT-023 · panelboard · aka WEB, WCA, WEHB, WFB, HWFB, WGB, WGHB · markings: Westinghouse

Westinghouse 1937-1988 era panelboards named for their branch breaker (E-frame, CA, F-frame, G-frame). PRL3 connector kits (KPRL3FD, KPRL3ED, KPRL3CA) fit WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	A	S13 p. V12-T4-7; oem_spec
Branch breakers accepted	WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	A	same as above
kit_fit	The PRL3 connector kits will fit the following panelboards: WEB, WCA, WEHB, WFB, and HWFB	A	S14 p. 7 note; oem_spec

Breaker families associated: EB, EHB, FB, HFB

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KPRL3FD, KPRL3ED, KPRL3CA

3.23 ES — Cutler-Hammer Type ES switchboard

FAM-EAT-019 · switchboard · aka ES switchboard, Type ES · markings: Cutler-Hammer

Cutler-Hammer branded service distribution switchboard using Westinghouse molded-case breakers under the 1960s supply agreement. Existing ES lineups can be extended with new Pow-R-Line C structures through a transition section.

Attribute	Value	Cl.	Sources
Status	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	A	same as above
Voltage rating	120-600 V	A	same as above
Main ampacity	ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA	A	same as above

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.24 IFS — Integrated Facility System switchboard

FAM-EAT-022 · switchboard · aka Integrated Facility Switchboard, IFS switchboard · markings: Eaton

Free-standing front-access UL 891 switchboard that integrates standard panelboards, dry-type transformers and other equipment in 'cells'; used with Type 1 Pow-R-Line C switchboard sections.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S17 p. 21.6-1; oem_spec
relationship	Used with Type 1 Pow-R-Line C switchboard sections; mains/feeders selected from Section 21.1 (PRLC)	A	same as above

Key documents: S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.25 PRLC — Pow-R-Line C switchboard

FAM-EAT-017 · switchboard · aka Pow-R-Line C, POW-R-LINE C, PRL-C, Pow-R-Line C switchboard, Type 1 Pow-R-Line C · markings: Westinghouse, Cutler-Hammer, Eaton

Eaton (originally Westinghouse) Class II service-distribution switchboard, UL 891 / NEMA PB-2, front- or rear-access, with individually mounted mains and group-mounted feeder chassis. Evolved from the Westinghouse WF/WRP St. Louis switchboard when the design moved to Sumter SC and Visalia CA in 1988 with the introduction of Series C breakers. Distribution chassis are laid out in X units (1X = 1-3/8 in) on 38X or 50X vertical panel space in 36 in or 45 in wide structures; device X requirements (EHD 1-3X, FD 2-3X, JD 3X, KD 4X, LD/MDL/ND 6X) parallel the PRL4 panelboard chassis. Vol 12 states breaker provisions 'are available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', but no PRLC-specific provision kit catalog numbers were found in public documents (factory/Sumter quoted).

Attribute	Value	Cl.	Sources
Status	current (listed in April 2018 consulting guide)	A	S17 p. 21.0-8; oem_spec
Era of manufacture	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	A	S13 p. V12-T15-5 (Chronology); oem_spec
Voltage rating	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rating table)	A	S17, S13 p. 21.0-9 Table 21.0-2; p. V12-T15-5; oem_spec
Main ampacity	Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	A	same as above
Branch breakers accepted	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A), drawout MCCB 70-1200 A, fusible switches 30-1200 A. Uses Series C MCCBs (EHD, FD/HFD/FDC, ED, JD, DK/KD/HKD/KDC, LD/HLD/LDC, MDL/HMDL, NG/ND, LG, etc.)	A	S17 pp. 21.0-8, 21.0-9, 21.1-12 Fig 21.1-9; oem_spec
x_unit	1X = 1-3/8 in (34.9 mm) in PRLC distribution layout	A	S17 p. 21.1-12 Fig 21.1-9; oem_spec
distribution_chassis	Distribution sections use 38X or 50X vertical panel space for devices (90 in high structures), widths 36 or 45 in	A	S17 p. 21.1-11 Fig 21.1-7; oem_spec
device_x_space	Fig 21.1-9 (36 in structure): EHD 100 A 1P 1X / 2P 2X / 3P 3X; FDB/FD/HFD/FDC 150 A 1-3P 1-3X; EDB/EDS/ED/EDH/EDC & FD/HFD/FDC 225 A 2P 2X 3P 3X; JD/HJD/JDC 250 A 3X; DK/KD/HKD/KDC/CKD/CHKD 400 A 4X; ELKD earth leakage 4X; LGE/LGH/LGC/LGU 600 A 4X; LD/HLD/LDC/CLD 600 A 6X; FB-P 3X; NHH/LA-P 6X; MDL/HMDL/CMDL 800 A 6X; NG/NGH/NGC 1200 A 6X. 45 in structure: twin DK/KD/HKD/KDC 4X, NB-P 6X, NG 6X. Breaker-to-fusible transition 1X; SPD 7X or 10X; customer metering 11X	A	S17 p. 21.1-12 Fig 21.1-9; oem_spec
main_lug_space	Main lugs only: 400/600 A 10X (2-#2-500) or 16X on 50X chassis (2-#250-750); 800 A 10X/16X; 1200-2000 A 12X/16X (38X chassis values 10-12X)	A	S17 p. 21.1-11 Table 21.1-11; oem_spec
renewal_parts	Eaton offers match-and-lineup PRLC structures, new breakers, breaker provisions/connectors 'available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', and switchboard structure parts	A	S13 p. V12-T15-5; oem_spec
bus_torque	Pow-R-Line CS (Canadian derivative) manual gives busbar torque #10 30 lb-in, 1/4 in 65, 5/16 in 130, 3/8 in 240, 1/2 in 600 lb-in; 70 lb-ft when two Belleville washers per bolt. Not verified for PRLC (IM01500001E not obtained)	C	S21 p. 17 Appendix A Table 2; oem_spec
branch_kit_relationship_to_prl4	A surplus listing titles the PRL4 connector kit KPRL4KDS as 'Pow-R-Line C'; the PRLC distribution X-space table matches PRL4 kit space requirements. Not OEM-confirmed that PRL4 KPRL4 kits are listed for PRLC switchboard chassis	D	S23, S17, S16 inference

Breaker families associated: ED, EHD, FD, JD, KD, LD, MDL, ND, RD

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S16 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S21 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual; S23 eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P; S25 Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard

3.26 PRLCS — Pow-R-Line CS switchboard

FAM-EAT-021 · switchboard · aka Pow-R-Line CS, PRL CS · markings: Eaton

Eaton Canada switchboard line documented by instruction manual IB015002EN (Nov 2021). Manual gives bus-joint torque table (Appendix A). No branch kit catalog numbers found.

Attribute	Value	Cl.	Sources
Status	current (Canadian market; manual IB015002EN effective Nov 2021)	B	S21 cover; oem_spec
bus_torque	Busbar connections: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in; with two Belleville washers per bolt (convex side up) torque to 70 lb-ft	A	S21 p. 17 Appendix A Table 2; oem_spec

Key documents: S21 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual

3.27 PRLi — Pow-R-Line i switchboard

FAM-EAT-020 · switchboard · aka Pow-R-Line i, PRL i, Pow-R-Line I · markings: Cutler-Hammer, Eaton

Rear-access, front- and rear-aligned UL 891 switchboard with individually compartmentalized feeder devices (not group-mounted). Included here for lineage; branch hardware is device-specific compartments rather than group-mounted connector kits.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S17 p. 21.0-11; oem_spec
Era of manufacture	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	A	S13 p. V12-T15-2; oem_spec
Main ampacity	4000 A main bus maximum	A	S17 p. 21.0-11; oem_spec
Branch breakers accepted	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum SB/DS, NRX	A	same as above

Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S17 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.28 WF/WRP — Westinghouse WF/WRP switchboard

FAM-EAT-018 · switchboard · aka WF, WRP, Type WF, Type WRP, WF/WRP switchboard · markings: Westinghouse

Westinghouse St. Louis Class II switchboard. Type WF = front access (rear flush), Type WRP = rear access (front and rear flush). Feeders were panel-mounted molded-case breakers or FDP fusible switches — the same device family used in CDP/FDP panelboards. Eaton's Sumter aftermarket center offers 'retrofit kits for WF and WRP distribution sections' and 'connector kits for WF and WRP distribution sections' (RP01400002E p.20), and Vol 12 says provisions/connectors are available for most ratings of WF/WRP; no catalog numbers published.

Attribute	Value	Cl.	Sources
Status	discontinued (superseded by Pow-R-Line C)	A	S13 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	A	same as above
Successor	Pow-R-Line C switchboard (new PRLC match/lineup structures can connect to existing WF/WRP)	A	same as above
Voltage rating	120-600 V	A	S13 p. V12-T15-5 ratings table; oem_spec
Main ampacity	Switchboard bus 600-4000 A; protective devices 15-4000 A; 10-200 kA	A	S13 p. V12-T15-5; oem_spec
Branch breakers accepted	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure switch (CBC) or MCCB	A	S13 pp. V12-T15-2, V12-T15-5; oem_spec
Aftermarket / reproduction	Sumter Plant Aftermarket Center offers retrofit kits and connector kits for WF and WRP distribution sections	A	S14 p. 20; oem_spec

Breaker families associated: FB, RD
Key documents: S13 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S14 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): KFDP4XT, KFDP5XT, KFDPB6X-2, KFDPW9X-4, KFDPW11X-6, KFDPW11X-8, KFDPW15X-12

3.29 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00462	**3T100FB**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A **A**	unknown
EDH-EAT-00466	**3T150FB**	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7) **A**	unknown
EDH-EAT-00461	**3T20FB**	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	unknown
EDH-EAT-00468	**3T225FD**	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	F-frame **C**	unknown
EDH-EAT-00465	**3TA100FD**	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	unknown
EDH-EAT-00622	**3TA150F3K**	Series C F-frame multiwire connector, 3 wires/terminal	F-frame (225 A max) **A**	unknown
EDH-EAT-00623	**3TA150F6K**	Series C F-frame multiwire connector, 6 wires/terminal	F-frame (225 A max) **A**	unknown
EDH-EAT-00469	**3TA150FB**	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	—	unknown
EDH-EAT-00463	**3TA225FD**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers **A**	unknown
EDH-EAT-00467	**3TA225FDK**	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	unknown
EDH-EAT-00464	**3TA50FB**	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	F-frame (FD, HFD, FDC, EHD etc.) **A**	unknown

EDH-EAT-00462 **3T100FB** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3T100FB	**A**	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	**A**	same as above
Application	accessory	**A**	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	**A**	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); HFDDC 100 A	**A**	same as above
Current rating	100 A max breaker	**A**	same as above
Kit contents	3 terminals per package	**A**	same as above
Material	terminal body steel	**A**	same as above
wire_range	14-1/0 AWG (2.5-50 mm2)	**A**	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00466	3T150FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)

OEM part number	3T150FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu only wire; package of 3 terminals	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also FP definite-purpose 200 A (s7)	A	same as above
Current rating	200 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Material	terminal body stainless steel	A	same as above
wire_range	4-4/0 AWG (25-95 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00461	3T20FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)

OEM part number	3T20FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	20 (EHD) A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Material	terminal body steel	A	same as above
wire_range	14-10 AWG (2.5-4 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00468	3T225FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)

OEM part number	3T225FD	C	S124 distributor
Description	Optional copper-body pressure terminal, Cu wire, 4-4/0 AWG (25-95 mm2), package of 3 (reseller reproduction of newer Eaton table; not in 2008 table)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	F-frame	C	same as above
Current rating	225 A	C	same as above
Kit contents	3 terminals per package	C	same as above
Material	copper body	C	same as above
wire_range	4-4/0 AWG (25-95 mm2) Cu	C	S124 distributor
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00465	3TA100FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)

OEM part number	3TA100FD	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	100 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	14-1/0 AWG (2.5-50 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00622	3TA150F3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame multiwire connector, 3 wires/terminal

OEM part number	3TA150F3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	F-frame (225 A max)	A	same as above
Current rating	225 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(3) 14-2 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00623	3TA150F6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame multiwire connector, 6 wires/terminal

OEM part number	3TA150F6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	F-frame (225 A max)	A	same as above
Current rating	225 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 14-6 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00469	3TA150FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 150 A, Cu/Al, Q18

OEM part number	3TA150FB	C	S121 p.1; oem_spec
Description	Line and load terminals, 150 A, #4-4/0 AWG Cu/Al, pressure type (Eaton web spec; frame field 'Frame J-K' doubtful)	C	same as above
Application	accessory	C	same as above
Current rating	150 A	C	same as above
Kit contents	Quantity 18 (per web spec)	C	same as above
wire_range	#4-4/0 AWG Cu/Al	C	S121 p.1; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	breaker compatibility, Dimensions, OEM instruction document, not found in 2008/2015 catalog tables, Status, Torque values		
Open question	*3TA150FB is absent from CA08101001E 2008 F-frame Table 12-163; is it a newer or regional (Canada) part, and which frame does it fit?*		

EDH-EAT-00463	3TA225FD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FD	A	S116 p.12-91, Table 12-163; oem_spec
Description	Standard pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Standard on 225 A F-frame; assemble collar enclosing conductor, clip snaps around collar	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.); also listed for JG-frame DC breakers (JGEDC/JGSDC/JGHDC 225 A) and FG enclosed breakers	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	4-4/0 AWG (25-95 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE), Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00467	3TA225FDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)

OEM part number	3TA225FDK	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Includes terminal shield kit; adds approx. 3 in (76.2 mm) to breaker height; 3-pole only	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	3 terminals per package; includes terminal shield kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	6 AWG-300 kcmil (16-150 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00464	3TA50FB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)

OEM part number	3TA50FB	A	S116 p.12-91, Table 12-163; oem_spec
Description	Optional pressure-type line/load terminal, Cu/Al wire; package of 3 terminals; Not for use with ED, EDH, EDC breakers	A	same as above
Application	accessory	A	same as above
Installation location	F-frame line/load conductor (load terminals standard; add suffix L for line)	A	same as above
Breaker compatibility	F-frame (FD, HFD, FDC, EHD etc.)	A	same as above
Current rating	50 A max breaker	A	same as above
Kit contents	3 terminals per package	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	14-4 AWG (2.5-25 mm2)	A	S116 p.12-91, Table 12-163; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00683	**1253C72G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00684	**1253C72G03**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00687	**1253C73G01**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00685	**1253C73G03**	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00688	**1253C73G05**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00686	**1253C73G06**	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00679	**673B142G02**	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00682	**673B142G03**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00681	**673B142G04**	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	F-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00680	**673B142G10**	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	F-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00683	1253C72G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A

OEM part number	1253C72G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 50 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00684	1253C72G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A

OEM part number	1253C72G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 50 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00687	1253C73G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A

OEM part number	1253C73G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00685	1253C73G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A

OEM part number	1253C73G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00688	1253C73G05	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A

OEM part number	1253C73G05	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00686	1253C73G06	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A

OEM part number	1253C73G06	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00679	673B142G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing, 100 A

OEM part number	673B142G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in bus spacing, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reproduction lists 673B142G02 as center strap for both 50 A and 100 A at 2.75 in spacing; 2008 OEM table lists only 100 A and 150 A rows at 2.75 in.*		

EDH-EAT-00682	673B142G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A

OEM part number	673B142G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00681	673B142G04	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A

OEM part number	673B142G04	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 2.75 in, 150 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00680	673B142G10	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A

OEM part number	673B142G10	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 2.75 in, 100 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	F-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00702	**624B600H01**	Series C F-frame panelboard strap mounting bracket	F-frame A	unknown
EDH-EAT-00701	**624B600H02**	Series C F-frame panelboard strap mounting bracket	F-frame A	unknown

EDH-EAT-00702	624B600H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00701	624B600H02	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C F-frame panelboard strap mounting bracket

OEM part number	624B600H02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	2	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00633	**4210B95G01**	Series C F-frame special terminal shield 3-pole for use with electrical operator	F-frame A	unknown
EDH-EAT-00634	**4210B95G02**	Series C F-frame special terminal shield 4-pole for use with electrical operator	F-frame A	unknown
EDH-EAT-00629	**625B229G06**	Series C F-frame terminal shield 1-pole, line	F-frame A	unknown
EDH-EAT-00630	**625B229G07**	Series C F-frame terminal shield 2-pole, line	F-frame A	unknown
EDH-EAT-00631	**625B229G08**	Series C F-frame terminal shield 3-pole, line	F-frame A	unknown
EDH-EAT-00632	**625B229G09**	Series C F-frame terminal shield 4-pole, line	F-frame A	unknown
EDH-EAT-00647	**IPB1**	Series C interphase barrier (F)	F A	unknown
EDH-EAT-00645	**TEC1**	Series C F-frame terminal end cover, 0.25 opening	F-frame 3-pole A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00646	**TEC2**	Series C F-frame terminal end cover, 0.41 opening	F-frame 3-pole **A**	unknown

EDH-EAT-00633	**4210B95G01**	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame special terminal shield 3-pole for use with electrical operator

OEM part number	4210B95G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 3-pole for use with electrical operator	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	3	**A**	same as above
Kit contents	individually packaged	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00634	**4210B95G02**	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame special terminal shield 4-pole for use with electrical operator

OEM part number	4210B95G02	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame special terminal shield 4-pole for use with electrical operator	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	4	**A**	same as above
Kit contents	individually packaged	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00629	**625B229G06**	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 1-pole, line

OEM part number	625B229G06	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 1-pole, line	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	F-frame	**A**	same as above
Poles	1	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00630	625B229G07	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 2-pole, line

OEM part number	625B229G07	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 2-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	2	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00631	625B229G08	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 3-pole, line

OEM part number	625B229G08	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 3-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00632	625B229G09	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal shield 4-pole, line

OEM part number	625B229G09	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. F-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	F-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00647	IPB1	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (F)

OEM part number	IPB1	**A**	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	F	**A**	same as above
Kit contents	2 per package	**A**	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00645	TEC1	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal end cover, 0.25 opening

OEM part number	TEC1	**A**	S116 p.12-249, Table 12-468; oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	F-frame 3-pole	**A**	same as above
Kit contents	one per breaker	**A**	same as above
Material	glass-polyester	**A**	same as above
Dimensions	conductor opening diameter 0.25 in (6.35 mm)	**A**	S116 p.12-249; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00646	TEC2	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C F-frame terminal end cover, 0.41 opening

OEM part number	TEC2	**A**	S116 p.12-249, Table 12-468; oem_spec
Description	Molded glass-polyester terminal end cover sliding over line end of 3-pole F-frame, forming terminal compartments isolating ionized gases (MCC applications); UL File E7819	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	F-frame 3-pole	**A**	same as above
Kit contents	one per breaker	**A**	same as above
Material	glass-polyester	**A**	same as above
Dimensions	conductor opening diameter 0.41 in (10.41 mm)	**A**	S116 p.12-249; oem_spec
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00609	**KPR1A**	Series C F-frame keeper nut (10-32, line or load end)	F-frame **A**	unknown
EDH-EAT-00610	**KPR1AM**	Series C F-frame keeper nut (M5, line or load end)	F-frame **A**	unknown

EDH-EAT-00609	KPR1A	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C F-frame keeper nut (10-32, line or load end)

OEM part number	KPR1A	A	S116 p.12-243, Table 12-448; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00610	KPR1AM	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C F-frame keeper nut (M5, line or load end)

OEM part number	KPR1AM	A	S116 p.12-243, Table 12-448; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00654	**374D883G01**	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	F-frame fixed-mounted A	unknown
EDH-EAT-00655	**374D883G02**	Series C F-frame rear connecting stud, 225 A long stud	F-frame fixed-mounted A	unknown
EDH-EAT-00652	**451D874G01**	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	F-frame fixed-mounted A	unknown
EDH-EAT-00653	**451D874G02**	Series C F-frame rear connecting stud, 100 A long stud	F-frame fixed-mounted A	unknown
EDH-EAT-00617	**FCWTK**	Series C F-frame control wire terminal kit	F-frame A	unknown
EDH-EAT-00618	**FCWTK225**	Series C F-frame control wire terminal kit	F-frame A	unknown
EDH-EAT-00593	**KPEK1**	Series C F-frame end cap kit, 3-pole, 10-32	F-frame 3-pole (225 A) A	unknown
EDH-EAT-00591	**KPEK12**	Series C F-frame end cap kit, 2-pole, 10-32	F-frame 2-pole (225 A) A	unknown
EDH-EAT-00595	**KPEK14**	Series C F-frame end cap kit, 4-pole, 10-32	F-frame 4-pole (225 A) A	unknown
EDH-EAT-00594	**KPEKM1**	Series C F-frame end cap kit, 3-pole, M5	F-frame 3-pole (225 A) A	unknown
EDH-EAT-00592	**KPEKM12**	Series C F-frame end cap kit, 2-pole, M5	F-frame 2-pole (225 A) A	unknown
EDH-EAT-00596	**KPEKM14**	Series C F-frame end cap kit, 4-pole, M5	F-frame 4-pole (225 A) A	unknown

EDH-EAT-00654	374D883G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)

OEM part number	374D883G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A short stud (110-225 A breakers); tubes 374D883H06-H09	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 374D883H06/H07/H08/H09 ordered separately by panel thickness	A	same as above
Fasteners	.44-14 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00655	374D883G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 225 A long stud

OEM part number	374D883G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 225 A long stud; tubes 374D883H10-H13	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 374D883H10/H11/H12/H13 ordered separately by panel thickness	A	same as above
Fasteners	.44-14 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00652	451D874G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)

OEM part number	451D874G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A short stud (15-100 A breakers); tubes 32B9446H20-H23 by panel thickness	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 32B9446H20/H21/H22/H23 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00653	451D874G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame rear connecting stud, 100 A long stud

OEM part number	451D874G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 100 A long stud; tubes 32B9446H24-H27	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	F-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 32B9446H24/H25/H26/H27 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 thread	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00617	FCWTK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame control wire terminal kit

OEM part number	FCWTK	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	F-frame control wire terminal kit, 150 A (12 tangs; terminals ordered separately); for steel or stainless steel terminals only; taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Requires	3T100FB (EDH-EAT-00462)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00618	FCWTK225	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame control wire terminal kit

OEM part number	FCWTK225	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	F-frame control wire terminal kit, 225 A (12 tangs); taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00593	KPEK1	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 3-pole, 10-32

OEM part number	KPEK1	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Poles	3	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00591	KPEK12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 2-pole, 10-32

OEM part number	KPEK12	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Poles	2	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00595	KPEK14	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 4-pole, 10-32

OEM part number	KPEK14	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
Poles	4	A	same as above
Fasteners	thread 10-32	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00594	KPEKM1	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 3-pole, M5

OEM part number	KPEKM1	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 3-pole (225 A)	A	same as above
Poles	3	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00592	KPEKM12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 2-pole, M5

OEM part number	KPEKM12	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 2-pole (225 A)	A	same as above
Poles	2	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00596	KPEKM14	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C F-frame end cap kit, 4-pole, M5

OEM part number	KPEKM14	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	F-frame 4-pole (225 A)	A	same as above
Poles	4	A	same as above
Fasteners	thread M5	A	same as above
Cross-links	Breakers: Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C G-Frame (GD/GHC/GHB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00620	**3TA100G3K**	Series C G-frame multiwire connector, 3 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	unknown
EDH-EAT-00621	**3TA100G6K**	Series C G-frame multiwire connector, 6 wires/terminal	G-frame (100 A max); GD breakers require special tapping and special t A	unknown

EDH-EAT-00620	3TA100G3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C G-frame multiwire connector, 3 wires/terminal

OEM part number	3TA100G3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	A	same as above
Current rating	100 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(3) 14-2 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00621	3TA100G6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C G-frame multiwire connector, 6 wires/terminal

OEM part number	3TA100G6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	G-frame (100 A max); GD breakers require special tapping and special terminals	A	same as above
Current rating	100 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 14-6 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00628	**GTSK3**	Series C G-frame terminal shield	G-frame **A**	unknown

EDH-EAT-00628	GTSK3	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C G-frame terminal shield

OEM part number	GTSK3	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. G-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	G-frame	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C J-Frame (JD/HJD/JDC/JDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00624	**3TA250J3K**	Series C J-frame multiwire connector, 3 wires/terminal	J-frame (250 A max) **A**	unknown
EDH-EAT-00625	**3TA250J6K**	Series C J-frame multiwire connector, 6 wires/terminal	J-frame (250 A max) **A**	unknown
EDH-EAT-00471	**T250KB**	Series C J-frame line/load terminal, 250 A, Cu only (optional)	J-frame JD/HJD/JDC/JDB **A**	unknown
EDH-EAT-00470	**TA250KB**	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 25 **A**	unknown

EDH-EAT-00624	3TA250J3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame multiwire connector, 3 wires/terminal

OEM part number	3TA250J3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	J-frame (250 A max)	A	same as above
Current rating	250 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(3) 14-2 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00625	3TA250J6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame multiwire connector, 6 wires/terminal

OEM part number	3TA250J6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	J-frame (250 A max)	A	same as above
Current rating	250 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 14-6 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00471	T250KB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame line/load terminal, 250 A, Cu only (optional)

OEM part number	T250KB	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Description	Optional Cu pressure terminal; stainless steel body; collar/slotted nut and screw	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame JD/HJD/JDC/JDB	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal	A	same as above
Material	stainless steel body	A	same as above
wire_range	4-350 kcmil (25-185 mm2) Cu only	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Some distributors list body material as copper - OEM says stainless steel.*		

EDH-EAT-00470	TA250KB	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C J-frame line/load terminal, 250 A, Cu/Al (standard)

OEM part number	TA250KB	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Description	Standard Cu/Al pressure terminal; bottom has recess positioned over J-frame terminal conductor; individually packed; no dual lugs	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame JD/HJD/JDC/JDB 70-250 A (standard); also HJDDC; JG enclosed 250 A (s7 V4-T2-345)	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	aluminum body	A	same as above
Torque values	275 lb-in (31 N-m) per J-frame IL table (search snippet) (Torque value seen only in search-result snippet of Eaton IL29C402D; not verified from downloaded document)	C	S117 oem_spec
wire_range	4-350 kcmil (25-185 mm2) Cu/Al	A	S116 p.12-97, Table 12-175 (Nov 2008); p.12-91 Table 12-163 (May 2008); oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00689	**2600D26G01**	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00690	**2600D26G02**	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	J-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00689	2600D26G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A

OEM part number	2600D26G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00690	2600D26G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A

OEM part number	2600D26G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	J-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00635	**1266C07G01**	Series C J-frame terminal shield 2/3-pole, line end	J-frame **A**	unknown
EDH-EAT-00636	**6631C01G01**	Series C J-frame terminal shield 4-pole, line end	J-frame **A**	unknown
EDH-EAT-00637	**6641C16G01**	Series C J-frame terminal shield 2/3-pole, load end	J-frame **A**	unknown
EDH-EAT-00638	**6641C16G02**	Series C J-frame terminal shield 4-pole, load end	J-frame **A**	unknown
EDH-EAT-00651	**IPB2**	Series C interphase barrier (J, K per newer table)	J, K frames (per KM page) **C**	unknown
EDH-EAT-00648	**IPB3**	Series C interphase barrier (J, K)	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L **A**	unknown

EDH-EAT-00635 — 1266C07G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, line end

OEM part number	1266C07G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	2,3	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00636 — 6631C01G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, line end

OEM part number	6631C01G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, line end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line terminal area	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	4	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00637 — 6641C16G01 — Eaton / Cutler-Hammer — barrier — STATUS UNKNOWN

Series C J-frame terminal shield 2/3-pole, load end

OEM part number	6641C16G01	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 2/3-pole, load end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	load end	**A**	same as above
Breaker compatibility	J-frame	**A**	same as above
Poles	2,3	**A**	same as above
Kit contents	package of 10	**A**	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00638	6641C16G02	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C J-frame terminal shield 4-pole, load end

OEM part number	6641C16G02	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. J-frame terminal shield 4-pole, load end	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	J-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller reproduction lists 6641C16G01/G02 as 'Line End'; 2008 OEM table says Load End.*		

EDH-EAT-00651	IPB2	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (J, K per newer table)

OEM part number	IPB2	C	S123 distributor
Description	Interphase barriers, 2 per package (reseller reproduction of newer Eaton table)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	J, K frames (per KM page)	C	same as above
Kit contents	2 per package	C	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Not in 2008 OEM table (which assigns IPB3 to J/K) - confirm in current CA08100005E.*		

EDH-EAT-00648	IPB3	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (J, K)

OEM part number	IPB3	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments between sources)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J, K (2008 Table 12-469); LG (2008 Table 12-67); KM reproduction: L	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB), Series G LG-Frame (LGE/LGS/LGH/LGC), Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Which frames does IPB3 fit? 2008 Table 12-469 says J,K; KM reproduction of newer table says J,K = IPB2 and L = IPB3.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00615	**PLN2**	Series C J-frame plug nut (.250-20)	J-frame A	unknown
EDH-EAT-00616	**PLN2M**	Series C J-frame plug nut (M6)	J-frame A	unknown

EDH-EAT-00615	PLN2	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C J-frame plug nut (.250-20)

OEM part number	PLN2	A	S116 p.12-244, Table 12-450; oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame	A	same as above
Kit contents	package of 6	A	same as above
Fasteners	thread .250-20	A	S116 p.12-244; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00616	PLN2M	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C J-frame plug nut (M6)

OEM part number	PLN2M	A	S116 p.12-244, Table 12-450; oem_spec
Description	Plug nut press-fit into opening in J-frame terminal conductor for screw-connected ring-type terminals; screws and washers by customer	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame	A	same as above
Kit contents	package of 6	A	same as above
Fasteners	thread M6	A	S116 p.12-244; oem_spec
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00656	**5010D23G01**	Series C J-frame rear connecting stud, 250 A short stud	J-frame fixed-mounted A	unknown
EDH-EAT-00657	**5010D23G02**	Series C J-frame rear connecting stud, 250 A long stud	J-frame fixed-mounted A	unknown
EDH-EAT-00619	**KCWTK**	Series C J/K-frame control wire terminal kit	J/K-frame A	unknown
EDH-EAT-00597	**KPEK2**	Series C J-frame end cap kit, 3-pole, .312-18	J-frame 3-pole A	unknown
EDH-EAT-00599	**KPEK24**	Series C J-frame end cap kit, 4-pole, .312-18	J-frame 4-pole A	unknown
EDH-EAT-00598	**KPEKM2**	Series C J-frame end cap kit, 3-pole, M8	J-frame 3-pole A	unknown
EDH-EAT-00600	**KPEKM24**	Series C J-frame end cap kit, 4-pole, M8	J-frame 4-pole A	unknown

EDH-EAT-00656	5010D23G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A short stud

OEM part number	5010D23G01	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A short stud; tubes 456D983H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 456D983H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00657	5010D23G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame rear connecting stud, 250 A long stud

OEM part number	5010D23G02	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 250 A long stud; tubes 5010D23H05-H07	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	J-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 5010D23H05/H06/H07 ordered separately by panel thickness	A	same as above
Fasteners	.31-18 / .50-13 thread	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00619	KCWTK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J/K-frame control wire terminal kit

OEM part number	KCWTK	A	S116 p.12-244, Tables 12-452..12-454; oem_spec
Description	J- and K-frame control wire terminal kit (12 tangs); not for use with T250KB terminals; taps control power using male quick-disconnect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J/K-frame	A	same as above
Kit contents	package of 12 control wire tangs, priced individually	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB), Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00597	KPEK2	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK2	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00599	KPEK24	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK24	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00598	KPEKM2	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 3-pole, M8

OEM part number	KPEKM2	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00600	KPEKM24	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C J-frame end cap kit, 4-pole, M8

OEM part number	KPEKM24	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	J-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C J-Frame (JD/HJD/JDC/JDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C K-Frame (KD/HKD/KDC/KDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00479	**2T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00494	**2T400KCW**	Series C K-frame terminal kit with control wire termination (2T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00488	**2T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00474	**2TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00491	**2TA400KCW**	Series C K-frame terminal kit with control wire termination (2TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00482	**2TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00497	**2TA401KCW**	Series C K-frame terminal kit with control wire termination (2TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00485	**2TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00480	**3T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00495	**3T400KCW**	Series C K-frame terminal kit with control wire termination (3T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00489	**3T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00475	**3TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00626	**3TA400K3K**	Series C K-frame multiwire connector, 3 wires/terminal	K-frame (400 A max) **A**	unknown
EDH-EAT-00627	**3TA400K6K**	Series C K-frame multiwire connector, 6 wires/terminal	K-frame (400 A max) **A**	unknown
EDH-EAT-00492	**3TA400KCW**	Series C K-frame terminal kit with control wire termination (3TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00483	**3TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00498	**3TA401KCW**	Series C K-frame terminal kit with control wire termination (3TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00486	**3TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00481	**4T400K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00496	**4T400KCW**	Series C K-frame terminal kit with control wire termination (4T400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00490	**4T402K**	Series C K-frame line/load terminal kit, 400 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00476	**4TA400K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00493	**4TA400KCW**	Series C K-frame terminal kit with control wire termination (4TA400K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00484	**4TA401K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00499	**4TA401KCW**	Series C K-frame terminal kit with control wire termination (4TA401K)	K-frame KD/HKD/KDC **A**	unknown
EDH-EAT-00487	**4TA402K**	Series C K-frame line/load terminal kit, 400 A, Cu/Al	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00477	**T300K**	Series C K-frame line/load terminal , 225 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00478	**T350K**	Series C K-frame line/load terminal , 350 A, Cu	K-frame KD/HKD/KDC/KDB; **A**	unknown
EDH-EAT-00472	**TA300K**	Series C K-frame line/load terminal , 225 A, Cu/Al	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to **A**	unknown
EDH-EAT-00473	**TA350K**	Series C K-frame line/load terminal , 350 A, Cu/Al	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HK **A**	unknown

EDH-EAT-00479 — 2T400K — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T400K	**A**	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	**A**	same as above
Poles	2	**A**	same as above
Current rating	400 A max breaker	**A**	same as above
Kit contents	2-pole kit	**A**	same as above
Material	terminal body copper	**A**	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	**A**	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00494	2T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2T400K)

OEM part number	2T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00488	2T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	2T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	500-750 kcmil (1) (- mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00474	2TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00491	2TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA400K)

OEM part number	2TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00482	2TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00497	2TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (2TA401K)

OEM part number	2TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 2TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-120 / 70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00485	2TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	500-750 kcmil (1) (300-400 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00480	3T400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00495	3T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3T400K)

OEM part number	3T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00489	3T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	3T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	500-750 kcmil (1) (- mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00475	3TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KP definite purpose/KG/HKDDC 400 A	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00626	3TA400K3K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame multiwire connector, 3 wires/terminal

OEM part number	3TA400K3K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Current rating	400 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(3) 14-2/0 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00627	3TA400K6K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame multiwire connector, 6 wires/terminal

OEM part number	3TA400K6K	A	S116 p.12-245, Table 12-456; oem_spec
Description	Field-installed multiwire connectors for load (OFF) end; mounting hardware, insulators, tin-plated Al connectors replacing three mechanical load lugs; UL listed on load end	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	K-frame (400 A max)	A	same as above
Current rating	400 A	A	same as above
Kit contents	package of 3	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 14-3 AWG Cu per terminal	A	S116 p.12-245, Table 12-456; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00492	3TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3TA400K)

OEM part number	3TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00483	3TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00498	3TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (3TA401K)

OEM part number	3TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 3TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00486	3TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	500-750 kcmil (1) (300-400 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00481	4T400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00496	4T400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4T400K)

OEM part number	4T400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4T400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00490	4T402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu

OEM part number	4T402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Material	terminal body copper	A	same as above
wire_range	500-750 kcmil (1) (- mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00476	4TA400K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA400K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00493	4TA400KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4TA400K)

OEM part number	4TA400KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA400K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-250 kcmil (2) (95-120 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00484	4TA401K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00499	4TA401KCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame terminal kit with control wire termination (4TA401K)

OEM part number	4TA401KCW	A	S116 p.12-113, Table 12-199; oem_spec
Description	Same as 4TA401K but with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2/0-250 kcmil (2) or 2/0-500 kcmil (1) (70-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00487	4TA402K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA402K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit (KM: with three interphase barriers)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	500-750 kcmil (1) (300-400 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00477	T300K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 225 A, Cu

OEM part number	T300K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	1 terminal	A	same as above
Material	terminal body copper	A	same as above
wire_range	3 AWG-350 kcmil (1) (35-185 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00478	T350K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 350 A, Cu

OEM part number	T350K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Optional Cu pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB;	A	same as above
Current rating	350 A max breaker	A	same as above
Kit contents	1 terminal	A	same as above
Material	terminal body copper	A	same as above
wire_range	250-500 kcmil (1) (120-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00472	TA300K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 225 A, Cu/Al

OEM part number	TA300K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; TA300K: standard for KES electronic ratings to 225-300 A; HKDDC 225 A	A	same as above
Current rating	225 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3 AWG-350 kcmil (1) (35-185 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00473	TA350K	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C K-frame line/load terminal , 350 A, Cu/Al

OEM part number	TA350K	A	S116 p.12-113, Table 12-199; oem_spec
Description	Standard Cu/Al pressure terminal; field installation (shipped separately)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K-frame KD/HKD/KDC/KDB; also KG enclosed/KP definite purpose 400 A, HKDDC 350 A	A	same as above
Current rating	350 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	250-500 kcmil (1) (120-240 mm2)	A	S116 p.12-113, Table 12-199; oem_spec
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*2008 table gives TA350K max 350 A; 2015 KP/KG tables and KM reproduction give 400 A - which is current?*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00692	**4212B77G01**	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00691	**4212B78G02**	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	K-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00692	4212B77G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A

OEM part number	4212B77G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 3.50 in, 400 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00691	4212B78G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A

OEM part number	4212B78G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 3.50 in, 400 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	K-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00703	**208B264H01**	Series C K-frame panelboard strap mounting bracket	K-frame **A**	unknown

EDH-EAT-00703	208B264H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C K-frame panelboard strap mounting bracket

OEM part number	208B264H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	2,3	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00641	**TS33LD**	Series C K-frame terminal shield 3-pole, load	K-frame **A**	unknown
EDH-EAT-00639	**TS33LN**	Series C K-frame terminal shield 2/3-pole, line	K-frame **A**	unknown
EDH-EAT-00640	**TS34LN**	Series C K-frame terminal shield 4-pole, line	K-frame **A**	unknown

EDH-EAT-00641	TS33LD	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 3-pole, load

OEM part number	TS33LD	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 3-pole, load	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00639	TS33LN	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 2/3-pole, line

OEM part number	TS33LN	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 2/3-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	2,3	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00640	TS34LN	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C K-frame terminal shield 4-pole, line

OEM part number	TS34LN	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. K-frame terminal shield 4-pole, line	A	same as above
Application	accessory	A	same as above
Installation location	line terminal area	A	same as above
Breaker compatibility	K-frame	A	same as above
Poles	4	A	same as above
Kit contents	package of 10	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00611	**KPR3A**	Series C K-frame keeper nut (.375-16, line end)	K-frame A	unknown
EDH-EAT-00613	**KPR3AM**	Series C K-frame keeper nut (M8, line end)	K-frame A	unknown
EDH-EAT-00612	**KPR3B**	Series C K-frame keeper nut (.375-16, load end)	K-frame A	unknown
EDH-EAT-00614	**KPR3BM**	Series C K-frame keeper nut (M8, load end)	K-frame A	unknown

EDH-EAT-00611	KPR3A	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (.375-16, line end)

OEM part number	KPR3A	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread .375-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00613	KPR3AM	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (M8, line end)

OEM part number	KPR3AM	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	line conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00612	KPR3B	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (.375-16, load end)

OEM part number	KPR3B	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	load conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread .375-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

EDH-EAT-00614	KPR3BM	Eaton / Cutler-Hammer	fastener	STATUS UNKNOWN

Series C K-frame keeper nut (M8, load end)

OEM part number	KPR3BM	A	S116 p.12-243, Table 12-449; oem_spec
Description	Keeper nut: slides onto breaker line/load conductor and acts as threaded adapter for ring terminal or bolt-on connector; screws/washers by customer; UL File E7819. L/M/N frames do not need keeper nuts (threaded terminals)	A	same as above
Application	accessory	A	same as above
Installation location	load conductor	A	same as above
Breaker compatibility	K-frame	A	same as above
Kit contents	package of 3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*KM reseller page says K-frame keeper nuts are packages of 12; 2008 OEM table says package of 3.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00658	**6642C14G02**	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	K-frame fixed-mounted A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00661	**6642C14G03**	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00659	**6642C14G04**	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00662	**6642C14G05**	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00660	**6642C14G06**	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00663	**6642C14G07**	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	K-frame fixed-mounted **A**	unknown
EDH-EAT-00601	**KPEK3**	Series C K-frame end cap kit, 3-pole, .312-18	K-frame 3-pole **A**	unknown
EDH-EAT-00603	**KPEK34**	Series C K-frame end cap kit, 4-pole, .312-18	K-frame 4-pole **A**	unknown
EDH-EAT-00602	**KPEKM3**	Series C K-frame end cap kit, 3-pole, M8	K-frame 3-pole **A**	unknown
EDH-EAT-00604	**KPEKM34**	Series C K-frame end cap kit, 4-pole, M8	K-frame 4-pole **A**	unknown

EDH-EAT-00658 **6642C14G02** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in

OEM part number	6642C14G02	**A**	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .75-1 in; tube 313C909H17	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	K-frame fixed-mounted	**A**	same as above
Kit contents	stud only; tube(s) 313C909H17 ordered separately by panel thickness	**A**	same as above
Fasteners	.75-16 thread	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00661 **6642C14G03** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in

OEM part number	6642C14G03	**A**	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .75-1 in; tube 313C909H20	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	**A**	same as above
Breaker compatibility	K-frame fixed-mounted	**A**	same as above
Kit contents	stud only; tube(s) 313C909H20 ordered separately by panel thickness	**A**	same as above
Fasteners	.75-16	**A**	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00659	6642C14G04	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in

OEM part number	6642C14G04	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .50-.75 in; tube 313C909H18	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H18 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00662	6642C14G05	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in

OEM part number	6642C14G05	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .50-.75 in; tube 313C909H21	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H21 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00660	6642C14G06	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in

OEM part number	6642C14G06	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A short stud, panel .25-.5 in; tube 313C909H19	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H19 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00663	6642C14G07	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in

OEM part number	6642C14G07	A	S116 pp.12-258..12-260, Tables 12-505..12-510; oem_spec
Description	Rear connecting stud assembly (stud + tube; tubes ordered separately); alternate long/short studs between poles; one per pole per end; English threads only; NOT UL listed. 400 A long stud, panel .25-.5 in; tube 313C909H22	A	same as above
Application	accessory	A	same as above
Installation location	line/load terminal, through mounting panel (rear connection)	A	same as above
Breaker compatibility	K-frame fixed-mounted	A	same as above
Kit contents	stud only; tube(s) 313C909H22 ordered separately by panel thickness	A	same as above
Fasteners	.75-16	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00601	KPEK3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK3	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00603	KPEK34	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK34	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00602	KPEKM3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 3-pole, M8

OEM part number	KPEKM3	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00604	KPEKM34	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C K-frame end cap kit, 4-pole, M8

OEM part number	KPEKM34	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	K-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C K-Frame (KD/HKD/KDC/KDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C L-Frame (LD/HLD/LDC/LDB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00500	**2TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00505	**2TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00510	**2TA603LDKCW**	Series C L-frame terminal with control wire termination (2TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00501	**3TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00506	**3TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00511	**3TA603LDKCW**	Series C L-frame terminal with control wire termination (3TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00502	**4TA401LDK**	Series C L-frame line/load terminal kit, 400 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00507	**4TA603LDK**	Series C L-frame line/load terminal kit, 600 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case s A	unknown
EDH-EAT-00512	**4TA603LDKCW**	Series C L-frame terminal with control wire termination (4TA603LDK)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00508	**T602LD**	Series C L-frame line/load terminal, 600 A, Cu	L-frame LD/HLD/LDC/LDB A	unknown
EDH-EAT-00513	**T602LDCW**	Series C L-frame terminal with control wire termination (T602LD)	L-frame LD/HLD/LDC A	unknown
EDH-EAT-00503	**TA450LD**	Series C L-frame line/load terminal, 450 A, Cu/Al	L-frame LD/HLD/LDC/LDB A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00504	**TA602LD**	Series C L-frame line/load terminal, 500 A, Cu/Al	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP de A	unknown
EDH-EAT-00509	**TA602LDCW**	Series C L-frame terminal with control wire termination (TA602LD)	L-frame LD/HLD/LDC A	unknown

EDH-EAT-00500 — 2TA401LDK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	2TA401LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	2	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	2-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	4/0-600 kcmil (1) (120-300 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00505 — 2TA603LDK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	2TA603LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Poles	2	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	2-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00510	2TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (2TA603LDK)

OEM part number	2TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 2TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	2	A	same as above
Kit contents	2-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00501	3TA401LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA401LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	4/0-600 kcmil (1) (120-300 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00506	3TA603LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	3TA603LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Poles	3	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	3-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00511	3TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (3TA603LDK)

OEM part number	3TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 3TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	3	A	same as above
Kit contents	3-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00502	4TA401LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA401LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA401LD (Figure caption names single 'TA401LD' terminal)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4-pole kit: one terminal per pole + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	4/0-600 kcmil (1) (120-300 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00507	4TA603LDK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal kit, 600 A, Cu/Al

OEM part number	4TA603LDK	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Alternate / superseded numbers	TA603LD (Figure caption names single 'TA401LD or TA603LD' step-type terminal; relation to kit unverified)	D	S118 alias; V4-T2-203 figure; inference
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws; step-type terminal requires terminal cover and warning label	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 600 A LD/HLD/LDC and molded case switches LD/LDB/HLD 600WK	A	same as above
Poles	4	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	4-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00512	4TA603LDKCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (4TA603LDK)

OEM part number	4TA603LDKCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as 4TA603LDK with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Poles	4	A	same as above
Kit contents	4-pole kit + one terminal cover	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	400-500 kcmil (2) (185-240 mm2)	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00508	T602LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 600 A, Cu

OEM part number	T602LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Optional Cu pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Current rating	600 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body copper	A	same as above
wire_range	250-350 kcmil (2) (120-250 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00513	T602LDCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (T602LD)

OEM part number	T602LDCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as T602LD with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body copper	A	same as above
wire_range	250-350 kcmil (2) (120-250 mm2)	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

EDH-EAT-00503	TA450LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 450 A, Cu/Al

OEM part number	TA450LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB	A	same as above
Current rating	450 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	4-4/0 AWG (2) (25-95 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00504	TA602LD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame line/load terminal, 500 A, Cu/Al

OEM part number	TA602LD	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Description	Standard Cu/Al pressure terminal; secured by two pan-head slotted screws + lockwashers; conductors clamped by recessed socket screws	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC/LDB; standard on 300-500 A LD/HLD/LDC; HLDDC; LP definite purpose 500 A	A	same as above
Current rating	500 A max breaker	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-350 kcmil (2) (95-150 mm2)	A	S116 p.12-132, Table 12-224 (Nov 2008); V4-T2-203 (Oct 2015); oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00509	TA602LDCW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C L-frame terminal with control wire termination (TA602LD)

OEM part number	TA602LDCW	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Description	Same as TA602LD with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	L-frame LD/HLD/LDC	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	3/0-350 kcmil (2) (95-150 mm2)	A	S116 p.12-132 Table 12-224; p.12-244 Table 12-455; oem_spec
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Table 12-455 lists T602LDCW range as (2) 250-350 kcmil Cu 120-150 mm2 and TA602LDCW as (2) 3/0-350 kcmil; KM page notes TA602LDCW 'not for use with T250KB terminals' - verify.*		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00694	**506C052G01**	Series C L-frame panelboard connecting strap, outside pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	unknown
EDH-EAT-00693	**624B609G01**	Series C L-frame panelboard connecting strap, center pole, 600 A	L-frame in panelboards (bus spacing per description) **A**	unknown

EDH-EAT-00694 **506C052G01** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C L-frame panelboard connecting strap, outside pole, 600 A

OEM part number	506C052G01	**A**	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. outside pole, 600 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00693 **624B609G01** Eaton / Cutler-Hammer connector-strap **STATUS UNKNOWN**

Series C L-frame panelboard connecting strap, center pole, 600 A

OEM part number	624B609G01	**A**	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. center pole, 600 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	between breaker line terminal and panelboard bus	**A**	same as above
Breaker compatibility	L-frame in panelboards (bus spacing per description)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00704	**208B297H01**	Series C L-frame panelboard strap mounting bracket	L-frame **A**	unknown

EDH-EAT-00704 **208B297H01** Eaton / Cutler-Hammer mounting-bracket **STATUS UNKNOWN**

Series C L-frame panelboard strap mounting bracket

OEM part number	208B297H01	**A**	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	panelboard interior, supports breaker/strap	**A**	same as above
Breaker compatibility	L-frame	**A**	same as above
Poles	2,3	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00642	**314C420G05**	Series C L-frame terminal shield	L-frame **A**	unknown
EDH-EAT-00649	**IPB4**	Series C interphase barrier (L, M)	L, M (2008); KM reproduction: M only **A**	unknown

EDH-EAT-00642	314C420G05	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C L-frame terminal shield

OEM part number	314C420G05	**A**	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. L-frame terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Installation location	terminal area	**A**	same as above
Breaker compatibility	L-frame	**A**	same as above
Kit contents	package of 1	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00649	IPB4	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (L, M)

OEM part number	IPB4	**A**	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package (Conflicting assignments)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	L, M (2008); KM reproduction: M only	**A**	same as above
Kit contents	2 per package	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Is IPB4 L+M or M only (newer edition)?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00664	**314C960G07**	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	L/M-frame **A**	unknown
EDH-EAT-00665	**314C960G08**	Series C L/M-frame rear connecting stud (L: 7.97 in)	L/M-frame **A**	unknown
EDH-EAT-00666	**314C960G09**	Series C L/M-frame rear connecting stud (L: 10.47 in)	L/M-frame **A**	unknown
EDH-EAT-00605	**KPEK4**	Series C L-frame end cap kit, 3-pole, .312-18	L-frame 3-pole **A**	unknown
EDH-EAT-00607	**KPEK44**	Series C L-frame end cap kit, 4-pole, .312-18	L-frame 4-pole **A**	unknown
EDH-EAT-00606	**KPEKM4**	Series C L-frame end cap kit, 3-pole, M8	L-frame 3-pole **A**	unknown
EDH-EAT-00608	**KPEKM44**	Series C L-frame end cap kit, 4-pole, M8	L-frame 4-pole **A**	unknown

EDH-EAT-00664	314C960G07	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: stud length 5.47 in)

OEM part number	314C960G07	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: stud length 5.47 in; M: 600 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	L/M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M)	**A**	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12 (M 600 A)	**A**	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00665	314C960G08	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: 7.97 in)

OEM part number	314C960G08	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 7.97 in; M: 600 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M)	A	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00666	314C960G09	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L/M-frame rear connecting stud (L: 10.47 in)

OEM part number	314C960G09	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. L: 10.47 in; M: 600 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	L/M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M)	A	S116 p.12-260; oem_spec
Fasteners	thread 1.00-12	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB), Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		
Open question	*Same style number listed in L-frame (by stud length) and M-frame 600 A tables - confirm identical part.*		

EDH-EAT-00605	KPEK4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 3-pole, .312-18

OEM part number	KPEK4	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00607	KPEK44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, .312-18

OEM part number	KPEK44	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread .312-18	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00606	KPEKM4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 3-pole, M8

OEM part number	KPEKM4	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 3-pole	A	same as above
Poles	3	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00608	KPEKM44	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C L-frame end cap kit, 4-pole, M8

OEM part number	KPEKM44	A	S116 p.12-243, Table 12-447; oem_spec
Description	End cap kit: slides onto line or load conductor, threaded adapter to accept ring terminal or bolt-on connector; field installation; UL File E7819	A	same as above
Application	accessory	A	same as above
Installation location	line or load conductor	A	same as above
Breaker compatibility	L-frame 4-pole	A	same as above
Poles	4	A	same as above
Fasteners	thread M8	A	same as above
Cross-links	Breakers: Series C L-Frame (LD/HLD/LDC/LDB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series C M-Frame (MDL/HMDL/MDLB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00517	**T600MA1**	Series C M-frame line/load terminal, 600 A, Cu	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00518	**T800MA1**	Series C M-frame line/load terminal, 800 A, Cu	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00514	**TA700MA1**	Series C M-frame line/load terminal, 600 A, Cu/Al	M-frame MDL/HMDL/MDLB A	unknown
EDH-EAT-00519	**TA700MA1CWT**	Series C M-frame terminal with control wire termination (TA700MA1)	M-frame MDL/HMDL A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00515	**TA800MA2**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC **A**	unknown
EDH-EAT-00520	**TA800MA2CWT**	Series C M-frame terminal with control wire termination (TA800MA2)	M-frame MDL/HMDL **A**	unknown
EDH-EAT-00516	**TA801MA**	Series C M-frame line/load terminal, 800 A, Cu/Al	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC **A**	unknown
EDH-EAT-00521	**TA801MACWT**	Series C M-frame terminal with control wire termination (TA801MA)	M-frame MDL/HMDL **A**	unknown

EDH-EAT-00517 **T600MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 600 A, Cu

OEM part number	T600MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Optional Cu pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	600 A max breaker	**A**	same as above
Material	terminal body copper	**A**	same as above
wire_range	(2) 2/0-500 kcmil	**A**	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00518 **T800MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 800 A, Cu

OEM part number	T800MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Optional Cu pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	800 A max breaker	**A**	same as above
Material	terminal body copper	**A**	same as above
wire_range	(3) 3/0-300 kcmil	**A**	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00514 **TA700MA1** Eaton / Cutler-Hammer lug-kit **STATUS UNKNOWN**

Series C M-frame line/load terminal, 600 A, Cu/Al

OEM part number	TA700MA1	**A**	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB	**A**	same as above
Current rating	600 (700 per KM/DC table) A max breaker	**A**	same as above
Material	terminal body aluminum	**A**	same as above
wire_range	(2) 1-500 kcmil	**A**	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00519	TA700MA1CWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA700MA1)

OEM part number	TA700MA1CWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA700MA1 with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(2) 1-500 kcmil	A	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00515	TA800MA2	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA800MA2	A	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	A	same as above
Current rating	800 (std.) A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(3) 3/0-400 kcmil	A	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00520	TA800MA2CWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA800MA2)

OEM part number	TA800MA2CWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA800MA2 with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(3) 3/0-400 kcmil	A	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00516	TA801MA	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame line/load terminal, 800 A, Cu/Al

OEM part number	TA801MA	A	S116 p.12-140, Table 12-240; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL/MDLB; MP definite purpose 800 A; HMDLDC	A	same as above
Current rating	800 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(2) 500-750 kcmil	A	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00521	TA801MACWT	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C M-frame terminal with control wire termination (TA801MA)

OEM part number	TA801MACWT	A	S116 p.12-140, Table 12-240; oem_spec
Description	Same as TA801MA with control wire termination	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M-frame MDL/HMDL	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(2) 500-750 kcmil	A	S116 p.12-140, Table 12-240; oem_spec
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00695	**314C996G01**	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00696	**314C996G02**	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00697	**314C996G03**	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	M-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00695	314C996G01	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A

OEM part number	314C996G01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00696	314C996G02	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A

OEM part number	314C996G02	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00697	314C996G03	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A

OEM part number	314C996G03	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 800 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	M-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00705	**315C270H01**	Series C M/N-frame panelboard strap mounting bracket	M/N-frame A	unknown

EDH-EAT-00705	315C270H01	Eaton / Cutler-Hammer	mounting-bracket	STATUS UNKNOWN

Series C M/N-frame panelboard strap mounting bracket

OEM part number	315C270H01	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Mounting bracket for panelboard connecting straps (CDP panelboard installations); N-frame requires four	A	same as above
Application	accessory	A	same as above
Installation location	panelboard interior, supports breaker/strap	A	same as above
Breaker compatibility	M/N-frame	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB), Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00643	**208B966G01**	Series C M-frame terminal shield	M-frame A	unknown

EDH-EAT-00643	208B966G01	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C M-frame terminal shield

OEM part number	208B966G01	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. M-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	M-frame	A	same as above
Kit contents	package of 1	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00667	**314C960G01**	Series C M-frame rear connecting stud (225 A)	M-frame A	unknown
EDH-EAT-00668	**314C960G04**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00669	**314C960G05**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00670	**314C960G06**	Series C M-frame rear connecting stud (400 A)	M-frame A	unknown
EDH-EAT-00671	**314C960G10**	Series C M-frame rear connecting stud (800 A)	M-frame A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00672	**314C960G11**	Series C M-frame rear connecting stud (800 A)	M-frame **A**	unknown
EDH-EAT-00673	**314C960G12**	Series C M-frame rear connecting stud (800 A)	M-frame **A**	unknown

EDH-EAT-00667 **314C960G01** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (225 A)

OEM part number	314C960G01	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 225 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 3.66 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .50-13	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00668 **314C960G04** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G04	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .75-16	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00669 **314C960G05** Eaton / Cutler-Hammer breaker-accessory **STATUS UNKNOWN**

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G05	**A**	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	**A**	same as above
Application	accessory	**A**	same as above
Installation location	rear connection, line/load	**A**	same as above
Breaker compatibility	M-frame	**A**	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	**A**	S116 p.12-260; oem_spec
Fasteners	thread .75-16	**A**	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00670	314C960G06	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (400 A)

OEM part number	314C960G06	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 400 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread .75-16	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00671	314C960G10	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G10	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00672	314C960G11	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G11	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.41 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00673	314C960G12	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C M-frame rear connecting stud (800 A)

OEM part number	314C960G12	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	M-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.91 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C M-Frame (MDL/HMDL/MDLB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C N-Frame (ND/HND/NDC/NB)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00527	**T1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00528	**T1200NB3**	Series C N-frame line/load terminal, 1200 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00526	**T700NB1**	Series C N-frame line/load terminal, 700 A, Cu	N-frame ND/HND/NDC A	unknown
EDH-EAT-00523	**TA1000NB1**	Series C N-frame line/load terminal, 1000 A, Cu/Al	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A A	unknown
EDH-EAT-00524	**TA1200NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A A	unknown
EDH-EAT-00525	**TA1201NB1**	Series C N-frame line/load terminal, 1200 A, Cu/Al	N-frame ND/HND/NDC A	unknown
EDH-EAT-00522	**TA700NB1**	Series C N-frame line/load terminal, 700 A, Cu/Al	N-frame ND/HND/NDC; NG enclosed 700 A A	unknown

EDH-EAT-00527	T1000NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1000 A, Cu

OEM part number	T1000NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1000 A max breaker	A	same as above
Material	terminal body copper	A	same as above
wire_range	(3) 3/0-500 kcmil (95-240 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00528	T1200NB3	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu

OEM part number	T1200NB3	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1200 A max breaker	A	same as above
Material	terminal body copper	A	same as above
wire_range	(4) 3/0-400 kcmil (95-185 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00526	T700NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 700 A, Cu

OEM part number	T700NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Optional Cu pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	700 A max breaker	A	same as above
Material	terminal body copper	A	same as above
wire_range	(2) 2/0-500 kcmil (70-240 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00523	TA1000NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1000 A, Cu/Al

OEM part number	TA1000NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NBDC 700-1000 A DC; NG enclosed 1000 A	A	same as above
Current rating	1000 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(3) 3/0-400 kcmil (95-185 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00524	TA1200NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1200NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NBDC 1200 A; NG enclosed 1200 A	A	same as above
Current rating	1200 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(4) 4/0-500 kcmil (120-240 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00525	TA1201NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 1200 A, Cu/Al

OEM part number	TA1201NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal; terminal rating AL9CU	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC	A	same as above
Current rating	1200 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(3) 500-750 kcmil (300-400 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote markers for AL9CU/AL7CU ratings lost in extraction - which terminals are AL7CU?*		

EDH-EAT-00522	TA700NB1	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C N-frame line/load terminal, 700 A, Cu/Al

OEM part number	TA700NB1	A	S116 p.12-162, Table 12-266; oem_spec
Description	Standard Cu/Al pressure terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N-frame ND/HND/NDC; NG enclosed 700 A	A	same as above
Current rating	700 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(2) 1-500 kcmil (50-240 mm2)	A	S116 p.12-162, Table 12-266; oem_spec
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00698	**505C606G04**	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00699	**505C606G05**	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown
EDH-EAT-00700	**505C606G06**	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	N-frame in panelboards (bus spacing per description) A	unknown

EDH-EAT-00698	505C606G04	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A

OEM part number	505C606G04	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. short, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00699	505C606G05	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A

OEM part number	505C606G05	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. medium, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00700	505C606G06	Eaton / Cutler-Hammer	connector-strap	STATUS UNKNOWN

Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A

OEM part number	505C606G06	A	S116 p.12-261, Tables 12-511..12-521; oem_spec
Description	Panelboard connecting strap connecting breaker terminals to panelboard bus; field installation; NOT UL listed; refer to panelboard manufacturer for compatibility. long, 3.50 in, 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	between breaker line terminal and panelboard bus	A	same as above
Breaker compatibility	N-frame in panelboards (bus spacing per description)	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00650	**IPB5**	Series C interphase barrier (N; NG)	N; NG (Table 12-87) A	unknown
EDH-EAT-00644	**NTS3K**	Series C N-frame terminal shield	N-frame A	unknown

EDH-EAT-00650	IPB5	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C interphase barrier (N; NG)

OEM part number	IPB5	A	S116 p.12-249, Table 12-469; oem_spec
Description	Interphase barriers: high-dielectric insulating plates installed in molded slots between terminals for added clearance; field installation only; two per package	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N; NG (Table 12-87)	A	same as above
Kit contents	2 per package	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB), Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00644	NTS3K	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series C N-frame terminal shield

OEM part number	NTS3K	A	S116 p.12-248, Tables 12-461..12-467; oem_spec
Description	Terminal shield: high-dielectric insulating shield fastened over front terminal access openings; small openings allow tightening connectors; field installation only. N-frame terminal shield	A	same as above
Application	accessory	A	same as above
Installation location	terminal area	A	same as above
Breaker compatibility	N-frame	A	same as above
Kit contents	package of 1	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00678	**373B375G03**	Series C N-frame rear connecting stud (1200 A)	N-frame A	unknown
EDH-EAT-00677	**373B375G04**	Series C N-frame rear connecting stud (1200 A)	N-frame A	unknown
EDH-EAT-00674	**623B222G01**	Series C N-frame rear connecting stud (800 A)	N-frame A	unknown
EDH-EAT-00675	**623B222G02**	Series C N-frame rear connecting stud (800 A)	N-frame A	unknown
EDH-EAT-00676	**623B222G03**	Series C N-frame rear connecting stud (800 A)	N-frame A	unknown

EDH-EAT-00678	373B375G03	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G03	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.25-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00677	373B375G04	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (1200 A)

OEM part number	373B375G04	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 1200 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.25-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00674	623B222G01	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G01	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 5.5 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00675	623B222G02	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G02	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 8.0 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-EAT-00676	623B222G03	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C N-frame rear connecting stud (800 A)

OEM part number	623B222G03	A	S116 p.12-260, Tables 12-508..12-510; oem_spec
Description	Rear connecting stud with insulators, washer, nut through insulating panel; NOT UL listed. 800 A	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line/load	A	same as above
Breaker compatibility	N-frame	A	same as above
Dimensions	length / back-of-breaker dimension 10.5 in	A	S116 p.12-260; oem_spec
Fasteners	thread 1.13-12	A	same as above
Cross-links	Breakers: Series C N-Frame (ND/HND/NDC/NB)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker family Series C R-Frame (RD/RDC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00531	**T1600RD**	Series C R-frame line/load terminal, 1600 A, Cu	R-frame RD/RDC A	unknown
EDH-EAT-00530	**TA1600RD**	Series C R-frame line/load terminal, 1600 A, Cu/Al	R-frame RD/RDC A	unknown
EDH-EAT-00532	**TA2000RD**	Series C R-frame line/load terminal, 2000 A, Cu/Al	R-frame RD/RDC A	unknown

EDH-EAT-00531	T1600RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 1600 A, Cu

OEM part number	T1600RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Wire terminal, English hardware	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	1600 A max breaker	A	same as above
Material	terminal body copper	A	same as above
wire_range	(4) 1-600 kcmil (50-300 mm2)	A	S116 p.12-181, Table 12-299; oem_spec
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00530	TA1600RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 1600 A, Cu/Al

OEM part number	TA1600RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Wire terminal, English hardware	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	1600 A max breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(4) 500-1000 kcmil (300-500 mm2)	A	S116 p.12-181, Table 12-299; oem_spec
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00532	TA2000RD	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series C R-frame line/load terminal, 2000 A, Cu/Al

OEM part number	TA2000RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Includes bus connection, terminals and hardware for either line or load side of 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Current rating	2000 A max breaker	A	same as above
Kit contents	one side (line or load) of 3-pole breaker	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	(6) 2-600 kcmil (35-300 mm2)	A	S116 p.12-181, Table 12-299; oem_spec
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00533	**B2016RD**	Series C R-frame copper rear connector	R-frame RD/RDC A	unknown
EDH-EAT-00534	**B2016RDL**	Series C R-frame copper rear connector	R-frame RD/RDC A	unknown
EDH-EAT-00535	**B2500RD**	Series C R-frame copper rear connector	R-frame RD/RDC A	unknown

EDH-EAT-00533	B2016RD	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2016RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu), for 1600 A and 2000 A frames	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00534	B2016RDL	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2016RDL	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu) for 100% rated 1600 A and 2000 A frame; included in breaker carton when 100% rated device ordered	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00535	B2500RD	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series C R-frame copper rear connector

OEM part number	B2500RD	A	S116 p.12-181, Table 12-299; oem_spec
Description	Rear connector (Cu) for 2500 A frame; included in breaker carton with 2500 A breaker	A	same as above
Application	accessory	A	same as above
Installation location	rear connection, line or load	A	same as above
Breaker compatibility	R-frame RD/RDC	A	same as above
Material	copper	A	same as above
Cross-links	Breakers: Series C R-Frame (RD/RDC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00536	**3T125EF**	Series G EG-frame line/load terminals, 125 A, Cu	EG-frame A	unknown
EDH-EAT-00577	**3TA125E3K**	Series G EG-frame multiwire connector	EG-frame A	unknown
EDH-EAT-00578	**3TA125E6K**	Series G EG-frame multiwire connector	EG-frame A	unknown
EDH-EAT-00537	**3TA125EF**	Series G EG-frame line/load terminals, 125 A, Cu/Al	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breaker A	unknown
EDH-EAT-00538	**3TA150EF**	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EG-frame A	unknown
EDH-EAT-00539	**3TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame A	unknown
EDH-EAT-00540	**4TA160EFK**	Series G EG-frame line/load terminals, 160 A, Cu/Al	EG-frame A	unknown

EDH-EAT-00536	3T125EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125 A, Cu

OEM part number	3T125EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard line and load terminals	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	125 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Material	terminal body steel	A	same as above
wire_range	#14-3/0 AWG Cu (2.5-95 mm2); 2014 also lists #12-10 Al (4-6 mm2)	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00577	3TA125E3K	Eaton	lug-kit	STATUS UNKNOWN

Series G EG-frame multiwire connector

OEM part number	3TA125E3K	A	S119 V4-T2-25; oem_spec
Description	EG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 125 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00578	3TA125E6K	Eaton	lug-kit	STATUS UNKNOWN

Series G EG-frame multiwire connector

OEM part number	3TA125E6K	A	S119 V4-T2-25; oem_spec
Description	EG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 125 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00537	3TA125EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125 A, Cu/Al

OEM part number	3TA125EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard 15-50 A EG	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame (EGB/EGE/EGS/EGH); 3TA125EF also EGEDC/EGSDC/EGHDC DC breakers	A	same as above
Current rating	125 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	#14-1/0 AWG (2.5-50 mm2)	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00538	3TA150EF	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 125/160 A, Cu/Al

OEM part number	3TA150EF	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal; Standard 60-125 A EG	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	125/160 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	#6-3/0 AWG (16-70 mm2 per 2014; 16-95 mm2 per 2008)	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Metric range conflict: 16-70 mm2 (2014) vs 16-95 mm2 (2008).*		

EDH-EAT-00539	3TA160EFK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	3TA160EFK	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	160 A max breaker	A	same as above
Kit contents	package of 3	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	#3-250 kcmil (35-120 mm2)	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00540	4TA160EFK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G EG-frame line/load terminals, 160 A, Cu/Al

OEM part number	4TA160EFK	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Description	Pressure type line/load terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Current rating	160 A max breaker	A	same as above
Kit contents	4-pole kit with four terminals	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	#3-250 kcmil (35-120 mm2)	A	S119 V4-T2-24 (Apr 2014); p.12-19 Table 12-13 (Nov 2008); oem_spec
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00573	**EEC3K**	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EG-frame **A**	unknown
EDH-EAT-00574	**EEC4K**	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EG-frame **A**	unknown
EDH-EAT-00570	**EFTS3K**	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EG-frame **A**	unknown
EDH-EAT-00571	**EFTS4K**	Series G EG-frame terminal shield IP30 4-pole	EG-frame **A**	unknown
EDH-EAT-00572	**EIPBK**	Series G EG-frame interphase barriers (package of 12 priced individually)	EG-frame **A**	unknown

EDH-EAT-00573	EEC3K	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening

OEM part number	EEC3K	A	S119 V4-T2-25; oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.25 in conductor opening	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*V4-T2-25 prints '6.35 (0.25)' and '10.41 (0.41)' with inch/mm swapped; for use with steel/stainless standard terminals only?*		

EDH-EAT-00574	EEC4K	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening

OEM part number	EEC4K	A	S119 V4-T2-25; oem_spec
Description	EG-frame terminal end cover (gas barrier), 0.41 in conductor opening	A	same as above
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00570	EFTS3K	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal shield IP30 3-pole (line terminal area)

OEM part number	EFTS3K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal shield IP30, 3-pole (line terminal area)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00571	EFTS4K	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame terminal shield IP30 4-pole

OEM part number	EFTS4K	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame terminal shield IP30, 4-pole	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00572	EIPBK	Eaton	barrier	STATUS UNKNOWN

Series G EG-frame interphase barriers (package of 12 priced individually)

OEM part number	EIPBK	**A**	S119 V4-T2-25; oem_spec
Description	EG-frame interphase barriers (package of 12, priced individually)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	EG-frame	**A**	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00576	**5652B38G01**	Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	EG-frame **A**	unknown
EDH-EAT-00584	**EF2RTDK**	Series G EG end cap kit, 2-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00581	**EF2RTWK**	Series G EG end cap kit, 2-pole, metric	EG-frame **A**	unknown
EDH-EAT-00585	**EF3RTDK**	Series G EG end cap kit, 3-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00582	**EF3RTWK**	Series G EG end cap kit, 3-pole, metric	EG-frame **A**	unknown
EDH-EAT-00586	**EF4RTDK**	Series G EG end cap kit, 4-pole, imperial	EG-frame **A**	unknown
EDH-EAT-00583	**EF4RTWK**	Series G EG end cap kit, 4-pole, metric	EG-frame **A**	unknown

EDH-EAT-00576	5652B38G01	Eaton	breaker-accessory	STATUS UNKNOWN

Series G Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only

OEM part number	5652B38G01	A	S119 V4-T2-25; p.12-244 Table 12-452; oem_spec
Alternate / superseded numbers	GCWTK (Table 12-452 (Series C G-frame control wire terminal, kit of 12) prints both 5652B38G01 and GCWTK; KM reproduction 'GCWTK (also 5652B38G01)'; EG table V4-T2-25 uses 5652B38G01)	A	S116 alias; p.12-244 Table 12-452; oem_spec
Description	Series G / G-frame control wire terminal kit (package of 12); for steel or stainless standard terminals only	A	S119 V4-T2-25; p.12-244 Table 12-452; oem_spec
Application	accessory	A	same as above
Breaker compatibility	EG-frame	A	same as above
Kit contents	package of 12	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC), Series C G-Frame (GD/GHC/GHB)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00584	EF2RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 2-pole, imperial

OEM part number	EF2RTDK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	2	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00581	EF2RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 2-pole, metric

OEM part number	EF2RTWK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	2	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00585	EF3RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 3-pole, imperial

OEM part number	EF3RTDK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00582	EF3RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 3-pole, metric

OEM part number	EF3RTWK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00586	EF4RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 4-pole, imperial

OEM part number	EF4RTDK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00583	EF4RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G EG end cap kit, 4-pole, metric

OEM part number	EF4RTWK	A	S119 V4-T2-24; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	EG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G EG-Frame (EGB/EGE/EGS/EGH/EGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G JG-Frame (JGE/JGS/JGH/JGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00579	**3TA250FJ3**	Series G JG-frame multiwire connector	JG-frame **A**	unknown
EDH-EAT-00580	**3TA250FJ6**	Series G JG-frame multiwire connector	JG-frame **A**	unknown
EDH-EAT-00541	**T250FJ**	Series G JG-frame line/load terminal, 250 A, Cu (standard)	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7) **A**	unknown
EDH-EAT-00542	**TA250FJ**	Series G JG-frame line/load terminal, 250 A, Cu/Al	JG-frame **A**	unknown

EDH-EAT-00579	3TA250FJ3	Eaton	lug-kit	STATUS UNKNOWN

Series G JG-frame multiwire connector

OEM part number	3TA250FJ3	A	S116 p.12-28, Table 12-39; oem_spec
Description	JG-frame multiwire connector, 3 wires per terminal, 14-2 AWG Cu, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	JG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00580	3TA250FJ6	Eaton	lug-kit	STATUS UNKNOWN

Series G JG-frame multiwire connector

OEM part number	3TA250FJ6	A	S116 p.12-28, Table 12-39; oem_spec
Description	JG-frame multiwire connector, 6 wires per terminal, 14-6 AWG Cu, 250 A	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end	A	same as above
Breaker compatibility	JG-frame	A	same as above
Kit contents	package of 3 (load side)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00541	T250FJ	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G JG-frame line/load terminal, 250 A, Cu (standard)

OEM part number	T250FJ	A	S116 p.12-28, Table 12-36; oem_spec
Description	Standard pressure type terminal (standard line and load); individually packed	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame; also JGEDC/JGSDC/JGHDC 250 A DC (s7)	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal	A	same as above
Material	stainless steel body	A	same as above
wire_range	#4-350 kcmil (25-185 mm2) Cu	A	S116 p.12-28, Table 12-36; oem_spec
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00542	TA250FJ	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G JG-frame line/load terminal, 250 A, Cu/Al

OEM part number	TA250FJ	A	S116 p.12-28, Table 12-36; oem_spec
Description	Pressure type Cu/Al terminal (contact factory for availability per footnote)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 terminal	A	same as above
Material	aluminum body	A	same as above
wire_range	#4-350 kcmil (25-185 mm2) Cu/Al	A	S116 p.12-28, Table 12-36; oem_spec
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Footnote 'Contact factory for availability' attaches to which JG terminal?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00568	**FJIPBK**	Series G JG-frame interphase barriers 3-pole (package of 2)	JG-frame A	unknown
EDH-EAT-00569	**FJIPBK4**	Series G JG-frame interphase barriers 4-pole (package of 2)	JG-frame A	unknown
EDH-EAT-00566	**FJTS3K**	Series G JG-frame terminal shield IP30 2/3-pole	JG-frame A	unknown
EDH-EAT-00567	**FJTS4K**	Series G JG-frame terminal shield IP30 4-pole	JG-frame A	unknown

EDH-EAT-00568	FJIPBK	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame interphase barriers 3-pole (package of 2)

OEM part number	FJIPBK	A	S116 p.12-28, Table 12-41; oem_spec
Description	JG-frame interphase barriers, 3-pole (package of 2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00569	FJIPBK4	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame interphase barriers 4-pole (package of 2)

OEM part number	FJIPBK4	A	S116 p.12-28, Table 12-41; oem_spec
Description	JG-frame interphase barriers, 4-pole (package of 2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00566	FJTS3K	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame terminal shield IP30 2/3-pole

OEM part number	FJTS3K	A	S116 p.12-28, Table 12-40; oem_spec
Description	JG-frame terminal shield IP30, 2/3-pole, line or load	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00567	FJTS4K	Eaton	barrier	STATUS UNKNOWN

Series G JG-frame terminal shield IP30 4-pole

OEM part number	FJTS4K	A	S116 p.12-28, Table 12-40; oem_spec
Description	JG-frame terminal shield IP30, 4-pole, line or load	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JG-frame	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00589	**FJ3RTDK**	Series G JG end cap kit, 3-pole, imperial	JG-frame A	unknown
EDH-EAT-00587	**FJ3RTWK**	Series G JG end cap kit, 3-pole, metric	JG-frame A	unknown
EDH-EAT-00590	**FJ4RTDK**	Series G JG end cap kit, 4-pole, imperial	JG-frame A	unknown
EDH-EAT-00588	**FJ4RTWK**	Series G JG end cap kit, 4-pole, metric	JG-frame A	unknown
EDH-EAT-00575	**FJCWTK**	Series G JG-frame control wire terminal kit (package of 14	JG-frame A	unknown

EDH-EAT-00589	FJ3RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 3-pole, imperial

OEM part number	FJ3RTDK	A	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	JG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00587	FJ3RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 3-pole, metric

OEM part number	FJ3RTWK	A	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	A	same as above
Application	accessory	A	same as above
Installation location	line side terminal	A	same as above
Breaker compatibility	JG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00590	FJ4RTDK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 4-pole, imperial

OEM part number	FJ4RTDK	**A**	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (imperial threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Poles	4	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00588	FJ4RTWK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG end cap kit, 4-pole, metric

OEM part number	FJ4RTWK	**A**	S116 p.12-28, Table 12-37; oem_spec
Description	End cap kit for line side to connect bus bar or similar connections; includes hardware (metric threads)	**A**	same as above
Application	accessory	**A**	same as above
Installation location	line side terminal	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Poles	4	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00575	FJCWTK	Eaton	breaker-accessory	STATUS UNKNOWN

Series G JG-frame control wire terminal kit (package of 14

OEM part number	FJCWTK	**A**	S116 p.12-28, Table 12-38; oem_spec
Description	JG-frame control wire terminal kit (package of 14, priced individually); for Al or Cu terminals	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	JG-frame	**A**	same as above
Kit contents	package of 14	**A**	same as above
Cross-links	Breakers: Series G JG-Frame (JGE/JGS/JGH/JGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G LG-Frame (LGE/LGS/LGH/LGC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00545	**3T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00549	**3T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00556	**3T632LKW**	Series G LG-frame control wire terminal kit, 3P, copper	LG-frame **A**	unknown
EDH-EAT-00543	**3TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00547	**3TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00554	**3TA632LKW**	Series G LG-frame control wire terminal kit, 3P, aluminum	LG-frame **A**	unknown
EDH-EAT-00546	**4T631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00550	**4T632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00557	**4T632LKW**	Series G LG-frame control wire terminal kit, 4P, copper	LG-frame **A**	unknown
EDH-EAT-00544	**4TA631LK**	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00548	**4TA632LK**	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00555	**4TA632LKW**	Series G LG-frame control wire terminal kit, 4P, aluminum	LG-frame **A**	unknown
EDH-EAT-00552	**T350LK**	Series G LG-frame line/load terminal, 400 A, Cu	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00551	**TA350LK**	Series G LG-frame line/load terminal, 400 A, Cu/Al	LG-frame (LGE/LGS/LGH/LGC) **A**	unknown
EDH-EAT-00553	**TA632L**	Series G LG-frame single terminal, 630 A, Cu/Al	LGEDC/LGSDC/LGHDC 630 A **A**	unknown

EDH-EAT-00545 — 3T631LK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	3T631LK	**A**	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	**A**	same as above
Poles	3	**A**	same as above
Current rating	400 A max breaker	**A**	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	**A**	same as above
Material	terminal body copper	**A**	same as above
wire_range	500-750 kcmil (1) (240-380 mm2)	**A**	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00549 — 3T632LK — Eaton / Cutler-Hammer — lug-kit — STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	3T632LK	**A**	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	**A**	same as above
Poles	3	**A**	same as above
Current rating	630 A max breaker	**A**	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	**A**	same as above
Material	terminal body copper	**A**	same as above
wire_range	2 AWG-500 kcmil (2) (35-240 mm2)	**A**	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00556	3T632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 3P, copper

OEM part number	3T632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body copper)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00543	3TA631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	3TA631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	3	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	500-750 kcmil (1) (240-380 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00547	3TA632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	3TA632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard on LGHDC 500-600 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	3	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	3 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2 AWG-500 kcmil (2) (35-240 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS3K (EDH-EAT-00558)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00554	3TA632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 3P, aluminum

OEM part number	3TA632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00546	4T631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu

OEM part number	4T631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body copper	A	same as above
wire_range	500-750 kcmil (1) (240-380 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00550	4T632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu

OEM part number	4T632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body copper	A	same as above
wire_range	2 AWG-500 kcmil (2) (35-240 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00557	4T632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, copper

OEM part number	4T632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body copper)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body copper	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00544	4TA631LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 400 A, Cu/Al

OEM part number	4TA631LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	500-750 kcmil (1) (240-380 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00548	4TA632LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal kit, 630 A, Cu/Al

OEM part number	4TA632LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Poles	4	A	same as above
Current rating	630 A max breaker	A	same as above
Kit contents	4 terminals included; includes LTS3K (3P) / LTS4K (4P) terminal covers	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2 AWG-500 kcmil (2) (35-240 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Requires	LTS4K (EDH-EAT-00559)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00555	4TA632LKW	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame control wire terminal kit, 4P, aluminum

OEM part number	4TA632LKW	A	S116 p.12-37, Table 12-63; oem_spec
Description	Control wire terminal kit (terminal body aluminum)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Material	terminal body aluminum	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		

EDH-EAT-00552	T350LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal, 400 A, Cu

OEM part number	T350LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu terminal for LG-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	1 terminals included	A	same as above
Material	terminal body copper	A	same as above
wire_range	2 AWG-500 kcmil (1) (35-240 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00551	TA350LK	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame line/load terminal, 400 A, Cu/Al

OEM part number	TA350LK	A	S116 p.12-37, Table 12-60; oem_spec
Description	Pressure type Cu/Al terminal for LG-frame; standard terminal on LGHDC 250-400 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame (LGE/LGS/LGH/LGC)	A	same as above
Current rating	400 A max breaker	A	same as above
Kit contents	1 terminals included	A	same as above
Material	terminal body aluminum	A	same as above
wire_range	2 AWG-500 kcmil (1) (35-240 mm2)	A	S116 p.12-37, Table 12-60; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00553	TA632L	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G LG-frame single terminal, 630 A, Cu/Al

OEM part number	TA632L	A	S118 V4-T2-356; oem_spec
Description	Single Cu/Al terminal, 1 per package, 2-500 kcmil (2)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LGEDC/LGSDC/LGHDC 630 A	A	same as above
Current rating	630 A	A	same as above
Kit contents	1 terminal	A	same as above
Material	aluminum body	A	same as above
wire_range	2 AWG-500 kcmil (2) (35-240 mm2)	A	S118 V4-T2-356; oem_spec
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00558	**LTS3K**	Series G LG-frame terminal cover, 3-pole	LG-frame A	unknown
EDH-EAT-00559	**LTS4K**	Series G LG-frame terminal cover, 4-pole	LG-frame A	unknown

EDH-EAT-00558	LTS3K	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series G LG-frame terminal cover, 3-pole

OEM part number	LTS3K	A	S116 p.12-37, Table 12-61; oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00559	LTS4K	Eaton / Cutler-Hammer	barrier	STATUS UNKNOWN

Series G LG-frame terminal cover, 4-pole

OEM part number	LTS4K	A	S116 p.12-37, Table 12-61; oem_spec
Description	Terminal cover; included in TA631L/T631L/TA632L kits	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00560	**L3RTWK**	Series G LG-frame end cap kit (metric nuts), 3-pole	LG-frame A	unknown
EDH-EAT-00561	**L4RTWK**	Series G LG-frame end cap kit (metric nuts), 4-pole	LG-frame A	unknown
EDH-EAT-00564	**LGTES3**	Series G LG-frame terminal spreader, 3-pole	LG-frame A	unknown
EDH-EAT-00565	**LGTES4**	Series G LG-frame terminal spreader, 4-pole	LG-frame A	unknown
EDH-EAT-00562	**LGTEW3**	Series G LG-frame terminal extension, 3-pole	LG-frame A	unknown
EDH-EAT-00563	**LGTEW4**	Series G LG-frame terminal extension, 4-pole	LG-frame A	unknown

EDH-EAT-00560	L3RTWK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame end cap kit (metric nuts), 3-pole

OEM part number	L3RTWK	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	End cap kit (metric nuts)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00561	L4RTWK	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame end cap kit (metric nuts), 4-pole

OEM part number	L4RTWK	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	End cap kit (metric nuts)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00564	LGTES3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal spreader, 3-pole

OEM part number	LGTES3	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal spreader	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00565	LGTES4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal spreader, 4-pole

OEM part number	LGTES4	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal spreader	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00562	LGTEW3	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal extension, 3-pole

OEM part number	LGTEW3	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal extension	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	3	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-EAT-00563	LGTEW4	Eaton / Cutler-Hammer	breaker-accessory	STATUS UNKNOWN

Series G LG-frame terminal extension, 4-pole

OEM part number	LGTEW4	A	S116 p.12-37, Tables 12-62/12-64/12-65; oem_spec
Description	Terminal extension	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LG-frame	A	same as above
Poles	4	A	same as above
Cross-links	Breakers: Series G LG-Frame (LGE/LGS/LGH/LGC)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Series G NG-Frame

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00529	**T1200NB3M**	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	NG-frame 1250 A (not 1600 A) A	unknown

EDH-EAT-00529	T1200NB3M	Eaton / Cutler-Hammer	lug-kit	STATUS UNKNOWN

Series G NG-frame line/load terminal, 1250 A, Cu (metric)

OEM part number	T1200NB3M	A	S116 p.12-48, Table 12-82; oem_spec
Description	Optional copper pressure terminal for NG-frame; single terminals individually packed; not suitable with 1600 A frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NG-frame 1250 A (not 1600 A)	A	same as above
Current rating	1250 A	A	same as above
Kit contents	1 terminal (individually packed)	A	same as above
Material	copper body	A	same as above
wire_range	(4) 3/0-400 kcmil (95-185 mm2)	A	S116 p.12-48, Table 12-82; oem_spec
Cross-links	Breakers: Series G NG-Frame		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

4 Square D / Schneider Electric

Lineage / brand markings: Square D, Schneider Electric, Federal Pioneer (Canada)

Family	Type	Status	Era	Entries	Pg
I-LINE I-Line Circuit Breaker Panelboard / I-Line distribution section	panelboard	current	Catalog copyright 1998-2019	37	353
QMB QMB Fusible Panelboard / QMB distribution (current design, Series E1)	panelboard	current	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	124	363
QMB-LEGACY Legacy QMB distribution (pre-October-1984 QM and QW interiors)	panelboard	obsolete; old-design blank fillers obsolete with no replacement	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches	22	408
QED-2 Power-Style QED-2 Switchboard	switchboard	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01)	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	145	414
SPEED-D Speed-D Merchandised Service Section Switchboard	switchboard	unknown	In 2700CT1101 (2012)	54	423

4.1 I-LINE — I-Line Circuit Breaker Panelboard / I-Line distribution section

FAM-SQD-004 · panelboard · aka I Line, ILine, HCP, HCP-SU, HCR-U, HCW, HCM, HCJ, HCN, Class 2110 · markings: Square D

Plug-on I-Line bus stack: breaker line-end jaws are integral to the breaker, shrouded in a molded insulator that keys into slots in the bus support base, are factory lubricated/preset and are 'blow-on'. The load end is held by an integral mounting bracket/foot screwed to the interior pan. The same interiors, fillers and extensions are used in QED switchboard I-Line distribution sections.

Attribute	Value	Cl.	Sources
Status	current	A	S27 oem_spec
Era of manufacture	Catalog copyright 1998-2019	A	S27 p. 6; oem_spec
Voltage rating	Up to 600 Vac; AC or DC systems	A	S27 pp. 2, 8; oem_spec
Branch breakers accepted	I-Line plug-on breakers 15-1200 A frames: FA, FH, BD/BG/BJ/BK, HD/HG/HJ/HL/HR, QB/QD/QG/QJ, JD/JG/JJ/JL/JR, LA/LH, LD/LG/LJ/LL/LR, MG/MJ, PG/PJ/PK/PL, RG/RJ/RK/RL	A	S27 pp. 8-11; oem_spec
qed_compat	I-Line panelboard fillers and extensions are the same for current I-Line distribution sections in QED switchboards	A	S36 oem_spec
Mounting	15-1200 A breakers require only a screwdriver; firmly attached to bus stack and mechanically attached to interior; load-end mounting bracket is integral to each breaker	A	S27 p. 6; oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact B-frame BD/BG/BJ/BK (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), R-frame RG/RJ/RK/RL (I-Line)
Key documents: S27 2110CT9701R07/19 I-Line Circuit Breaker Panelboards Catalog, Class 2110; S29 80030-695-02 I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation; S36 FA108059 FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED
Also fits this family (entry printed elsewhere): AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00152	**S33930**	I-Line plug-on sub-feed lug kit S33930	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00153	**SL100**	I-Line plug-on sub-feed lug kit SL100	—	unknown
EDH-SQD-00149	**SL1200P5**	I-Line plug-on sub-feed lug kit SL1200P5	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00150	**SL1200P6**	I-Line plug-on sub-feed lug kit SL1200P6	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00151	**SL1200P7**	I-Line plug-on sub-feed lug kit SL1200P7	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00146	**SL250**	I-Line plug-on sub-feed lug kit SL250	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown
EDH-SQD-00147	**SL400**	I-Line plug-on sub-feed lug kit SL400	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space **C**	unknown
EDH-SQD-00154	**SL800**	I-Line plug-on sub-feed lug kit SL800	—	unknown
EDH-SQD-00148	**SL800M5**	I-Line plug-on sub-feed lug kit SL800M5	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ0 **B**	unknown

EDH-SQD-00152 S33930 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit S33930

OEM part number	S33930	**A**	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A (100% rated, for R-frame applications), terminal wire range (4) 3/0-600 kcmil Al/Cu	**A**	S27 p. 10; oem_spec
Application	sub-feed for 100% rated ('R' frame) applications; also listed on HCR-U interior page	**A**	S27 pp. 10, 21; oem_spec
Installation location	I-Line branch mounting space	**B**	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	**B**	S50 oem_spec
Current rating	1200 A (100% rated, for R-frame applications)	**A**	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00153 SL100 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL100

OEM part number	SL100 (Listed in FAQ FAQ000269509 (via search summary); not in 2019 catalog table)	**B**	S50 oem_spec
Current rating	100 A	**C**	S50 inference
Cross-links	Families: I-LINE		
Not yet documented	Status, wire range		

EDH-SQD-00149 SL1200P5 Square D sub-feed-lug-kit STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P5

OEM part number	SL1200P5	**A**	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (4) 3/0 AWG-500 kcmil	**A**	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	**A**	S27, S50 oem_spec
Installation location	I-Line branch mounting space	**B**	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	**B**	S50 oem_spec
Current rating	1200 A	**A**	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00150	SL1200P6	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P6

OEM part number	SL1200P6	A	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 350-600 kcmil	A	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Current rating	1200 A	A	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00151	SL1200P7	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL1200P7

OEM part number	SL1200P7	A	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 1200 A, terminal wire range (3) 3/0 AWG-750 kcmil (750 kcmil compact Al only)	A	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Current rating	1200 A	A	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00146	SL250	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL250

OEM part number	SL250	A	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 250 A, terminal wire range (1) #4-300 kcmil Al/Cu	A	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Current rating	250 A	A	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00147	SL400	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL400

OEM part number	SL400	A	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 400 A, terminal wire range (1) #1-600 kcmil or (2) #1-250 kcmil Al/Cu	A	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Distributor: for HCP/HCP-SU/HCR-U panelboards; LA/LH frame space	C	S56 distributor
Current rating	400 A	A	S27 p. 10; oem_spec
Dimensions	Occupies 6 in. of mounting space	C	S56 distributor
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

EDH-SQD-00154	SL800	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL800

OEM part number	SL800 (Listed in FAQ FAQ000269509 (via search summary); 2019 catalog lists SL800M5 only - SL800 may be predecessor)	B	S50 oem_spec
Current rating	800 A	C	S50 inference
Cross-links	Families: I-LINE		
Not yet documented	relation to SL800M5, Status, wire range		

EDH-SQD-00148	SL800M5	Square D	sub-feed-lug-kit	STATUS UNKNOWN

I-Line plug-on sub-feed lug kit SL800M5

OEM part number	SL800M5	A	S27 Plug-On Lugs Terminal Data, p. 10; oem_spec
Description	I-Line plug-on (sub-feed) lug assembly, 800 A, terminal wire range (3) 3/0 AWG-500 kcmil	A	S27 p. 10; oem_spec
Application	sub-feed (plugs onto I-Line bus in breaker space)	A	S27, S50 oem_spec
Installation location	I-Line branch mounting space	B	S27, S56 oem_spec
Breaker compatibility	Rating must be >= ampacity of I-Line interior it is added to (FAQ FAQ000269509) (Via search summary)	B	S50 oem_spec
Current rating	800 A	A	S27 p. 10; oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Kit contents, mounting height (except SL400), Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00156	**PK32DGTA**	Equipment ground bar kit PK32DGTA (I-Line)	—	unknown

EDH-SQD-00156	PK32DGTA	Square D	ground-bar	STATUS UNKNOWN

Equipment ground bar kit PK32DGTA (I-Line)

OEM part number	PK32DGTA	A	S27 p. 7; oem_spec
Description	Equipment ground bar mounted in panelboard box (available Cu or Al)	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	material of this specific number, terminals		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00159	**4051749901**	I-Line deadfront (trim) support bracket 4051749901	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown **A**	unknown

EDH-SQD-00159	4051749901	Square D	mounting-bracket	STATUS UNKNOWN

I-Line deadfront (trim) support bracket 4051749901

OEM part number	4051749901	**A**	S42 oem_spec
Description	Single trim support bracket, deadfront bracket for I-Line HCN3254-2 panelboard	**A**	same as above
Breaker compatibility	HCN-style I-Line panelboard (HCN3254-2); QED applicability unknown	**A**	same as above
Cross-links	Families: I-LINE		
Requires	8011417101 (EDH-SQD-00160)		
Not yet documented	Dimensions, other HCN sizes		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00139	**HLN1BL**	I-Line blank extension HLN1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00140	**HLN4BL**	I-Line blank extension HLN4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00141	**HLN4EBL**	I-Line blank extension HLN4EBL	PowerPact H/J with Micrologic 5/6 trip unit only **A**	current
EDH-SQD-00142	**HLW1BL**	I-Line blank extension HLW1BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00143	**HLW4BL**	I-Line blank extension HLW4BL	All I-Line breaker applications except PowerPact H/J with Micrologic 5 **A**	current
EDH-SQD-00144	**HLW4EBL**	I-Line blank extension HLW4EBL	PowerPact H/J with Micrologic 5/6 trip unit only **A**	current
EDH-SQD-00137	**HNM1BL**	I-Line blank filler HNM1BL	any I-Line interior unused space **A**	current
EDH-SQD-00138	**HNM4BL**	I-Line blank filler HNM4BL	any I-Line interior unused space **A**	current

EDH-SQD-00139	HLN1BL	Square D	filler-plate	CURRENT

I-Line blank extension HLN1BL

OEM part number	HLN1BL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-651-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 1.5 in. (all applications except PowerPact H/J with Micrologic 5/6)	A	S33, S29 oem_spec
Application	blank extension (snaps onto mounting rail on underside of trim/deadfront; no screws)	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00140	HLN4BL	Square D	filler-plate	CURRENT

I-Line blank extension HLN4BL

OEM part number	HLN4BL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-652-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec
Application	blank extension	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00141	HLN4EBL	Square D	filler-plate	CURRENT

I-Line blank extension HLN4EBL

OEM part number	HLN4EBL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-752-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, narrow side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S33, S29 oem_spec
Application	blank extension added to end of H/J breaker	A	S33 oem_spec
Installation location	Narrow side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S29, S33 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00142	HLW1BL	Square D	filler-plate	CURRENT

I-Line blank extension HLW1BL

OEM part number	HLW1BL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-187-02 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, wide side, 1.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S33, S35, S34 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S33 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
Kit contents	Kit of 3 per FA112712 and distributors (se.com product title says qty 5 - conflict)	C	S34, S53 distributor
Dimensions	Covers 1.5 in. (38.1 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00143	HLW4BL	Square D	filler-plate	CURRENT

I-Line blank extension HLW4BL

OEM part number	HLW4BL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80034-188-03 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, wide side, 4.5 in. (all except H/J with Micrologic 5/6)	A	S33, S29 oem_spec
Application	blank extension; also used on wide side of HCW panelboards; LI->KI swap needs (1) HLW4BL + HNM1BL + HLW1BL	A	S33, S35, S34 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	S33 oem_spec
Breaker compatibility	All I-Line breaker applications except PowerPact H/J with Micrologic 5/6	A	S29, S33 oem_spec
Kit contents	Qty 5 per distributors	C	S53 distributor
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Identification features	Surface-mount plate approx. 6.35 in. W x 4.5 in. H	C	S53 distributor
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00144	HLW4EBL	Square D	filler-plate	CURRENT

I-Line blank extension HLW4EBL

OEM part number	HLW4EBL	A	S33, S29 s4 p. 2 table; oem_spec
Alternate / superseded numbers	80121-653-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank extension, wide side, 4.5 in., only for PowerPact H/J with Micrologic 5/6 trip unit	A	S33, S29 oem_spec
Application	blank extension added to end of H/J breaker	A	S33 oem_spec
Installation location	Wide side of I-Line interior deadfront	A	same as above
Breaker compatibility	PowerPact H/J with Micrologic 5/6 trip unit only	A	S29, S33 oem_spec
Dimensions	Covers 4.5 in. (114.3 mm) of breaker mounting height	A	S29 p. 2; oem_spec
OEM instruction document	Instruction Bulletin 80030-695-02 (2011-09): mount over mounting bracket in deadfront; Phillips screwdriver; applies to I-Line panelboards and QED2 switchboards built after 2011	A	S29 oem_spec
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		
Open question	*Pre-2011 I-Line/QED deadfronts: which extensions/fillers applied (80030-695-02 covers post-2011 only)?*		

EDH-SQD-00137	HNM1BL	Square D	filler-plate	CURRENT

I-Line blank filler HNM1BL

OEM part number	HNM1BL	A	S33, S27 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-408-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank filler 1.5 in.	A	same as above
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan with screws 21593-20100)	A	same as above
Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
Breaker compatibility	any I-Line interior unused space	A	S29, S33 oem_spec
Kit contents	Kit of 3 (FA112712)	A	S34, S53 oem_spec
Dimensions	1.5 in. wide	A	S33 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	same as above
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

EDH-SQD-00138	HNM4BL	Square D	filler-plate	CURRENT

I-Line blank filler HNM4BL

OEM part number	HNM4BL	A	S33, S27 s2 p. 7; oem_spec
Alternate / superseded numbers	40517-407-01 (Internal Schneider part number per FAQ FA243887 (WebFetch summary))	A	S33 style_number; oem_spec
Description	Blank filler 4.5 in.	A	same as above
Application	blank filler (covers bus in unused breaker mounting space; screws to interior mounting pan)	A	same as above
Installation location	On I-Line bus stack/mounting pan in unused space (single- and double-row interiors)	A	same as above
Breaker compatibility	any I-Line interior unused space	A	S29, S33 oem_spec
Dimensions	4.5 in. wide	A	S33 oem_spec
OEM instruction document	Secured with screws 21593-20100 to interior mounting pan (FA243887)	A	same as above
Status	current	B	S33, S53 oem_spec
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Finish / plating, Mounting-hole pattern, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00158	**2152620361**	FA/FH I-Line breaker mounting bracket screw 2152620361	FA, FH I-Line A	unknown
EDH-SQD-00157	**21590-20241**	PowerPact H/J I-Line mounting bracket screw 21590-20241	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to int A	unknown
EDH-SQD-00145	**21593-20100**	I-Line blank filler mounting screw 21593-20100	—	unknown
EDH-SQD-00160	**8011417101**	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	—	unknown
EDH-SQD-00161	**PKDFSCREW**	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	—	current (80025-067-01 obsolete)

EDH-SQD-00158	2152620361	Square D	fastener	STATUS UNKNOWN

FA/FH I-Line breaker mounting bracket screw 2152620361

OEM part number	2152620361	A	S39 oem_spec
Description	Mounting bracket (mounting foot) screw for FA or FH I-Line breaker	A	same as above
Breaker compatibility	FA, FH I-Line	A	same as above
Cross-links	Families: I-LINE, QED-2 · Breakers: FA / FH (I-Line)		
Not yet documented	length, thread		

EDH-SQD-00157	21590-20241	Square D	fastener	STATUS UNKNOWN

PowerPact H/J I-Line mounting bracket screw 21590-20241

OEM part number	21590-20241	A	S38 oem_spec
Description	Pan head steel thread-forming trilobe screw, combination slot / #3 square recess, ANSI B18.6.4, 1/4-20 x 0.75 in. (+.00/-.03)	A	same as above
Installation location	Load-end mounting bracket of I-Line breaker into interior mounting pan	A	S38, S27 oem_spec
Breaker compatibility	PowerPact H- and J-frame I-Line breakers (mounting bracket/foot to interior pan)	A	S38 oem_spec
Cross-links	Families: I-LINE, QED-2 · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line)		
Not yet documented	Finish / plating		

EDH-SQD-00145	21593-20100	Square D	fastener	STATUS UNKNOWN

I-Line blank filler mounting screw 21593-20100

OEM part number	21593-20100	A	S33 oem_spec
Description	Screw securing HNM1BL/HNM4BL blank fillers to I-Line interior mounting pan	A	same as above
Application	accessory hardware	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	length, thread size		

EDH-SQD-00160	8011417101	Square D	fastener	STATUS UNKNOWN

Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket

OEM part number	8011417101	A	S42 oem_spec
Description	Slotted Roberts (square) head screw used with trim support bracket 4051749901 on HCN3254-2	A	same as above
Cross-links	Families: I-LINE		
Not yet documented	length, thread		

EDH-SQD-00161	PKDFSCREW	Square D	fastener	CURRENT (80025-067-01

Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)

OEM part number	PKDFSCREW	A	S47 oem_spec
Alternate / superseded numbers	80025-067-01 [supersedes] (Obsolete original deadfront screw)	A	same as above
Description	Deadfront screw used on NF, I-Line, NQ and QMB panels; PKDFSCREW is a kit of 8	A	same as above
Status	current (80025-067-01 obsolete)	A	same as above
Cross-links	Families: I-LINE, QMB		
Not yet documented	length, thread size		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00155	**HQO306**	Plug-on QO distribution panel HQO306 for I-Line	—	unknown

EDH-SQD-00155	HQO306	Square D	other	STATUS UNKNOWN

Plug-on QO distribution panel HQO306 for I-Line

OEM part number	HQO306	A	S27 p. 10; oem_spec
Description	Six-pole, 240 Vac max QO plug-on distribution panel that mounts in all I-Line panelboards; accepts QO, QO-H, QO-VH, QH and Qwik-Gard plug-on breakers through 30 A; max three GFI-suffix breakers	A	same as above
Application	branch (small-circuit adapter in I-Line space)	A	S27 oem_spec
Voltage rating	240 Vac max	A	same as above
Cross-links	Families: I-LINE, QED-2		
Not yet documented	Dimensions, mounting height		
Open question	*Is HQO306 listed for QED-2 I-Line sections?*		

4.2 QMB — QMB Fusible Panelboard / QMB distribution (current design, Series E1)

FAM-SQD-003 · panelboard · aka QMB fusible, QMB-QMJ, Class 4620 · markings: Square D

Extruded-bus fusible distribution system used both as stand-alone panelboards and as the QMB distribution section of QED-2 / Speed-D switchboards. Branch units have permanently attached mounting brackets and blow-on plug-on jaws onto the QMB bus and mount with a screwdriver; glass-reinforced polyester bus supports. ISCR up to 200 kA at 600 Vac with Class R/J/L/T fuses.

Attribute	Value	Cl.	Sources
Status	current	A	S28 oem_spec
Era of manufacture	Catalog 4620CT9601 copyright 1985-2015; current design post-October 1984 (older QM/QW interiors pre-1984)	A	S28, S61 p. 1; oem_spec
Voltage rating	600 Vac / 250 Vdc max	A	S28 pp. 4, 7; oem_spec
Main ampacity	Main lug interiors 225-1200 A; main switch 200-800 A; QMJ only on 400, 600, 800, 1200 A interiors; QMB panelboards limited to 800 A main and branch switches (1200 A QMB368W only in QED-2)	A	S28, S26 pp. 6, 14; oem_spec
Branch breakers accepted	QMB twin and single fusible switch units 30-800 A (1200 A in QED-2 only), QMJ Class J switch units 30-600 A, QMB circuit breaker units (twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A and LA/LH 225-400 A), NEMA size 0-3 motor starter units, QMB Surgelogic TVSS	A	S28 pp. 6, 7, 14, 17-19; oem_spec
standards	UL 67, UL 50, CSA C22.2 No. 29, NEMA PB 1, Fed Spec W-P115C; switch units UL 98 File E34358	A	S28 p. 4; oem_spec

Breaker families associated: QMB circuit breaker units (H-, J-, L-frame)
Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S28 4620CT9601R07/15 QMB Fusible Panelboards Catalog, Class 4620; S61 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T
Also fits this family (entry printed elsewhere): 40251-287-50, AL150HD, AL175JD, AL250JD, AL400LA, CU150HD, CU250JD, CU400LA, QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB320EX, QMB3400LA, QMB3300LA, QMB362T, QMB364, QMB323TD, PKDFSCREW

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00081	**QMB12CLA**	QMB main lug compression adaptor kit QMB12CLA (1200 A)	—	unknown
EDH-SQD-00080	**QMB8CLA**	QMB main lug compression adaptor kit QMB8CLA (800 A)	—	unknown

EDH-SQD-00081	QMB12CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB12CLA (1200 A)

OEM part number	QMB12CLA	A	S28 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 1200 A QMB main-lug interior (4 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S28 Table 2; oem_spec
Application	main	A	S28 oem_spec
Current rating	1200 A	A	S28 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00080	QMB8CLA	Square D	main-lug-kit	STATUS UNKNOWN

QMB main lug compression adaptor kit QMB8CLA (800 A)

OEM part number	QMB8CLA	A	S28 Table 2, p. 6; oem_spec
Description	Adaptor kit for VCEL compression main lugs on 800 A QMB main-lug interior (3 conductors/phase, VCEL050-12H1 2/0-500 or VCEL075-12H1 500-750 Al)	A	S28 Table 2; oem_spec
Application	main	A	S28 oem_spec
Current rating	800 A	A	S28 Table 2; oem_spec
Cross-links	Families: QMB		
Not yet documented	Dimensions, Kit contents		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00063	**40251-016-51**	QMB/QMJ switch terminal lug 40251-016-51	30 A and 60 A QMB switch units (std) A	unknown
EDH-SQD-00065	**40251-018-50**	QMB/QMJ switch terminal lug 40251-018-50	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T A	unknown
EDH-SQD-00124	**4025101851**	QMB363TW Series E1 renewal part: Lug assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00067	**40251-162-50**	QMB/QMJ switch terminal lug 40251-162-50	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W) A	unknown
EDH-SQD-00066	**40256-014-50**	QMB/QMJ switch terminal lug 40256-014-50	100 A 600 V QMB units; QMJ363T/H A	unknown
EDH-SQD-00064	**40256-034-50**	QMB/QMJ switch terminal lug 40256-034-50	30 A and 60 A QMB units; QMJ361T, QMJ362T A	unknown
EDH-SQD-00070	**40256-039-50**	QMB/QMJ switch terminal lug 40256-039-50	QMJ365 (400 A) A	unknown
EDH-SQD-00068	**40560-270-50**	QMB/QMJ switch terminal lug 40560-270-50	200 A QMB units; QMJ364T/H A	unknown
EDH-SQD-00074	**VCEL02114S1**	VERSA-CRIMP compression lug VCEL02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00071	**VCEL030516H1**	VERSA-CRIMP compression lug VCEL030516H1	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QM A	unknown
EDH-SQD-00072	**VCEL05012H1**	VERSA-CRIMP compression lug VCEL05012H1	400-800 A QMB units optional; QMB main lug and main switch interiors (A	unknown
EDH-SQD-00079	**VCEL06012H1**	VERSA-CRIMP compression lug VCEL06012H1	400 A QMB main switch interior (Table 3) A	unknown
EDH-SQD-00073	**VCEL07512H1**	VERSA-CRIMP compression lug VCEL07512H1	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ3 A	unknown
EDH-SQD-00075	**VCELC02114S1**	VERSA-CRIMP compression lug VCELC02114S1	100 A 600 V QMB units; QMJ363 A	unknown
EDH-SQD-00076	**VCELC03038H1**	VERSA-CRIMP compression lug VCELC03038H1	200 A QMB units; QMJ364 A	unknown
EDH-SQD-00077	**VCELC05012H1**	VERSA-CRIMP compression lug VCELC05012H1	400-800 A QMB units A	unknown
EDH-SQD-00078	**VCELC07512H1**	VERSA-CRIMP compression lug VCELC07512H1	400-800 A QMB units A	unknown

EDH-SQD-00063	40251-016-51	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-016-51

OEM part number	40251-016-51	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-#2 AWG	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	30 A and 60 A QMB switch units (std)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00065	40251-018-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-018-50

OEM part number	40251-018-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #12-1/0 AWG	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	100 A 600 V QMB units (QMB263TW/HW, QMB363TW/HW, 100 A side of QMB363T31W/T32W)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00124	4025101851	Square D	lug	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug assembly

OEM part number	4025101851	A	S62 oem_spec
Description	Lug assembly	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00067	40251-162-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40251-162-50

OEM part number	40251-162-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, #6 AWG-300 kcmil	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	200 A QMB units (QMB224W, QMB324W, QMB264W, QMB364W)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00066	40256-014-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-014-50

OEM part number	40256-014-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-1/0 AWG	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	100 A 600 V QMB units; QMJ363T/H	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00064	40256-034-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-034-50

OEM part number	40256-034-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #14-#4 AWG (QMB); QMJ361T/362T Cu lug #14-#2	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	30 A and 60 A QMB units; QMJ361T, QMJ362T	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00070	40256-039-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40256-039-50

OEM part number	40256-039-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Cu mechanical lug, 1/0 AWG-750 kcmil	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	QMJ365 (400 A)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00068	40560-270-50	Square D	lug	STATUS UNKNOWN

QMB/QMJ switch terminal lug 40560-270-50

OEM part number	40560-270-50	A	S28 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Optional Cu mechanical lug, #6 AWG-250 kcmil (QMB); #6-300 (QMJ364)	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Application	branch load terminals of QMB/QMJ switch units	A	S28 oem_spec
Installation location	Load-side terminals of switch unit	C	S28 inference
Breaker compatibility	200 A QMB units; QMJ364T/H	A	S28 Table 5, pp. 12-13; Table 7; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Material, quantity per package, Torque values		

EDH-SQD-00074	VCEL02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL02114S1

OEM part number	VCEL02114S1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL021-14S1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #8-1/0 AWG	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00071	VCEL030516H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL030516H1

OEM part number	VCEL030516H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL030-516H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug #4 AWG-300 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units optional; 200 A QMB main switch interior (Table 3); QMJ364 (VCEL-030-516H1)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00072	VCEL05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL05012H1

OEM part number	VCEL05012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL050-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 2/0 AWG-500 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug and main switch interiors (Tables 2, 3)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00079	VCEL06012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL06012H1

OEM part number	VCEL06012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL060-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP compression lug 400-600 kcmil Al or Cu	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400 A QMB main switch interior (Table 3)	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		
Open question	*VCEL060-12H1 appears only in Table 3 (no un-hyphenated catalog form printed) - confirm orderable number*		

EDH-SQD-00073	VCEL07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCEL07512H1

OEM part number	VCEL07512H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCEL075-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Al compression lug 500-750 kcmil Al	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units optional; QMB main lug/main switch interiors; QMJ365	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00075	VCELC02114S1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC02114S1

OEM part number	VCELC02114S1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC021-14S1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug #6-1/0 AWG	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	100 A 600 V QMB units; QMJ363	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00076	VCELC03038H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC03038H1

OEM part number	VCELC03038H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC030-38H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 2/0-300	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	200 A QMB units; QMJ364	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00077	VCELC05012H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC05012H1

OEM part number	VCELC05012H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC050-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 250-500 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

EDH-SQD-00078	VCELC07512H1	Square D	lug	STATUS UNKNOWN

VERSA-CRIMP compression lug VCELC07512H1

OEM part number	VCELC07512H1	A	S28 Tables 2, 3, 5, 7; oem_spec
Alternate / superseded numbers	VCELC075-12H1 (Hyphenated form used in catalog tables)	A	S28 alias; Tables 2, 3, 7; oem_spec
Description	VERSA-CRIMP Cu compression lug 400-750 kcmil	A	S28 Tables 2, 3, 5, 7; oem_spec
Application	optional field-installed compression termination (100-800 A QMB, 100-600 A QMJ)	A	S28 pp. 9, 15; oem_spec
Breaker compatibility	400-800 A QMB units	A	S28 pp. 6, 12-13, 16; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	crimp tool/die, stud size, Torque values		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00130	**4052098601**	QMB367W Series E1 renewal part: Load base side insulator	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00130	4052098601	Square D	insulator	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base side insulator

OEM part number	4052098601	A	S63 oem_spec
Description	Load base side insulator	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00092	**QMB15BLW**	QMB blank filler plate QMB15BLW (15 in.)	—	current
EDH-SQD-00089	**QMB1BLW**	QMB blank filler plate QMB1BLW (1.5 in.)	—	current (Crescent lists QMB1BLW as discontinued - unverified
EDH-SQD-00090	**QMB3BLW**	QMB blank filler plate QMB3BLW (3 in.)	—	current
EDH-SQD-00091	**QMB6BLW**	QMB blank filler plate QMB6BLW (6 in.)	—	current

EDH-SQD-00092	QMB15BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB15BLW (15 in.)

OEM part number	QMB15BLW	A	S71, S31, S32 oem_spec
Alternate / superseded numbers	GTIN 785901798019	A	S30 alias; oem_spec
Description	Panelboard blank filler plate, 15 in.; Speed-D switchboards with current-series QMB provisions ship with (2)	A	S30, S31 oem_spec
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) (Packaging dimensions, not part dimensions)	A	S30 oem_spec
Status	current	B	S71 oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00089	QMB1BLW	Square D	filler-plate	CURRENT (CRESCENT LIST

QMB blank filler plate QMB1BLW (1.5 in.)

OEM part number	QMB1BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 1.5 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 1.5 in. of QMB mounting space	A	S71 oem_spec
Status	current (Crescent lists QMB1BLW as discontinued - unverified)	C	S52 distributor
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00090	QMB3BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB3BLW (3 in.)

OEM part number	QMB3BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 3 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 3 in. of QMB mounting space	A	S71 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

EDH-SQD-00091	QMB6BLW	Square D	filler-plate	CURRENT

QMB blank filler plate QMB6BLW (6 in.)

OEM part number	QMB6BLW	A	S71, S31, S32 oem_spec
Description	Blank filler (closing plate) 6 in. for current-style QMB panelboards and switchboards with QMB distribution	A	same as above
Application	filler for unused QMB mounting space	A	S71 oem_spec
Installation location	Deadfront/unit space of QMB interior (current design, post-1984)	B	same as above
Kit contents	Blanking plate, (2) support brackets, (2) self-tapping screws, (2) bolts, (2) nuts	C	S52 distributor
Dimensions	Covers 6 in. of QMB mounting space	A	S71 oem_spec
Status	current	B	same as above
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Finish / plating, Material, part dimensions		
Open question	*Do current QMBxBLW fillers fit QED-2 Series 2 QMB sections identically to QMB panelboards?*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00133	**4028343250**	QMB367W Series E1 renewal part: Switch mounting hardware kit:	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00131	**4028343550**	QMB367W Series E1 renewal part: Handle knob kit	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00123	**4028343750**	QMB363TW Series E1 renewal part: Handle knob kit	QMB363TW, Series E1 (E01) A	unknown

EDH-SQD-00133	4028343250	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Switch mounting hardware kit:

OEM part number	4028343250	A	S63 oem_spec
Description	Switch mounting hardware kit: (6) spring nuts, (6) screws, (1) circuit ID card	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00131	4028343550	Square D	hardware-kit	STATUS UNKNOWN

QMB367W Series E1 renewal part: Handle knob kit

OEM part number	4028343550	A	S63 oem_spec
Description	Handle knob kit	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: -	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00123	4028343750	Square D	hardware-kit	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Handle knob kit

OEM part number	4028343750	**A**	S62 oem_spec
Description	Handle knob kit	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00129	**2142720241**	QMB367W Series E1 renewal part: Load base mounting screw	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00120	**2330241601**	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00125	**2342702001**	QMB363TW Series E1 renewal part: Lug mounting nut	QMB363TW, Series E1 (E01) **A**	unknown
EDH-SQD-00132	**2342702400**	QMB367W Series E1 renewal part: Lug mounting nut	QMB367W, Series E1 (E01) **A**	unknown
EDH-SQD-00122	**4020506501**	QMB363TW Series E1 renewal part: Load base mounting screw	QMB363TW, Series E1 (E01) **A**	unknown

EDH-SQD-00129	2142720241	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base mounting screw

OEM part number	2142720241	**A**	S63 oem_spec
Description	Load base mounting screw	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 3 per load base	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00120	2330241601	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Push nut for arc suppression assembly

OEM part number	2330241601	**A**	S62 oem_spec
Description	Push nut for arc suppression assembly	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: 2 per switch	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00125	2342702001	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Lug mounting nut

OEM part number	2342702001	**A**	S62 oem_spec
Description	Lug mounting nut (also used as Keps nut in QO load centers per FA294947)	**A**	same as above
Application	renewal part (field replaceable)	**A**	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	**A**	same as above
Kit contents	Quantity: per lug	**A**	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00132	2342702400	Square D	fastener	STATUS UNKNOWN

QMB367W Series E1 renewal part: Lug mounting nut

OEM part number	2342702400	A	S63 oem_spec
Description	Lug mounting nut	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per lug	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00122	4020506501	Square D	fastener	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base mounting screw

OEM part number	4020506501	A	S62 oem_spec
Description	Load base mounting screw	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 2 per load base	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00058	**QMB600T6**	QMB Class T fuse adapter kit QMB600T6	QMB366W A	unknown
EDH-SQD-00059	**QMB800T6**	QMB Class T fuse adapter kit QMB800T6	QMB367W A	unknown

EDH-SQD-00058	QMB600T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB600T6

OEM part number	QMB600T6	A	S28 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB366W 600 A switch to 600 Vac Class T fuses (use T6 fuses with standard hp ratings only)	A	same as above
Application	accessory	A	S28 oem_spec
Breaker compatibility	QMB366W	A	S28 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

EDH-SQD-00059	QMB800T6	Square D	conversion-kit	STATUS UNKNOWN

QMB Class T fuse adapter kit QMB800T6

OEM part number	QMB800T6	A	S28 Table 4 notes e, j; oem_spec
Description	Kit to adapt QMB367W 800 A switch to 600 Vac Class T fuses (standard hp ratings only)	A	same as above
Application	accessory	A	S28 oem_spec
Breaker compatibility	QMB367W	A	S28 Table 4; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Kit contents		

Spd Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00093	**QMB1IMA_**	QMB Surgelogic IMA TVSS unit QMB1IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00094	**QMB2IMA_**	QMB Surgelogic IMA TVSS unit QMB2IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00095	**QMB3IMA_**	QMB Surgelogic IMA TVSS unit QMB3IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00096	**QMB4IMA_**	QMB Surgelogic IMA TVSS unit QMB4IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00097	**QMB8IMA_**	QMB Surgelogic IMA TVSS unit QMB8IMA	—	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later S
EDH-SQD-00098	**TVS12RMU**	Surgelogic TVSS remote monitor TVS12RMU	—	unknown

EDH-SQD-00093 QMB1IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB1IMA

OEM part number	QMB1IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 120/240 Vac 1-phase; MCOV 150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	120/240 Vac 1-phase; MCOV 150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00094 QMB2IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB2IMA

OEM part number	QMB2IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	208Y/120 Vac 3-phase 4-wire; MCOV 150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00095 QMB3IMA_ Square D spd-kit LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB3IMA

OEM part number	QMB3IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	240/120 Vac 3-phase high-leg delta; MCOV 275/150	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00096	QMB4IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB4IMA

OEM part number	QMB4IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	480Y/277 Vac 3-phase 4-wire; MCOV 320	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00097	QMB8IMA_	Square D	spd-kit	LIKELY OBSOLETE (UL 14

QMB Surgelogic IMA TVSS unit QMB8IMA

OEM part number	QMB8IMA<surge capacity code>[C] (Catalog prints 'QMB1IMAb_' - trailing digit(s) = surge capacity (120/160/240 kA per phase); add C for surge counter. Exact capacity codes not printed in text)	A	S28 Table 13, p. 20; oem_spec
Description	QMB-mounted Surgelogic IMA series modular parallel TVSS, 600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S28 pp. 19-20; oem_spec
Application	accessory (surge protection, QMB unit space)	A	S28 oem_spec
Voltage rating	600Y/347 Vac 3-phase 4-wire; MCOV 420	A	S28 Table 13; oem_spec
Status	likely obsolete (UL 1449 2nd ed. TVSS; superseded by later SPD)	D	S28 inference
Cross-links	Families: QMB, QED-2		
Not yet documented	capacity code digits, mounting height		
Open question	*What are the capacity code digits (e.g. 120/160/240 kA) in the IMA catalog number?*		

EDH-SQD-00098	TVS12RMU	Square D	spd-kit	STATUS UNKNOWN

Surgelogic TVSS remote monitor TVS12RMU

OEM part number	TVS12RMU	A	S28 Table 15, p. 20; oem_spec
Description	Remote monitor providing TVSS status up to 1000 ft from unit	A	S28 Table 15; oem_spec
Application	accessory	A	S28 oem_spec
Cross-links	Families: QMB		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00002	**QMB221HW**	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00001	**QMB221TW**	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00004	**QMB222HW**	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00003	**QMB222TW**	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00006	**QMB223HW**	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00005	**QMB223TW**	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00007	**QMB224W**	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00008	**QMB225W**	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00009	**QMB225WT3**	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00023	**QMB261HW**	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00022	**QMB261TW**	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00025	**QMB262HW**	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00024	**QMB262TW**	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00027	**QMB263HW**	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00026	**QMB263TW**	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00028	**QMB264W**	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00011	**QMB321HW**	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00010	**QMB321TW**	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00013	**QMB322HW**	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00012	**QMB322TW**	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00015	**QMB323HW**	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00014	**QMB323TW**	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00016	**QMB324W**	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00017	**QMB325W**	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00018	**QMB325WT3**	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00019	**QMB326W**	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00020	**QMB326WT3**	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00021	**QMB327WT3**	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	Use 300 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00030	**QMB361HW**	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00029	**QMB361TW**	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00032	**QMB362HW**	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00033	**QMB362T21W**	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00031	**QMB362TW**	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00035	**QMB363HW**	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00036	**QMB363T31W**	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00037	**QMB363T32W**	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00034	**QMB363TW**	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00038	**QMB364W**	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00039	**QMB365W**	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	—	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00040	**QMB365WT6**	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	Use 600 Vac Class T fuses only **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00041	**QMB366W**	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00042	**QMB367W**	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions n **A**	current per 2015 catalog (catalog warns it may contain obsol
EDH-SQD-00044	**QMJ361T**	QMJ fusible switch unit QMJ361T (30-30 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300 **A**	current per 2015 catalog
EDH-SQD-00045	**QMJ362T**	QMJ fusible switch unit QMJ362T (60-60 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00047	**QMJ363H**	QMJ fusible switch unit QMJ363H (100-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00046	**QMJ363T**	QMJ fusible switch unit QMJ363T (100-100 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00049	**QMJ364H**	QMJ fusible switch unit QMJ364H (200-blank A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00048	**QMJ364T**	QMJ fusible switch unit QMJ364T (200-200 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610 **A**	current per 2015 catalog
EDH-SQD-00050	**QMJ365**	QMJ fusible switch unit QMJ365 (400 A)	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200 **A**	current per 2015 catalog
EDH-SQD-00051	**QMJ366**	QMJ fusible switch unit QMJ366 (600 A)	600 V Class J fuses only; 200 kA SCCR **A**	current per 2015 catalog

EDH-SQD-00002	QMB221HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)

OEM part number	QMB221HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-blank (single switch in twin frame) A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-blank (single switch in twin frame) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00001	QMB221TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)

OEM part number	QMB221TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00004	QMB222HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)

OEM part number	QMB222HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00003	QMB222TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)

OEM part number	QMB222TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00006	QMB223HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)

OEM part number	QMB223HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00005	QMB223TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)

OEM part number	QMB223TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00007	QMB224W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)

OEM part number	QMB224W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00008	QMB225W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)

OEM part number	QMB225W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	2	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00009	QMB225WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)

OEM part number	QMB225WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	2	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600); no optional lugs	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00023	QMB261HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)

OEM part number	QMB261HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00022	QMB261TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)

OEM part number	QMB261TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00025	QMB262HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)

OEM part number	QMB262HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00024	QMB262TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)

OEM part number	QMB262TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 60-60 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00027	QMB263HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)

OEM part number	QMB263HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00026	QMB263TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)

OEM part number	QMB263TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 100-100 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00028	QMB264W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)

OEM part number	QMB264W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 2-pole, 600 Vac / 250 Vdc, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	2	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00011	QMB321HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)

OEM part number	QMB321HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00010	QMB321TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)

OEM part number	QMB321TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK30 (2 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00013	QMB322HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)

OEM part number	QMB322HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00012	QMB322TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)

OEM part number	QMB322TW	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB322TD (Distributor-listed variant; FA119872/FA122651-family FAQs cite 'TD' units as replacements for legacy switches; relation of TD vs TW suffix unknown)	C	S55 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 60-60 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*What distinguishes QMB322TD from QMB322TW (suffix D vs W)? Is TD the legacy-interior-compatible version?*		

EDH-SQD-00015	QMB323HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)

OEM part number	QMB323HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00014	QMB323TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)

OEM part number	QMB323TW	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB323TD (QMB323TD is Schneider's stated replacement for legacy QMB310T; relation to QMB323TW unknown)	C	S55, S64 alias; distributor
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 100-100 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	100-100 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB100R (1 req.); Standard lug not replaceable (#12-1/0); no optional lugs	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		
Open question	*Is QMB323TD a variant of QMB323TW for pre-1984 QM/QW interiors?*		

EDH-SQD-00016	QMB324W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)

OEM part number	QMB324W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 200 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	240 Vac	A	same as above
Current rating	200 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00017	QMB325W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)

OEM part number	QMB325W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00018	QMB325WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)

OEM part number	QMB325WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 400 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	400 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable (#1-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00019	QMB326W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)

OEM part number	QMB326W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00020	QMB326WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)

OEM part number	QMB326WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 600 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	600 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00021	QMB327WT3	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)

OEM part number	QMB327WT3	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 240 Vac, 800 (single, 300 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 300 Vac Class T fuses only	A	S28 Table 4 note c; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	240 Vac	A	same as above
Current rating	800 (single, 300 Vac Class T fuses only) A	A	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00030	QMB361HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)

OEM part number	QMB361HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00029	QMB361TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)

OEM part number	QMB361TW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 30-30 (twin) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB300EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	30-30 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB36R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00032	QMB362HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)

OEM part number	QMB362HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-blank A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R; 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00033	QMB362T21W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)

OEM part number	QMB362T21W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R and QMB36R (1 each); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00031	QMB362TW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)

OEM part number	QMB362TW	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB362T (FAQ FA88047 names 'QMB362T' (no W) as replacement for QMB3606T; relation to QMB362TW unverified)	C	S66 alias; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 60-60 (twin) A	A	S28 Table 4, pp. 10-11; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	60-60 (twin) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB60R (1 req.); 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00035	QMB363HW	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)

OEM part number	QMB363HW	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 4, pp. 10-11; Table 4 note b; oem_spec
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-blank A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00036	QMB363T31W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)

OEM part number	QMB363T31W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-30 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-30 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB36R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 30 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00037	QMB363T32W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)

OEM part number	QMB363T32W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-60 (twin, unequal) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)	A	S28 Table 4, pp. 10-11; oem_spec
Poles	3	A	same as above
Voltage rating	600 Vac	A	same as above
Current rating	100-60 (twin, unequal) A	A	same as above
Kit contents	Optional Class R fuse kit: HRK1020 and QMB60R (1 each); 100 A side: 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0; 60 A side: 40251-016-51 Al mech #12-#2 (std); optional Cu mech 40256-034-50 #14-#4; no crimp option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00034	QMB363TW	Square D	switch-unit		CURRENT PER 2015 CATAL
QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)					
OEM part number	QMB363TW			**A**	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 100-100 (twin) A			**A**	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)			**A**	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure			**A**	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB610EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)			**A**	S28 Table 4, pp. 10-11; oem_spec
Poles	3			**A**	same as above
Voltage rating	600 Vac			**A**	same as above
Current rating	100-100 (twin) A			**A**	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (2 req.); 40251-018-50 Al mech #12-1/0 (std); Cu mech 40256-014-50 #14-1/0; Al crimp VCEL02114S1 #8-1/0; Cu crimp VCELC02114S1 #6-1/0			**A**	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)			**A**	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)			**B**	S28 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records			**A**	S62 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)			**A**	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D				
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight				

EDH-SQD-00038	QMB364W	Square D	switch-unit		CURRENT PER 2015 CATAL
QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)					
OEM part number	QMB364W			**A**	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 200 (single) A			**A**	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)			**A**	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure			**A**	S28 pp. 6-7; oem_spec
Breaker compatibility	Electrical interlock kit QMB200EK-1 or -2 (-1 = 1 NO + 1 NC; -2 = 2 NO + 2 NC)			**A**	S28 Table 4, pp. 10-11; oem_spec
Poles	3			**A**	same as above
Voltage rating	600 Vac			**A**	same as above
Current rating	200 (single) A			**A**	same as above
Kit contents	Optional Class R fuse kit: HRK1020 (1 req.); 40251-162-50 Al mech #6-300 (std); Cu mech 40560-270-50 #6-250; Al crimp VCEL030516H1 #4-300; Cu crimp VCELC03038H1 2/0-300			**A**	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)			**A**	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)			**B**	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)			**A**	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D				
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight				

EDH-SQD-00039	QMB365W	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)

OEM part number	QMB365W	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 400 (single) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc	A	same as above
Current rating	400 (single) A	A	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1 2/0-500 or (2) VCEL07512H1 500-750; Cu crimp (2) VCELC05012H1 250-500 or (2) VCELC07512H1 400-750; no Cu mech option	A	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00040	QMB365WT6	Square D	switch-unit	CURRENT PER 2015 CATAL

QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)

OEM part number	QMB365WT6	A	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 400 (single, 600 Vac Class T fuses only) A	A	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)	A	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure	A	S28 pp. 6-7; oem_spec
Breaker compatibility	Use 600 Vac Class T fuses only	A	S28 Table 4 note h; oem_spec
Poles	3	A	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac	A	same as above
Current rating	400 (single, 600 Vac Class T fuses only) A	A	same as above
Kit contents	Standard lug not replaceable ((2) 3/0-600)	A	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)	B	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)	A	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D		
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight		

EDH-SQD-00041	QMB366W	Square D	switch-unit		CURRENT PER 2015 CATAL
QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)					
OEM part number	QMB366W			**A**	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac / 250 Vdc, 600 (single) A			**A**	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)			**A**	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure			**A**	S28 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB600T6 (standard hp ratings only)			**A**	S28 Table 4 note e; oem_spec
Poles	3			**A**	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac / 250 Vdc			**A**	same as above
Current rating	600 (single) A			**A**	same as above
Kit contents	Optional Class R fuse kit: QMB4060R (1 req.); (2) 40251-287-50 Al mech 3/0-600 (std); Al crimp (2) VCEL05012H1; Cu crimp (2) VCELC05012H1			**A**	S28 Table 4, pp. 10-11; Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)			**A**	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)			**B**	S28 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)			**A**	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D				
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight				

EDH-SQD-00042	QMB367W	Square D	switch-unit		CURRENT PER 2015 CATAL
QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)					
OEM part number	QMB367W			**A**	S28 Table 4, pp. 10-11; oem_spec
Description	QMB fusible branch switch unit, 3-pole, 600 Vac, 800 (single) A			**A**	same as above
Application	branch (group-mounted QMB distribution in QMB panelboards and QED-2/Speed-D QMB switchboard sections)			**A**	S28, S26 s3 p. 7; s1 p. 29; oem_spec
Installation location	Plugs onto QMB vertical bus; mounting brackets permanently attached to switch enclosure			**A**	S28 pp. 6-7; oem_spec
Breaker compatibility	Adapt to 600 Vac Class T fuses with kit QMB800T6; Class J provisions not available on 800 A			**A**	S28 Table 4 notes d, j; oem_spec
Poles	3			**A**	S28 Table 4, pp. 10-11; oem_spec
Voltage rating	600 Vac			**A**	same as above
Current rating	800 (single) A			**A**	same as above
Kit contents	(3) 40251-287-50 Al mech 3/0-600 (std); Al crimp (3) VCEL05012H1 or (3) VCEL07512H1; Cu crimp VCELC05012H1 / VCELC07512H1			**A**	S28 Table 5, pp. 12-13; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)			**A**	S28 Table 4, pp. 10-11; oem_spec
Status	current per 2015 catalog (catalog warns it may contain obsolete part numbers)			**B**	S28 oem_spec
Replacement / successor	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records			**A**	S63 oem_spec
Identification features	Red/black operating handle with large ON-OFF nameplate, lock-off for three 3/8 in. shackle padlocks, dual cover interlock, door-latch hasp; visible blades (30-800 A)			**A**	S28 pp. 7-8; oem_spec
Cross-links	Families: QMB, QED-2, SPEED-D				
Not yet documented	Fasteners, OEM instruction document, Material, Torque values, weight				

EDH-SQD-00044	QMJ361T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ361T (30-30 A)

OEM part number	QMJ361T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 30-30 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB300EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	30-30 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 4.5 in. (114 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00045	QMJ362T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ362T (60-60 A)

OEM part number	QMJ362T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 60-60 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	60-60 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-034-50; wire #14-#2 Al/Cu; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00047	QMJ363H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363H (100-blank A)

OEM part number	QMJ363H	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	100-blank A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00046	QMJ363T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ363T (100-100 A)

OEM part number	QMJ363T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 100-100 (twin) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	100-100 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-014-50; optional VERSA-CRIMP VCELC or VCEL-021-14S1; #14-1/0; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 6 in. (152 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00049	QMJ364H	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364H (200-blank A)

OEM part number	QMJ364H	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-blank A; Blank units cannot be modified to accept a switch interior	A	S28 Table 6/7, p. 16; Table 6 note c; oem_spec
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	200-blank A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00048	QMJ364T	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ364T (200-200 A)

OEM part number	QMJ364T	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 200-200 (twin) A	A	same as above
Application	Tandem 200 A fusible arrangement uses QMJ364T (600 V, J clips); NEMA 1, 400-1200 A interiors (Tandem statement from Schneider FAQ FA280263 via search summary)	B	S28, S51 oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB610EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	200-200 (twin) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40560-270-50; optional VCEL-030-516H1 or VCELC-030-38H1; #6-300; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 7.5 in. (191 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00050	QMJ365	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ365 (400 A)

OEM part number	QMJ365	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 400 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR; Electrical interlock kit QMB200EK-1 or -2	A	S28 p. 14; Table 6/7, p. 16; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	400 (single) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	Cu mech 40256-039-50; optional VCELC or VCEL-075-12H1; 1/0-750; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 9 in. (229 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

EDH-SQD-00051	QMJ366	Square D	switch-unit	CURRENT PER 2015 CATAL

QMJ fusible switch unit QMJ366 (600 A)

OEM part number	QMJ366	A	S28 Table 6/7, p. 16; oem_spec
Description	QMJ Class J fusible branch switch unit, 3-pole, 600 Vac/250 Vdc, 600 (single) A	A	same as above
Application	branch; NEMA 1 vented enclosures only; 400, 600, 800, 1200 A QMB interiors only	A	S28 pp. 14, 16; oem_spec
Breaker compatibility	600 V Class J fuses only; 200 kA SCCR	A	S28 p. 14; oem_spec
Poles	3	A	S28 p. 16; oem_spec
Voltage rating	600 Vac / 250 Vdc (dc: use top and bottom poles)	A	S28 p. 14; oem_spec
Current rating	600 (single) A	A	S28 Table 6/7, p. 16; oem_spec
Kit contents	(2) per phase 3/0-600; optional VCELC or VCEL-050-12HS1; use 90 C insulated conductors sized at 75 C ampacity	A	S28 Table 7; oem_spec
Dimensions	Unit mounting height 15 in. (381 mm)	A	S28 Table 6/7, p. 16; oem_spec
Status	current per 2015 catalog	B	S28 oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Material, renewal parts		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00056	**HRK1020**	QMB Class R fuse kit HRK1020	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, Q A	unknown
EDH-SQD-00052	**HRK30**	QMB Class R fuse kit HRK30	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW A	unknown
EDH-SQD-00055	**QMB100R**	QMB Class R fuse kit QMB100R	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW A	unknown
EDH-SQD-00062	**QMB200EK**	QMB electrical interlock kit QMB200EK	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB3 A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00060	**QMB300EK**	QMB electrical interlock kit QMB300EK	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB22 **A**	unknown
EDH-SQD-00053	**QMB36R**	QMB Class R fuse kit QMB36R	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW **A**	unknown
EDH-SQD-00057	**QMB4060R**	QMB Class R fuse kit QMB4060R	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W **A**	unknown
EDH-SQD-00054	**QMB60R**	QMB Class R fuse kit QMB60R	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363 **A**	unknown
EDH-SQD-00061	**QMB610EK**	QMB electrical interlock kit QMB610EK	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223T **A**	unknown

EDH-SQD-00056 HRK1020 — Square D — breaker-accessory — STATUS UNKNOWN

QMB Class R fuse kit HRK1020

OEM part number	HRK1020	**A**	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 600 V and 200 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	**A**	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	**A**	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	**C**	S28 p. 8; inference
Breaker compatibility	Listed for: QMB224W, QMB324W, QMB263TW, QMB263HW, QMB264W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W	**A**	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00052 HRK30 — Square D — breaker-accessory — STATUS UNKNOWN

QMB Class R fuse kit HRK30

OEM part number	HRK30	**A**	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit (rejection kit), 30 A QMB switches; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	**A**	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	**A**	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	**C**	S28 p. 8; inference
Breaker compatibility	Listed for: QMB221TW, QMB221HW, QMB321TW, QMB321HW	**A**	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		
Open question	*HRK30/HRK1020 prefix differs from QMB..R kits - are they shared with Square D heavy-duty safety switches?*		

EDH-SQD-00055	QMB100R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB100R

OEM part number	QMB100R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 100 A 240 V QMB twin units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB223TW, QMB223HW, QMB323TW, QMB323HW	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00062	QMB200EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB200EK

OEM part number	QMB200EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB200EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB200EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	200 A QMB units and QMJ365; listed for QMB224W, QMB324W, QMB264W, QMB364W, QMJ365	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00060	QMB300EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB300EK

OEM part number	QMB300EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB300EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB300EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	30 A and 60 A (4.5 in.) QMB units; QMJ361T; listed for QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMJ361T	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

EDH-SQD-00053	QMB36R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB36R

OEM part number	QMB36R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for QMB switch units (30 A 600 V / 60 A 240 V positions per Table 4); with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB222TW, QMB222HW, QMB322TW, QMB322HW, QMB261TW, QMB261HW, QMB361TW, QMB361HW, QMB362T21W, QMB363T31W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00057	QMB4060R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB4060R

OEM part number	QMB4060R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 400 A and 600 A QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB225W, QMB325W, QMB326W, QMB365W, QMB366W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00054	QMB60R	Square D	breaker-accessory	STATUS UNKNOWN

QMB Class R fuse kit QMB60R

OEM part number	QMB60R	A	S28 Table 4, pp. 10-11; oem_spec
Description	Class R fuse kit for 60 A 600 V QMB switch units; with kit installed the switch accepts only Class R fuses; field installable (30-600 A QMB switches)	A	S28 p. 8; Table 4, pp. 10-11; oem_spec
Application	accessory	A	S28 oem_spec
Installation location	Installed on fuse clips/bases inside the QMB switch unit	C	S28 p. 8; inference
Breaker compatibility	Listed for: QMB262TW, QMB262HW, QMB362TW, QMB362HW, QMB362T21W, QMB363T32W	A	S28 Table 4, pp. 10-11; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	Dimensions, Kit contents		

EDH-SQD-00061	QMB610EK	Square D	breaker-accessory	STATUS UNKNOWN

QMB electrical interlock kit QMB610EK

OEM part number	QMB610EK	A	S28 Table 4, pp. 10-11; oem_spec
Alternate / superseded numbers	QMB610EK-1	A	S28 alias; Table 4 note a; oem_spec
	QMB610EK-2 [alias]	A	same as above
Description	Electrical interlock (auxiliary contact) kit for QMB/QMJ switches; suffix -1 = 1 NO + 1 NC, -2 = 2 NO + 2 NC; for motor control or auxiliary circuits; field installable (QMB 30-200 A; QMJ 30-400 A)	A	S28 pp. 9, 15; Table 4 note a; oem_spec
Application	accessory	A	S28 oem_spec
Breaker compatibility	60-100 A (6/7.5 in.) QMB units and QMJ362T-QMJ364H; listed for QMB223TW, QMB223HW, QMB323TW, QMB323HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H	A	S28 Tables 4, 6; oem_spec
Cross-links	Families: QMB, QED-2		
Not yet documented	contact ratings, Kit contents		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00119	**4052017302**	QMB363TW Series E1 renewal part: Arc shield	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00118	**4052021450**	QMB363TW Series E1 renewal part: Arc suppressor assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00121	**4052021650**	QMB363TW Series E1 renewal part: Load base assembly	QMB363TW, Series E1 (E01) A	unknown
EDH-SQD-00126	**4052031850**	QMB367W Series E1 renewal part: Arc suppressor assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00128	**4052036750**	QMB367W Series E1 renewal part: Load base assembly	QMB367W, Series E1 (E01) A	unknown
EDH-SQD-00127	**4052085601**	QMB367W Series E1 renewal part: Arc shield	QMB367W, Series E1 (E01) A	unknown

EDH-SQD-00119	4052017302	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc shield

OEM part number	4052017302	A	S62 oem_spec
Description	Arc shield (top cover)	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00118	4052021450	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Arc suppressor assembly

OEM part number	4052021450	A	S62 oem_spec
Description	Arc suppressor assembly	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per switch (twin = per switch)	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00121	4052021650	Square D	other	STATUS UNKNOWN

QMB363TW Series E1 renewal part: Load base assembly

OEM part number	4052021650	A	S62 oem_spec
Description	Load base assembly (includes lugs)	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB363TW, Series E1 (E01)	A	same as above
Kit contents	Quantity: 1 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00126	4052031850	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc suppressor assembly

OEM part number	4052031850	A	S63 oem_spec
Description	Arc suppressor assembly	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 3 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00128	4052036750	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Load base assembly

OEM part number	4052036750	A	S63 oem_spec
Description	Load base assembly (includes lugs)	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 3 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

EDH-SQD-00127	4052085601	Square D	other	STATUS UNKNOWN

QMB367W Series E1 renewal part: Arc shield

OEM part number	4052085601	A	S63 oem_spec
Description	Arc shield	A	same as above
Application	renewal part (field replaceable)	A	same as above
Breaker compatibility	QMB367W, Series E1 (E01)	A	same as above
Kit contents	Quantity: 3 per switch	A	same as above
Cross-links	Families: QMB, QED-2		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material		

4.3 QMB-LEGACY — Legacy QMB distribution (pre-October-1984 QM and QW interiors)

FAM-SQD-005 · panelboard · aka QM interior, QW interior, old style QMB, QMB Series 1-4, Saflex, QMB Saflex, Saflex panelboard · markings: Square D

Older QMB fusible distribution used in panelboards and switchboards before the current (Series E1) design. Legacy switch catalog numbers had no 'W' suffix (e.g. QMB3606T, QMB310T, QMB3620, QMB3240, QMB2240, QMB3260). Current-design units are retrofitted using plug-on extension assemblies (QMB306EX, QMB306LEX, QMB310EX, QMB310LEX, QMB-320-EX) in QW interiors; QM interiors built 1961-1984 accept some current units directly.

Attribute	Value	Cl.	Sources
Status	obsolete; old-design blank fillers obsolete with no replacement	A	S61 oem_spec
Era of manufacture	QM (31 in. wide box) and QW (38 in. wide box) interiors built before October 1984; pre-1961 interiors (incl. round bus bar) have no replacement switches (From several Schneider FAQs (FA119872, FA88047, FA127541, FA100372))	A	same as above
saflex	Schneider FAQ refers to 'an old QMB Saflex Panelboard' (QW type 38 in. box with flatwise bus needs QMB310EX for current CB units); surplus listings label QMB3606T Series 2/4 units 'QMB Saflex' ('Saflex' = legacy QMB panelboard trade name per OEM FAQ; surplus label corroborates)	A	S73, S74 oem_spec

Key documents: S61 FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified) QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T; S64 FA119872 FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch; S65 FA127541 FAQ FA127541: replacement for a QMB3620; S66 FA88047 FAQ FA88047: replacement for a QMB3606T; S67 FA100372 FAQ FA100372: replacement for a QMB3260 600 A QMB switch; S68 FA128647 FAQ FA128647: replacement parts for a QMB3240; S69 FA122651 FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch; S72 FA113960 FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4; S73 FA118445 FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex pane; S74 MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00112	**QMB3300LA**	QMB circuit breaker unit QMB3300LA	—	unknown
EDH-SQD-00111	**QMB3400LA**	QMB circuit breaker unit QMB3400LA	—	unknown

EDH-SQD-00112 **QMB3300LA** Square D breaker-mounting-kit **STATUS UNKNOWN**

QMB circuit breaker unit QMB3300LA

OEM part number	QMB3300LA	A	S73 oem_spec
Description	QMB circuit breaker unit, 3P 300 A (LA frame) for old QMB Saflex panelboards; not for QM panelboards made before 1961; QMB310EX needed for QW 38 in. flatwise-bus panels	A	same as above
Application	branch	A	same as above
Breaker frame	LA (implied by 'LA' suffix)	C	S73 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

EDH-SQD-00111 **QMB3400LA** Square D breaker-mounting-kit **STATUS UNKNOWN**

QMB circuit breaker unit QMB3400LA

OEM part number	QMB3400LA	A	S67 oem_spec
Description	QMB circuit breaker unit, 3P 400 A (LA frame), 7.5 in. mounting space; replacement for legacy QMB3240/QMB2240/QMB3260/QMB3640; fits QMB interiors 1961-Oct 1984 (QMB310EX needed in QW)	A	S67, S68, S69, S61 oem_spec
Application	branch	A	S67 oem_spec
Breaker frame	LA (implied by 'LA' suffix)	C	S67 inference
Cross-links	Families: QMB-LEGACY, QMB · Breakers: QMB circuit breaker units (H-, J-, L-frame), LA / LH (I-Line)		
Not yet documented	current status, lug kit		
Open question	*Supplemental Digest reference for QMB3400LA not retrieved*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00113	**QW1BL**	Legacy QW interior blank filler QW1BL	—	obsolete, NLA, no replacement; Schneider suggests local shee
EDH-SQD-00114	**QW3BL**	Legacy QW interior blank filler QW3BL	—	obsolete, NLA, no replacement; Schneider suggests local shee

EDH-SQD-00113 **QW1BL** Square D filler-plate **OBSOLETE, NLA, NO REPL**

Legacy QW interior blank filler QW1BL

OEM part number	QW1BL	**A**	S68, S69 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 1.5 in. (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	**B**	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	**A**	S68, S69, S67 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	**A**	S67 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

EDH-SQD-00114 **QW3BL** Square D filler-plate **OBSOLETE, NLA, NO REPL**

Legacy QW interior blank filler QW3BL

OEM part number	QW3BL	**A**	S68, S69 oem_spec
Description	Blank filler plate for old-design (QW) QMB interior, 3 in. (FAQ FA128647: one QW1BL + one QW3BL fill 4.5 in.) (FA122651 summary called QW3BL 4.5 in.; FA128647 arithmetic implies 3 in.)	**B**	same as above
Status	obsolete, NLA, no replacement; Schneider suggests local sheet-metal fabrication	**A**	S68, S69, S67 oem_spec
Aftermarket / reproduction	Fabricated filler plates (local sheet metal shop) per OEM suggestion	**A**	S67 oem_spec
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, Mounting-hole pattern, Material		
Open question	*Obtain an original QW1BL/QW3BL for reverse-engineering (dimensions, hole pattern, gauge) - strong remanufacture candidate*		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00106	**QMB306EX**	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	—	unknown
EDH-SQD-00107	**QMB306LEX**	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00108	**QMB310EX**	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	—	unknown
EDH-SQD-00109	**QMB310LEX**	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	—	unknown
EDH-SQD-00110	**QMB320EX**	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	—	unknown

EDH-SQD-00106	QMB306EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306EX (legacy QW retrofit)

OEM part number	QMB306EX	A	S66 oem_spec
Description	Plug-on extension assembly for QW (38 in.) interiors used with QMB362T replacing QMB3606T	A	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S66 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00107	QMB306LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)

OEM part number	QMB306LEX (Seen via search summary of Schneider FAQ only)	C	S61 oem_spec
Description	Plug-on extension kit for QW interiors (flat bus) used with QMB321T / QMB322TD replacing QMB303T / QMB306T	C	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S61 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00108	QMB310EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310EX (legacy QW retrofit)

OEM part number	QMB310EX	A	S68 oem_spec
Description	Plug-on extension assembly for QW (38 in., flatwise bus) interiors; used with QMB3400LA and QMB3300LA breaker units	A	S68, S67, S69, S73 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S68, S67, S69, S73 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00109	QMB310LEX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)

OEM part number	QMB310LEX	A	S64 oem_spec
Description	Plug-on extension assembly for QW interiors with flat bus bars; used with QMB323TD replacing QMB310T / QMB210T	A	S64, S72 oem_spec
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S64, S72 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

EDH-SQD-00110	QMB320EX	Square D	conversion-kit	STATUS UNKNOWN

QMB plug-on extension assembly QMB320EX (legacy QW retrofit)

OEM part number	QMB320EX	A	S65 oem_spec
Alternate / superseded numbers	QMB-320-EX [alias]	A	same as above
Description	Plug-on extension kit for QW panelboards/switchboards used with QMB364 replacing QMB3620 (printed 'QMB-320-EX')	A	same as above
Application	adapter between legacy QW interior bus and current-design QMB unit jaws (Function inferred from name 'plug-on extension' and usage context)	C	S65 inference
Installation location	Between QW interior bus and replacement QMB unit	D	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, Kit contents, Status		
Open question	*Is this extension still orderable?*		
Open question	*Difference between EX and LEX versions (flatwise vs edgewise bus?)*		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00101	**QMB210T**	Legacy QMB switch QMB210T (obsolete)	—	obsolete
EDH-SQD-00104	**QMB2240**	Legacy QMB switch QMB2240 (obsolete)	—	obsolete
EDH-SQD-00135	**QMB303T**	Legacy QMB switch QMB303T (obsolete)	—	obsolete
EDH-SQD-00136	**QMB306T**	Legacy QMB switch QMB306T (obsolete)	—	obsolete
EDH-SQD-00100	**QMB310T**	Legacy QMB switch QMB310T (obsolete)	—	obsolete
EDH-SQD-00117	**QMB323TD**	QMB replacement switch QMB323TD for legacy interiors	—	unknown
EDH-SQD-00103	**QMB3240**	Legacy QMB switch QMB3240 (obsolete)	—	obsolete
EDH-SQD-00105	**QMB3260**	Legacy QMB switch QMB3260 (obsolete)	—	obsolete
EDH-SQD-00099	**QMB3606T**	Legacy QMB switch QMB3606T (obsolete)	—	obsolete
EDH-SQD-00102	**QMB3620**	Legacy QMB switch QMB3620 (obsolete)	—	obsolete
EDH-SQD-00115	**QMB362T**	QMB replacement switch QMB362T for legacy interiors	—	unknown
EDH-SQD-00116	**QMB364**	QMB replacement switch QMB364 for legacy interiors	—	unknown
EDH-SQD-00134	**QMB3640**	Legacy QMB switch QMB3640 (obsolete)	—	obsolete

EDH-SQD-00101	QMB210T	Square D	other	OBSOLETE

Legacy QMB switch QMB210T (obsolete)

OEM part number	QMB210T	A	S72 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00104	QMB2240	Square D	other	OBSOLETE

Legacy QMB switch QMB2240 (obsolete)

OEM part number	QMB2240	A	S69 oem_spec
Description	Legacy QMB fusible switch 2P 400 A, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00135	QMB303T	Square D	other	OBSOLETE

Legacy QMB switch QMB303T (obsolete)

OEM part number	QMB303T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S61 oem_spec
Description	Legacy QMB fusible switch	D	S61 inference
Status	obsolete	C	S61 oem_spec
Replacement / successor	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00136	QMB306T	Square D	other	OBSOLETE

Legacy QMB switch QMB306T (obsolete)

OEM part number	QMB306T (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S61 oem_spec
Description	Legacy QMB fusible switch, Series 1	D	S61 inference
Status	obsolete	C	S61 oem_spec
Replacement / successor	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

EDH-SQD-00100	QMB310T	Square D	other	OBSOLETE

Legacy QMB switch QMB310T (obsolete)

OEM part number	QMB310T	A	S64 oem_spec
Description	Legacy QMB fusible switch, Series 1-4	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00117	QMB323TD	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB323TD for legacy interiors

OEM part number	QMB323TD	A	S64 oem_spec
Description	Replacement switch for QMB310T/QMB210T on QM (31 in.) 1961-Oct 1984 or QW pre-1984 interiors; use outside poles	A	S64, S72, S55 oem_spec
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB323TD a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00103	QMB3240	Square D	other	OBSOLETE

Legacy QMB switch QMB3240 (obsolete)

OEM part number	QMB3240	A	S68 oem_spec
Description	Legacy QMB branch switch, occupied 12 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00105	QMB3260	Square D	other	OBSOLETE

Legacy QMB switch QMB3260 (obsolete)

OEM part number	QMB3260	A	S67 oem_spec
Description	Legacy QMB fusible switch 600 A (pre-1984), occupied 15 in.	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00099	QMB3606T	Square D	other	OBSOLETE

Legacy QMB switch QMB3606T (obsolete)

OEM part number	QMB3606T	A	S66 oem_spec
Description	Legacy QMB fusible twin switch unit, 3P 600 V 60 A (Series 1-4 'Saflex')	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		
Open question	*Surplus listings disagree on QMB3606T series (Series 2 vs Series 4)*		

EDH-SQD-00102	QMB3620	Square D	other	OBSOLETE

Legacy QMB switch QMB3620 (obsolete)

OEM part number	QMB3620	A	S65 oem_spec
Description	Legacy QMB fusible switch (pre-1984 panelboards)	A	same as above
Application	branch (legacy QMB 'Saflex' panelboards/switchboards, QM/QW interiors)	A	same as above
Status	obsolete	A	same as above
Replacement / successor	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, renewal parts		

EDH-SQD-00115	QMB362T	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB362T for legacy interiors

OEM part number	QMB362T	A	S66 oem_spec
Description	Replacement QMB fusible switch named for QMB3606T (QM 1961-1984, or QW with QMB306EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB362T a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00116	QMB364	Square D	other	STATUS UNKNOWN

QMB replacement switch QMB364 for legacy interiors

OEM part number	QMB364	A	S65 oem_spec
Description	Replacement switch named for QMB3620 (1961-1984; QW needs QMB-320-EX)	A	same as above
Application	branch retrofit into legacy QMB interiors	A	same as above
Cross-links	Families: QMB-LEGACY, QMB		
Not yet documented	Dimensions, ratings		
Open question	*Is QMB364 a distinct current catalog number or shorthand for the W-suffix current unit (e.g. QMB362TW / QMB364W / QMB323TW)?*		

EDH-SQD-00134	QMB3640	Square D	other	OBSOLETE

Legacy QMB switch QMB3640 (obsolete)

OEM part number	QMB3640 (Seen via search-engine summary of Schneider FAQ; direct page not retrieved)	C	S61 oem_spec
Description	Legacy QMB fusible switch (3P 400 A implied by numbering - unverified)	D	S61 inference
Status	obsolete	C	S61 oem_spec
Replacement / successor	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C	same as above
Cross-links	Families: QMB-LEGACY		
Not yet documented	Dimensions, ratings		

4.4 QED-2 — Power-Style QED-2 Switchboard

FAM-SQD-001 · switchboard · aka QED2, QED 2, Power-Style QED-2, QED-2 Series 2, QED-2/S · markings: Square D, Schneider Electric

Free-standing UL 891 low-voltage switchboard, 91.5 in. high with base channels, front or front-and-rear accessible, NEMA 1 or 3R. Distribution is by group-mounted I-Line plug-on breaker sections (interiors up to 3000 A single-row / 2000 A double-row) or QMB/QMJ fusible switch sections, plus individually mounted PowerPact M/P/R, Masterpact NW or Bolt-Loc BP mains/feeders. Adding sections later requires the through-bus construction with splice-plate extensions; through bus sits at top, middle or bottom at 19.5, 27.5 or 36.0 in. from the front.

Attribute	Value	Cl.	Sources
Status	current (2700CT1101 v02 dated 2025-12 listed on se.com; OEM interiors catalog 2700CT1601 v1.3 2023-01) (Status inferred from current document listings; documents themselves not retrieved)	B	S51, S57 oem_spec
Era of manufacture	Catalog 2700CT1101 copyright 1995-2012; 'connect to existing' list names generations QED-2/S, QED-2 Series 2, QED-3, QED-4	A	S26 p. 1, p. 9; oem_spec
Voltage rating	600 Vac or 250 Vdc max	A	S26 p. 3; oem_spec
Main ampacity	Sections to 5000 A horizontal bus, 3000 A vertical bus; single mains to 5000 A; six subdivision mains to 4000 A; individually mounted feeders to 4000 A	A	same as above
Branch breakers accepted	Group-mounted I-Line: FA, FH, HD, HG, HJ, HL, QB, QD, QG, QJ, JD, JG, JJ, JL, LA, LH, LC, LI, FI, KI, MG, MJ, PG, PK, PJ, PL (and -C 100% variants), RG-C, RK-C, RJ-C, RL-C; group-mounted QMB/QMJ fusible switches 30-1200 A	A	S26 pp. 22, 29; oem_spec
Dimensions	Height 91.5 in. (2324 mm) with base channels; section widths 12, 24, 30, 36, 42, 48, 54 in.; frame depths 24, 36, 48, 54, 60 in.; NEMA 3R adds 11.50 in. front and 0.50 in. rear	A	S26 pp. 3, 24; oem_spec
i_line_interiors	Full-height I-Line distribution: 2000 A interiors (36/42/48 in. W; mounting space 54 or 72 in.) and 3000 A interior (54 in. W, L=72 in., R=40.5 in., min depth 36 in.)	A	S26 p. 23; oem_spec
i_line_section_limits	Max I-Line interior 3000 A, single row only; double-row interiors 2000 A max; no 4000 A I-Line section (Schneider FAQ seen via search summary)	B	S51 oem_spec
qmb_sections	Group-mounted QMB switch sections: 36 in. W max switch 400 A; 42 in. W 1200 A; 48 in. W (2) 1200 A; interior 2000 A (36/42 in.) or 3000 A (48 in.); 42 in. main switch connector access space	A	S26 pp. 25, 29; oem_spec
qmb_mount_height	QED-2 Series 2 eliminated the 72 in. QMB switch mounting height option; 63 in. is standard (Schneider FAQ via search summary)	B	S51 oem_spec
through_bus	Connect-to-existing data needed: factory order number, equipment type (QED-2/S, QED-2 Series 2, QED-3, QED-4, special), through-bus location top/middle/bottom, bus bar size 1.5 or 2.0 in. if <=2000 A, through-bus depth 19.5/27.5/36.0 in.	A	S26 p. 9; oem_spec
splice	Stand-alone QED switchboards have no through-bus feature; only boards built with through-bus construction and splice-plate extensions can have sections added	A	S48 oem_spec
bottom	All QED-2 switchboards (NEMA 1 or 3R) ship with bottom open; bottom closure plates are an order adder	A	S49 oem_spec

Breaker families associated: FA / FH (I-Line), H-frame HD/HG/HJ/HL/HR (I-Line), I-Limiter FI / KI / LI (I-Line), J-frame JD/JG/JJ/JL/JR (I-Line), LA / LH (I-Line), LC (I-Line, 600 A), M-frame MG/MJ (I-Line), P-frame PG/PJ/PK/PL (I-Line), PowerPact L-frame LD/LG/LJ/LL/LR (I-Line), Q-frame QB/QD/QG/QJ (I-Line), QMB circuit breaker units (H-, J-, L-frame), R-frame RG/RJ/RK/RL (I-Line)

Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S48 FA121592 FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections i; S49 FA308905 FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?; S51 FAQ000279508 / FAQ000257217 Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line se; S57 2700CT1601 OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Ca; S58 80043-055-16 Power-Style QED-2 Switchboards Instruction Bulletin

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMJ361T, QMJ362T, QMJ363T, QMJ363H, QMJ364T, QMJ364H, QMJ365, QMJ366, HRK30, QMB36R, QMB60R, QMB100R, HRK1020, QMB4060R, QMB600T6, QMB800T6, QMB300EK, QMB610EK, QMB200EK, 40251-016-51, 40256-034-50, 40251-018-50, 40256-014-50, 40251-162-50, 40560-270-50, 40256-039-50, VCEL030516H1, VCEL05012H1, VCEL07512H1, VCEL02114S1, VCELC02114S1, VCELC03038H1, VCELC05012H1, VCELC07512H1, VCEL06012H1, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, QMB1IMA_, QMB2IMA_, QMB3IMA_, QMB4IMA_, QMB8IMA_, 4052021450, 4052017302, 2330241601, 4052021650, 4020506501, 4028343750, 4025101851, 2342702001, 4052031850, 4052085601, 4052036750, 2142720241, 4052098601, 4028343550, 2342702400, 4028343250, HNM1BL, HNM4BL, HLN1BL, HLN4BL, HLN4EBL, HLW1BL, HLW4BL, HLW4EBL, 21593-20100, SL250, SL400, SL800M5, SL1200P5, SL1200P6, SL1200P7, S33930,

HQO306, 21590-20241, 2152620361

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00082	**AL150HD**	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	HD/HG 15-150 A **A**	unknown
EDH-SQD-00083	**AL175JD**	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	JD/JG 150-175 A **A**	unknown
EDH-SQD-00084	**AL250JD**	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	JD/JG 200-250 A **A**	unknown
EDH-SQD-00085	**AL400LA**	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	LA 125-400 A **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00086	**CU150HD**	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	HD/HG 15-150 A **A**	unknown
EDH-SQD-00087	**CU250JD**	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	JD/JG 150-250 A **A**	unknown
EDH-SQD-00088	**CU400LA**	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	LA 125-400 A **A**	Still listed in 2016 Digest Table 3.70

EDH-SQD-00082 — AL150HD — Square D — lug-kit — STATUS UNKNOWN

Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)

OEM part number	AL150HD	**A**	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #14-3/0 Al/Cu	**A**	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard lug for HD/HG/HJ/HL 15-150 A	**A**	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	**A**	S28 p. 18; oem_spec
	accessory	**A**	S112 p.124, Table 120; oem_spec
Installation location	line and/or load terminals (lay on top of breaker terminal, snap into insulating retainer)	**A**	same as above
Breaker compatibility	HD/HG 15-150 A	**A**	S28 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (standard)	**A**	S112 p.124, Table 120; oem_spec
Current rating	15-150 A	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	S28, S112 p. 18; oem_spec
Material	tin-plated aluminum (catalog: Al/Cu lugs are tin-plated Al)	**A**	S112 p.124, Table 120; oem_spec
wire_range	(1) 14-3/0 AWG Al or Cu	**A**	S112 p.124, Table 120; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37446 (EDH-SQD-00245), S37447 (EDH-SQD-00246)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Which short lug shield (S37446 60 A / S37447 150 A) applies when AL150HD is used on 60 A HD frames?*		

EDH-SQD-00083 — AL175JD — Square D — lug-kit — STATUS UNKNOWN

Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)

OEM part number	AL175JD	**A**	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1/0-4/0 Al/Cu	**A**	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire; standard for JD/JG/JJ/JL 150-175 A	**A**	S112 p.124, Table 120; oem_spec

Application	load terminals of QMB circuit breaker units	**A**	S28 p. 18; oem_spec
	accessory	**A**	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-175 A	**A**	S28 p. 18; oem_spec
	JD, JG, JJ, JL 150-175 A (standard)	**A**	S112 p.124, Table 120; oem_spec
Current rating	150-175 A	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	S28 p. 18; oem_spec
	3 lugs per kit (set of 3)	**A**	S112 p.124, Table 120; oem_spec
Material	aluminum (data sheet: Material Aluminium)	**A**	same as above
Identification features	Data sheet: mounting by screws; line and load (upstream/downstream); GTIN 785901686569	**A**	S113 p.1; oem_spec
wire_range	(1) 4-4/0 AWG Al or Cu	**A**	S112 p.124, Table 120; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00247)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00084 **AL250JD** Square D lug-kit **STATUS UNKNOWN**

Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)

OEM part number	AL250JD	**A**	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #3/0-350 kcmil Al/Cu	**A**	S28 p. 18; oem_spec
	Al lugs for Al or Cu wire; standard for JD/JG/JJ/JL 200-250 A, optional for 150-175 A	**A**	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	**A**	S28 p. 18; oem_spec
	accessory	**A**	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 200-250 A	**A**	S28 p. 18; oem_spec
	JD, JG, JJ, JL 200-250 A standard; 150-175 A optional	**A**	S112 p.124, Table 120; oem_spec
Current rating	150-250 A	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	S28, S112 p. 18; oem_spec
Material	tin-plated aluminum	**A**	S112 p.124, Table 120; oem_spec
wire_range	(1) 3/0 AWG-350 kcmil Al or Cu	**A**	S112 p.124, Table 120; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37448 (EDH-SQD-00247)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		
Open question	*Distributor (Stanion) lists AL250JD wire range as 8-1/0 AWG Al / 14-1/0 Cu, contradicting OEM 3/0-350 kcmil; distributor likely in error.*		

EDH-SQD-00085	AL400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)

OEM part number	AL400LA	A	S28, S114 Tables 10/11, p. 18; oem_spec
Description	Standard aluminum mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Al/Cu	A	S28 p. 18; oem_spec
	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	S114 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S114 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S28 p. 18; oem_spec
	Q4, LA, LH 125-400 A standard	A	S114 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S28, S114 p. 18; oem_spec
Material	aluminum lug body	A	S114 p.3-28, Table 3.88; oem_spec
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 1 AWG-600 kcmil or (2) 1 AWG-250 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00086	CU150HD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)

OEM part number	CU150HD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #14-2/0 Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	HD/HG 15-150 A	A	S28 p. 18; oem_spec
	HD, HG, HJ, HL 15-150 A (optional)	A	S112 p.124, Table 120; oem_spec
Current rating	15-150 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Material	copper (Cu-only lugs are made of copper)	A	S112 p.124, Table 120; oem_spec
wire_range	(1) 14-2/0 AWG Cu	A	S112 p.124, Table 120; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: H-frame HD/HG/HJ/HL/HR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00087	CU250JD	Square D	lug-kit	STATUS UNKNOWN

Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)

OEM part number	CU250JD	A	S28, S112 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1/0-300 kcmil Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only (optional)	A	S112 p.124, Table 120; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S112 p.124, Table 120; oem_spec
Breaker compatibility	JD/JG 150-250 A	A	S28 p. 18; oem_spec
	JD, JG, JJ, JL 150-250 A (optional)	A	S112 p.124, Table 120; oem_spec
Current rating	150-250 A	A	same as above
Kit contents	3 lug(s) per kit	A	S28, S112 p. 18; oem_spec
Material	copper	A	S112 p.124, Table 120; oem_spec
wire_range	(1) 1/0-300 kcmil Cu	A	S112 p.124, Table 120; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: J-frame JD/JG/JJ/JL/JR (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, use on I-Line versions of same frames not stated in this source		

EDH-SQD-00088	CU400LA	Square D	lug-kit	STILL LISTED IN 2016 D

Optional copper mechanical lug kit CU400LA (LA 125-400 A)

OEM part number	CU400LA	A	S28, S114 Tables 10/11, p. 18; oem_spec
Description	Optional copper mechanical lug kit; wire range (1) #1-600 or (2) #1-250 kcmil Cu	A	S28 p. 18; oem_spec
	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	S114 p.3-28, Table 3.88; oem_spec
Application	load terminals of QMB circuit breaker units	A	S28 p. 18; oem_spec
	accessory	A	S114 p.3-28, Table 3.88; oem_spec
Breaker compatibility	LA 125-400 A	A	S28 p. 18; oem_spec
	Q4, LA, LH 125-400 A optional	A	S114 p.3-28, Table 3.88; oem_spec
Kit contents	1 lug(s) per kit	A	S28, S114 p. 18; oem_spec
Material	copper lug body	A	S114 p.3-28, Table 3.88; oem_spec
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 1 AWG-600 kcmil Cu or (2) 1 AWG-250 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Families: QED-2, QMB, I-LINE · Breakers: LA / LH (I-Line), QMB circuit breaker units (H-, J-, L-frame), Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values, use on I-Line versions of same frames not stated in this source		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00069	**40251-287-50**	QMB/QMJ switch terminal lug 40251-287-50	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W **A**	unknown

EDH-SQD-00069 **40251-287-50** Square D lug **STATUS UNKNOWN**

QMB/QMJ switch terminal lug 40251-287-50

OEM part number	40251-287-50	**A**	S28, S63 Table 5, pp. 12-13; Table 7 p. 16; oem_spec
Description	Standard Al mechanical lug, 3/0 AWG-600 kcmil (2 per phase at 400/600 A, 3 per phase at 800 A)	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
	Lug assembly	**A**	S63 oem_spec
Application	branch load terminals of QMB/QMJ switch units	**A**	S28 oem_spec
	renewal part (field replaceable)	**A**	S63 oem_spec
Installation location	Load-side terminals of switch unit	**C**	S28 inference
Breaker compatibility	QMB225W, QMB325W, QMB326W, QMB365W, QMB366W, QMB327WT3, QMB367W	**A**	S28 Table 5, pp. 12-13; Table 7; oem_spec
	QMB367W, Series E1 (E01)	**A**	S63 oem_spec
Kit contents	Quantity: 1 per lug	**A**	same as above
Cross-links	Families: QED-2, QMB		
Not yet documented	applicability to other QMB unit sizes, Dimensions, Material, quantity per package, Torque values		

Interior

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00176	**CF16RJ63C36**	OEM QED-2 I-Line switchboard interior CF16RJ63C36	—	unknown
EDH-SQD-00172	**CF20R63C**	OEM QED-2 I-Line switchboard interior CF20R63C	—	unknown
EDH-SQD-00174	**CF20RJ63C**	OEM QED-2 I-Line switchboard interior CF20RJ63C	—	unknown
EDH-SQD-00173	**CF25R63C**	OEM QED-2 I-Line switchboard interior CF25R63C	—	unknown
EDH-SQD-00175	**CF30RJ63C**	OEM QED-2 I-Line switchboard interior CF30RJ63C	—	unknown

EDH-SQD-00176 **CF16RJ63C36** Square D interior **STATUS UNKNOWN**

OEM QED-2 I-Line switchboard interior CF16RJ63C36

OEM part number	CF16RJ63C36	**C**	S54 distributor
Description	1600 A double-row center-fed copper interior, 63 in. high, 48 in. W	**C**	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	**C**	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	**D**	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00172	CF20R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20R63C

OEM part number	CF20R63C	C	S54 distributor
Description	2000 A single-row center-feed copper I-Line switchboard interior, 63 in.; listing as CF20R63C36: 36 in. W, 36 in. D, 1200 A left-side max frame	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00174	CF20RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF20RJ63C

OEM part number	CF20RJ63C	C	S54 distributor
Description	2000 A double-row copper I-Line interior, 63 in. high, 24 in. D, 48 in. W; right side to 250 A, left side to 1200 A frames	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00173	CF25R63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF25R63C

OEM part number	CF25R63C	C	S54 distributor
Description	2500 A single-row copper I-Line switchboard interior, 63 in., 24 in. depth (Rexel: 'SWITCHBOARD INT CU I-LINE SR 2500A')	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

EDH-SQD-00175	CF30RJ63C	Square D	interior	STATUS UNKNOWN

OEM QED-2 I-Line switchboard interior CF30RJ63C

OEM part number	CF30RJ63C	C	S54 distributor
Description	Listed by Rexel as 'Panelboard interior QED-2 I-Line 63 height 3000A copper bus center feed', 54 in. W, 24 in. D (double-row per listing - conflicts with OEM FAQ that 3000 A is single-row only)	C	same as above
Application	OEM interior for building custom QED-2 I-Line distribution sections (catalog 2700CT1601)	C	S54, S57 distributor
Identification features	Number pattern apparently CF<amps/100><R=single row | RJ=double row><height in.><C=copper?><width suffix>	D	S54 inference
Cross-links	Families: QED-2, I-LINE		
Not yet documented	bus material confirm, feed configuration, full ratings, weight		
Open question	*Decode CF / R / RJ / 63 / C / A suffixes from 2700CT1601 selection tables*		
Open question	*CF30RJ63C: double-row at 3000 A contradicts FAQ - verify*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00165	**8000602003**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00166	**8023317701**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as

EDH-SQD-00165 **8000602003** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf

OEM part number	8000602003	**A**	S46 oem_spec
Description	Hinge frame leaf; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00166 **8023317701** Square D hardware-kit **ORDERABLE VIA DISTRIBU**

NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf

OEM part number	8023317701	**A**	S46 oem_spec
Description	Hinge door leaf; NEMA 3R door hinge set - 4 sets per N3R door	**A**	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	**A**	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	**A**	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00163	**21427-20401**	QED cover screw 21427-20401	—	unknown
EDH-SQD-00169	**2150720200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00168	**2271020200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00170	**2300100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00171	**2370100200**	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as
EDH-SQD-00167	**8000602001**	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	NEMA 3R QED2, CMM and Speed-D switchboards **A**	orderable via distributor; some may need to be forced in as

EDH-SQD-00163 **21427-20401** Square D fastener **STATUS UNKNOWN**

QED cover screw 21427-20401

OEM part number	21427-20401 (OEM FAQ text seen only via search snippets)	**B**	S44 oem_spec
Description	1/4-20 x 1-1/4 in. self-tapping screw fastening cover plates to front of QED switchboard	**B**	same as above
Cross-links	Families: QED-2		
Not yet documented	Finish / plating, head style		

EDH-SQD-00169	2150720200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)

OEM part number	2150720200	A	S46 oem_spec
Description	Door leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00168	2271020200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set)

OEM part number	2271020200	A	S46 oem_spec
Description	Frame leaf bolt (2 per set); NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00170	2300100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut

OEM part number	2300100200	A	S46 oem_spec
Description	Nut; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00171	2370100200	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer

OEM part number	2370100200	A	S46 oem_spec
Description	Washer; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

EDH-SQD-00167	8000602001	Square D	fastener	ORDERABLE VIA DISTRIBU

NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin

OEM part number	8000602001	A	S46 oem_spec
Description	Hinge pin; NEMA 3R door hinge set - 4 sets per N3R door	A	same as above
Breaker compatibility	NEMA 3R QED2, CMM and Speed-D switchboards	A	same as above
Status	orderable via distributor; some may need to be forced in as ad hoc items	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	Dimensions, Material		

Switch Unit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00043	**QMB368W**	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	1200 A branch switch or group-mounted six-disconnect main with Class L A	unknown

EDH-SQD-00043	QMB368W	Square D	switch-unit	STATUS UNKNOWN

QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)

OEM part number	QMB368W	A	S70 oem_spec
Description	1200 A QMB fusible switch; 3-pole, 600 Vac max, 24 in. unit (distributor) (Ratings/height from distributor; existence/restriction from OEM FAQ)	B	S70, S55 oem_spec
Application	Restricted to QED-2 switchboards with 42 in. (qty 1) and 48 in. (qty 2) wide QMB distribution sections; cannot be installed in QMB panelboards	A	S70 oem_spec
Breaker compatibility	1200 A branch switch or group-mounted six-disconnect main with Class L fuses, 100 kA at 600 Vac; a single 1200 A main switch must be Bolt-Loc	A	S26 p. 29 note c; oem_spec
Kit contents	(4) #3/0-600 kcmil per phase	A	S26 p. 29; oem_spec
Dimensions	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2	A	same as above
Cross-links	Families: QED-2		
Not yet documented	horsepower ratings, renewal parts		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00164	**50552-108-01**	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	—	unknown
EDH-SQD-00162	**80031-024-02**	QED plug-button for unused holes 80031-024-02	—	unknown

EDH-SQD-00164	50552-108-01	Square D	other	STATUS UNKNOWN

NEMA 3R QED-2 switchboard replacement door handle 50552-108-01

OEM part number	50552-108-01	A	S45 oem_spec
Description	Replacement handle for outdoor (NEMA 3R) QED-2 switchboard	A	same as above
Cross-links	Families: QED-2		
Not yet documented	Dimensions, lockable		

EDH-SQD-00162	80031-024-02	Square D	other	STATUS UNKNOWN

QED plug-button for unused holes 80031-024-02

OEM part number	80031-024-02	A	S43 oem_spec
Description	Plug-button that seals/plugs unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards, including Speed-D	A	same as above
Cross-links	Families: QED-2, SPEED-D		
Not yet documented	hole diameter, Material		

4.5 SPEED-D — Speed-D Merchandised Service Section Switchboard

FAM-SQD-002 · switchboard · aka Speed D, SpeedD · markings: Square D

Merchandised (quick-ship) service-section switchboard family covered in the same catalog as QED-2 (Class 2741/2742). Speed-D boards with provisions for current-series QMB branch devices ship with (2) 15 in. QMB15BLW closing plates.

Attribute	Value	Cl.	Sources
Era of manufacture	In 2700CT1101 (2012)	A	S26 p. 47; oem_spec
qmb_fillers	Furnished with (2) 15 in. closing plates QMB15BLW; other closing plates QMB1BLW, QMB3BLW, QMB6BLW	A	S31 oem_spec

Key documents: S26 2700CT1101 Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switc; S31 FA225625 FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with b

Also fits this family (entry printed elsewhere): QMB221TW, QMB221HW, QMB222TW, QMB222HW, QMB223TW, QMB223HW, QMB224W, QMB225W, QMB225WT3, QMB321TW, QMB321HW, QMB322TW, QMB322HW, QMB323TW, QMB323HW, QMB324W, QMB325W, QMB325WT3, QMB326W, QMB326WT3, QMB327WT3, QMB261TW, QMB261HW, QMB262TW, QMB262HW, QMB263TW, QMB263HW, QMB264W, QMB361TW, QMB361HW, QMB362TW, QMB362HW, QMB362T21W, QMB363TW, QMB363HW, QMB363T31W, QMB363T32W, QMB364W, QMB365W, QMB365WT6, QMB366W, QMB367W, QMB1BLW, QMB3BLW, QMB6BLW, QMB15BLW, 80031-024-02, 8000602003, 8023317701, 8000602001, 2271020200, 2150720200, 2300100200, 2370100200

4.6 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family Square D FA/FH/FC/FI (F-frame 100/150 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00252	**AL100FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 35-100 A standard; 15-30 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00251	**AL100FA4**	Square D FA mechanical lug kit (Al lugs) - FC	FC 35-100 A standard; FC 15-30 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00253	**AL100TF**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00254	**AL150FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA (only) 150 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00250	**AL50FA**	Square D FA mechanical lug kit (Al lugs) - FA	FA, FH, FI 15-30 A standard; 35-100 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00262	**CU100FA**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC, FI 15-100 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00263	**CU100TF**	Square D FA mechanical lug kit (Cu lugs) - FA	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00261	**CU30FA4**	Square D FA mechanical lug kit (Cu lugs) - FC	FC 15-30 A standard **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00282	**CVC100FA**	Square D FA Cu compression lug kit	FA, FH, FC, FI **A**	unknown
EDH-SQD-00288	**PDC3FA2**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) **A**	unknown
EDH-SQD-00287	**PDC6FA6**	Square D FA power distribution connector (multi-wire load lug)	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end) **A**	unknown
EDH-SQD-00272	**VC100FA**	Square D FA Al compression lug kit	FA, FH, FC, FI **A**	unknown

EDH-SQD-00252	AL100FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100FA	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	FA, FH, FI 35-100 A standard; 15-30 A optional	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Material	aluminum lug body	**A**	same as above
Status	Still listed in 2016 Digest Table 3.70	**A**	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 14-1/0 AWG Cu or (1) 12-1/0 AWG Al	**A**	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		
Open question	*Digest Plus web table (search snippet) gives 12-1/0 AWG Al; another edition shows 12-1 AWG - confirm per edition.*		

EDH-SQD-00251	AL100FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FC

OEM part number	AL100FA4	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 35-100 A standard; FC 15-30 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 14-3 AWG Cu or (1) 12-1 AWG Al	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00253	AL100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL100TF	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 12-3 AWG Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00254	AL150FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL150FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA (only) 150 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 2-3/0 AWG	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00250	AL50FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Al lugs) - FA

OEM part number	AL50FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI 15-30 A standard; 35-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 14-4 AWG Cu or (1) 12-4 AWG Al	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00262	CU100FA	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100FA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI 15-100 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 14-1 AWG Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00263	CU100TF	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FA

OEM part number	CU100TF	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC 15-100 A optional; OFF end only when OFF end is load end	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 12-3 AWG Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00261	CU30FA4	Square D	lug-kit	STILL LISTED IN 2016 D

Square D FA mechanical lug kit (Cu lugs) - FC

OEM part number	CU30FA4	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FC 15-30 A standard	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 14-10 AWG Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00282	CVC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Cu compression lug kit

OEM part number	CVC100FA	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.4 in	A	same as above
wire_range	6-1/0 AWG Cu	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00288	PDC3FA2	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC3FA2	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.2 in	A	same as above
wire_range	(3) 14-2 AWG Cu	A	S114 p.3-29, Table 3.92; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00287	PDC6FA6	Square D	lug-kit	STATUS UNKNOWN

Square D FA power distribution connector (multi-wire load lug)

OEM part number	PDC6FA6	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	FAL, FHL, FCL 15-100 A (OFF end only when OFF is load end)	A	same as above
Kit contents	3 per kit	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.0 in	A	same as above
wire_range	(6) 14-6 AWG Cu	A	S114 p.3-29, Table 3.92; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00272	VC100FA	Square D	lug-kit	STATUS UNKNOWN

Square D FA Al compression lug kit

OEM part number	VC100FA	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FC, FI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
wire_range	8-1/0 AWG	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00294	**FAT**	Square D control wire terminal / tapped lug (FA)	FA, FH, FI A	unknown

EDH-SQD-00294	FAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (FA)

OEM part number	FAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041; use fully insulated 0.250 in slip-on connectors	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FA, FH, FI	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D FA/FH/FC/FI (F-frame 100/150 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D KA/KH/KC/KI (K-frame 250 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00255	**AL250KA**	Square D KA mechanical lug kit (Al lugs) - KI	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC **A**	unknown
EDH-SQD-00256	**AL250KI**	Square D KA mechanical lug kit (Al lugs) - KI	KI 200-250 A standard; KI 110-175 A optional **A**	unknown
EDH-SQD-00264	**CU250KA**	Square D KA mechanical lug kit (Cu lugs) - KI	KI 110-250 A optional **A**	unknown
EDH-SQD-00283	**CVC250KA3**	Square D KA Cu compression lug kit	KI **A**	unknown
EDH-SQD-00273	**VC250KA3**	Square D KA Al compression lug kit	KI **A**	unknown
EDH-SQD-00274	**VC250KA35**	Square D KA Al compression lug kit	KI **A**	unknown

EDH-SQD-00255 AL250KA — Square D — lug-kit — STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KA	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI 110-175 A standard (2012 table); distributors also list KA, KH, KC	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Material	aluminum lug body	**A**	same as above
wire_range	(1) 4 AWG-350 kcmil	**A**	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*AL250KA: OEM 2012 Digest lists only KI application; confirm KA/KH/KC applicability from KA-era Digest or instruction bulletin.*		

EDH-SQD-00256 AL250KI — Square D — lug-kit — STATUS UNKNOWN

Square D KA mechanical lug kit (Al lugs) - KI

OEM part number	AL250KI	**A**	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI 200-250 A standard; KI 110-175 A optional	**A**	same as above
Kit contents	3 lug(s) per kit	**A**	same as above
Material	aluminum lug body	**A**	same as above
wire_range	(1) 1/0 AWG-350 kcmil	**A**	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00264	CU250KA	Square D	lug-kit	STATUS UNKNOWN

Square D KA mechanical lug kit (Cu lugs) - KI

OEM part number	CU250KA	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI 110-250 A optional	A	same as above
Kit contents	3 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
wire_range	(1) 4 AWG-250 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00283	CVC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Cu compression lug kit

OEM part number	CVC250KA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
wire_range	2/0 AWG-300 kcmil Cu	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00273	VC250KA3	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	KI	A	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	A	same as above
wire_range	4 AWG-300 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00274	VC250KA35	Square D	lug-kit	STATUS UNKNOWN

Square D KA Al compression lug kit

OEM part number	VC250KA35	**A**	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI	**A**	same as above
Kit contents	3 lug(s) per kit; 1 lug(s) per terminal	**A**	same as above
Material	aluminum compression lug	**A**	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.5 in	**A**	same as above
wire_range	250-350 kcmil	**A**	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00295	**AL250KIT**	Square D control wire terminal / tapped lug (KI)	KI **A**	unknown

EDH-SQD-00295	AL250KIT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (KI)

OEM part number	AL250KIT	**A**	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	KI	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D KA/KH/KC/KI (K-frame 250 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2016 shows 'AL250KAT' in the control-wire illustration while 2012 table lists AL250KIT for KI - verify which number is current for KA/KI.*		

Breaker family Square D LA/LH (L-frame 400 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00257	**AL400LH7**	Square D LA mechanical lug kit (Al lugs) - Q4	Q4, LA, LH 125-400 A optional **A**	Still listed in 2016 Digest Table 3.70
EDH-SQD-00284	**CVC400LA3**	Square D LA Cu compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00285	**CVC400LA5**	Square D LA Cu compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00290	**PDC12LA4**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00291	**PDC4LA250**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00289	**PDC6LA20**	Square D LA power distribution connector (multi-wire load lug)	LAL, LHL, Q4L 125-400 A **A**	unknown
EDH-SQD-00276	**VC400LA3**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00275	**VC400LA35**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00277	**VC400LA5**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown
EDH-SQD-00278	**VC400LA7**	Square D LA Al compression lug kit	LA, LH, Q4 **A**	unknown

EDH-SQD-00257	AL400LH7	Square D	lug-kit	STILL LISTED IN 2016 D

Square D LA mechanical lug kit (Al lugs) - Q4

OEM part number	AL400LH7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH 125-400 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
Status	Still listed in 2016 Digest Table 3.70	A	S115 p.3-26, Table 3.70; oem_spec
wire_range	(1) 350-750 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Torque values		

EDH-SQD-00284	CVC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.3 in	A	same as above
wire_range	2/0 AWG-300 kcmil Cu	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00285	CVC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Cu compression lug kit

OEM part number	CVC400LA5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.3 in	A	same as above
wire_range	250-500 kcmil Cu	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00290	PDC12LA4	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC12LA4	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 1.25 in	A	same as above
wire_range	(12) 14-4 AWG Cu	A	S114 p.3-29, Table 3.92; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00291	PDC4LA250	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC4LA250	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.0 in	A	same as above
wire_range	(3) 14-2 AWG + (1) 2 AWG-250 kcmil Cu	A	S114 p.3-29, Table 3.92; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00289	PDC6LA20	Square D	lug-kit	STATUS UNKNOWN

Square D LA power distribution connector (multi-wire load lug)

OEM part number	PDC6LA20	A	S114 p.3-29, Table 3.92; oem_spec
Description	Field-replacement PDC lug for multiple load connections; tin-plated Al connectors and hardware; load end only; Cu wire only; UL508 / UL1995; not for I-Line	A	same as above
Application	accessory	A	same as above
Installation location	load end	A	same as above
Breaker compatibility	LAL, LHL, Q4L 125-400 A	A	same as above
Kit contents	1 per kit	A	same as above
Material	tin-plated aluminum	A	same as above
Dimensions	Dimension A 2.25 in	A	same as above
wire_range	(6) 12-2/0 AWG Cu	A	S114 p.3-29, Table 3.92; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00276	VC400LA3	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.0 in	A	same as above
wire_range	4 AWG-300 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00275	VC400LA35	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA35	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.25 in	A	same as above
wire_range	250-350 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00277	VC400LA5	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.2 in	A	same as above
wire_range	2/0 AWG-500 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00278	VC400LA7	Square D	lug-kit	STATUS UNKNOWN

Square D LA Al compression lug kit

OEM part number	VC400LA7	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LA, LH, Q4	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 2.5 in	A	same as above
wire_range	500-750 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00296	**AL400LAT**	Square D control wire terminal / tapped lug (Q4)	Q4, LA, LH A	unknown

EDH-SQD-00296	AL400LAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (Q4)

OEM part number	AL400LAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Q4, LA, LH	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LA/LH (L-frame 400 A), Square D Q4 (400 A, LA-type lugs)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D LC/LI/LE/LX/LXI (L-frame 600 A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00258	**AL600LI35**	Square D LI mechanical lug kit (Al lugs) - LE	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional A	unknown
EDH-SQD-00259	**AL600LI5**	Square D LI mechanical lug kit (Al lugs) - LI	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional A	unknown
EDH-SQD-00260	**AL600LI7**	Square D LI mechanical lug kit (Al lugs) - LC	LC, LI, LE, LX, LXI optional A	unknown
EDH-SQD-00265	**CU600LI35**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00266	**CU600LI5**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00267	**CU600LI7**	Square D LI mechanical lug kit (Cu lugs) - LI	LI, LE, LX, LXI optional A	unknown
EDH-SQD-00286	**CVC600LI5**	Square D LI Cu compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00279	**VC600LI3**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00280	**VC600LI5**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown
EDH-SQD-00281	**VC600LI7**	Square D LI Al compression lug kit	LI, LE, LX, LXI (not I-Line) A	unknown

EDH-SQD-00258	AL600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LE

OEM part number	AL600LI35	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LE, LX, LXI 100-250 A standard; LC, LI, LE, LX, LXI 300-600 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
wire_range	(2) 1 AWG-350 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00259	AL600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LI

OEM part number	AL600LI5	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI 300-600 A standard; LE, LX, LXI 100-250 A optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
wire_range	(2) 4/0 AWG-500 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00260	AL600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Al lugs) - LC

OEM part number	AL600LI7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Al lugs for use with Al or Cu wire. Unless otherwise specified, wire sizes apply to both Al and Cu conductors.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	aluminum lug body	A	same as above
wire_range	(1) 500-750 kcmil	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00265	CU600LI35	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI35	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
wire_range	(2) 1 AWG-350 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00266	CU600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI5	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
wire_range	(2) 4/0 AWG-500 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00267	CU600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI mechanical lug kit (Cu lugs) - LI

OEM part number	CU600LI7	A	S114 p.3-28, Table 3.88; oem_spec
Description	Cu lugs for use with Cu wire only. Unless otherwise specified, wire sizes apply to both Al and Cu conductors. Use suffix 8002 for factory-installed Cu lugs.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI optional	A	same as above
Kit contents	1 lug(s) per kit	A	same as above
Material	copper lug body	A	same as above
wire_range	(1) 500-750 kcmil Cu	A	S114 p.3-28, Table 3.88; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00286	CVC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Cu compression lug kit

OEM part number	CVC600LI5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Copper compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	copper compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
wire_range	250-500 kcmil Cu	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00279	VC600LI3	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI3	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 1.05 in	A	same as above
wire_range	4 AWG-300 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00280	VC600LI5	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI5	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	2 lug(s) per kit; 2 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.20 in	A	same as above
wire_range	2/0 AWG-500 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00281	VC600LI7	Square D	lug-kit	STATUS UNKNOWN

Square D LI Al compression lug kit

OEM part number	VC600LI7	A	S114 p.3-29, Table 3.91; oem_spec
Description	Aluminum compression lug kit, field-installable (see instruction bulletins for tools); cannot be used on I-Line breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LI, LE, LX, LXI (not I-Line)	A	same as above
Kit contents	1 lug(s) per kit; 1 lug(s) per terminal	A	same as above
Material	aluminum compression lug	A	same as above
Dimensions	Dimension A (max extension past end of breaker) 3.45 in	A	same as above
wire_range	500-750 kcmil	A	S114 p.3-29, Table 3.91; oem_spec
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00310	**AL600IN**	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	LC, LI, LE, LX, LXI A	unknown
EDH-SQD-00297	**AL600LI35T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown
EDH-SQD-00298	**AL600LI5T**	Square D control wire terminal / tapped lug (LC)	LC, LI, LXI, LX, LE A	unknown

EDH-SQD-00310	AL600IN	Square D	breaker-accessory	STATUS UNKNOWN

Square D LC/LI/LE/LX/LXI threaded terminal clip kit

OEM part number	AL600IN	A	S114 p.3-20, Table 3.71; oem_spec
Description	Threaded terminal clip kit; snaps onto bottom of terminal to allow bolted connection when the standard lug is removed (P-MT configuration)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LE, LX, LXI	A	same as above
Kit contents	3 clips per kit	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00297	AL600LI35T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI35T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00298	AL600LI5T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (LC)

OEM part number	AL600LI5T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LC, LI, LXI, LX, LE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D LC/LI/LE/LX/LXI (L-frame 600 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D MA/MH/MX/ME (M-frame 1000 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00300	**AL1000MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown
EDH-SQD-00299	**AL900MAT**	Square D control wire terminal / tapped lug (MA)	MA, MH, MX, ME A	unknown

EDH-SQD-00300	AL1000MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL1000MAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00299	AL900MAT	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (MA)

OEM part number	AL900MAT	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MA, MH, MX, ME	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D MA/MH/MX/ME (M-frame 1000 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D NA/NC/NX/NE (N-frame 1200 A)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00301	**AL1200NE6T**	Square D control wire terminal / tapped lug (NA)	NA, NC, NX, NE A	unknown

EDH-SQD-00301	AL1200NE6T	Square D	breaker-accessory	STATUS UNKNOWN

Square D control wire terminal / tapped lug (NA)

OEM part number	AL1200NE6T	A	S114 p.3-17, Table 3.61; oem_spec
Description	Control wire termination kit (tapped lug) for 22-14 AWG control wire via crimp terminal; factory-installed version suffix 8041	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NA, NC, NX, NE	A	same as above
Kit contents	1 per standard package	A	same as above
Cross-links	Breakers: Square D NA/NC/NX/NE (N-frame 1200 A)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact D-Frame (DG/DJ/DL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00268	**32508**	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	D-frame 3P 400 A A	unknown
EDH-SQD-00269	**32510**	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	D-frame 3P 600 A A	unknown
EDH-SQD-00293	**PDC12DG4**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown
EDH-SQD-00292	**PDC5DG20**	PowerPact D-frame power distribution connector	DG, DJ, DL 150-600 A A	unknown

EDH-SQD-00268	32508	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 400 A field-installable lug kit (with terminal cover)

OEM part number	32508	A	S114 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32508 (Printed without S prefix)	D	S114 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 400 A	A	S114 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 400 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Material	not stated	A	same as above
wire_range	(1) 2 AWG-600 kcmil stranded Cu or (1) 2 AWG-500 kcmil stranded Al	A	S114 p.3-28, Table 3.89; oem_spec
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Requires	29348 (EDH-SQD-00181)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00269	32510	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame 600 A field-installable lug kit (with terminal cover)

OEM part number	32510	A	S114 p.3-28, Table 3.89; oem_spec
Alternate / superseded numbers	S32510 (Printed without S prefix)	D	S114 alias; p.3-28; inference
Description	Field-installable lug kit, terminal cover included, 600 A	A	S114 p.3-28, Table 3.89; oem_spec
Application	accessory	A	same as above
Breaker compatibility	D-frame 3P 600 A	A	same as above
Poles	3	A	same as above
Kit contents	kit for 3 poles incl. terminal cover	A	same as above
Material	not stated	A	same as above
wire_range	(2) 2/0 AWG-350 kcmil stranded Cu or (2) 2/0 AWG-500 kcmil stranded Al	A	S114 p.3-28, Table 3.89; oem_spec
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00293	PDC12DG4	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC12DG4	A	S114 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
wire_range	(12) 14-4 AWG	A	S114 p.3-29, Table 3.93; oem_spec
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00292	PDC5DG20	Square D	lug-kit	STATUS UNKNOWN

PowerPact D-frame power distribution connector

OEM part number	PDC5DG20	A	S114 p.3-29, Table 3.93; oem_spec
Description	Power distribution connector for D-frame; kit includes long terminal shield (adds 1.65 in vs standard lug with short shield)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	DG, DJ, DL 150-600 A	A	same as above
Kit contents	3 per kit	A	same as above
Material	not stated	A	same as above
Dimensions	Dimension A 1.28-1.31 in	A	same as above
wire_range	(3) 14-2 AWG and (2) 14-2/0 AWG	A	S114 p.3-29, Table 3.93; oem_spec
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00270	**36965**	PowerPact D-frame terminal shield 3P	D-frame (3P) A	unknown

EDH-SQD-00270	36965	Square D	barrier	STATUS UNKNOWN

PowerPact D-frame terminal shield 3P

OEM part number	36965	A	S114 p.3-28, Table 3.90; oem_spec
Description	Terminal shield for D-frame 3P	A	same as above
Application	accessory	A	same as above
Breaker compatibility	D-frame (3P)	A	same as above
Kit contents	1 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00208	**CYA060HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00209	**CYA150HD**	PowerPact H-frame Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00190	**PDC3HD2**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00189	**PDC6HD6**	PowerPact H-Frame power distribution connector (multi-wire load lug)	PowerPact H-Frame A	unknown
EDH-SQD-00195	**YA060HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown
EDH-SQD-00196	**YA150HD**	PowerPact H-frame Al/Cu compression lug kit	PowerPact H-frame A	unknown

EDH-SQD-00208	CYA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA060HD	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	6-1/0 AWG Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00209	CYA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Cu compression lug kit

OEM part number	CYA150HD	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	4-2/0 AWG Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00190	PDC3HD2	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3HD2	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(3) 2 AWG or 14-3 AWG Cu	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00189	PDC6HD6	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6HD6	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact H-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 8-6 AWG or 14-10 AWG Cu per terminal; 1 terminal per kit... (6 wires)	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00195	YA060HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA060HD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=60 A Al/Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	6-2 AWG Cu or Al; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00196	YA150HD	Square D	lug-kit	STATUS UNKNOWN

PowerPact H-frame Al/Cu compression lug kit

OEM part number	YA150HD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	1/0-4/0 AWG Cu or Al; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Requires	S37449 (EDH-SQD-00248)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00231	**S37432**	PowerPact H-frame mixed rear connection kit	PowerPact H-frame A	unknown
EDH-SQD-00234	**S37436**	PowerPact H-frame short terminal cover 3p	PowerPact H-frame A	unknown
EDH-SQD-00245	**S37446**	PowerPact H-frame 60 A short lug shield	PowerPact H-frame A	unknown
EDH-SQD-00246	**S37447**	PowerPact H-frame 150 A short lug shield	PowerPact H-frame A	unknown
EDH-SQD-00248	**S37449**	PowerPact H-frame long lug shield	PowerPact H-frame A	unknown

EDH-SQD-00231	S37432	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame mixed rear connection kit

OEM part number	S37432	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, H-frame 3P (4 short + 2 long rear connections, hardware, 2 terminal covers)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00234	S37436	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame short terminal cover 3p

OEM part number	S37436	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, H-frame	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, H-frame	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00245	S37446	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 60 A short lug shield

OEM part number	S37446	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 60 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3 AWG	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00246	S37447	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame 150 A short lug shield

OEM part number	S37447	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame 150 A short lug shield (mechanical lugs); extension 'B' past end of breaker 0.50 in; max wire size 3/0 AWG	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 0.50 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00248	S37449	Square D	barrier	STATUS UNKNOWN

PowerPact H-frame long lug shield

OEM part number	S37449	A	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: H-frame long lug shield (PDC and compression lugs: PDC6HD6, PDC3HD2, YA060HD, YA150HD, CYA060HD, CYA150HD); extension 'B' past end of breaker 2.24 in	A	same as above
Application	accessory	A	same as above
Installation location	over line/load terminals	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Kit contents	1 per kit	A	same as above
Dimensions	dimension B (extension past breaker end) = 2.24 in	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00177	**S37423**	PowerPact H-frame control wire terminal for mechanical lugs	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) **A**	unknown
EDH-SQD-00182	**S37425**	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	HD/HG/HJ/HL **A**	unknown
EDH-SQD-00184	**S37426**	PowerPact H-frame terminal nut insert (M6) for bus bar connection	HD/HG/HJ/HL **A**	unknown
EDH-SQD-00179	**S37429**	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	H-frame with terminal nut inserts **A**	unknown
EDH-SQD-00232	**S37433**	PowerPact H-frame short rear connections (set of 2)	PowerPact H-frame **A**	unknown
EDH-SQD-00233	**S37434**	PowerPact H-frame long rear connections (set of 2)	PowerPact H-frame **A**	unknown
EDH-SQD-00183	**S37444**	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	HD/HG/HJ/HL **A**	unknown

EDH-SQD-00177	S37423	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for mechanical lugs

OEM part number	S37423	A	S112 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	A	same as above
Application	accessory	A	same as above
Installation location	under mechanical lug at breaker terminal	A	same as above
Breaker compatibility	H-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00182	S37425	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37425	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00184	S37426	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (M6) for bus bar connection

OEM part number	S37426	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	2 per kit	A	same as above
Fasteners	tap M6; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00179	S37429	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37429	A	S112 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	H-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00232	S37433	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame short rear connections (set of 2)

OEM part number	S37433	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), H-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00233	S37434	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame long rear connections (set of 2)

OEM part number	S37434	A	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), H-frame	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact H-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Long rear connections (set of 2), H-frame	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00183	S37444	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37444	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	HD/HG/HJ/HL	A	same as above
Kit contents	3 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact H-Frame (HD/HG/HJ/HL/HR)		
Not yet documented	Dimensions, OEM instruction document, Status		

Breaker family Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00210	**CYA150JD**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00211	**CYA250J3**	PowerPact J-frame Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00192	**PDC3JD20**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame A	unknown
EDH-SQD-00191	**PDC6JD4**	PowerPact J-Frame power distribution connector (multi-wire load lug)	PowerPact J-Frame A	unknown
EDH-SQD-00197	**YA150JD**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame A	unknown
EDH-SQD-00198	**YA250J35**	PowerPact J-frame Al/Cu compression lug kit	PowerPact J-frame A	unknown

EDH-SQD-00210	CYA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA150JD	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=150 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	4-2/0 AWG Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00211	CYA250J3	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Cu compression lug kit

OEM part number	CYA250J3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	2/0 AWG-300 kcmil Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00192	PDC3JD20	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC3JD20	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	3 total: (2) 14-6 AWG or 4-1 AWG Cu and (1) 3-2/0 AWG Cu	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		
Open question	*Table 130 lists 'PDC3JD2' for long lug shield compatibility while Table 127 lists PDC3JD20 - same part?*		

EDH-SQD-00191	PDC6JD4	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC6JD4	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact J-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(6) 8-4 AWG or 14-10 AWG Cu	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00197	YA150JD	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA150JD	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=200 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	1-3/0 AWG Cu or Al; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00198	YA250J35	Square D	lug-kit	STATUS UNKNOWN

PowerPact J-frame Al/Cu compression lug kit

OEM part number	YA250J35	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Current rating	<=250 A (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 2 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	3/0 AWG-350 kcmil Cu or Al; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Requires	S37450 (EDH-SQD-00249)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00238	**S37440**	PowerPact J-frame short terminal cover 3p	PowerPact J-frame **A**	unknown
EDH-SQD-00247	**S37448**	PowerPact J-frame short lug shield	PowerPact J-frame **A**	unknown
EDH-SQD-00249	**S37450**	PowerPact J-frame long lug shield	PowerPact J-frame **A**	unknown

EDH-SQD-00238	S37440	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short terminal cover 3p

OEM part number	S37440	**A**	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, J-frame	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over breaker terminals	**A**	same as above
Breaker compatibility	PowerPact J-frame	**A**	same as above
Poles	3	**A**	same as above
Kit contents	Short terminal cover 3P, J-frame	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00247	S37448	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame short lug shield

OEM part number	S37448	**A**	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame short lug shield (mechanical lugs); extension 'B' past end of breaker 0.24 in; max wire size 350 kcmil	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over line/load terminals	**A**	same as above
Breaker compatibility	PowerPact J-frame	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Dimensions	dimension B (extension past breaker end) = 0.24 in	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

EDH-SQD-00249	S37450	Square D	barrier	STATUS UNKNOWN

PowerPact J-frame long lug shield

OEM part number	S37450	**A**	S112 p.129, Table 130; oem_spec
Description	Terminal shield / phase barrier: J-frame long lug shield (PDC and compression lugs: PDC6JD4, PDC3JD2(0), YA150JD, CYA150JD, CYA250J3); extension 'B' past end of breaker 1.68 in	**A**	same as above
Application	accessory	**A**	same as above
Installation location	over line/load terminals	**A**	same as above
Breaker compatibility	PowerPact J-frame	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Dimensions	dimension B (extension past breaker end) = 1.68 in	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00178	**S37424**	PowerPact J-frame control wire terminal for mechanical lugs	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable) **A**	unknown
EDH-SQD-00185	**S37427**	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	JD/JG/JJ/JL **A**	unknown
EDH-SQD-00187	**S37428**	PowerPact J-frame terminal nut insert (M8) for bus bar connection	JD/JG/JJ/JL **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00180	**S37430**	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	J-frame with terminal nut inserts **A**	unknown
EDH-SQD-00235	**S37437**	PowerPact J-frame mixed rear connection kit	PowerPact J-frame **A**	unknown
EDH-SQD-00236	**S37438**	PowerPact J-frame short rear connections (set of 2)	PowerPact J-frame **A**	unknown
EDH-SQD-00237	**S37439**	PowerPact J-frame long rear connections (set of 2)	PowerPact J-frame **A**	unknown
EDH-SQD-00186	**S37445**	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	JD/JG/JJ/JL **A**	unknown

EDH-SQD-00178 S37424 Square D breaker-accessory STATUS UNKNOWN

PowerPact J-frame control wire terminal for mechanical lugs

OEM part number	S37424	**A**	S112 p.124, Tables 120 & 122; oem_spec
Description	Voltage takeoff (control wire terminal) secured under the mechanical lug, tab for 0.250 in slip-on connector; field or factory installed	**A**	same as above
Application	accessory	**A**	same as above
Installation location	under mechanical lug at breaker terminal	**A**	same as above
Breaker compatibility	J-frame lugs (HD/HG/HJ/HL or JD/JG/JJ/JL as applicable)	**A**	same as above
Kit contents	2 per kit	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00185 S37427 Square D breaker-accessory STATUS UNKNOWN

PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37427	**A**	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	**A**	same as above
Application	accessory	**A**	same as above
Installation location	breaker line/load terminal (in place of lug)	**A**	same as above
Breaker compatibility	JD/JG/JJ/JL	**A**	same as above
Kit contents	2 per kit	**A**	same as above
Fasteners	tap 1/4-20; screws not included	**A**	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00187 S37428 Square D breaker-accessory STATUS UNKNOWN

PowerPact J-frame terminal nut insert (M8) for bus bar connection

OEM part number	S37428	**A**	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	**A**	same as above
Application	accessory	**A**	same as above
Installation location	breaker line/load terminal (in place of lug)	**A**	same as above
Breaker compatibility	JD/JG/JJ/JL	**A**	same as above
Kit contents	2 per kit	**A**	same as above
Fasteners	tap M8; screws not included	**A**	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	**A**	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

EDH-SQD-00180	S37430	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame control wire terminal for terminal nut (busbar connection)

OEM part number	S37430	A	S112 p.124, Table 122; oem_spec
Description	Control wire terminal for busbar connection using terminal nut insert	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J-frame with terminal nut inserts	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00235	S37437	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame mixed rear connection kit

OEM part number	S37437	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, J-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, J-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00236	S37438	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame short rear connections (set of 2)

OEM part number	S37438	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	2/3	A	same as above
Kit contents	Short rear connections (set of 2), J-frame; order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00237	S37439	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame long rear connections (set of 2)

OEM part number	S37439	A	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact J-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), J-frame (3P breakers only)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00186	S37445	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection

OEM part number	S37445	A	S112 p.125, Table 124; oem_spec
Description	Terminal nut insert replacing the mechanical lug for direct bus bar or crimp lug connection; screws not included	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminal (in place of lug)	A	same as above
Breaker compatibility	JD/JG/JJ/JL	A	same as above
Kit contents	3 per kit	A	same as above
Fasteners	tap 1/4-20; screws not included	A	same as above
Torque values	80-90 lb-in (9-10.2 N-m)	A	same as above
Cross-links	Breakers: Square D PowerPact J-Frame (JD/JG/JJ/JL/JR)		
Not yet documented	Dimensions, OEM instruction document, Status		

Breaker family Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00221	**AL400L61K3**	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 40 A	unknown
EDH-SQD-00222	**AL400L61K4**	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	PowerPact L 250 A, 4P unit mount A	unknown
EDH-SQD-00225	**AL600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	PowerPact L 400/600 A, 3P unit mount and I-Line A	unknown
EDH-SQD-00223	**AL600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	PowerPact L 400/600 A, 3P unit mount A	unknown
EDH-SQD-00224	**AL600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	PowerPact L 400/600 A, 4P unit mount A	unknown
EDH-SQD-00226	**CU400L61K3**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	PowerPact L 250/400 A, 3P, unit mount and I-Line A	unknown
EDH-SQD-00227	**CU400L61K4**	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	PowerPact L 250/400 A, 4P, unit mount A	unknown
EDH-SQD-00230	**CU600LF52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount and I-Line A	unknown
EDH-SQD-00228	**CU600LS52K3**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	PowerPact L 400/600 A, 3P, unit mount A	unknown
EDH-SQD-00229	**CU600LS52K4**	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	PowerPact L 400/600 A, 4P, unit mount A	unknown
EDH-SQD-00212	**CYA400L31K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00217	**CYA400L31K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00214	**CYA400L51K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00219	**CYA400L51K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00216	**CYA400L71K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00213	**CYA600L32K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00218	**CYA600L32K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00215	**CYA600L52K3**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00220	**CYA600L52K4**	PowerPact L-frame Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00194	**PDC12DG4L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame A	unknown
EDH-SQD-00193	**PDC5DG20L3**	PowerPact L-Frame power distribution connector (multi-wire load lug)	PowerPact L-Frame A	unknown
EDH-SQD-00199	**YA400L31K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00201	**YA400L51K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00205	**YA400L51K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame A	unknown
EDH-SQD-00203	**YA400L71K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00207	**YA400L71K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00200	**YA600L32K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00204	**YA600L32K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00202	**YA600L52K3**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown
EDH-SQD-00206	**YA600L52K4**	PowerPact L-frame Al/Cu compression lug kit	PowerPact L-frame **A**	unknown

EDH-SQD-00221 AL400L61K3 Square D lug-kit STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 3P

OEM part number	AL400L61K3	**A**	S112 p.124, Table 121; oem_spec
Alternate / superseded numbers	AL400L6IK3 [alias] (Typographical variant printed under lug illustration in Table 121)	**A**	same as above
Description	Al lugs for Al or Cu wire, 250 A; unit mount and I-Line; short terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PowerPact L 250 A, 3P, unit-mount and I-Line; FAQ: also optional on 400/600 A L-frame within wire-size/rating limits	**A**	same as above
Poles	3	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs per kit; short terminal shield	**A**	same as above
Material	tin-plated aluminum	**A**	same as above
Identification features	L-frame lugs are pre-tapped for control wire: 8-32 x 1/4 in screw (not provided) into tapped hole in lower left corner of lug	**A**	same as above
wire_range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	**A**	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00222 AL400L61K4 Square D lug-kit STATUS UNKNOWN

PowerPact L-frame 250 A mechanical lug kit, Al, 4P

OEM part number	AL400L61K4	**A**	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 250 A, 4-pole, unit mount only; short terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PowerPact L 250 A, 4P unit mount	**A**	same as above
Poles	4	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	4 lugs per kit; short terminal shield	**A**	same as above
Material	tin-plated aluminum	**A**	same as above
wire_range	(1) 2 AWG-500 kcmil Al or (1) 2 AWG-600 kcmil Cu	**A**	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00225	AL600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)

OEM part number	AL600LF52K3	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount and I-Line; short terminal shield; standard on I-Line LGA/LLA/LRA 400 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Material	tin-plated aluminum	A	same as above
wire_range	(2) 3/0 AWG-500 kcmil Al or Cu	A	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00223	AL600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)

OEM part number	AL600LS52K3	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, unit mount; medium terminal shield; standard lug on 400/600 A unit-mount L-frame	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Material	tin-plated aluminum	A	same as above
wire_range	(2) 2/0 AWG-500 kcmil Al or Cu	A	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Digest 2012/2016 lists 'AL600S52K3' - typo for AL600LS52K3 or distinct part?*		

EDH-SQD-00224	AL600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)

OEM part number	AL600LS52K4	A	S112 p.124, Table 121; oem_spec
Description	Al lugs for Al or Cu wire, 400/600 A, 4P unit mount; medium terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Material	tin-plated aluminum	A	same as above
wire_range	(2) 2/0 AWG-500 kcmil Al or Cu	A	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00226	CU400L61K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P

OEM part number	CU400L61K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
wire_range	as printed: (1) 2 AWG-500 kcmil Al / (1) 2 AWG-600 kcmil Cu (row layout garbled) (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00227	CU400L61K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P

OEM part number	CU400L61K4	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 250/400 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	250/400 A	A	same as above
Kit contents	4 lugs per kit; short terminal shield	A	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
wire_range	as printed: (1) 2 AWG-600 kcmil Cu (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00230	CU600LF52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LF52K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; short terminal shield; unit mount and I-Line	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount and I-Line	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; short terminal shield	A	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
wire_range	as printed: (1) 3/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00228	CU600LS52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P

OEM part number	CU600LS52K3	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 3P, unit mount	A	same as above
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	3 lugs per kit; medium terminal shield	A	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
wire_range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00229	CU600LS52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P

OEM part number	CU600LS52K4	A	S112 p.124, Table 121; oem_spec
Description	Cu lugs for use with Cu wire only; medium terminal shield; unit mount	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L 400/600 A, 4P, unit mount	A	same as above
Poles	4	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	4 lugs per kit; medium terminal shield	A	same as above
Material	copper (Cu-only lugs are made of copper)	A	same as above
wire_range	as printed: (1) 2/0 AWG-500 kcmil (Table 121 text extraction is column-scrambled for Cu rows; number of conductors and Al/Cu wording not reliable)	C	S112 p.124, Table 121; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range (verify against PDF p.124)		
Open question	*Confirm Cu lug wire ranges and conductors per lug from Table 121 image.*		

EDH-SQD-00212	CYA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00217	CYA400L31K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L31K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	285 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	2/0-300 kcmil Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00214	CYA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	250-500 kcmil Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00219	CYA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L51K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	250-500 kcmil Cu; 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00216	CYA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA400L71K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	500-750 kcmil Al / 500 kcmil Cu (as printed); 1 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00213	CYA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00218	CYA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L32K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	2/0-300 kcmil Cu; 2 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00215	CYA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K3	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	250-500 kcmil Cu; 2 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00220	CYA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Cu compression lug kit

OEM part number	CYA600L52K4	A	S112 p.128, Table 129; oem_spec
Description	Copper compression (crimp) lug kit for Cu conductors; kit contains insulators and mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 2 lugs per terminal	A	same as above
Material	copper compression lugs	A	same as above
wire_range	250-500 kcmil Cu; 2 wire(s) per lug	A	S112 p.128, Table 129; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00194	PDC12DG4L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC12DG4L3	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	(12) 8-4 AWG or 14-10 AWG	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00193	PDC5DG20L3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-Frame power distribution connector (multi-wire load lug)

OEM part number	PDC5DG20L3	A	S112 p.126, Table 127; oem_spec
Description	Power distribution connector for multiple load wires; tin-plated Al lug, connectors and hardware; load end only; Cu wire only; UL 508 / UL 1995 applications	A	same as above
Application	accessory	A	same as above
Installation location	load (OFF) end only	A	same as above
Breaker compatibility	PowerPact L-Frame	A	same as above
Kit contents	1 per kit (field kit incl. hardware)	A	same as above
Material	tin-plated aluminum connectors	A	same as above
wire_range	5 total: (3) 4-1 AWG or 14-6 AWG and (2) 3-2/0 AWG	A	S112 p.126, Table 127; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, exact per-wire torque mapping (see Table 127), OEM instruction document, Status, Torque values		

EDH-SQD-00199	YA400L31K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L31K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	230 A Al / 285 A Cu @75C (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	4-300 kcmil Al/Cu; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00201	YA400L51K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00205	YA400L51K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L51K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	310 A Al / 380 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	2/0-500 kcmil Al/Cu; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00203	YA400L71K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	3 lugs per kit; 1 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00207	YA400L71K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA400L71K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	385 A Al / 475 A Cu (rating at 75 C)	A	same as above
Kit contents	4 lugs per kit; 2 (as printed) lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	500-750 kcmil Al or 500 kcmil Cu; 1 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00200	YA600L32K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00204	YA600L32K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L32K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	460 A Al / 570 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	4-300 kcmil Al/Cu; 2 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

EDH-SQD-00202	YA600L52K3	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K3	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	6 lugs per kit; 2 lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00206	YA600L52K4	Square D	lug-kit	STATUS UNKNOWN

PowerPact L-frame Al/Cu compression lug kit

OEM part number	YA600L52K4	A	S112 p.127, Table 128; oem_spec
Description	Compression (crimp) lug kit for Al/Cu conductors; kit contains required insulators and all mounting hardware; requires long lug cover pack	A	same as above
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Current rating	620 A Al / 760 A Cu (rating at 75 C)	A	same as above
Kit contents	8 lugs per kit; 1 (as printed) lugs per terminal	A	same as above
Material	Al/Cu compression lugs (body material not stated)	A	same as above
wire_range	2/0-500 kcmil Al/Cu; 2 wire(s) per lug	A	S112 p.127, Table 128; oem_spec
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		
Open question	*Wires-per-lug / lugs-per-terminal columns for 4P kits appear transposed vs 3P kits in extracted text - verify against PDF page 127.*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00243	**S32562**	PowerPact L-frame short terminal cover 3p	PowerPact L-frame A	unknown
EDH-SQD-00244	**S32563**	PowerPact L-frame short terminal cover 4p	PowerPact L-frame A	unknown

EDH-SQD-00243	S32562	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 3p

OEM part number	S32562	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short terminal cover 3P, L-frame (kit has one cover; order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00244	S32563	Square D	barrier	STATUS UNKNOWN

PowerPact L-frame short terminal cover 4p

OEM part number	S32563	A	S112 p.123, Table 118; oem_spec
Description	Short terminal cover 4P, L-frame (order two)	A	same as above
Application	accessory	A	same as above
Installation location	over breaker terminals	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Short terminal cover 4P, L-frame (order two)	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00188	**S36967**	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	PowerPact L-frame; D-frame (4P) A	unknown

EDH-SQD-00188	S36967	Square D	fastener	STATUS UNKNOWN

PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)

OEM part number	S36967	A	S112 p.123 Table 119; p.125 Table 126; oem_spec
Alternate / superseded numbers	36967	A	S114 alias; p.3-29 Table 3.94; oem_spec
Description	Set of 4 M10 x 25 terminal screws and washers for one side; L-frame rear connection and bus bar hardware; D-frame 4P bus bar hardware (Digest 36967)	A	S112 p.123 Table 119; p.125 Table 126; oem_spec
Application	accessory	A	same as above
Breaker compatibility	PowerPact L-frame; D-frame (4P)	A	same as above
Kit contents	4 screws + washers	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00181	**29348**	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	L-frame (s1); D-frame 400/600 A lugs (s3) A	unknown
EDH-SQD-00239	**S32477**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00240	**S32478**	PowerPact L-frame mixed rear connection kit	PowerPact L-frame A	unknown
EDH-SQD-00241	**S432475**	PowerPact L-frame short rear connections (set of 2)	PowerPact L-frame A	unknown
EDH-SQD-00242	**S432476**	PowerPact L-frame long rear connections (set of 2)	PowerPact L-frame A	unknown

EDH-SQD-00181	29348	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)

OEM part number	29348	A	S112 p.124, Table 122; oem_spec
Alternate / superseded numbers	S29348 (Printed '29348' without S prefix; other PowerPact kits use S prefix - unverified)	D	S112 alias; p.124; inference
Description	Control tap takeoff, L-frame; also listed as 'Voltage Takeoffs (set of two)' for D-frame lugs in Digest	A	S112 p.124, Table 122; oem_spec
Application	accessory	A	same as above
Breaker compatibility	L-frame (s1); D-frame 400/600 A lugs (s3)	A	same as above
Kit contents	2 per kit	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR), Square D PowerPact D-Frame (DG/DJ/DL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00239	S32477	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32477	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 3P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Mixed rear connection kit, L-frame 3P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00240	S32478	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame mixed rear connection kit

OEM part number	S32478	A	S112 p.123, Table 118; oem_spec
Description	Mixed rear connection kit, L-frame 4P	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	4	A	same as above
Kit contents	Mixed rear connection kit, L-frame 4P	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00241	S432475	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame short rear connections (set of 2)

OEM part number	S432475	A	S112 p.123, Table 118; oem_spec
Description	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Short rear connections (set of 2), L-frame; parts only, no hardware (see S36967); order two kits	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00188)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

EDH-SQD-00242	S432476	Square D	breaker-accessory	STATUS UNKNOWN

PowerPact L-frame long rear connections (set of 2)

OEM part number	S432476	A	S112 p.123, Table 118; oem_spec
Description	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Application	accessory	A	same as above
Installation location	breaker line/load terminals, rear (backplate-mounted breaker)	A	same as above
Breaker compatibility	PowerPact L-frame	A	same as above
Poles	3	A	same as above
Kit contents	Long rear connections (set of 2), L-frame; parts only, no hardware	A	same as above
Cross-links	Breakers: Square D PowerPact L-Frame (LD/LG/LJ/LL/LR)		
Requires	S36967 (EDH-SQD-00188)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values		

Breaker family Square D PowerPact M-Frame (MG/MJ)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00311	**AL800M23K**	PowerPact M/P-frame 800 A mechanical lug kit, Al	PowerPact M and P frame 800 A (distributor) C	unknown
EDH-SQD-00302	**AL800M23TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown
EDH-SQD-00304	**AL800M23TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00303	**AL800P6TK**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M **A**	unknown
EDH-SQD-00305	**AL800P6TK4**	PowerPact M/P tapped (control-wire) lug kit 800 A	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M **A**	unknown
EDH-SQD-00312	**AL800P7K**	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	PowerPact M and P frame 800 A unit mount (distributor) **C**	unknown

EDH-SQD-00311 AL800M23K Square D lug-kit STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al

OEM part number	AL800M23K	**C**	S128 distributor
Description	Mechanical lug kit, 800 A, aluminum, for PowerPact M- and P-frame (distributor description)	**C**	same as above
Application	accessory	**C**	same as above
Breaker compatibility	PowerPact M and P frame 800 A (distributor)	**C**	same as above
Kit contents	3-piece set (distributor)	**C**	same as above
wire_range	3/0 AWG-500 kcmil Al/Cu (distributor)	**C**	S128 distributor
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	OEM table reference, conductors per lug, Dimensions, OEM instruction document, Status, Torque values		
Open question	*Obtain 0612CT0101 (PowerPact M/P/R catalog) lug table to confirm (likely (2) or (3) conductors per lug).*		

EDH-SQD-00302 AL800M23TK Square D lug-kit STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	**A**	same as above
Current rating	800 A	**A**	same as above
Kit contents	3 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00304 AL800M23TK4 Square D lug-kit STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800M23TK4	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	**A**	same as above
Current rating	800 A	**A**	same as above
Kit contents	4 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00303	AL800P6TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	3 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00305	AL800P6TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P tapped (control-wire) lug kit 800 A

OEM part number	AL800P6TK4	A	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MG, MJ, PG, PJ, PL 800 A (table cell layout ambiguous as to which of M23/P6 fits M vs P)	A	same as above
Current rating	800 A	A	same as above
Kit contents	4 per standard package	A	same as above
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		
Open question	*Does AL800M23TK fit MG/MJ only and AL800P6TK PG/PJ/PL only?*		

EDH-SQD-00312	AL800P7K	Square D	lug-kit	STATUS UNKNOWN

PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)

OEM part number	AL800P7K	C	S128 distributor
Description	Mechanical lug kit for 800 A M/P frame unit-mount breakers (distributor description)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	PowerPact M and P frame 800 A unit mount (distributor)	C	same as above
wire_range	3/0 AWG-750 kcmil Al/Cu; 750 kcmil compact Al only (distributor)	C	S128 distributor
Cross-links	Breakers: Square D PowerPact M-Frame (MG/MJ), Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	conductors per lug, Dimensions, OEM instruction document, kit quantity, Status, Torque values		

Breaker family Square D PowerPact P-Frame (PG/PJ/PL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00306	**AL1200P24TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00307	**AL1200P25TK**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown
EDH-SQD-00308	**AL1200P25TK4**	PowerPact P tapped (control-wire) lug kit 1200 A	PG, PJ, PL 1200 A **A**	unknown

EDH-SQD-00306	AL1200P24TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P24TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00307	AL1200P25TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	3 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

EDH-SQD-00308	AL1200P25TK4	Square D	lug-kit	STATUS UNKNOWN

PowerPact P tapped (control-wire) lug kit 1200 A

OEM part number	AL1200P25TK4	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PG, PJ, PL 1200 A	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	4 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact P-Frame (PG/PJ/PL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

Breaker family Square D PowerPact R-Frame (RG/RJ/RL)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00309	**AL1200R53TK**	PowerPact R tapped (control-wire) lug kit 1200 A	RG, RJ, RL 1200 A (I-Line only) **A**	unknown

EDH-SQD-00309	AL1200R53TK	Square D	lug-kit	STATUS UNKNOWN

PowerPact R tapped (control-wire) lug kit 1200 A

OEM part number	AL1200R53TK	**A**	S114 p.3-17, Table 3.62; oem_spec
Description	Tapped lugs for control wire takeoff, PowerPact (I-Line only)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	RG, RJ, RL 1200 A (I-Line only)	**A**	same as above
Current rating	1200 A	**A**	same as above
Kit contents	1 per standard package	**A**	same as above
Cross-links	Breakers: Square D PowerPact R-Frame (RG/RJ/RL)		
Not yet documented	Dimensions, OEM instruction document, Status, Torque values, wire range		
Open question	*Is the tapped lug wire range identical to the untapped AL800M23K / AL800P6K / AL1200P25K equivalents?*		

4.7 General / family not yet assigned

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SQD-00271	**GYT**	Square D G-frame terminal shield 3P	Square D G-frame 3P **A**	unknown

EDH-SQD-00271	GYT	Square D	barrier	STATUS UNKNOWN

Square D G-frame terminal shield 3P

OEM part number	GYT	**A**	S115 p.3-25, Table 3.69; oem_spec
Description	Terminal shield, G-frame (3P)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Square D G-frame 3P	**A**	same as above
Kit contents	1 per kit	**A**	same as above
Not yet documented	breaker family record not created for Square D G-frame, Dimensions, OEM instruction document, Status, Torque values		

5 GE / ABB lineage

Lineage / brand markings: General Electric Industrial Solutions; ABB from 2018; ReliaGear

Family	Type	Status	Era	Entries	Pg
A-SERIES A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	panelboard	current as of BuyLog 07/2014	—	62	473
A-SERIES-COL A-Series Column Panelboards (ALC, AQC, AEC)	panelboard	unknown	—	6	490
A-SERIES-PWR A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	panelboard	current as of BuyLog 07/2014	—	35	490
CCB-QMR Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	panelboard	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	—	20	503
NHB NAB / NHB bolt-on panelboards (legacy)	panelboard	discontinued (legacy); hardware sold as new-surplus	—	1	508
RG-NEXT ReliaGear neXT Power Panelboards	panelboard	unknown	—	0	509
SCP-PLUS Spectra Series Type SCP Plus panelboards	panelboard	unknown	—	15	509
SPECTRA-PP Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	panelboard	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted'	—	147	514
TRUMBULL Trumbull Electric (Plainville CT) panelboards and switches	panelboard	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	0	574
AV-LINE AV-Line switchboards (legacy)	switchboard	unknown	—	0	574

5.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)

FAM-GEA-001 · panelboard · aka A Series, A-Series II, AQ, AE, AS, AL, AD, AD Plus, AQF, AEF, Pro-Stock · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's lighting/appliance panelboard platform. Symmetrical 20 in wide x 5.81 in deep galvanized boxes with removable endwalls, branch-bus direct connection and captive branch hardware. Type letter indicates breaker family: AL = plug-in Q-line, AQ = bolt-on Q-line (THQB), AE = bolt-on E-frame (TEY) 480Y/277 V, AD = 600 V TED/SE/FB. Pro-Stock unassembled interiors (AQU/AEU) are completed with MB main breaker kits, ML main lug kits and NK neutral kits. Pages in the 2014 BuyLog are headed 'A-Series II' on the column-panel kit page.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S75 p.11-1; oem_spec
Voltage rating	AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 Vac	A	S75 p.11-4 to 11-6; oem_spec
Main ampacity	Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A (SK)	A	S75 p.11-4, 11-5, 11-6; oem_spec
Branch breakers accepted	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THED/SE/FB; subfeeds TQD/THQD (AQ) or TED/TFJ/SE/SF (AE/AD)	A	S75 p.11-4 to 11-6; oem_spec
Dimensions	Box width 20 in, depth 5.81 in; lengths 25.5-88.5 in	A	S75 p.11-4; oem_spec
seismic	IBC Zone 3/4 and CBC Zone 4 certified	A	S75 p.11-3; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL,

THQB / THHQB / TXQB, THQL / THHQL / TXQL, TJD / TJJ / TJK / THJK, TQD / THQD
Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S76 BuyLog p.11-10 Rev. 11/13 GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Pa

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00059	**MB133**	A-Series Pro-Stock main/sub-feed breaker kit MB133	TED (18k) / THED (22k); SEHA/SELA/SEPA **A**	unknown
EDH-GEA-00060	**MB133WB**	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	SEHA + kit (breaker included) **A**	unknown
EDH-GEA-00051	**MB233**	A-Series Pro-Stock main/sub-feed breaker kit MB233	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00053	**MB2332**	A-Series Pro-Stock main/sub-feed breaker kit MB2332	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only) **A**	unknown
EDH-GEA-00054	**MB2332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	2nd SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00052	**MB233WB**	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00045	**MB332**	A-Series Pro-Stock main/sub-feed breaker kit MB332	SGHA (65k), SGLA (100k), SGPA (200k) **A**	unknown
EDH-GEA-00046	**MB332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00055	**MB333**	A-Series Pro-Stock main/sub-feed breaker kit MB333	SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00056	**MB333WB**	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00057	**MB423**	A-Series Pro-Stock main/sub-feed breaker kit MB423	TEY (14k) **A**	unknown
EDH-GEA-00058	**MB426**	A-Series Pro-Stock main/sub-feed breaker kit MB426	(2) TEY **A**	unknown
EDH-GEA-00044	**MB512**	A-Series Pro-Stock main/sub-feed breaker kit MB512	TQD (10k) / THQD (22k) **A**	unknown
EDH-GEA-00049	**MB513**	A-Series Pro-Stock main/sub-feed breaker kit MB513	TQD / THQD **A**	unknown
EDH-GEA-00050	**MB516**	A-Series Pro-Stock main/sub-feed breaker kit MB516	(2) TQD / (2) THQD **A**	unknown
EDH-GEA-00042	**MB612**	A-Series Pro-Stock main/sub-feed breaker kit MB612	THQB (10k) / THHQB (22k) **A**	unknown
EDH-GEA-00047	**MB613**	A-Series Pro-Stock main/sub-feed breaker kit MB613	THQB / THHQB **A**	unknown
EDH-GEA-00043	**MB614**	A-Series Pro-Stock main/sub-feed breaker kit MB614	(2) THQB / (2) THHQB **A**	unknown
EDH-GEA-00048	**MB616**	A-Series Pro-Stock main/sub-feed breaker kit MB616	(2) THQB / (2) THHQB **A**	unknown

EDH-GEA-00059 **MB133** GE main-breaker-kit **STATUS UNKNOWN**

A-Series Pro-Stock main/sub-feed breaker kit MB133

OEM part number	MB133	**A**	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S75 p.11-15 note; oem_spec
Breaker compatibility	TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	S75 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Breaker not included	**A**	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00060	MB133WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133WB

OEM part number	MB133WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: SEHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SEHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	150 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00051	MB233	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233

OEM part number	MB233	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V and AEU3 480/277V 3ph interior, 225 A, 3 poles; breakers: SFHA, SFLA, SFPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00053	MB2332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332

OEM part number	MB2332 (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00054	MB2332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332WB

OEM part number	MB2332WB (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00052	MB233WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233WB

OEM part number	MB233WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 225 A, 3 poles; breakers: SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SFHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00045	MB332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332

OEM part number	MB332	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 400/600 A, 2 poles; breakers: SGHA (65k), SGLA (100k), SGPA (200k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA (65k), SGLA (100k), SGPA (200k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00046	MB332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332WB

OEM part number	MB332WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 600 A, 2 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00055	MB333	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333

OEM part number	MB333	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400/600 A, 3 poles; breakers: SGHA, SGLA, SGPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA, SGLA, SGPA	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00056	MB333WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333WB

OEM part number	MB333WB	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 600 A, 3 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00057	MB423	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB423

OEM part number	MB423	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 3 poles; breakers: TEY (14k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TEY (14k)	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00058	MB426	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB426

OEM part number	MB426	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 6 poles; breakers: (2) TEY	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) TEY	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00044	MB512	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB512

OEM part number	MB512	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 225 A, 2 poles; breakers: TQD (10k) / THQD (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TQD (10k) / THQD (22k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00049	MB513	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB513

OEM part number	MB513	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 225 A, 3 poles; breakers: TQD / THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	TQD / THQD	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00050	MB516	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB516

OEM part number	MB516	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 400 A, 6 poles; breakers: (2) TQD / (2) THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) TQD / (2) THQD	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00042	MB612	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB612

OEM part number	MB612	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 2 poles; breakers: THQB (10k) / THHQB (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	THQB (10k) / THHQB (22k)	A	S75 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00047	MB613	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB613

OEM part number	MB613	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 3 poles; breakers: THQB / THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	THQB / THHQB	A	S75 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00043	MB614	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB614

OEM part number	MB614	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 4 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S75 p.11-15; oem_spec
Poles	4	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00048	MB616	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB616

OEM part number	MB616	A	S75 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 6 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S75 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S75 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S75 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00061	**MLA1**	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	—	unknown
EDH-GEA-00062	**MLA2**	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00063	**MLA41**	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	—	unknown
EDH-GEA-00064	**MLA61**	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	—	unknown
EDH-GEA-00065	**MLA62**	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	—	unknown
EDH-GEA-00066	**MLR1**	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	—	unknown
EDH-GEA-00067	**MLR2**	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	—	unknown
EDH-GEA-00068	**MLR41**	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	—	unknown
EDH-GEA-00069	**MLR61**	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	—	unknown
EDH-GEA-00070	**MLT1**	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	—	unknown
EDH-GEA-00071	**MLT2**	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	—	unknown
EDH-GEA-00073	**MLT41**	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	—	unknown
EDH-GEA-00072	**MLT42**	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	—	unknown

EDH-GEA-00061	MLA1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)

OEM part number	MLA1	**A**	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure (mechanical), 225 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 6-350 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00062	MLA2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)

OEM part number	MLA2	**A**	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 225 A, oversized 225 A; also 225 A dual main	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 1-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00063	MLA41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)

OEM part number	MLA41	**A**	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	400 A	**A**	same as above
Kit contents	Wire range 2-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00064	MLA61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)

OEM part number	MLA61	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 600 A, standard 600 A; also 400 A dual main	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00065	MLA62	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)

OEM part number	MLA62	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400/600 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range 3/0-800 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00066	MLR1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)

OEM part number	MLR1	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00067	MLR2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)

OEM part number	MLR2	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00068	MLR41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)

OEM part number	MLR41	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00069	MLR61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)

OEM part number	MLR61	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400/600 A, standard 600 A; oversized 400 A	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00070	MLT1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)

OEM part number	MLT1	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 2/0-300 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00071	MLT2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)

OEM part number	MLT2	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00073	MLT41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)

OEM part number	MLT41	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 500-750 MCM (500 MCM Cu, 750 MCM Al)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00072	MLT42	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)

OEM part number	MLT42	A	S75 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 250-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00038	**ASPFB12P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	—	listed 07/2014
EDH-GEA-00039	**ASPFB3P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	—	listed 07/2014
EDH-GEA-00036	**ASPTED3P**	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	—	listed 07/2014
EDH-GEA-00037	**ASPTQD3P**	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	—	listed 07/2014

EDH-GEA-00038 **ASPFB12P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles

OEM part number	ASPFB12P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Mounting screws and washers only (footnote 2)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00039 **ASPFB3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles

OEM part number	ASPFB3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00036 **ASPTED3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE

OEM part number	ASPTED3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TED/THED4/SE	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00037 **ASPTQD3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TQD/THQD

OEM part number	ASPTQD3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S75 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TQD/THQD	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00074	**NKA**	A-Series 200% neutral kit NKA (225 A)	—	unknown
EDH-GEA-00075	**NKA42**	A-Series 200% neutral kit NKA42 (400 A)	—	unknown
EDH-GEA-00080	**NKA4FT**	A-Series 200% neutral kit NKA4FT (400 A)	—	unknown
EDH-GEA-00076	**NKR**	A-Series 200% neutral kit NKR (225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00077	**NKR4**	A-Series 200% neutral kit NKR4 (400 A)	—	unknown
EDH-GEA-00078	**NKT**	A-Series 200% neutral kit NKT (225 A)	—	unknown
EDH-GEA-00079	**NKT4**	A-Series 200% neutral kit NKT4 (400 A)	—	unknown

EDH-GEA-00074	NKA	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA (225 A)

OEM part number	NKA	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00075	NKA42	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA42 (400 A)

OEM part number	NKA42	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00080	NKA4FT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKA4FT (400 A)

OEM part number	NKA4FT	A	S75 p.11-17 footnote 2; oem_spec
Description	200% neutral kit, Pressure, 200% neutral feed-thru lugs, 400 A; wire range (2) 2/0-600 MCM or (4) 4-250 MCM; ref. GO-101P	A	S75 p.11-17; oem_spec
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00076	NKR	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR (225 A)

OEM part number	NKR	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00077	NKR4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKR4 (400 A)

OEM part number	NKR4	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00078	NKT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT (225 A)

OEM part number	NKT	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00079	NKT4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT4 (400 A)

OEM part number	NKT4	A	S75 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00097	**EGS12**	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	—	unknown
EDH-GEA-00096	**TGL2**	A-Series Equipment ground, standard bonded to box, per 12 branch positions	—	unknown
EDH-GEA-00095	**TGL20**	A-Series Main lug for equipment ground terminal kits	—	unknown

EDH-GEA-00097	EGS12	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard isolated/insulated, per 12 branch positions

OEM part number	EGS12	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard isolated/insulated, per 12 branch positions	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00096	TGL2	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard bonded to box, per 12 branch positions

OEM part number	TGL2	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard bonded to box, per 12 branch positions ((11) 14-8 Cu/12-8 Al, (3) 14-4 Cu/6-4 Al)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00095	TGL20	GE	ground-bar	STATUS UNKNOWN

A-Series Main lug for equipment ground terminal kits

OEM part number	TGL20	A	S75, S76 p.11-19; p.11-10; oem_spec
Description	Main lug for equipment ground terminal kits (6-2/0 Cu/Al)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00089	**ASPAQLEBKT**	A-Series AQ/AL/AE rail bracket	—	unknown

EDH-GEA-00089	ASPAQLEBKT	GE	mounting-bracket	STATUS UNKNOWN

A-Series AQ/AL/AE rail bracket

OEM part number	ASPAQLEBKT	**A**	S75 p.11-20; oem_spec
Description	AQ/AL/AE rail bracket	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00087	**ASP25AD65KA**	A-Series AD 25 to 65 kAIC barrier kit	—	unknown

EDH-GEA-00087	ASP25AD65KA	GE	barrier	STATUS UNKNOWN

A-Series AD 25 to 65 kAIC barrier kit

OEM part number	ASP25AD65KA	**A**	S75 p.11-20; oem_spec
Description	AD 25 to 65 kAIC barrier kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00040	**TEDFP1**	A-Series filler plate for TQD/THQD/TED4/SE/FB	—	unknown
EDH-GEA-00041	**TQLFP1**	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	—	unknown

EDH-GEA-00040	TEDFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for TQD/THQD/TED4/SE/FB

OEM part number	TEDFP1	**A**	S75 p.11-19; oem_spec
Description	TQD/THQD/TED4/SE/FB Filler Plates	**A**	same as above
Installation location	A-Series deadfront	**B**	S75 inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD, TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA), Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

EDH-GEA-00041	TQLFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY

OEM part number	TQLFP1	**A**	S75, S76 p.11-19; p.11-10; oem_spec
Description	THQB/THHQB/THQL/THHQL/TEY Filler Plates; 'Filler Plate for Q Line and TEY Breakers'	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00090	**139C5720G3**	A-Series AE front mounting kit	—	unknown
EDH-GEA-00091	**139C5720G6**	A-Series AQ/AL front mounting kit	—	unknown
EDH-GEA-00092	**139C5720G9**	A-Series AD front mounting kit	—	unknown
EDH-GEA-00081	**BNDKT**	A-Series Service entrance kit 225 A	—	unknown
EDH-GEA-00082	**BNDKT6**	A-Series Service entrance kit 400/600 A	—	unknown

EDH-GEA-00090	139C5720G3	GE	hardware-kit	STATUS UNKNOWN

A-Series AE front mounting kit

OEM part number	139C5720G3	A	S75 p.11-20; oem_spec
Description	AE front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00091	139C5720G6	GE	hardware-kit	STATUS UNKNOWN

A-Series AQ/AL front mounting kit

OEM part number	139C5720G6	A	S75 p.11-20; oem_spec
Description	AQ/AL front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00092	139C5720G9	GE	hardware-kit	STATUS UNKNOWN

A-Series AD front mounting kit

OEM part number	139C5720G9	A	S75 p.11-20; oem_spec
Description	AD front mounting kit	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00081	BNDKT	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 225 A

OEM part number	BNDKT	A	S75 p.11-17; oem_spec
Description	Service entrance kit 225 A (bonding strap with hardware and service entrance label)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00082	BNDKT6	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 400/600 A

OEM part number	BNDKT6	A	S75 p.11-17; oem_spec
Description	Service entrance kit 400/600 A (bonding strap with hardware and SE label)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00084	**APHBL**	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	—	unknown
EDH-GEA-00083	**APHBQ**	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	—	unknown
EDH-GEA-00086	**ASP2PTFJ3P**	A-Series 2P to 3P SF conversion kit for horizontal subfeed	—	unknown
EDH-GEA-00085	**ASP2PTQD3P**	A-Series 2P to 3P TQD conversion kit	—	unknown

EDH-GEA-00084	APHBL	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels

OEM part number	APHBL	A	S75 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00083	APHBQ	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels

OEM part number	APHBQ	A	S75 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00086	ASP2PTFJ3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P SF conversion kit for horizontal subfeed

OEM part number	ASP2PTFJ3P	A	S75 p.11-20; oem_spec
Description	2P to 3P SF conversion kit for horizontal subfeed	A	same as above
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00085	ASP2PTQD3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P TQD conversion kit

OEM part number	ASP2PTQD3P	A	S75 p.11-20; oem_spec
Description	2P to 3P TQD conversion kit	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00088	**TQDFM1**	A-Series 2-3 pole TQD mechanical interlock	—	unknown

EDH-GEA-00088	TQDFM1	GE	breaker-accessory	STATUS UNKNOWN

A-Series 2-3 pole TQD mechanical interlock

OEM part number	TQDFM1	A	S75 p.11-20; oem_spec
Description	2-3 pole TQD mechanical interlock	A	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00093	**APN48**	A-Series Permanent circuit number kit, Nos 1-48	—	unknown
EDH-GEA-00094	**APN84**	A-Series Permanent circuit number kit, Nos 43-84	—	unknown

EDH-GEA-00093	APN48	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 1-48

OEM part number	APN48	A	S75, S76 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 1-48 (AQ, AL, AE; AD version APN48AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00094	APN84	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 43-84

OEM part number	APN84	A	S75, S76 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 43-84 (AQ, AL, AE; AD version APN84AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

5.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC)

FAM-GEA-003 · panelboard · aka ALC, AQC, AEC · markings: GE

Narrow column-type A-Series panels (8.62 in wide x 5.81 in deep). ALC plug-in Q-line, AQC bolt-on THQB, AEC bolt-on TEY 15-80 A.

Attribute	Value	Cl.	Sources
Main ampacity	Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/SF 225 A	A	S75 p.11-9; oem_spec
Dimensions	Width 8.62 in, depth 5.81 in; lengths 37.5-76.5 in	A	same as above

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;
Also fits this family (entry printed elsewhere): TQLFP1, APN48, APN84, TGL20, TGL2, EGS12

5.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')

FAM-GEA-002 · panelboard · aka AQP, AEP, ADP, A-Series II Powerpanel, AD/AE/AQ Type P & N Power Panel · markings: GE, GE Industrial Solutions, ABB

Power-panel version of the A-Series: 30 in wide x 8 in deep box, single-piece deadfront (no filler plates needed per catalog), up to 600 A branch device, staggered center-mounted SF/SG breakers. Field breaker kits ASPP6xxxx (DEH40150-DEH40158) are installed into 'Un-Specified Space' on the interior, bolting branch bases/straps to the main bus next to the crossbar and replacing a blank shield insert on the deadfront with a breaker-specific filler plate.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S75 p.11-21; oem_spec
Main ampacity	Mains 125-800 A SG/SK breakers; main lug 600-800 A	A	S75 p.11-22; oem_spec
Branch breakers accepted	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/SG. ADP: FB, THED, double branch TED/SE, center SF/SG	A	same as above
Dimensions	Width 30 in, depth 8 in; lengths 25.5-88.5 in	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB, TQD / THQD
Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S77 DEH40150 Rev.No.03 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Break; S78 DEH40151 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Break; S79 DEH40152 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Brea; S80 DEH40153 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit B; S81 DEH40154 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K; S82 DEH40155 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S83 DEH40156 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Break; S84 DEH40157 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S85 DEH40158 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00009	**ASPP6EY12D**	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	TEY frame per kit title A	unknown
EDH-GEA-00008	**ASPP6EY6D**	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	TEY frame per kit title A	unknown
EDH-GEA-00005	**ASPP6FB6D**	A-Series II power panel FB three-phase circuit breaker kit, six-pole	FB frame per kit title A	unknown
EDH-GEA-00007	**ASPP6QB12D**	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	QB frame per kit title A	unknown
EDH-GEA-00006	**ASPP6QB6D**	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	QB frame per kit title A	unknown
EDH-GEA-00001	**ASPP6QD6D**	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)	TQD frame per kit title A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00002	**ASPP6SE6D**	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	SE frame per kit title **A**	unknown
EDH-GEA-00003	**ASPP6SF3S**	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	SF frame per kit title **A**	unknown
EDH-GEA-00004	**ASPP6SG3S**	A-Series II power panel SG three-phase circuit breaker kit, three-pole	SG frame per kit title **A**	unknown

EDH-GEA-00009 — ASPP6EY12D — GE — branch-connector-kit — STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6EY12D	**A**	S82 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S82 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S82 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S82 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S82 steps 4-11; oem_spec
OEM instruction document	DEH40155 Rev.No.02	**A**	S82 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc).	**A**	S82 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00008 — ASPP6EY6D — GE — branch-connector-kit — STATUS UNKNOWN

A-Series II power panel TEY three-phase circuit breaker kit, six-pole

OEM part number	ASPP6EY6D	**A**	S84 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S84 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S84 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S84 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S84 steps 4-11; oem_spec
OEM instruction document	DEH40157 Rev.No.01	**A**	S84 header; oem_spec
Identification features	Crossbar gap 0.06 in	**A**	S84 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00005	ASPP6FB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel FB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6FB6D	A	S83 p.1; oem_spec
Description	FB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S83 steps 4-13; oem_spec
Breaker compatibility	FB frame per kit title	A	S83 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1 (same as SE kit); (6) spool 10093207P2; (6) spool screw 10093208P2; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5700P86; (8) screw N667P16008B6; (4) screw N80P15046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S83 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler & deadfront 27-36 in-lb	A	S83 steps 4-11; oem_spec
OEM instruction document	DEH40156 Rev.No.01	A	S83 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in	A	S83 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5700P86 (EDH-GEA-00026), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00007	ASPP6QB12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6QB12D	A	S81 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S81 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S81 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S81 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S81 steps 4-11; oem_spec
OEM instruction document	DEH40154 Rev.No.02	A	S81 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in.	A	S81 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00006	ASPP6QB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6QB6D	A	S85 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S85 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S85 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S85 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; breaker terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S85 steps 4-11; oem_spec
OEM instruction document	DEH40158 Rev.No.01	A	S85 header; oem_spec
Identification features	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in	A	S85 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00001	ASPP6QD6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)

OEM part number	ASPP6QD6D	A	S79 p.1; oem_spec
Description	TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD); for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S79 steps 4-13; oem_spec
Breaker compatibility	TQD frame per kit title	A	S79 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CQDG1; (6) spool 315A7036P19; (6) spool screw 315A7037P4; (6) spool washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P81; (8) bracket-to-rail screw N667P16008B6; (4) C/B-to-bracket screw N80P150046B6; (1) filler plate TQD 139C5503P64; (4) #10-32x3/8 screw N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S79 p.1 Table 1; oem_spec
Torque values	Branch bases to main bus 60 in-lb max; bracket to rail 27-36 in-lb; 1/4-28 x 1-3/8 spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler plate & deadfront 27-36 in-lb	A	S79 steps 4-11; oem_spec
OEM instruction document	DEH40152 Rev.No.02	A	S79 header; oem_spec
Identification features	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in	A	S79 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Requires	139C5702AQDG1 (EDH-GEA-00010), 139C5702BQDG1 (EDH-GEA-00013), 139C5702CQDG1 (EDH-GEA-00016), 139C5500P81 (EDH-GEA-00022), 139C5503P64 (EDH-GEA-00030)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00002	ASPP6SE6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole

OEM part number	ASPP6SE6D	A	S80 p.1; oem_spec
Description	SE/TED three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S80 steps 4-13; oem_spec
Breaker compatibility	SE frame per kit title	A	S80 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1; (6) spool 315A7036P18; (6) spool screw 315A7037P3; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P82; (8) screw N667P16008B6; (4) screw N80P150046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S80 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 in-lb; breaker to bracket 18-22 in-lb; filler/deadfront 27-36 in-lb	A	S80 steps 4-11; oem_spec
OEM instruction document	DEH40153 Rev.No.02	A	S80 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in	A	S80 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5500P82 (EDH-GEA-00023), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00003	ASPP6SF3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SF three-phase circuit breaker kit, three-pole single

OEM part number	ASPP6SF3S	A	S78 p.1; oem_spec
Description	SF three-phase circuit breaker kit, three-pole single; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S78 steps 4-13; oem_spec
Breaker compatibility	SF frame per kit title	A	S78 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSFG1; (3) spool 315A7036P20; (3) spool screw 315A7037P1; (3) washer 75A105503P111; (3) bus screw 315A7034P6; (1) 3P bracket 139C5500P84; (2) screw N37P16060B6; (2) cup washer N405P40B6; (1) filler plate SF/TFJ 139C5503P90; (4) N722P16006B6	A	S78 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max (left) / 50-70 in-lb (right side text); bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler 27-36 in-lb	A	S78 steps 4-11; oem_spec
OEM instruction document	DEH40151 Rev.No.02	A	S78 header; oem_spec
Identification features	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting.	A	S78 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	139C5702ASFG1 (EDH-GEA-00012), 139C5702BSFG1 (EDH-GEA-00015), 139C5702CSFG1 (EDH-GEA-00018), 139C5500P84 (EDH-GEA-00025), 139C5503P90 (EDH-GEA-00032)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00004	ASPP6SG3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SG three-phase circuit breaker kit, three-pole

OEM part number	ASPP6SG3S	A	S77 p.1; oem_spec
Description	SG three-phase circuit breaker kit, three-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S77 steps 4-13; oem_spec
Breaker compatibility	SG frame per kit title	A	S77 p.1, title; oem_spec
Kit contents	(3) straps A/B/C 315A7046P7/P8/P9; (3) spool 315A7036P22; (3) spool screw 315A7037P5; (3) washer 75A105503P111; (3) bus screw 315A7034P7; (1) 3P bracket 139C5500P83; (2) screw N667P16008B6; (3) xmas tree 315A7077P1; (1) filler plate SG/TFG 139C5503P103; (4) N722P16006B6; (1) bracket insulation 10086929P11; insulators B/A/C 10086929P5/P7/P6; (2) breaker mounting screws N37P16060B6; (2) spring lock washer #12 N405P40B6	A	S77 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 lb-in; breaker to bracket 18-22 lb-in; filler/deadfront 27-36 lb-in	A	S77 steps 4-11; oem_spec
OEM instruction document	DEH40150 Rev.No.03	A	S77 header; oem_spec
Identification features	Crossbar gap 0.002 in	A	S77 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	315A7046P7 (EDH-GEA-00019), 315A7046P8 (EDH-GEA-00020), 315A7046P9 (EDH-GEA-00021), 139C5500P83 (EDH-GEA-00024), 139C5503P103 (EDH-GEA-00033)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00010	**139C5702AQDG1**	Branch base, A phase, TQD (A-Series II)	—	unknown
EDH-GEA-00011	**139C5702ASEG1**	Branch base, A phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00012	**139C5702ASFG1**	Branch base, A phase, SF (A-Series II)	—	unknown
EDH-GEA-00013	**139C5702BQDG1**	Branch base, B phase, TQD (A-Series II)	—	unknown
EDH-GEA-00014	**139C5702BSEG1**	Branch base, B phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00015	**139C5702BSFG1**	Branch base, B phase, SF (A-Series II)	—	unknown
EDH-GEA-00016	**139C5702CQDG1**	Branch base, C phase, TQD (A-Series II)	—	unknown
EDH-GEA-00017	**139C5702CSEG1**	Branch base, C phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00018	**139C5702CSFG1**	Branch base, C phase, SF (A-Series II)	—	unknown
EDH-GEA-00019	**315A7046P7**	SG breaker strap, A phase (A-Series II)	—	unknown
EDH-GEA-00020	**315A7046P8**	SG breaker strap, B phase (A-Series II)	—	unknown
EDH-GEA-00021	**315A7046P9**	SG breaker strap, C phase (A-Series II)	—	unknown
EDH-GEA-00028	**315A7048P20**	Center (B phase) strap (THQB/TEY, A-Series II)	—	unknown
EDH-GEA-00027	**315A7049P10**	A & C phase 200A strap (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00010	139C5702AQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, TQD (A-Series II)

OEM part number	139C5702AQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00011	139C5702ASEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SE/TED/FB (A-Series II)

OEM part number	139C5702ASEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00012	139C5702ASFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SF (A-Series II)

OEM part number	139C5702ASFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00013	139C5702BQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, TQD (A-Series II)

OEM part number	139C5702BQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00014	139C5702BSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SE/TED/FB (A-Series II)

OEM part number	139C5702BSEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00015	139C5702BSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SF (A-Series II)

OEM part number	139C5702BSFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00016	139C5702CQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, TQD (A-Series II)

OEM part number	139C5702CQDG1	A	S79 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00017	139C5702CSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SE/TED/FB (A-Series II)

OEM part number	139C5702CSEG1	A	S80, S83 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar, 60 in-lb max	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00018	139C5702CSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SF (A-Series II)

OEM part number	139C5702CSFG1	A	S78 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P6	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00019	315A7046P7	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, A phase (A-Series II)

OEM part number	315A7046P7	A	S77 Table 1; oem_spec
Description	STRAP FOR A PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00020	315A7046P8	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, B phase (A-Series II)

OEM part number	315A7046P8	A	S77 Table 1; oem_spec
Description	STRAP FOR B PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00021	315A7046P9	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, C phase (A-Series II)

OEM part number	315A7046P9	A	S77 Table 1; oem_spec
Description	STRAP FOR C PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00028	315A7048P20	GE	connector-strap	STATUS UNKNOWN

Center (B phase) strap (THQB/TEY, A-Series II)

OEM part number	315A7048P20	A	S81, S82, S84, S85 Table 1; oem_spec
Description	STRAP, CENTER	A	same as above
Application	branch	A	same as above
Installation location	B phase main bus; located using 3X branch base placed against crossbar	A	S81, S82, S84, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00027	315A7049P10	GE	connector-strap	STATUS UNKNOWN

A & C phase 200A strap (THQB/TEY, A-Series II)

OEM part number	315A7049P10	A	S81, S82, S84, S85 Table 1; oem_spec
Description	A & C PHASE 200A STRAP	A	same as above
Application	branch	A	same as above
Installation location	Screwed to main bus with thread rolling screw & washer 315A7034P6, 60 in-lb max	A	S81, S82, S84, S85 installation steps; oem_spec
Current rating	200 A (per description)	A	S81 Table 1; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00022	**139C5500P81**	3P breaker support bracket (ASPP6QD6D)	—	unknown
EDH-GEA-00023	**139C5500P82**	3P breaker support bracket (ASPP6SE6D)	—	unknown
EDH-GEA-00024	**139C5500P83**	3P breaker support bracket (ASPP6SG3S)	—	unknown
EDH-GEA-00025	**139C5500P84**	3P breaker support bracket (ASPP6SF3S)	—	unknown
EDH-GEA-00026	**139C5700P86**	3P breaker support bracket (ASPP6FB6D)	—	unknown

EDH-GEA-00022	139C5500P81	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6QD6D)

OEM part number	139C5500P81	A	S79 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00023	139C5500P82	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SE6D)

OEM part number	139C5500P82	A	S80 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S80 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D	A	S80 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00024	139C5500P83	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SG3S)

OEM part number	139C5500P83	A	S77 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00025	139C5500P84	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SF3S)

OEM part number	139C5500P84	A	S78 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00026	139C5700P86	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6FB6D)

OEM part number	139C5700P86	A	S83 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6FB6D	A	S83 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00029	**911E347P3**	3X branch base (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00029 **911E347P3** GE insulator **STATUS UNKNOWN**

3X branch base (THQB/TEY, A-Series II)

OEM part number	911E347P3	A	S81, S82, S84, S85 Table 1; oem_spec
Description	3X BRANCH BASE; load end of breaker snaps into base lancing slot	A	same as above
Application	branch	A	same as above
Installation location	Interior, adjacent to crossbar; supports load end of THQB/TEY	A	S81, S82, S84, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S81, S82, S84, S85 Table 1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in per GE convention)	B	S81, S75 Table 1; BuyLog p.11-40; inference
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00035	**139C5362P2**	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	—	unknown
EDH-GEA-00033	**139C5503P103**	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	—	unknown
EDH-GEA-00034	**139C5503P129**	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	—	unknown
EDH-GEA-00030	**139C5503P64**	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	—	unknown
EDH-GEA-00031	**139C5503P77**	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	—	unknown
EDH-GEA-00032	**139C5503P90**	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	—	unknown

EDH-GEA-00035 **139C5362P2** GE filler-plate **STATUS UNKNOWN**

Deadfront filler plate (shield insert) - QB (A-Series II power panel)

OEM part number	139C5362P2	A	S81, S85 Table 1; oem_spec
Description	FILLER PLATE, QB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S81, S85 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D	A	S81, S85 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S81 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00033	139C5503P103	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)

OEM part number	139C5503P103	A	S77 Table 1; oem_spec
Description	FILLER PLATE, SG/TFG	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S77 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S77 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00034	139C5503P129	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TEY (A-Series II power panel)

OEM part number	139C5503P129	A	S82, S84 Table 1; oem_spec
Description	FILLER PLATE, TEY	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S82, S84 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6EY6D, ASPP6EY12D	A	S82, S84 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S82 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00030	139C5503P64	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TQD (A-Series II power panel)

OEM part number	139C5503P64	A	S79 Table 1; oem_spec
Description	FILLER PLATE, TQD	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S79 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S79 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00031	139C5503P77	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)

OEM part number	139C5503P77	A	S80, S83 Table 1; oem_spec
Description	FILLER PLATE, SE/TED/FB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S80, S83 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S80, S83 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S80 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00032	139C5503P90	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)

OEM part number	139C5503P90	A	S78 Table 1; oem_spec
Description	FILLER PLATE, SF/TFJ	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S78 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S78 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

5.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)

FAM-GEA-006 · panelboard · aka CCB, QMR, CDP? · markings: GE, General Electric

Older GE power panelboards. Breakers mount with copper strap kits suffixed DPK (dual/twin mount) or SPK (single mount) usable on Cu or Al main bus; device product number + suffix ordered as a unit. Replacement CCB fronts CBAxxxxS/F and boxes DASW/DACB; filler plates CCBFPx/QMRFPx. QMR used THFP fusible switches. CDP is named in the batch scope but no CDP-specific data was found.

Attribute	Value	Cl.	Sources
Status	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	A	S75 p.11-49 to 11-51; oem_spec

Breaker families associated: Spectra SF (SFHA/SFLA/SFPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TFJ / TFK / THFK / TFL, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00262	**SF2DPK**	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	SFH/SFL A	unknown
EDH-GEA-00266	**SK12SPK**	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	SKH12 A	unknown
EDH-GEA-00265	**SK8SPK**	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	SKH8 A	unknown
EDH-GEA-00256	**TED1DPK**	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	TEB/TED A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00261	**TEL1DPK**	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	TEL **A**	unknown
EDH-GEA-00257	**TF2DPK**	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	TFJ/TFK/TFL **A**	unknown
EDH-GEA-00259	**TJ4DPK**	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	TJD/TJJ/TJK **A**	unknown
EDH-GEA-00260	**TJ6DPK**	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	TJK **A**	unknown
EDH-GEA-00264	**TK12SPK**	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	TKM12/THKM12 **A**	unknown
EDH-GEA-00263	**TK8SPK**	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	TKM8/THKM8 **A**	unknown
EDH-GEA-00258	**TQ2DPK**	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	TQD **A**	unknown

EDH-GEA-00262 SF2DPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)

OEM part number	SF2DPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, SFH/SFL, 225 A kit. Footnotes: if mounting hardware exists must order SFCARE for additional insulators; 225 A max	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SFH/SFL	**A**	same as above
Current rating	225 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00266 SK12SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)

OEM part number	SK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH12, 1200 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH12	**A**	same as above
Current rating	1200 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00265 SK8SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)

OEM part number	SK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH8, 800 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH8	**A**	same as above
Current rating	800 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00256	TED1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)

OEM part number	TED1DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEB/TED, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEB/TED	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00261	TEL1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)

OEM part number	TEL1DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEL, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEL	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00257	TF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)

OEM part number	TF2DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TFJ/TFK/TFL, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TFJ/TFK/TFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00259	TJ4DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)

OEM part number	TJ4DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJD/TJJ/TJK, 400 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJD/TJJ/TJK	A	same as above
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00260	TJ6DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)

OEM part number	TJ6DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJK, 600 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJK	A	same as above
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00264	TK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)

OEM part number	TK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM12/THKM12, 1200 A kit. Deep mounted interior required; requires 7X at extreme end or 8X if mounted in center of interior	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM12/THKM12	A	same as above
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00263	TK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)

OEM part number	TK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM8/THKM8, 800 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM8/THKM8	A	same as above
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00258	TQ2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)

OEM part number	TQ2DPK	A	S75 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TQD, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TQD	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard' (Stanion page seen only via search summary; returned 404 on fetch)	C	S95 distributor
Cross-links	Families: CCB-QMR · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00275	**75C145005G703**	QMR panelboard filler plate 3X	—	unknown
EDH-GEA-00270	**75C145005G711**	CCB panelboard filler plate 2X	—	unknown
EDH-GEA-00271	**75C145005G715**	CCB panelboard filler plate 6X	—	unknown
EDH-GEA-00267	**CCBFP1**	CCB panelboard filler plate 1X	—	unknown
EDH-GEA-00268	**CCBFP3**	CCB panelboard filler plate 3X	—	unknown
EDH-GEA-00269	**CCBFP5**	CCB panelboard filler plate 5X	—	unknown
EDH-GEA-00272	**QMRFP1**	QMR panelboard filler plate 1X	—	unknown
EDH-GEA-00273	**QMRFP2**	QMR panelboard filler plate 2X	—	unknown
EDH-GEA-00274	**QMRFP5**	QMR panelboard filler plate 5X	—	unknown

EDH-GEA-00275 **75C145005G703** GE filler-plate **STATUS UNKNOWN**

QMR panelboard filler plate 3X

OEM part number	75C145005G703	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00270 **75C145005G711** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 2X

OEM part number	75C145005G711	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 2X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00271 **75C145005G715** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 6X

OEM part number	75C145005G715	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 6X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00267 **CCBFP1** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 1X

OEM part number	CCBFP1	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 1X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00268 **CCBFP3** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 3X

OEM part number	CCBFP3	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00269	CCBFP5	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 5X

OEM part number	CCBFP5	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00272	QMRFP1	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 1X

OEM part number	QMRFP1	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00273	QMRFP2	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 2X

OEM part number	QMRFP2	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00274	QMRFP5	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 5X

OEM part number	QMRFP5	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

5.5 NHB — NAB / NHB bolt-on panelboards (legacy)

FAM-GEA-007 · panelboard · aka NAB, NHB, NLAB? · markings: General Electric

Legacy GE bolt-on panelboard line. Only distributor evidence found (NHB150PK twin-mount hardware). No OEM document for NHB or NLAB located in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued (legacy); hardware sold as new-surplus	C	S91 surplus_listing
Branch breakers accepted	E-frame bolt-on TEB/TED/TEC/THED and SEDA (per distributor)	C	same as above

Breaker families associated: TEB / TED / THED / TED4 / TED6

Key documents: S91 NHB150PK General Electric / GE Mounting Hardware (product page); S92 General Electric NHB150PK Twin Mount Mounting Hardware (product page)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00280	**NHB150PK**	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SE C	discontinued; new-surplus stock

EDH-GEA-00280	NHB150PK	GE	branch-connector-kit	DISCONTINUED; NEW-SURP

NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole

OEM part number	NHB150PK	B	S91, S92 distributor
Description	Direct replacement mounting hardware for GE NHB bolt-on style panelboards; dual/twin branch mounting; copper; 150 A, 600 V max	C	S91 surplus_listing
Breaker compatibility	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SEPA (Distributor lists disagree)	C	same as above
Kit contents	Screws, a panel cover and brackets (SuperBreakers)	C	S92 distributor
Material	Copper	C	S91 surplus_listing
Status	discontinued; new-surplus stock	C	same as above
Cross-links	Families: NHB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM confirmation, Dimensions, OEM instruction document		
Open question	*Does NHB150PK also fit NLAB panels? No evidence found.*		

5.6 RG-NEXT — ReliaGear neXT Power Panelboards

FAM-GEA-008 · panelboard · aka ReliaGear neXT, ReliaGear OEM neXT · markings: ABB, GE

ABB's post-2018 power panelboard (doc 1SXU900191B0201, 2022). ABB states there is a single catalog number for all circuit breaker installation kits; that number was not found in accessible sources.

Attribute	Value	Cl.	Sources
Voltage rating	up to 600 Vac 3ph3w / 600Y/347 V	A	S90 oem_spec
Main ampacity	Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) or feed-through lug pads	A	same as above
Branch breakers accepted	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), TEY / TEYF / TEYD / TEYH / TEYL
Key documents: S90 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S93 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

5.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards

FAM-GEA-005 · panelboard · aka SCP+, SCP · markings: GE

Spectra-family power panel variant with its own ACB boxes (31 and 40 in wide x 11.5 in deep), ACF fronts, ACTMK/ACSMK mounting hardware kits (hardware + straps), ACTFPK/ACSFPK filler kits and ACTHK/ACSHK single-breaker hardware. Filler plates for SCP+ are to be ordered from the Houston equipment plant.

Attribute	Value	Cl.	Sources
box	ACB31xxxx 31 in W x 11.5 in D; ACB40xxxx 40 in W x 11.5 in D; X heights 15-42	A	S75 p.11-48; oem_spec

Breaker families associated: Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TJD / TJJ / TJK / THJK
Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00254	**ACSMKSG**	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)	SGD, SGH, SGL, SGP A	unknown
EDH-GEA-00255	**ACSMKSK**	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	SKH, SKL A	unknown
EDH-GEA-00246	**ACTMKEB1P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00247	**ACTMKEB2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00248	**ACTMKEB3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00252	**ACTMKJD**	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	TJD, TJJ, TJK A	unknown
EDH-GEA-00250	**ACTMKQD2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	TQD, THQD A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00251	**ACTMKQD3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00245	**ACTMKSE**	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00249	**ACTMKSF**	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)	TFK, SFH, SFL, SFP **A**	unknown
EDH-GEA-00253	**ACTMKSG**	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)	SGD, SGH, SGL, SGP **A**	unknown

EDH-GEA-00254 ACSMKSG — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)

OEM part number	ACSMKSG	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SGD, SGH, SGL, SGP, 400/800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00255 ACSMKSK — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)

OEM part number	ACSMKSK	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSK [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSK [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SKH, SKL, 800/1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800/1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSK listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00246 ACTMKEB1P — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)

OEM part number	ACTMKEB1P	**A**	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB1P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB1P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB1P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00247	ACTMKEB2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)

OEM part number	ACTMKEB2P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKEB2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 2-pole	A	same as above
Breaker compatibility	TEB, TED, THED	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00248	ACTMKEB3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)

OEM part number	ACTMKEB3P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKEB3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 3-pole	A	same as above
Breaker compatibility	TEB, TED, THED	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00252	ACTMKJD	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)

OEM part number	ACTMKJD	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKJD [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKJD [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TJD, TJJ, TJK, 400 A	A	same as above
Breaker compatibility	TJD, TJJ, TJK	A	same as above
Current rating	400 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKJD listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00250	ACTMKQD2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)

OEM part number	ACTMKQD2P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00251	ACTMKQD3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)

OEM part number	ACTMKQD3P	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00245	ACTMKSE	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)

OEM part number	ACTMKSE	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSE [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSE [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SHE (SEH), SEL, SED, SEP, 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSE listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00249	ACTMKSF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)

OEM part number	ACTMKSF	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSF [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSF [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TFK, SFH, SFL, SFP, 250 A	A	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	A	same as above
Current rating	250 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSF listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00253	ACTMKSG	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)

OEM part number	ACTMKSG	A	S75 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSG [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SGD, SGH, SGL, SGP, 400/600 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400/600 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00276	**SCPFP1**	SCP+ panelboard filler plate 1X	—	unknown
EDH-GEA-00277	**SCPFP2**	SCP+ panelboard filler plate 2X	—	unknown
EDH-GEA-00278	**SCPFP3**	SCP+ panelboard filler plate 3X	—	unknown
EDH-GEA-00279	**SCPFP5**	SCP+ panelboard filler plate 5X	—	unknown

EDH-GEA-00276	SCPFP1	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 1X

OEM part number	SCPFP1	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00277	SCPFP2	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 2X

OEM part number	SCPFP2	A	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00278	SCPFP3	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 3X

OEM part number	SCPFP3	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00279	SCPFP5	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 5X

OEM part number	SCPFP5	**A**	S75 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 5X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

5.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)

FAM-GEA-004 · panelboard · aka Spectra, Spectra Series, SpectraRMS, APN, APNB, Spectra Bolt-On (SBO), Spectra Plug-In · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's power distribution panelboard. Two interior styles: APN plug-in (breakers bolt to AMC circuit breaker mounting modules that latch onto the interior rail and clip onto the bus; ADS fusible switch modules) and APNB bolt-on (breakers bolt to copper straps AMCB kits fastened with carriage bolts/antiturn clips to the vertical bus). Vertical space measured in X units (1X = 1-3/8 in). Box widths 27/31/36/40/44 in, APB boxes and APF fronts, AML main-lug modules, ANK/ANKN neutral kits, AEG ground kits. NOTE on 'APN': in GE nomenclature APN is the Spectra plug-in interior type code (APNB = bolt-on), while APN48/APN84/APN126 (A-Series) and APN49/APN99 (Spectra) are permanent circuit-number tab kits; no 'A-Series power panel' code APN was found.

Attribute	Value	Cl.	Sources
Status	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted' (Obsolescence wording seen only in a search-engine summary of the blocked ABB BuyLog.)	**C**	S75, S93 inference
Successor	ReliaGear neXT power panelboards (ABB) - inferred from ABB BuyLog placing 'Retrofit kit for Spectra panelboards' alongside ReliaGear neXT	**D**	S93, S90 inference
Voltage rating	600 Vac / 250 Vdc max	**A**	S75 p.11-24; oem_spec
Main ampacity	Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, breaker (SF/SG/SK/FG) or fusible switch	**A**	same as above
Branch breakers accepted	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusible switches 30-1200 A	**A**	same as above
x_unit	1X = 1 3/8 in vertical panel space	**A**	S75 p.11-40 note; oem_spec
box_widths	27, 31, 36, 40, 44 in	**A**	S75 p.11-34, 11-35; oem_spec
apn_meaning	APN = Panelboard Interior Type (plug-in); APNB = Panelboard Interior Type bolt-on; structure APN<X-height><amps>U[B4]	**A**	S75 p.11-37; oem_spec
plug_in_vs_bolt_on	Main lug kits bolt directly to interior bus bars (either APN Plug-In Style or APNB Bolt-On Style)	**A**	S75 p.11-28; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Record Plus FC (FCS/FCV/FCN/FCH/FCL), Record Plus FG (FGV/FGN/FGH/FGL/FGP), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S75 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S86 DEH065 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD); S87 GEH5674 R03 Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM); S88 DEH40392 R01 Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL; S89 DEH212 R02 Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S; S90 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S93 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00231	**AML3120CFP**	Spectra main lug module AML3120CFP (1200 A compression)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00226	**AML3120FP**	Spectra main lug module AML3120FP (1200 A mechanical)	—	unknown
EDH-GEA-00227	**AML3250CFP**	Spectra main lug module AML3250CFP (250 A compression)	—	unknown
EDH-GEA-00220	**AML3250FP**	Spectra main lug module AML3250FP (250 A mechanical)	—	unknown
EDH-GEA-00219	**AML3250SFP**	Spectra main lug module AML3250SFP (250 A mechanical)	—	unknown
EDH-GEA-00228	**AML3400CFP**	Spectra main lug module AML3400CFP (400 A compression)	—	unknown
EDH-GEA-00222	**AML3400FP**	Spectra main lug module AML3400FP (400 A mechanical)	—	unknown
EDH-GEA-00221	**AML3400SFP**	Spectra main lug module AML3400SFP (400 A mechanical)	—	unknown
EDH-GEA-00229	**AML3600CFP**	Spectra main lug module AML3600CFP (600 A compression)	—	unknown
EDH-GEA-00224	**AML3600FP**	Spectra main lug module AML3600FP (600 A mechanical)	—	unknown
EDH-GEA-00223	**AML3600SFP**	Spectra main lug module AML3600SFP (600 A mechanical)	—	unknown
EDH-GEA-00230	**AML3800CFP**	Spectra main lug module AML3800CFP (800 A compression)	—	unknown
EDH-GEA-00225	**AML3800FP**	Spectra main lug module AML3800FP (800 A mechanical)	—	unknown

EDH-GEA-00231 **AML3120CFP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120CFP (1200 A compression)

OEM part number	AML3120CFP	**A**	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00226 **AML3120FP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120FP (1200 A mechanical)

OEM part number	AML3120FP	**A**	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00227	AML3250CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250CFP (250 A compression)

OEM part number	AML3250CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00220	AML3250FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250FP (250 A mechanical)

OEM part number	AML3250FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00219	AML3250SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250SFP (250 A mechanical)

OEM part number	AML3250SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	4X module height; box width 27, 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00228	AML3400CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400CFP (400 A compression)

OEM part number	AML3400CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00222	AML3400FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400FP (400 A mechanical)

OEM part number	AML3400FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00221	AML3400SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400SFP (400 A mechanical)

OEM part number	AML3400SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00229	AML3600CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600CFP (600 A compression)

OEM part number	AML3600CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00224	AML3600FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600FP (600 A mechanical)

OEM part number	AML3600FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00223	AML3600SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600SFP (600 A mechanical)

OEM part number	AML3600SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00230	AML3800CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800CFP (800 A compression)

OEM part number	AML3800CFP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00225	AML3800FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800FP (800 A mechanical)

OEM part number	AML3800FP	A	S75 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00243	**AFL120**	Spectra feed-thru lug cover plate kit AFL120	—	unknown
EDH-GEA-00242	**AFL600**	Spectra feed-thru lug cover plate kit AFL600	—	unknown

EDH-GEA-00243	AFL120	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL120

OEM part number	AFL120	A	S75 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	800/1200 A	A	same as above
Dimensions	12X; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

EDH-GEA-00242	AFL600	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL600

OEM part number	AFL600	A	S75 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	A	same as above
Current rating	250/400/600 A	A	same as above
Dimensions	9X; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00119	**AMCB2FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00117	**AMCB2FJFP**	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)	SFH, SFL, SFP A	unknown
EDH-GEA-00118	**AMCB2FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)	TFJ, TFK, THFK A	unknown
EDH-GEA-00120	**AMCB2GMFP**	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)	SGH, SGL, SGP A	unknown
EDH-GEA-00126	**AMCB2KMFP**	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)	SKH, SKL, SKP, TKM, THKM A	unknown
EDH-GEA-00123	**AMCB3FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00121	**AMCB3FJFP**	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)	SFH, SFL, SFP A	unknown
EDH-GEA-00122	**AMCB3FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)	TFJ, TFK, THFK A	unknown
EDH-GEA-00124	**AMCB3GMFP**	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)	SGH, SGL, SGP A	unknown
EDH-GEA-00127	**AMCB3KMFP**	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)	SKH, SKL, SKP, TKM, THKM A	unknown
EDH-GEA-00125	**AMCB3LBFP**	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	SKP (as printed; LB code = THLC2/THLC4 per nomenclature) A	unknown
EDH-GEA-00098	**AMCB4EBFP**	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	TEB, TED A	unknown
EDH-GEA-00099	**AMCB4EYFP**	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	TEY A	unknown
EDH-GEA-00100	**AMCB4FBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)	FBV, FBN, FBH, FBL A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00101	**AMCB4FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00113	**AMCB4FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00109	**AMCB4FJFP**	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00111	**AMCB4FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00114	**AMCB4GBFP**	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00102	**AMCB4QDFP**	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	TQD, THQD **A**	unknown
EDH-GEA-00103	**AMCB4SEFP**	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)	THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00104	**AMCB6EBFP**	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00105	**AMCB6EYFP**	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	TEY **A**	unknown
EDH-GEA-00106	**AMCB6FBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00107	**AMCB6FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00115	**AMCB6FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00110	**AMCB6FJFP**	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00112	**AMCB6FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00116	**AMCB6GBFP**	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00108	**AMCB6QDFP**	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	TQD, THQD **A**	unknown

EDH-GEA-00119 — AMCB2FGMFP

GE | branch-connector-kit | **STATUS UNKNOWN**

Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)

OEM part number	AMCB2FGMFP	**A**	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	**A**	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	**A**	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S75 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00117	AMCB2FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)

OEM part number	AMCB2FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00118	AMCB2FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)

OEM part number	AMCB2FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00120	AMCB2GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)

OEM part number	AMCB2GMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00126	AMCB2KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)

OEM part number	AMCB2KMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00123	AMCB3FGMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)

OEM part number	AMCB3FGMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00121	AMCB3FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)

OEM part number	AMCB3FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00122	AMCB3FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)

OEM part number	AMCB3FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00124	AMCB3GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)

OEM part number	AMCB3GMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00127	AMCB3KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)

OEM part number	AMCB3KMFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00125	AMCB3LBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)

OEM part number	AMCB3LBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3LB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKP (as printed; LB code = THLC2/THLC4 per nomenclature)	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		
Open question	*AMCB3LBFP is listed for 'SKP 2-pole' but LB code = THLC2/THLC4 and the 3 = 3 poles: verify against OEM*		

EDH-GEA-00098	AMCB4EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)

OEM part number	AMCB4EBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00099	AMCB4EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)

OEM part number	AMCB4EYFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-062 (TEY)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00100	AMCB4FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)

OEM part number	AMCB4FBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00101	AMCB4FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)

OEM part number	AMCB4FDBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00113	AMCB4FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)

OEM part number	AMCB4FGBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00109	AMCB4FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)

OEM part number	AMCB4FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00111	AMCB4FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)

OEM part number	AMCB4FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00114	AMCB4GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)

OEM part number	AMCB4GBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00102	AMCB4QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)

OEM part number	AMCB4QDFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Poles	2	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S86 DEH065 Table 1; oem_spec
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	S75 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S86 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S86 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S86, S75 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S86 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00103	AMCB4SEFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)

OEM part number	AMCB4SEFP	**A**	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4SE (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	**A**	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	THED, SED, SEH, SEL, SEP	**A**	S75 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	**A**	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00104	AMCB6EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)

OEM part number	AMCB6EBFP	**A**	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	**A**	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	**A**	S75 p.11-43; oem_spec
Poles	3	**A**	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	**A**	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00105	AMCB6EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)

OEM part number	AMCB6EYFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-062 (TEY)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00106	AMCB6FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)

OEM part number	AMCB6FBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00107	AMCB6FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)

OEM part number	AMCB6FDBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00115	AMCB6FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)

OEM part number	AMCB6FGBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00110	AMCB6FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)

OEM part number	AMCB6FJFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00112	AMCB6FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)

OEM part number	AMCB6FJFPTF	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00116	AMCB6GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)

OEM part number	AMCB6GBFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00108	AMCB6QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)

OEM part number	AMCB6QDFP	A	S75 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S75 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S75 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S75 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S75, S86 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Poles	3	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S86 DEH065 Table 1; oem_spec
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	S75 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S86 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S86 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S86, S75 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S86 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00181	**AMC2FGMFP**	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00179	**AMC2FJFP**	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00178	**AMC2FJFPTF**	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00184	**AMC2FLSFP**	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00182	**AMC2GMFP**	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00180	**AMC2JKFP**	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00183	**AMC2KMFP**	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00162	**AMC3FGMFP**	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00160	**AMC3FJFP**	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00159	**AMC3FJFPTF**	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00165	**AMC3FLSFP**	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00163	**AMC3GMFP**	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00161	**AMC3JKFP**	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00164	**AMC3KMFP**	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00167	**AMC4EBFP**	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	TEB, TED **A**	unknown
EDH-GEA-00176	**AMC4EBSFP**	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00166	**AMC4FDBFP**	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00175	**AMC4FDSFP**	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00173	**AMC4FGBFP**	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00171	**AMC4FJFP**	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00170	**AMC4FJFPTF**	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00177	**AMC4FLSFP**	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00174	**AMC4GBFP**	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00172	**AMC4JKFP**	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00169	**AMC4QDFP**	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown
EDH-GEA-00168	**AMC4SEFP**	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)	SEDA, SEHA, SELA, SEPA, THED **A**	unknown
EDH-GEA-00149	**AMC6EBFP**	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)	TEB, TED, THED, SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00157	**AMC6EBSFP**	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00146	**AMC6EYFP**	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	TEY **A**	unknown
EDH-GEA-00147	**AMC6FBFP**	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00148	**AMC6FDBFP**	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00156	**AMC6FDSPF**	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00154	**AMC6FGBFP**	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)	FGL, FGN, FGH, FGP **A**	unknown
EDH-GEA-00152	**AMC6FJFP**	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00151	**AMC6FJFPTF**	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00158	**AMC6FLSFP**	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00155	**AMC6GBFP**	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max) **A**	unknown
EDH-GEA-00153	**AMC6JKFP**	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00145	**AMC6QBFP**	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	THQB, THHQB **A**	unknown
EDH-GEA-00150	**AMC6QDFP**	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown

EDH-GEA-00181	AMC2FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC2FGMFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00179	AMC2FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC2FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00178	AMC2FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC2FJFPTF	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00184	AMC2FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC2FLSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00182	AMC2GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC2GMFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S87 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S87, S75 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S87 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00180	AMC2JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC2JKFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00183	AMC2KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC2KMFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00162	AMC3FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC3FGMFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00160	AMC3FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC3FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00159	AMC3FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC3FJFPTF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00165	AMC3FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC3FLSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00163	AMC3GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC3GMFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S87 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S87, S75 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S87 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00161	AMC3JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC3JKFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00164	AMC3KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC3KMFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S75 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00167	AMC4EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)

OEM part number	AMC4EBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP2TED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2TED); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP2TED (EDH-GEA-00129)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00176	AMC4EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC4EBSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00166	AMC4FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC4FDBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00175	AMC4FDSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC4FDSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00173	AMC4FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)

OEM part number	AMC4FGBFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00171	AMC4FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC4FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00170	AMC4FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC4FJFPTF	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00177	AMC4FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC4FLSFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00174	AMC4GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC4GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00172	AMC4JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC4JKFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00169	AMC4QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)

OEM part number	AMC4QDFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP2QDD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2QDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	2X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00168	AMC4SEFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)

OEM part number	AMC4SEFP	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4SE (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA, THED	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00149	AMC6EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)

OEM part number	AMC6EBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED, THED, SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00157	AMC6EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC6EBSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00146	AMC6EYFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)

OEM part number	AMC6EYFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EY (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3EYD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TEY	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3EYD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	AFP3EYD (EDH-GEA-00130)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00147	AMC6FBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)

OEM part number	AMC6FBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FBD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FBD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	AFP3FBD (EDH-GEA-00132)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00148	AMC6FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC6FDBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00156	AMC6FDSPF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC6FDSPF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDSPF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00154	AMC6FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)

OEM part number	AMC6FGBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	FGL, FGN, FGH, FGP	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00152	AMC6FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC6FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00151	AMC6FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC6FJFPTF	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00158	AMC6FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC6FLSFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00155	AMC6GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC6GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max)	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S75 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00153	AMC6JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC6JKFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00145	AMC6QBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)

OEM part number	AMC6QBFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3QBD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	THQB, THHQB	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QBD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00150	AMC6QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)

OEM part number	AMC6QDFP	A	S75 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S75 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3QDD	A	S75 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S87 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QDD); breaker not included	A	S75 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S75 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S75 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	bus clip/connector part numbers, Material, Status		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00235	**ANK120D**	Spectra neutral kit ANK120D	—	unknown
EDH-GEA-00234	**ANK800D**	Spectra neutral kit ANK800D	—	unknown
EDH-GEA-00233	**ANKN120**	Spectra neutral kit ANKN120	—	unknown
EDH-GEA-00232	**ANKN400**	Spectra neutral kit ANKN400	—	unknown

EDH-GEA-00235	ANK120D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK120D

OEM part number	ANK120D	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 1200 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00234	ANK800D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK800D

OEM part number	ANK800D	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 800 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	800 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00233	ANKN120	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN120

OEM part number	ANKN120	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 600/800/1200 A, single/dual: 8 main #2-600kcmil, 9 x #14-2/0, 10 x #6-300kcmil, 10 x #14-#4; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	600-1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00232	ANKN400	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN400

OEM part number	ANKN400	A	S75 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 250/400 A, single/dual main: 2 main lugs #2-600kcmil, 16 x #14-2/0, 5 x #6-300kcmil, 24 x #14-#4; includes mechanical lugs and bonding strap	A	S75 p.11-45; oem_spec
Current rating	250/400 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00236	**AEG10**	Spectra equipment ground kit AEG10	—	unknown
EDH-GEA-00237	**AEG21**	Spectra equipment ground kit AEG21	—	unknown
EDH-GEA-00238	**AEG21S**	Spectra equipment ground kit AEG21S	—	unknown
EDH-GEA-00239	**AEG31S**	Spectra equipment ground kit AEG31S	—	unknown
EDH-GEA-00240	**AEG47**	Spectra equipment ground kit AEG47	—	unknown
EDH-GEA-00241	**AEG47S**	Spectra equipment ground kit AEG47S	—	unknown

EDH-GEA-00236	AEG10	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG10

OEM part number	AEG10	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 10 circuits, 10 wires #6-2/0 Cu/Al (cartons of 10)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00237	AEG21	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21

OEM part number	AEG21	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 21 circuits, 9 wires	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00238	AEG21S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21S

OEM part number	AEG21S	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 21 circuits	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00239	AEG31S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG31S

OEM part number	AEG31S	A	S75 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 31 circuits, 10 wires #6-2/0	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00240	AEG47	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47

OEM part number	AEG47	A	S89 DEH212; oem_spec
Description	Equipment ground, bonded for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S89 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S89 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S89 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

EDH-GEA-00241	AEG47S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47S

OEM part number	AEG47S	A	S89 DEH212; oem_spec
Description	Equipment ground, isolated for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S89 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S89 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S89 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00131	**AFP2FBD**	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00128	**AFP2QDD**	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00129	**AFP2TED**	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	TEB, TED **A**	unknown
EDH-GEA-00130	**AFP3EYD**	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	TEY **A**	unknown
EDH-GEA-00132	**AFP3FBD**	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00133	**AFP3QDD**	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00134	**AFP3SED**	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00135	**AFP3SFD**	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00139	**AFP3SFS**	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	SFH, SFL, SFP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00136	**AFP3TFD**	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00140	**AFP3TFS**	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00137	**AFP4FGD**	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00141	**AFP4FGS**	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00138	**AFP4SGD**	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00142	**AFP4SGS**	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00143	**AFP5LCS**	Spectra breaker filler plate kit AFP5LCS (SKP, single)	SKP **A**	unknown
EDH-GEA-00144	**AFP6SKS**	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	SKP, SKH, SKL, TKM, THKM **A**	unknown
EDH-GEA-00244	**AMCB6TEDL**	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	—	unknown
EDH-GEA-00202	**APP1**	Spectra blank filler plate 1X (36, 40 in box)	—	unknown
EDH-GEA-00201	**APP1S**	Spectra blank filler plate 1X (27, 31 in box)	—	unknown
EDH-GEA-00203	**APP1W**	Spectra blank filler plate 1X (44 in box)	—	unknown
EDH-GEA-00205	**APP2**	Spectra blank filler plate 2X (36, 40 in box)	—	unknown
EDH-GEA-00204	**APP2S**	Spectra blank filler plate 2X (27, 31 in box)	—	unknown
EDH-GEA-00206	**APP2W**	Spectra blank filler plate 2X (44 in box)	—	unknown
EDH-GEA-00208	**APP3**	Spectra blank filler plate 3X (36, 40 in box)	—	unknown
EDH-GEA-00207	**APP3S**	Spectra blank filler plate 3X (27, 31 in box)	—	unknown
EDH-GEA-00209	**APP3W**	Spectra blank filler plate 3X (44 in box)	—	unknown
EDH-GEA-00211	**APP4**	Spectra blank filler plate 4X (36, 40 in box)	—	unknown
EDH-GEA-00210	**APP4S**	Spectra blank filler plate 4X (27, 31 in box)	—	unknown
EDH-GEA-00212	**APP4W**	Spectra blank filler plate 4X (44 in box)	—	unknown
EDH-GEA-00214	**APP5**	Spectra blank filler plate 5X (36, 40 in box)	—	unknown
EDH-GEA-00213	**APP5S**	Spectra blank filler plate 5X (27, 31 in box)	—	unknown
EDH-GEA-00215	**APP5W**	Spectra blank filler plate 5X (44 in box)	—	unknown
EDH-GEA-00217	**APP6**	Spectra blank filler plate 6X (36, 40 in box)	—	unknown
EDH-GEA-00216	**APP6S**	Spectra blank filler plate 6X (27, 31 in box)	—	unknown
EDH-GEA-00218	**APP6W**	Spectra blank filler plate 6X (44 in box)	—	unknown

EDH-GEA-00131	**AFP2FBD**	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP2FBD	**A**	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	**A**	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	**A**	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	**A**	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00128	AFP2QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)

OEM part number	AFP2QDD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S86 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00129	AFP2TED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)

OEM part number	AFP2TED	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED	A	S75 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00130	AFP3EYD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3EYD (TEY, dual)

OEM part number	AFP3EYD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEY	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00132	AFP3FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP3FBD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00133	AFP3QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)

OEM part number	AFP3QDD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S86 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00134	AFP3SED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)

OEM part number	AFP3SED	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00135	AFP3SFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)

OEM part number	AFP3SFD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 31-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00139	AFP3SFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)

OEM part number	AFP3SFS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00136	AFP3TFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)

OEM part number	AFP3TFD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Dimensions	2X, 3X vertical; box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00140	AFP3TFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)

OEM part number	AFP3TFS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S75 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00137	AFP4FGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)

OEM part number	AFP4FGD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00141	AFP4FGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)

OEM part number	AFP4FGS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00138	AFP4SGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)

OEM part number	AFP4SGD	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 40-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00142	AFP4SGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)

OEM part number	AFP4SGS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S75 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
OEM instruction document	GEH5674: install filler plate kit AFP4SGS on AMC2GM/AMC3GM module	A	S87 GEH5674 step 5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00143	AFP5LCS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP5LCS (SKP, single)

OEM part number	AFP5LCS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP	A	S75 p.11-43; oem_spec
Dimensions	6X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00144	AFP6SKS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)

OEM part number	AFP6SKS	A	S75 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S75 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S75 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP, SKH, SKL, TKM, THKM	A	S75 p.11-43; oem_spec
Dimensions	6X vertical; box width 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00244	AMCB6TEDL	GE	filler-plate	STATUS UNKNOWN

Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter

OEM part number	AMCB6TEDL	A	S88 p.1; oem_spec
Description	Circuit breaker cover kit for TED136 breaker with TEDL36 current limiter on Spectra APNB bolt-on interiors; 3X (4.125 in) vertical space	A	same as above
Kit contents	(1) filler 36/40W TEDL DB 3X 168D1930P3; (1) filler 44/45W 168D1930P4; (2) cover support 3X 208C1850P3; (1) barrier center 252B1667P1; (1) spacer plate TED6 w/TEDL 252B2056P8; (2) steel drive rivet #10 x 1/2 331A3329P2; (2) thread-forming screw 10-32 x 3/8 N722EP16006B6; instruction DEH40392	A	S88 Table 1; oem_spec
Dimensions	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards	A	S88 p.1; oem_spec
OEM instruction document	DEH40392 R01	A	S88 oem_spec
Identification features	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler	A	S88 steps 2-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, Status		

EDH-GEA-00202	APP1	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (36, 40 in box)

OEM part number	APP1	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00201	APP1S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (27, 31 in box)

OEM part number	APP1S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00203	APP1W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (44 in box)

OEM part number	APP1W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00205	APP2	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (36, 40 in box)

OEM part number	APP2	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00204	APP2S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (27, 31 in box)

OEM part number	APP2S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00206	APP2W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (44 in box)

OEM part number	APP2W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00208	APP3	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (36, 40 in box)

OEM part number	APP3	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00207	APP3S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (27, 31 in box)

OEM part number	APP3S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00209	APP3W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (44 in box)

OEM part number	APP3W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00211	APP4	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (36, 40 in box)

OEM part number	APP4	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00210	APP4S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (27, 31 in box)

OEM part number	APP4S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00212	APP4W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (44 in box)

OEM part number	APP4W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00214	APP5	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (36, 40 in box)

OEM part number	APP5	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00213	APP5S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (27, 31 in box)

OEM part number	APP5S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00215	APP5W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (44 in box)

OEM part number	APP5W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00217	APP6	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (36, 40 in box)

OEM part number	APP6	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00216	APP6S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (27, 31 in box)

OEM part number	APP6S	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00218	APP6W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (44 in box)

OEM part number	APP6W	A	S75 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00194	**AHKBE1**	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	SE A	unknown
EDH-GEA-00195	**AHKBF1**	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	SF A	unknown
EDH-GEA-00200	**AHKBFB1**	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	FB A	unknown
EDH-GEA-00198	**AHKBFD1**	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	FCS, FCV, FCN, FCH, FCL A	unknown
EDH-GEA-00199	**AHKBFG1**	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00196	**AHKBG1**	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	SG A	unknown
EDH-GEA-00197	**AHKBQ1**	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	THQD A	unknown
EDH-GEA-00185	**AHKE1**	Spectra plug-in single-breaker mounting hardware AHKE1	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS A	unknown
EDH-GEA-00186	**AHKEL1**	Spectra plug-in single-breaker mounting hardware AHKEL1	For AMC modules: AMC6EL A	unknown
EDH-GEA-00187	**AHKF1**	Spectra plug-in single-breaker mounting hardware AHKF1	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC A	unknown
EDH-GEA-00192	**AHKFD1**	Spectra plug-in single-breaker mounting hardware AHKFD1	For AMC modules: FCS/FCV/FCN/FCH/FCL modules A	unknown
EDH-GEA-00193	**AHKFG1**	Spectra plug-in single-breaker mounting hardware AHKFG1	For AMC modules: FGV/FGN/FGH/FGP modules A	unknown
EDH-GEA-00188	**AHKG1**	Spectra plug-in single-breaker mounting hardware AHKG1	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM A	unknown
EDH-GEA-00189	**AHKJ1**	Spectra plug-in single-breaker mounting hardware AHKJ1	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK A	unknown
EDH-GEA-00190	**AHKLB1**	Spectra plug-in single-breaker mounting hardware AHKLB1	For AMC modules: AMC3LB, AMC6LB A	unknown
EDH-GEA-00191	**AHKQ1**	Spectra plug-in single-breaker mounting hardware AHKQ1	For AMC modules: AMC4QD, AMC6QD A	unknown

EDH-GEA-00194	AHKBE1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)

OEM part number	AHKBE1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SE	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00195	AHKBF1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)

OEM part number	AHKBF1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SF	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00200	AHKBFB1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)

OEM part number	AHKBFB1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00198	AHKBFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)

OEM part number	AHKBFD1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00199	AHKBFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)

OEM part number	AHKBFG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FGV, FGN, FGH, FGP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00196	AHKBG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)

OEM part number	AHKBG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SG	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00197	AHKBQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)

OEM part number	AHKBQ1	A	S75 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	THQD	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00185	AHKE1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKE1

OEM part number	AHKE1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00186	AHKEL1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKEL1

OEM part number	AHKEL1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EL (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00187	AHKF1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKF1

OEM part number	AHKF1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC4FLS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00192	AHKFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFD1

OEM part number	AHKFD1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FCS/FCV/FCN/FCH/FCL modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00193	AHKFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFG1

OEM part number	AHKFG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FGV/FGN/FGH/FGP modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00188	AHKG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKG1

OEM part number	AHKG1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00189	AHKJ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKJ1

OEM part number	AHKJ1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00190	AHKLB1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKLB1

OEM part number	AHKLB1	A	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC3LB, AMC6LB (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00191	AHKQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKQ1

OEM part number	AHKQ1	**A**	S75 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	**A**	same as above
Breaker compatibility	For AMC modules: AMC4QD, AMC6QD (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	**A**	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	**B**	S75 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Kit contents, Material, Status		

5.9 TRUMBULL — Trumbull Electric (Plainville CT) panelboards and switches

FAM-GEA-010 · panelboard · aka Trumbell (misspelling), GE-Trumbull · markings: Trumbull, Trumbull Electric Mfg. Co., A General Electric Organization

Trumbull Electric was GE's panelboard/switch maker before GE-branded distribution products; later Trumbull panels accept GE breakers per labels. Coded GEA per lineage. No Trumbull hardware part numbers were found.

Attribute	Value	Cl.	Sources
Status	Obsolete; forum states GE and Trumbull breakers share part numbers (e.g., TQL/THQL)	**D**	S158 forum
Era of manufacture	Trumbull Electric Mfg. Co., Plainville CT, labelled 'A General Electric Organization'; split-bus panels into early 1960s	**C**	same as above
Successor	General Electric (GE Industrial -> ABB 2018)	**C**	same as above
Branch breakers accepted	GE-type plug-in (TQL/THQL family) in later panels; ATB-type breakers reported in older Trumbull switchboards (not in SKM library)	**D**	same as above

Key documents: S158 Trumbull Electric panel / GE-Trumbull discussions

5.10 AV-LINE — AV-Line switchboards (legacy)

FAM-GEA-009 · switchboard · aka AV Line, AV-Line · markings: General Electric

Legacy GE distribution switchboard; only surplus listings (800-1600 A, 208Y/120 to 480Y/277 V, Power Break mains) were found. No OEM document located.

Attribute	Value	Cl.	Sources
ratings	Surplus units listed at 800, 1200, 1600 A; 120/208 and 480 V 3ph4w	**C**	S96 surplus_listing

Key documents: S96 Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)

5.11 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family E150 line (TEB, TED, THED, TEC)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00287	**TC012**	GE TC012 copper-only lug, E150/TB1 thru 150A	E150, TB1 (thru 150 A) **A**	current
EDH-GEA-00284	**TCAL12**	GE TCAL12 lug, E150/THLC1/TB1 15-60A	E150, THLC1, TB1; 15-60 A **A**	current
EDH-GEA-00285	**TCAL12A**	GE TCAL12A lug, E150/THLC1/TB1 70-90A	E150, THLC1, TB1; 70-90 A **A**	current
EDH-GEA-00283	**TCAL14**	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A **A**	current
EDH-GEA-00286	**TCAL15**	GE TCAL15 lug, E150/THLC1/TB1 100-150A	E150, THLC1, TB1; 100-150 A **A**	current

EDH-GEA-00287	TC012	GE	lug	CURRENT

GE TC012 copper-only lug, E150/TB1 thru 150A

OEM part number	TC012	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, TB1 (thru 150 A)	A	same as above
Kit contents	1 lug; wire range #14-2/0 Cu	A	same as above
Material	{'value': 'Copper (copper-only lug, with follower and extra plating)', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00284	TCAL12	GE	lug	CURRENT

GE TCAL12 lug, E150/THLC1/TB1 15-60A

OEM part number	TCAL12	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 15-60 A	A	same as above
Current rating	15-60 A	A	same as above
Kit contents	1 lug; wire range (1) #14-3 Cu, #12-1 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00285	TCAL12A	GE	lug	CURRENT

GE TCAL12A lug, E150/THLC1/TB1 70-90A

OEM part number	TCAL12A	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 70-90 A	A	same as above
Current rating	70-90 A	A	same as above
Kit contents	1 lug; wire range (1) #6-2/0 Cu, #4-2/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00283	TCAL14	GE	lug	CURRENT

GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8

OEM part number	TCAL14	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150 (TEB/TED/THED), THLC1, TB1; 15-30 A	A	same as above
Current rating	15-30 A	A	same as above
Kit contents	1 lug; wire range (1) #14-8	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00286	TCAL15	GE	lug	CURRENT

GE TCAL15 lug, E150/THLC1/TB1 100-150A

OEM part number	TCAL15	A	S130, S132, S134 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	E150, THLC1, TB1; 100-150 A	A	same as above
Current rating	100-150 A	A	same as above
Kit contents	1 lug; wire range (1) #3-3/0 Cu, #1-3/0 Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00325	**TEDLS**	GE TEDLS line shield, TEB/TEC/TED/THED	TEB, TEC, TED, THED A	current

EDH-GEA-00325	TEDLS	GE	barrier	CURRENT

GE TEDLS line shield, TEB/TEC/TED/THED

OEM part number	TEDLS	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Installation location	Line end of breaker	C	S130, S132 s1 p. 6-102; s3 p. 3-120; inference
Breaker compatibility	TEB, TEC, TED, THED	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Kit contents, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00386	**TEF1**	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current
EDH-GEA-00387	**TEF2**	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (50 A) A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00388	**TEF3**	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current
EDH-GEA-00389	**TEF4**	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)	E150 2-pole, TB1, THLC1 / SE150 (150 A) **A**	current

EDH-GEA-00386 TEF1 GE breaker-accessory CURRENT

GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (short)

OEM part number	TEF1	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 25/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00387 TEF2 GE breaker-accessory CURRENT

GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long)

OEM part number	TEF2	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (50 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 4 13/32 in (long)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00388 TEF3 GE breaker-accessory CURRENT

GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (short)

OEM part number	TEF3	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 3 13/32 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00389	TEF4	GE	breaker-accessory	CURRENT

GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long)

OEM part number	TEF4	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	E150 2-pole, TB1, THLC1 / SE150 (150 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 5 25/32 in (long)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: E150 line (TEB, TED, THED, TEC), Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family F225 line (TFJ, TFK, THFK, TFC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00289	**TCALK324**	GE TCALK324 3-lug kit, F225	F225 **A**	current

EDH-GEA-00289	TCALK324	GE	lug-kit	CURRENT

GE TCALK324 3-lug kit, F225

OEM part number	TCALK324	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	F225	**A**	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00290	**TC024**	GE TC024 copper-only lug, TFJ 250A	TFJ (250 A) **A**	current
EDH-GEA-00288	**TCAL24**	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	F225 (TFJ/TFK/THFK) **A**	current
EDH-GEA-00291	**TCAL27**	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	THLC2 **A**	discontinued

EDH-GEA-00290	TC024	GE	lug	CURRENT

GE TC024 copper-only lug, TFJ 250A

OEM part number	TC024	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ (250 A)	A	same as above
Kit contents	1 lug; wire range #4-300 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00288	TCAL24	GE	lug	CURRENT

GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL24	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F225 (TFJ/TFK/THFK)	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00291	TCAL27	GE	lug	DISCONTINUED

GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL27	A	S132 s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	THLC2	A	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In the 9/12 table but absent from the 11/13 and 1/19 lug tables)	C	S130, S132 s3 p. 3-120; absent from s1 p. 6-102; inference
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which F225-type frame is THLC2, and what replaced TCAL27 when it left the table?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00326	**TFKLS**	GE TFKLS line shield, TFJ/TFK/TFC	TFJ, TFK, TFC **A**	current

EDH-GEA-00326	TFKLS	GE	barrier	CURRENT

GE TFKLS line shield, TFJ/TFK/TFC

OEM part number	TFKLS	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, TFC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00390	**TFK1**	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current
EDH-GEA-00391	**TFK2**	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	TFJ, TFK, THFK / SF250 (225-250 A) **A**	current

EDH-GEA-00390	TFK1	GE	breaker-accessory	CURRENT

GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)

OEM part number	TFK1	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 2 23/32 in (short)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00391	TFK2	GE	breaker-accessory	CURRENT

GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)

OEM part number	TFK2	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TFJ, TFK, THFK / SF250 (225-250 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 31/32 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: F225 line (TFJ, TFK, THFK, TFC), Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00300	**TCALK343**	GE TCALK343 3-lug kit, TLB4/THLC4	TLB4, THLC4 A	discontinued
EDH-GEA-00294	**TCALK347**	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	J400, TJD A	discontinued
EDH-GEA-00296	**TCALK363**	GE TCALK363 3-lug kit, J600 450-600A	J600 (450-600 A) A	current

EDH-GEA-00300 **TCALK343** GE lug-kit **DISCONTINUED**

GE TCALK343 3-lug kit, TLB4/THLC4

OEM part number	TCALK343	A	S132 s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	3 lugs; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	C	S130, S132 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00294 **TCALK347** GE lug-kit **DISCONTINUED**

GE TCALK347 3-lug kit, J400/TJD 750 kcmil

OEM part number	TCALK347	A	S132 s3 p. 3-120; oem_spec
Description	3-lug kit (TCAL47 range)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD	A	same as above
Kit contents	3 lugs; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	discontinued (In 9/12 but not in the 11/13 or 1/19 tables)	C	S130, S132 absent from s1 p. 6-102; inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00296 **TCALK363** GE lug-kit **CURRENT**

GE TCALK363 3-lug kit, J600 450-600A

OEM part number	TCALK363	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A)	A	same as above
Kit contents	3 lugs; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00297	**TC043**	GE TC043 copper-only lug, J400/TB4	J400, TB4 A	current
EDH-GEA-00298	**TC063**	GE TC063 copper-only lug, J600	J600 A	current
EDH-GEA-00292	**TCAL43**	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all rating A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00293	**TCAL47**	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	J400, TJD; alternate on TJJ/TJK 400A **A**	current
EDH-GEA-00295	**TCAL63**	GE TCAL63 lug, J600 450-600A	J600 (450-600 A); TJK/THJK 600A frame 450-600 A **A**	current
EDH-GEA-00299	**TCLK43**	GE TCLK43 lug, TLB4/THLC4	TLB4, THLC4 **A**	current

EDH-GEA-00297 TC043 GE lug CURRENT

GE TC043 copper-only lug, J400/TB4

OEM part number	TC043	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4	**A**	same as above
Kit contents	1 lug; wire range (1) 6-600 kcmil or (2) 1/0-250 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00298 TC063 GE lug CURRENT

GE TC063 copper-only lug, J600

OEM part number	TC063	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	J600	**A**	same as above
Kit contents	1 lug; wire range (2) 250-350 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00292 TCAL43 GE lug CURRENT

GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD

OEM part number	TCAL43	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Alternate / superseded numbers	TCAL433 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL433 / TCAL432'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Footnote 2/3 on p. 6-36/37 reads 'Alternate lug for 750 kcmil Cu/Al cable, Product Number TCAL47'.)	**B**	S130, S132 alias; s1 p. 6-36; s3 TJJ/TJK tables; oem_spec
Description	Copper-aluminum single lug, standard lug on TJJ/TJK 400A frames and on J600 frames rated 250-400 A	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36, 6-37; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	J400, TB4, J600 (thru 400 A), TJD; TJJ/TJK/THJK 400A frame (all ratings); TJK/THJK 600A frame 250-400 A	**A**	same as above
Kit contents	1 lug; order 2 per pole; wire range (1) 6-600 kcmil or (2) 2/0-250 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00293	TCAL47	GE	lug	CURRENT

GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al

OEM part number	TCAL47	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-36 fn; oem_spec
Description	Copper-aluminum single lug, alternate lug for 750 kcmil Cu/Al cable on TJJ/TJK	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J400, TJD; alternate on TJJ/TJK 400A	A	same as above
Kit contents	1 lug; wire range (1) 750 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00295	TCAL63	GE	lug	CURRENT

GE TCAL63 lug, J600 450-600A

OEM part number	TCAL63	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-37; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600 (450-600 A); TJK/THJK 600A frame 450-600 A	A	same as above
Kit contents	1 lug; order 2 per pole; wire range (2) 4/0-350 kcmil Cu or (2) 300-500 kcmil Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00299	TCLK43	GE	lug	CURRENT

GE TCLK43 lug, TLB4/THLC4

OEM part number	TCLK43	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TLB4, THLC4	A	same as above
Kit contents	1 lug; wire range (1) 3/0-500 kcmil or (2) 3/0-250 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00327	**TJKLS**	GE TJKLS line shield, TJJ/TJK/TJC	TJJ, TJK, TJC A	current

EDH-GEA-00327	TJKLS	GE	barrier	CURRENT

GE TJKLS line shield, TJJ/TJK/TJC

OEM part number	TJKLS	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TJJ, TJK, TJC	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Dimensions, Fasteners, OEM instruction document, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00334	**TJLVK**	GE TJLVK line voltage control wire kit, J600	J600 A	discontinued

EDH-GEA-00334	TJLVK	GE	breaker-accessory	DISCONTINUED

GE TJLVK line voltage control wire kit, J600

OEM part number	TJLVK	A	S132 s3 p. 3-120; oem_spec
Alternate / superseded numbers	TJLVK8 (as printed) [alias] (Footnote 8 = '3-pole kit')	B	same as above
Description	Line voltage control wire kit for terminating control wire at breaker lugs (3-pole kit per footnote)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J600	A	same as above
Status	discontinued (Not in the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: J400 / J600 line (TJJ, TJK, THJK, TJD, TJC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00313	**TCALK2121**	GE TCALK2121 2-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00317	**TCALK2122**	GE TCALK2122 2-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00305	**TCALK261**	GE TCALK261 2-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00309	**TCALK281**	GE TCALK281 2-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00320	**TCALK291**	GE TCALK291 2-lug kit, TK4V load end	TK4V - load end B	current
EDH-GEA-00314	**TCALK3121**	GE TCALK3121 3-lug kit with wrench (TCAL121)	K1200 (1000-1200 A) B	current
EDH-GEA-00318	**TCALK3122**	GE TCALK3122 3-lug kit (TCAL122)	K1200 (1200 A) B	current
EDH-GEA-00302	**TCALK341**	GE TCALK341 3-lug kit, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	discontinued
EDH-GEA-00306	**TCALK361**	GE TCALK361 3-lug kit with wrench, K1200/TB6	K1200, TB6 (300-600 A) A	current
EDH-GEA-00310	**TCALK381**	GE TCALK381 3-lug kit with wrench (TCAL81)	K1200/TB8 600-800 A; Spectra SK1200 300-800 A A	current
EDH-GEA-00321	**TCALK391**	GE TCALK391 3-lug kit, TK4V load end	TK4V - load end B	current

EDH-GEA-00313	TCALK2121	GE	lug-kit	CURRENT

GE TCALK2121 2-lug kit with wrench (TCAL121)

OEM part number	TCALK2121	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21214 / TCALK21212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21214/TCALK21212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00317	TCALK2122	GE	lug-kit	CURRENT

GE TCALK2122 2-lug kit (TCAL122)

OEM part number	TCALK2122	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK21225 / TCALK21223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK21225/TCALK21223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00305	TCALK261	GE	lug-kit	CURRENT

GE TCALK261 2-lug kit with wrench, K1200/TB6

OEM part number	TCALK261	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	2 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00309	TCALK281	GE	lug-kit	CURRENT

GE TCALK281 2-lug kit with wrench (TCAL81)

OEM part number	TCALK281	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK2812 / TCALK2811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2812/TCALK2811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	2-lug kit with wrench	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00320	TCALK291	GE	lug-kit	CURRENT

GE TCALK291 2-lug kit, TK4V load end

OEM part number	TCALK291	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK2912 / TCALK2911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK2912/TCALK2911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	2-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	2 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00314	TCALK3121	GE	lug-kit	CURRENT

GE TCALK3121 3-lug kit with wrench (TCAL121)

OEM part number	TCALK3121	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31214 / TCALK31212 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31214/TCALK31212'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1000-1200 A)	B	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00318	TCALK3122	GE	lug-kit	CURRENT

GE TCALK3122 3-lug kit (TCAL122)

OEM part number	TCALK3122	**B**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK31225 / TCALK31223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK31225/TCALK31223'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	**B**	same as above
Description	3-lug kit with wrench	**B**	same as above
Application	accessory	**B**	same as above
Breaker compatibility	K1200 (1200 A)	**B**	same as above
Kit contents	3 lugs + wrench; wire range (3) 750 kcmil Cu-Al	**B**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**B**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00302	TCALK341	GE	lug-kit	DISCONTINUED

GE TCALK341 3-lug kit, K1200/TB6 300-400A

OEM part number	TCALK341	**A**	S132 s3 p. 3-120; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	**A**	same as above
Kit contents	3 lugs; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	discontinued (Not in the 11/13 or 1/19 tables)	**C**	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00306	TCALK361	GE	lug-kit	CURRENT

GE TCALK361 3-lug kit with wrench, K1200/TB6

OEM part number	TCALK361	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	**A**	same as above
Kit contents	3 lugs + wrench; wire range (2) 2/0-500 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00310	TCALK381	GE	lug-kit	CURRENT

GE TCALK381 3-lug kit with wrench (TCAL81)

OEM part number	TCALK381	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCALK3812 / TCALK3811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3812/TCALK3811'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit with wrench	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200/TB8 600-800 A; Spectra SK1200 300-800 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00321	TCALK391	GE	lug-kit	CURRENT

GE TCALK391 3-lug kit, TK4V load end

OEM part number	TCALK391	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCALK3912 / TCALK3911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCALK3912/TCALK3911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-lug kit with wrench	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	3 lugs + wrench; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00315	**TC0121**	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	K1200 (1000-1200 A); Spectra SK1200 600-1200 A A	current
EDH-GEA-00324	**TC0131**	GE TC0131 copper lug, TK4V load end	TK4V - load end A	current
EDH-GEA-00303	**TC041**	GE TC041 copper-only lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	current
EDH-GEA-00307	**TC061**	GE TC061 copper-only lug, K1200/TB6 300-600A	K1200, TB6 (300-600 A) A	current
EDH-GEA-00311	**TC081A**	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A A	current
EDH-GEA-00323	**TC091**	GE TC091 copper lug, TK4V load end	TK4V - load end A	current
EDH-GEA-00312	**TCAL121**	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A A	current
EDH-GEA-00316	**TCAL122**	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	K1200 (1200 A) B	current
EDH-GEA-00322	**TCAL131**	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	TK4V - load end B	current
EDH-GEA-00301	**TCAL41**	GE TCAL41 lug, K1200/TB6 300-400A	K1200, TB6 (300-400 A) A	current
EDH-GEA-00304	**TCAL61**	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	K1200, TB6 (300-600 A) A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00308	**TCAL81**	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 **A**	current
EDH-GEA-00319	**TCAL91**	GE TCAL91 lug, TK4V load end, (3) 3/0-500	TK4V - load end **B**	current

EDH-GEA-00315 TC0121 GE lug CURRENT

GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A

OEM part number	TC0121	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO121 (Printed TCO121 (letter O) in the 2012 Spectra table)	**B**	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	K1200 (1000-1200 A); Spectra SK1200 600-1200 A	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00324 TC0131 GE lug CURRENT

GE TC0131 copper lug, TK4V load end

OEM part number	TC0131	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TK4V - load end	**A**	same as above
Kit contents	1 lug; wire range (4) 250-400 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Is this printed as TC0131 (zero) or TCO131 (letter O)? Is there a trailing footnote digit?*		

EDH-GEA-00303	TC041	GE	lug	CURRENT

GE TC041 copper-only lug, K1200/TB6 300-400A

OEM part number	TC041	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TC0416 / TC0414 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TC0416 (2012, fn6 'Not UL listed') / TC0414 (2019, fn4 'Not UL listed')'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The base number TC041 is printed in the 2012 lug-cover row.)	B	same as above
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (1) 1/0-600 kcmil or (2) 1/0-250 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Identification features	Not UL listed (per table footnote) (Taken from the footnote digit appended to the printed part number)	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Torque values		

EDH-GEA-00307	TC061	GE	lug	CURRENT

GE TC061 copper-only lug, K1200/TB6 300-600A

OEM part number	TC061	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00311	TC081A	GE	lug	CURRENT

GE TC081A copper lug, K1200/TB8/SK1200 600-800A

OEM part number	TC081A	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO81A (The 2012 Spectra table prints letter 'O' (TCO81A); the general table prints zero (TC081A).)	B	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug with follower and extra plating	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200, TB8 (600-800 A); Spectra SK1200 300-800 A	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu (6-102); (3) 250-500 kcmil (6-103)	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*The two tables give different wire ranges (3/0-500 vs 250-500 kcmil). Which is correct?*		

EDH-GEA-00323	TC091	GE	lug	CURRENT

GE TC091 copper lug, TK4V load end

OEM part number	TC091	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-only lug with follower and extra plating	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TK4V - load end	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-102; s3 p. 3-120'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00312	TCAL121	GE	lug	CURRENT

GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL121	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Alternate / superseded numbers	TCAL1214 / TCAL1212 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1214 (2012 fn4) / TCAL1212 (2019 fn2)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Suitable for 500 kcmil copper for voltage drop considerations'.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s3 TKMA 1200A table; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 (1000-1200 A); TKMA/THKMA 1000-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al (TKMA table: (4) 300-500 Al)	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G2 (EDH-GEA-00329)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00316	TCAL122	GE	lug	CURRENT

GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al

OEM part number	TCAL122	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1225 / TCAL1223 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1225 (2012 fn5) / TCAL1223 (2019 fn3)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not UL listed, requires user supplied lug cover'. The bare base number TCAL122 is not printed anywhere, so it is inferred.)	B	same as above
Description	Copper-aluminum single lug; not UL listed, requires user-supplied lug cover (footnote)	B	same as above
Application	accessory	B	same as above
Breaker compatibility	K1200 (1200 A)	B	same as above
Kit contents	1 lug; wire range (3) 750 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, lug cover part number (footnote says a user-supplied lug cover is required), Torque values		
Open question	*Confirm that the orderable base number is TCAL122 (for example on a distributor or ABB product page).*		

EDH-GEA-00322	TCAL131	GE	lug	CURRENT

GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al

OEM part number	TCAL131	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL1314 / TCAL1312 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL1314/TCAL1312'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (4) 250-350 kcmil Cu or (4) 250-500 kcmil Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00301	TCAL41	GE	lug	CURRENT

GE TCAL41 lug, K1200/TB6 300-400A

OEM part number	TCAL41	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-400 A)	A	same as above
Kit contents	1 lug; wire range (2) 1/0-250 kcmil or (1) #4-600 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00304	TCAL61	GE	lug	CURRENT

GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500

OEM part number	TCAL61	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6 (300-600 A)	A	same as above
Kit contents	1 lug; wire range (2) 2/0-500 kcmil Cu-Al	A	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00308	TCAL81	GE	lug	CURRENT

GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500

OEM part number	TCAL81	A	S130, S132, S133 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Alternate / superseded numbers	TCAL812 / TCAL811 (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL812 (2012) / TCAL811 (2019)'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. Both footnotes read 'Not suitable for 100 A aluminum conductor'. TCAL81 is printed bare in the Spectra SK1200 table, TKMA tables and lug-cover row.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Plated extruded aluminum lug for Cu or Al cables (per the Spectra table)	A	S130, S132, S133 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; s1 p. 6-11 cross-ref; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200 / TB8 (600-800 A); TKMA/THKMA 600-800 A; Spectra SK1200 300-800 A; SK800	A	same as above
Current rating	300-800 A (SK1200 table)	A	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
OEM instruction document	TKM application requires lug cover 789A448G1 (two per breaker)	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Requires	789A448G1 (EDH-GEA-00328)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00319	TCAL91	GE	lug	CURRENT

GE TCAL91 lug, TK4V load end, (3) 3/0-500

OEM part number	TCAL91	B	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Alternate / superseded numbers	TCAL912 / TCAL911 [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCAL912/TCAL911'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	Copper-aluminum single lug	B	same as above
Application	accessory	B	same as above
Installation location	Load end of TK4V breaker	A	same as above
Breaker compatibility	TK4V - load end	B	same as above
Kit contents	1 lug; wire range (3) 3/0-500 kcmil Cu-Al	B	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	B	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00332	**TKMC1**	GE TKMC1 connector (back strap), TKM	TKM **A**	current

EDH-GEA-00332	TKMC1	GE	connector-strap	CURRENT

GE TKMC1 connector (back strap), TKM

OEM part number	TKMC1	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Connector (back strap)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What is the TKMC1 back strap geometry, and which end of the breaker does it fit?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00331	**286A8066G1**	GE 286A8066G1 lug cover, TH4V/THK9V	TH4V, THK9V A	discontinued
EDH-GEA-00328	**789A448G1**	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	TKM with TC061, TCAL61, TCAL81 or TC081A lugs A	current
EDH-GEA-00329	**789A448G2**	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	TKM with TC0121 or TCAL121 lugs A	current
EDH-GEA-00330	**789A448G3**	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	TKM with TC041 or TCAL41 lugs C	discontinued
EDH-GEA-00333	**SKLVK**	GE SKLVK line voltage control wire kit, K1200/SK1200	K1200; Spectra SK1200 A	current
EDH-GEA-00394	**TKM11**	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current
EDH-GEA-00395	**TKM12**	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	K1200, TB6, TB8 / SK1200 (1200 A) A	current

EDH-GEA-00331	286A8066G1	GE	breaker-accessory	DISCONTINUED

GE 286A8066G1 lug cover, TH4V/THK9V

OEM part number	286A8066G1	A	S132 s3 p. 3-120; oem_spec
Description	Lug cover	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TH4V, THK9V	A	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00328	789A448G1	GE	breaker-accessory	CURRENT

GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)

OEM part number	789A448G1	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC061, TCAL61, TCAL81 or TC081A lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00329	789A448G2	GE	breaker-accessory	CURRENT

GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)

OEM part number	789A448G2	A	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Lug cover, TKM breaker (two per breaker)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	TKM with TC0121 or TCAL121 lugs	A	same as above
Kit contents	two required per breaker	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00330	789A448G3	GE	breaker-accessory	DISCONTINUED

GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain

OEM part number	789A448G3	C	S132 s3 p. 3-120; oem_spec
Alternate / superseded numbers	789A448G377 (as printed) [alias] (The printed string '789A448G377' probably carries footnote digit(s) 7 ('End cover supplied with 800A frame is used as lug cover'). The base number may be 789A448G3 or 789A448G37.)	C	same as above
Description	Lug cover, TKM breaker (two per breaker)	C	same as above
Application	accessory	C	same as above
Breaker compatibility	TKM with TC041 or TCAL41 lugs	C	same as above
Status	discontinued (Row absent from the 1/19 table)	C	S130, S132 inference
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the true number 789A448G3 or 789A448G37?*		

EDH-GEA-00333	SKLVK	GE	breaker-accessory	CURRENT

GE SKLVK line voltage control wire kit, K1200/SK1200

OEM part number	SKLVK	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SKLVK6 / SKLVK8 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'SKLVK8/SKLVK6'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs. The footnote is '3-pole kit'.)	B	S130, S132 alias; s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	S130, S132 s1 p. 6-102; s3 p. 3-120; s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	K1200; Spectra SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-102/6-103; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00394	TKM11	GE	breaker-accessory	CURRENT

GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in

OEM part number	TKM11	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 5 1/2 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00395	TKM12	GE	breaker-accessory	CURRENT

GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in

OEM part number	TKM12	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	K1200, TB6, TB8 / SK1200 (1200 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 8 in	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8), Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

Breaker family Record Plus FB 100

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00370	**FCALK12**	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A **A**	current
EDH-GEA-00372	**FCALK13**	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A **A**	current
EDH-GEA-00374	**FCALK14**	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A **A**	current

EDH-GEA-00370	FCALK12	GE	lug-kit	CURRENT

GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A

OEM part number	FCALK12	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	3 lugs; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00372	FCALK13	GE	lug-kit	CURRENT

GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A

OEM part number	FCALK13	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	3 lugs; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00374	FCALK14	GE	lug-kit	CURRENT

GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A

OEM part number	FCALK14	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Lug kit, set of 3; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	3 lugs; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00369	**FCAL12**	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	Record Plus FB 100 and FC 100; 15-20 A A	current
EDH-GEA-00371	**FCAL13**	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	Record Plus FB 100 and FC 100; 25-60 A A	current
EDH-GEA-00373	**FCAL14**	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	Record Plus FB 100 and FC 100; 70-100 A A	current

EDH-GEA-00369	FCAL12	GE	lug	CURRENT

GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A

OEM part number	FCAL12	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 15-20 A	A	same as above
Current rating	15-20 A	A	same as above
Kit contents	1 lug; wire range 14-10 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00371	FCAL13	GE	lug	CURRENT

GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A

OEM part number	FCAL13	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 25-60 A	A	same as above
Current rating	25-60 A	A	same as above
Kit contents	1 lug; wire range 10-4 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00373	FCAL14	GE	lug	CURRENT

GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A

OEM part number	FCAL14	A	S130 s1 p. 6-73, 6-78; oem_spec
Description	Single lug; strip length .40-.50 in	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FB 100 and FC 100; 70-100 A	A	same as above
Current rating	70-100 A	A	same as above
Kit contents	1 lug; wire range 4-1/0 Cu/Al	A	same as above
Torque values	#10 AWG 35 in-lb; #8 AWG 40 in-lb; #6-#4 AWG 45 in-lb; #3 AWG-1/0 50 in-lb (lug tightening torque table)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-73; oem_spec
Cross-links	Breakers: Record Plus FB 100, Record Plus FC 100		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FE 250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00376	**FCALK15**	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00377	**FCALK15LV**	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	Record Plus FE 250; 150 A **A**	current
EDH-GEA-00379	**FCALK16**	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00380	**FCALK16LV**	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	Record Plus FE 250; 250 A **A**	current

EDH-GEA-00376 FCALK15 GE lug-kit CURRENT

GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)

OEM part number	FCALK15	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00377 FCALK15LV GE lug-kit CURRENT

GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)

OEM part number	FCALK15LV	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 150 A	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	lug kit with control wire terminal; wire range #14-3/0 Cu/Al	**A**	same as above
Torque values	Lug torque 150 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00379 FCALK16 GE lug-kit CURRENT

GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)

OEM part number	FCALK16	**A**	S130 s1 p. 6-81; oem_spec
Description	Lug kit: 3 lugs + lug cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FE 250; 250 A	**A**	same as above
Current rating	250 A	**A**	same as above
Kit contents	3 lugs + lug cover; wire range #8-250 MCM Cu / #8-350 MCM Al	**A**	same as above
Torque values	Lug torque 275 in-lb max	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00380	FCALK16LV	GE	lug-kit	CURRENT

GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)

OEM part number	FCALK16LV	A	S130 s1 p. 6-81; oem_spec
Description	Lug kit with control wire terminal	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	lug kit with control wire terminal; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00375	**FCAL15**	GE FCAL15 single lug, Record Plus FE 250 (150 A)	Record Plus FE 250; 150 A A	current
EDH-GEA-00378	**FCAL16**	GE FCAL16 single lug, Record Plus FE 250 (250 A)	Record Plus FE 250; 250 A A	current

EDH-GEA-00375	FCAL15	GE	lug	CURRENT

GE FCAL15 single lug, Record Plus FE 250 (150 A)

OEM part number	FCAL15	A	S130 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 150 A	A	same as above
Current rating	150 A	A	same as above
Kit contents	1 lug; wire range #14-3/0 Cu/Al	A	same as above
Torque values	Lug torque 150 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

EDH-GEA-00378	FCAL16	GE	lug	CURRENT

GE FCAL16 single lug, Record Plus FE 250 (250 A)

OEM part number	FCAL16	A	S130 s1 p. 6-81; oem_spec
Description	Single lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Record Plus FE 250; 250 A	A	same as above
Current rating	250 A	A	same as above
Kit contents	1 lug; wire range #8-250 MCM Cu / #8-350 MCM Al	A	same as above
Torque values	Lug torque 275 in-lb max	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-81; oem_spec
Cross-links	Breakers: Record Plus FE 250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Breaker family Record Plus FG 600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00381	**FCALK218H**	GE FCALK218H 2-pole lug kit, Record Plus FG 600	Record Plus FG 600, 2-pole **A**	current
EDH-GEA-00382	**FCALK318H**	GE FCALK318H 3-pole lug kit, Record Plus FG 600	Record Plus FG 600, 3-pole **A**	current

EDH-GEA-00381 **FCALK218H** GE lug-kit **CURRENT**

GE FCALK218H 2-pole lug kit, Record Plus FG 600

OEM part number	FCALK218H	**A**	S130 s1 p. 6-88; oem_spec
Description	2-pole lug kit for FG600, top and bottom lug types	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600, 2-pole	**A**	same as above
Poles	2	**A**	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	**A**	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		
Open question	*How many lugs are in the kit, and are the top and bottom lugs different parts?*		

EDH-GEA-00382 **FCALK318H** GE lug-kit **CURRENT**

GE FCALK318H 3-pole lug kit, Record Plus FG 600

OEM part number	FCALK318H	**A**	S130 s1 p. 6-88; oem_spec
Description	3-pole lug kit for FG600 (table lists FCALK218H/FCALK318H against the 3-pole row)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600, 3-pole	**A**	same as above
Poles	3	**A**	same as above
Kit contents	wire range Top: wire #8-400 kcmil Cu / #6-500 kcmil Al, lug-strap #8-#4 AWG Cu/Al; Bottom: wire #2/0-600 kcmil Cu/Al, lug-strap #3 AWG-600 kcmil Cu/Al	**A**	same as above
Torque values	Top: wire-lug 275 lb-in (31 N-m), lug-strap 200 lb-in (23 N-m); bottom: wire-lug 375 lb-in (42 N-m), lug-strap 200 lb-in (23 N-m); strip length 7/8 in top, 1 5/8 in bottom	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00384	**FGJS3**	GE FGJS3 terminal shield fin cover, Record Plus FG	Record Plus FG 600 **A**	current

EDH-GEA-00384 **FGJS3** GE barrier **CURRENT**

GE FGJS3 terminal shield fin cover, Record Plus FG

OEM part number	FGJS3	**A**	S130 s1 p. 6-88; oem_spec
Description	Terminal shield fin cover	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00383	**FGH1LCK**	GE FGH1LCK lug cover kit, Record Plus FG	Record Plus FG 600 **A**	current
EDH-GEA-00385	**FGJN3**	GE FGJN3 nut plate / terminal shoe, Record Plus FG	Record Plus FG 600 **A**	current

EDH-GEA-00383 **FGH1LCK** GE breaker-accessory **CURRENT**

GE FGH1LCK lug cover kit, Record Plus FG

OEM part number	FGH1LCK	**A**	S130 s1 p. 6-88; oem_spec
Description	Lug cover kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00385 **FGJN3** GE breaker-accessory **CURRENT**

GE FGJN3 nut plate / terminal shoe, Record Plus FG

OEM part number	FGJN3	**A**	S130 s1 p. 6-88; oem_spec
Description	Nut plate / terminal shoe	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Record Plus FG 600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-88; oem_spec
Cross-links	Breakers: Record Plus FG 600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SE150

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00364	**TCAL19PD3**	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	SE1, TED; max 125 A **A**	current
EDH-GEA-00336	**TCALK318**	GE TCALK318 3-lug kit, Spectra SE150	Spectra RMS SE150 **A**	current

EDH-GEA-00364 **TCAL19PD3** GE lug-kit **CURRENT**

GE TCAL19PD3 3-lug power distribution kit, SE1/TED

OEM part number	TCAL19PD3	**A**	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	**A**	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	**A**	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	**A**	same as above
Kit contents	3-lug power distribution kit; wire range (2) 4-14 or (1) 2/0-4 Cu only	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00336	TCALK318	GE	lug-kit	CURRENT

GE TCALK318 3-lug kit, Spectra SE150

OEM part number	TCALK318	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SE150	**A**	same as above
Current rating	15-150 A	**A**	same as above
Kit contents	3 lugs; wire range (1) #12-3/0 Cu or Al	**A**	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00354	**TC018**	GE TC018 (TCO18) plated copper lug, SE150	Spectra RMS SE150 **A**	current
EDH-GEA-00335	**TCAL18**	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	Spectra RMS SE150 **A**	current
EDH-GEA-00360	**TCAL18LV**	GE TCAL18LV lug with control-voltage quick connect, SE150	Spectra RMS SE150 **A**	current
EDH-GEA-00363	**TCAL19PD1**	GE TCAL19PD1 power distribution lug, SE1/TED 125A	SE1, TED; max 125 A **A**	current

EDH-GEA-00354	TC018	GE	lug	CURRENT

GE TC018 (TCO18) plated copper lug, SE150

OEM part number	TC018	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	TCO18 (2012 prints TCO18 (letter O); 2019 prints TC018)	**B**	S132 alias; s3 p. 3-121; oem_spec
Description	Plated copper lug	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	**A**	same as above
Breaker compatibility	Spectra RMS SE150	**A**	same as above
Current rating	15-150 A	**A**	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu	**A**	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00335	TCAL18	GE	lug	CURRENT

GE TCAL18 lug, Spectra SE150, (1) #12-3/0

OEM part number	TCAL18	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug for terminating copper or aluminum cables	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug; wire range (1) #12-3/0 Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00360	TCAL18LV	GE	lug	CURRENT

GE TCAL18LV lug with control-voltage quick connect, SE150

OEM part number	TCAL18LV	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Current rating	15-150 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #12-3/0 Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00363	TCAL19PD1	GE	lug	CURRENT

GE TCAL19PD1 power distribution lug, SE1/TED 125A

OEM part number	TCAL19PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SE1, TED; max 125 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	125 A max	A	same as above
Kit contents	1 power distribution lug; wire range (2) 4-14 or (1) 2/0-4 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SE150, E150 line (TEB, TED, THED, TEC)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00347	**SE3LCK**	GE SE3LCK lug cover kit, SE150 line end	Spectra RMS SE150 A	current
EDH-GEA-00348	**SE3LCKL**	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	Spectra RMS SE150 with SEFR1 handle A	current

EDH-GEA-00347	SE3LCK	GE	breaker-accessory	CURRENT

GE SE3LCK lug cover kit, SE150 line end

OEM part number	SE3LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SE150	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00348	SE3LCKL	GE	breaker-accessory	CURRENT

GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)

OEM part number	SE3LCKL	A	S130 s1 p. 6-103; oem_spec
Description	SE150 lug cover kit (modified for SEFR1 handle)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SE150 with SEFR1 handle	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SE150		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SF250

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00366	**TCAL28PD3**	GE TCAL28PD3 3-lug power distribution kit, SF	SF; max 250 A A	current
EDH-GEA-00338	**TCALK329**	GE TCALK329 3-lug kit, Spectra SF250	Spectra RMS SF250 A	current

EDH-GEA-00366	TCAL28PD3	GE	lug-kit	CURRENT

GE TCAL28PD3 3-lug power distribution kit, SF

OEM part number	TCAL28PD3	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00338	TCALK329	GE	lug-kit	CURRENT

GE TCALK329 3-lug kit, Spectra SF250

OEM part number	TCALK329	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	3 lugs; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00365	**TCAL28PD1**	GE TCAL28PD1 power distribution lug, SF 250A	SF; max 250 A A	current
EDH-GEA-00337	**TCAL29**	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	Spectra RMS SF250 A	current
EDH-GEA-00361	**TCAL29LV**	GE TCAL29LV lug with control-voltage quick connect, SF250	Spectra RMS SF250 A	current
EDH-GEA-00355	**TCO29**	GE TCO29 plated copper lug, SF250	Spectra RMS SF250 A	current

EDH-GEA-00365	TCAL28PD1	GE	lug	CURRENT

GE TCAL28PD1 power distribution lug, SF 250A

OEM part number	TCAL28PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SF; max 250 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	250 A max	A	same as above
Kit contents	1 power distribution lug; wire range (6) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00337	TCAL29	GE	lug	CURRENT

GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil

OEM part number	TCAL29	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00361	TCAL29LV	GE	lug	CURRENT

GE TCAL29LV lug with control-voltage quick connect, SF250

OEM part number	TCAL29LV	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit: single lug with .25 quick connect for control voltage	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug with .25 in quick-connect tab; wire range (1) #8-350 kcmil Cu or Al	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00355	TCO29	GE	lug	CURRENT

GE TCO29 plated copper lug, SF250

OEM part number	TCO29	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Current rating	70-250 A	A	same as above
Kit contents	1 lug; wire range (1) #8-350 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00349	**SF3LCK**	GE SF3LCK lug cover kit, SF250 line end	Spectra RMS SF250 A	current

EDH-GEA-00349	SF3LCK	GE	breaker-accessory	CURRENT

GE SF3LCK lug cover kit, SF250 line end

OEM part number	SF3LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Three lug covers for upper (line) end	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra RMS SF250	A	same as above
Kit contents	3 lug covers	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SF250		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SG600

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00368	**TCAL40PD3**	GE TCAL40PD3 3-lug power distribution kit, SG	SG; max 400 A A	current
EDH-GEA-00339	**TCLK265**	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP) A	current
EDH-GEA-00340	**TCLK365**	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	Spectra RMS SG600/SG400, 3-pole A	current
EDH-GEA-00356	**TCOK265**	GE TCOK265 2-pole copper lug kit, SG600	Spectra RMS SG600 A	current
EDH-GEA-00357	**TCOK365**	GE TCOK365 3-pole copper lug kit, SG600	Spectra RMS SG600 A	current

EDH-GEA-00368	TCAL40PD3	GE	lug-kit	CURRENT

GE TCAL40PD3 3-lug power distribution kit, SG

OEM part number	TCAL40PD3	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	3-lug power distribution kit; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

EDH-GEA-00339	TCLK265	GE	lug-kit	CURRENT

GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK265	A	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK2652 / TCLK2651 (as printed) (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK2652'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	S130, S132 alias; s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 2-pole (SGD/SGH/SGL/SGP)	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 2-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00340	TCLK365	GE	lug-kit	CURRENT

GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)

OEM part number	TCLK365	A	S130, S132 s1 p. 6-103; s3 p. 3-121; s1 p. 6-48; oem_spec
Alternate / superseded numbers	TCLK3652 / TCLK3653 / TCLK3654 (as printed) [alias] (The printed number in the cited table has a footnote superscript run into it (e.g. 'TCLK3652/TCLK3653/TCLK3654'). The base number was reconciled across the 2012 and 2019 editions, whose footnote numbering differs.)	B	same as above
Description	3-pole lug kit with lug cover for line or load end. Footnote: 'Order one kit for either line or load end; two kits required for both' (s1 p. 6-48). The 6-103 entry also says 'With lug cover for line or load end'.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600/SG400, 3-pole	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	lugs for one end of a 3-pole breaker, plus lug cover; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00356	TCOK265	GE	lug-kit	CURRENT

GE TCOK265 2-pole copper lug kit, SG600

OEM part number	TCOK265	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 2-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	2-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00357	TCOK365	GE	lug-kit	CURRENT

GE TCOK365 3-pole copper lug kit, SG600

OEM part number	TCOK365	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper 3-pole lug kit	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Current rating	125-600 A	A	same as above
Kit contents	3-pole kit; wire range (2) 2/0-500 kcmil or (1) #8-600 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00367	**TCAL40PD1**	GE TCAL40PD1 power distribution lug, SG 400A	SG; max 400 A A	current

EDH-GEA-00367	TCAL40PD1	GE	lug	CURRENT

GE TCAL40PD1 power distribution lug, SG 400A

OEM part number	TCAL40PD1	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Description	Power distribution (multi-wire) lug. Footnote: 'Lug barrier supplied is only suitable for the load/bottom side of the breaker.'	A	same as above
Application	accessory	A	same as above
Installation location	Load (bottom) side; the supplied lug barrier suits the load side only	A	S130 s1 p. 6-104; oem_spec
Breaker compatibility	SG; max 400 A	A	S130, S132 s1 p. 6-104; s3 equivalent page; oem_spec
Current rating	400 A max	A	same as above
Kit contents	1 power distribution lug; wire range (12) 4-14 Cu only	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-104; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the printed suffix digit '1' on PD1 include footnote 1? The PD1/PD3 pair (single vs 3-lug) suggests both are genuine numbers.*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00351	**SG1BCK**	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	Spectra RMS SG600 **A**	current
EDH-GEA-00350	**SG1LCK**	GE SG1LCK 3-pole lug cover, SG600	Spectra RMS SG600 **A**	current
EDH-GEA-00392	**SGBCS1**	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	SG600 (600 A) **A**	current
EDH-GEA-00393	**SGBCS2**	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	SG600 (600 A) **A**	current
EDH-GEA-00362	**SGLVK**	GE SGLVK line voltage control wire kit, SG600	Spectra RMS SG600 **A**	current

EDH-GEA-00351 — SG1BCK — GE — breaker-accessory — CURRENT

GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)

OEM part number	SG1BCK	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SG1BCK4 (as printed 2019) [alias] (Footnote 4 'Required for line end bus connection' is appended in the 2019 extract. The 2012 edition prints SG1BCK.)	**B**	same as above
Description	3-pole lug cover for upper (line) or lower (load) end; required for line end bus connection	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end; required at line end for bus connection	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00350 — SG1LCK — GE — breaker-accessory — CURRENT

GE SG1LCK 3-pole lug cover, SG600

OEM part number	SG1LCK	**A**	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Replacement 3-pole lug cover for upper (line) or lower (load) end	**A**	same as above
Application	accessory	**A**	same as above
Installation location	Line or load end	**A**	same as above
Breaker compatibility	Spectra RMS SG600	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-GEA-00392 — SGBCS1 — GE — breaker-accessory — CURRENT

GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)

OEM part number	SGBCS1	**A**	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SG600 (600 A)	**A**	same as above
Kit contents	Std pkg 1	**A**	same as above
Dimensions	Length behind back of breaker: 2 13/16 in (short)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00393	SGBCS2	GE	breaker-accessory	CURRENT

GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)

OEM part number	SGBCS2	A	S130 s1 p. 6-101; oem_spec
Description	Back-connected line and load stud (rear connection). For proper clearance between poles, a short and a long stud must be assembled adjacent to each other.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SG600 (600 A)	A	same as above
Kit contents	Std pkg 1	A	same as above
Dimensions	Length behind back of breaker: 6 1/16 in (long)	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-101; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Does the 'Std Pkg 1' quantity mean one stud or a set? The page also references GEJ-3609 (Back Connected Studs, E150).*		

EDH-GEA-00362	SGLVK	GE	breaker-accessory	CURRENT

GE SGLVK line voltage control wire kit, SG600

OEM part number	SGLVK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Line voltage control wire kit for terminating control wire at breaker lugs; single .25 quick connect	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SG600	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SG600		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Spectra RMS SK1200

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00342	**TCALK2124**	GE TCALK2124 2-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00345	**TCALK2125**	GE TCALK2125 2-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current
EDH-GEA-00343	**TCALK3124**	GE TCALK3124 3-lug kit with wrench (TCAL124)	Spectra RMS SK1200 A	current
EDH-GEA-00346	**TCALK3125**	GE TCALK3125 3-lug kit with wrench (TCAL125)	Spectra RMS SK1200 A	current

EDH-GEA-00342	TCALK2124	GE	lug-kit	CURRENT

GE TCALK2124 2-lug kit with wrench (TCAL124)

OEM part number	TCALK2124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	2 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00345	TCALK2125	GE	lug-kit	CURRENT

GE TCALK2125 2-lug kit with wrench (TCAL125)

OEM part number	TCALK2125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	2-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	2 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00343	TCALK3124	GE	lug-kit	CURRENT

GE TCALK3124 3-lug kit with wrench (TCAL124)

OEM part number	TCALK3124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	3 lugs + wrench; wire range (3) 350-750 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00346	TCALK3125	GE	lug-kit	CURRENT

GE TCALK3125 3-lug kit with wrench (TCAL125)

OEM part number	TCALK3125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	3-lug kit with wrench	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	3 lugs + wrench; wire range (4) 250-500 kcmil	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00341	**TCAL124**	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00344	**TCAL125**	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	Spectra RMS SK1200 A	current
EDH-GEA-00358	**TCO124**	GE TCO124 plated copper lug, SK1200 (3) 350-750	Spectra RMS SK1200 A	current
EDH-GEA-00359	**TCO125**	GE TCO125 plated copper lug, SK1200 (4) 250-500	Spectra RMS SK1200 A	current

EDH-GEA-00341	TCAL124	GE	lug	CURRENT

GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil

OEM part number	TCAL124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	Cu 275-1200 A / Al 225-1100 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00344	TCAL125	GE	lug	CURRENT

GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil

OEM part number	TCAL125	A	S130, S132, S133 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated extruded aluminum lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu or Al	A	same as above
Material	{'value': 'Plated extruded aluminum', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00358	TCO124	GE	lug	CURRENT

GE TCO124 plated copper lug, SK1200 (3) 350-750

OEM part number	TCO124	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (3) 350-750 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-GEA-00359	TCO125	GE	lug	CURRENT

GE TCO125 plated copper lug, SK1200 (4) 250-500

OEM part number	TCO125	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Description	Plated copper lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Current rating	600-1200 A	A	same as above
Kit contents	1 lug; wire range (4) 250-500 kcmil Cu	A	same as above
Material	{'value': 'Plated copper', 'conf': 'A', 'src': ['s1', 's3'], 'basis': 'oem_spec', 'page': 's1 p. 6-103; s3 p. 3-121'}	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00353	**SKPSHLD**	GE SKPSHLD lug cover/arc shield, SKPA upper end	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices A	current

EDH-GEA-00353	SKPSHLD	GE	barrier	CURRENT

GE SKPSHLD lug cover/arc shield, SKPA upper end

OEM part number	SKPSHLD	A	S130 s1 p. 6-103 fn 3; oem_spec
Description	Longer lug cover/arc shield for the upper end of the 100 kA 480 Vac SKPA; replacement part number; may be used on other SK1200 devices	A	same as above
Application	accessory	A	same as above
Installation location	Upper (line) end	A	same as above
Breaker compatibility	Spectra SKPA (100 kA @ 480 Vac); may be used on other SK1200 devices	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00352	**SK1LCK**	GE SK1LCK lug cover, SK1200	Spectra RMS SK1200 A	current

EDH-GEA-00352	SK1LCK	GE	breaker-accessory	CURRENT

GE SK1LCK lug cover, SK1200

OEM part number	SK1LCK	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Alternate / superseded numbers	SK1LCK3 (as printed 2019) (Footnote 3 is appended)	B	S130 alias; s1 p. 6-103; oem_spec
Description	Lug cover for upper (line) or lower (load) end. SKPA (100 kA, 480 Vac) uses a longer lug cover/arc shield on the upper end (SKPSHLD).	A	S130, S132 s1 p. 6-103; s3 p. 3-121; oem_spec
Application	accessory	A	same as above
Breaker compatibility	Spectra RMS SK1200	A	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	B	S130 p. 6-103; oem_spec
Cross-links	Breakers: Spectra RMS SK1200		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family TQD / THQD (Q-Line 225A)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00282	**TCALK325**	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00282 **TCALK325** GE lug-kit **CURRENT**

GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCALK325	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	3-lug kit of Cu-Al lugs (TCAL25 range)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	3 lugs; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Does TCALK325 contain three TCAL25 lugs? The kit/single relationship is inferred from shared table rows, not stated.*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00281	**TCAL25**	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	TQD **A**	current

EDH-GEA-00281 **TCAL25** GE lug **CURRENT**

GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al

OEM part number	TCAL25	**A**	S130, S132 s1 p. 6-102; s3 p. 3-120; oem_spec
Description	Copper-aluminum single lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	TQD	**A**	same as above
Kit contents	1 lug; wire range (1) #4-300 kcmil Cu-Al	**A**	same as above
Material	Cu/Al-rated mechanical lug (body material not stated in the table)	**A**	same as above
Status	current (Listed in the catalog edition cited; current status not otherwise verified)	**B**	S130 p. 6-102; oem_spec
Cross-links	Breakers: TQD / THQD (Q-Line 225A)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

6 Siemens lineage

Lineage / brand markings: Siemens, ITE, ITE Imperial, Gould, Murray

Family	Type	Status	Era	Entries	Pg
MURRAY Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	loadcenter	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	0	618
P1 Type P1 (original)	panelboard	discontinued (kits still offered)	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	40	619
P2 Type P2 panelboard	panelboard	current	—	49	628
P3 Type P3 panelboard	panelboard	current	—	44	640
P4 Type P4 / S4 / Sentron SPP (10in deep) power panelboard	panelboard	current	—	38	645
P5 Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	panelboard	current	—	47	660
PUSHMATIC Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	panelboard	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	0	678
RP1 Type P1 (Revised P1)	panelboard	current	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014'	72	678
S1/S2 Type S1 / S2 lighting panelboards	panelboard	discontinued; some kits available	—	29	712
SE Type SE panelboard	panelboard	discontinued	—	10	714
CDP6 Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	switchboard	discontinued equipment; strap kits still catalogued (Canada)	Strap kits fit switchboards manufactured since 1974	55	714
SB Type SB1 / SB2 / SB3 distribution switchboards	switchboard	current	—	69	727

6.1 MURRAY — Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)

FAM-SIE-012 · loadcenter · aka Murray MP, MP-HT, Crouse-Hinds MP · markings: Murray, Crouse-Hinds, Siemens Murray

Murray (and Crouse-Hinds-branded) panels are primarily residential/light-commercial loadcenters; lineage passed to Siemens (code SIE). Commercial three-phase Murray panelboards were not found in this batch; surplus listings show only loadcenter mains (MEQ9985, MEQ9683R, MD200-H) and a motor-control ground bar LX074M.

Attribute	Value	Cl.	Sources
Status	Murray-branded breakers (MP/MP-T/MP-HT types) treated as interchangeable with Siemens Q-line per forum; panel label governs	D	S171 forum
Era of manufacture	Murray line owned by Crouse-Hinds (Cooper) by late 1970s; Siemens bought line c.1992 and restored Murray name; Murray brand reportedly phased out c.2019	D	same as above
Branch breakers accepted	Murray MP / MP-T / MP-HT plug-in; MD-series 2P mains (MD200-H, MD2150V); MEQ9985 / MEQ9683R 150 A 4P 120/240 MP-HT with mounting hardware	C	S161, S171 distributor

Key documents: S161 Superbreakers Murray + Wadsworth collections (products.json); S171 Murray / Crouse-Hinds / Siemens lineage (forum threads)

6.2 P1 — Type P1 (original)

FAM-SIE-002 · panelboard · aka Original P1, P1 (pre-2014/2015) · markings: Siemens

Original Siemens P1 lighting panelboard (pre-revision), 20in wide x 5.75in deep, main lug or main/subfeed strap kits through 400A. Subfeed space standard. Catalog numbers like Revised P1 but without the T suffix, up to 42 circuits. Kits for original P1 (MBKBL1, MBKED3, MBKQR3, MLKA3 etc.) are strap-only (breakers not included) and also fit 250A-max S1/S2 panels.

Attribute	Value	Cl.	Sources
Status	discontinued (kits still offered)	A	S97 p.11-15; oem_spec
Era of manufacture	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	A	S97, S100 s1 p.11-7, s4 p.10-17; oem_spec
Successor	Revised P1 (RP1)	A	S97 p.11-7; oem_spec
Branch breakers accepted	BL, BLH, HBL, BQD, NGB/HGB/LGB	A	S100 p.10-18; oem_spec

Breaker families associated: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S100 SPEEDFAX 2007-2008 pp.10-17..10-22 SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22
Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFP01B, DFFPFD01, DFFPJD01, DFFPQJ01, DFFPQJ02, MBKQRFK, P1SCRWS, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK3, EWK1B

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00045	**MBKBC3**	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	3-pole BQD 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00043	**MBKBL1**	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	2-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00044	**MBKBL3**	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	3-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00048	**MBKED1**	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	2-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00049	**MBKED3**	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	3-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00052	**MBKFD1**	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	2-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00053	**MBKFD3**	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	3-pole F(X)D6/HF(X)D6 70A-250A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00054	**MBKJD1**	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00055	**MBKJD3**	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00046	**MBKNB1**	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	2-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00047	**MBKNB3**	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	3-pole NGB/LGB/HGB 15A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00050	**MBKQR1**	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	2-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00051	**MBKQR3**	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	3-pole QR(H)2/HQR2(H) 125A-225A A	listed for Original P1 (2021); strap only, breaker kits not

EDH-SIE-00045	MBKBC3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A

OEM part number	MBKBC3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BQD 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BQD 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BQD		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00043	MBKBL1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00044	MBKBL3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00048	MBKED1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A

OEM part number	MBKED1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00049	MBKED3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A

OEM part number	MBKED3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00052	MBKFD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00053	MBKFD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00054	MBKJD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00055	MBKJD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00046	MBKNB1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00047	MBKNB3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00050	MBKQR1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR1	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole QR(H)2/HQR2(H) 125A-225A	A	same as above
Current rating	225A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00051	MBKQR3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR3	A	S97 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole QR(H)2/HQR2(H) 125A-225A	A	same as above
Current rating	225A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00029	**4MLKA1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00030	**4MLKA3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00031	**4MLKC1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00032	**4MLKC3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00025	**MLKA1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00026	**MLKA3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00027	**MLKC1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) A	listed as available for Original P1 (2021)
EDH-SIE-00028	**MLKC3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) A	listed as available for Original P1 (2021)

EDH-SIE-00029	4MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKA1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00030	4MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKA3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00031	4MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKC1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00032	4MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKC3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00025	MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKA1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00026	MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKA3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00027	MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKC1	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00028	MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKC3	A	S97 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00069	**DFFPED01**	P1 main filler for 100-125A frames ED	—	replaced by DFFPVA41A

EDH-SIE-00069	DFFPED01	Siemens	filler-plate	REPLACED BY DFFPVA41A

P1 main filler for 100-125A frames ED

OEM part number	DFFPED01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPVA41A	A	S97 superseded_by; p.11-20; oem_spec
Description	P1 main filler for 100-125A frames ED, BL/BQD or xGB (replaced by DFFPVA41A)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Status	replaced by DFFPVA41A	A	S97 pp.11-13, 11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1802-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: P1, RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.3 P2 — Type P2 panelboard

FAM-SIE-005 · panelboard · aka P2 · markings: Siemens

Siemens bolt-on lighting/distribution panelboard with unit-space construction; branch devices installed via field strap kits (BBK*) in 3in or 6in increments; deadfront uses center strips (DFK*) and blank plates (DFFP3/DFFP6).

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-42; oem_spec
Branch breakers accepted	BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	A	S97 p.11-53; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S102 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)
Also fits this family (entry printed elsewhere): DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, IMK1, EGK, ECGK, IGK, ICGK, SEBKP1P2P3V1, EWK1, EWK2, EWK3, EWK1B, EWK2B

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00117	**BNK350N**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00117 **BNK350N** Siemens lug-kit **LISTED (2019-2021)**

Neutral lug kit

OEM part number	BNK350N	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, narrow 350 kcmil lug with two mounting screws; used in P2/P3 neutrals	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1869-61	A	same as above
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00102	**BBKB32**	P2/P3 BL/BQD 100A max twin-mount branch strap kit	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole A	current
EDH-SIE-00104	**BBKED32**	P2/P3 ED twin-mount branch strap kit	P2/P3 ED twin-mount branch strap kit A	field replacement only; use 3VA41 with BBKVA4P2P3 where poss
EDH-SIE-00106	**BBKGB32**	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit A	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00105	**BBKNB32**	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit A	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00110	**BBKQ1**	P2 QJ single-mount branch strap kit	P2 QJ single-mount branch strap kit A	discontinued - QJ not available, use new kit BBKQR1
EDH-SIE-00108	**BBKQR1**	P2 QR 225A max single-mount branch strap kit	P2 QR 225A max single-mount branch strap kit A	current
EDH-SIE-00103	**BBKVA4P2P3**	P2/P3 3VA41/xGB 125A max twin-mount strap kit	P2/P3 3VA41/xGB 125A max twin-mount strap kit A	current
EDH-SIE-00112	**BBKVA5262P2S**	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit A	current

EDH-SIE-00102	BBKB32	Siemens	branch-connector-kit	CURRENT

P2/P3 BL/BQD 100A max twin-mount branch strap kit

OEM part number	BBKB32	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole, uses 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space) (BL/BQD kits also accept GFCI/AFCI breakers, BT twin and BSPD surge devices (s6))	A	same as above
Breaker compatibility	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole	A	same as above
Current rating	100A max	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Identification features	Drawing ref 11-D-2267-01	A	S97 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00104	BBKED32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 ED twin-mount branch strap kit

OEM part number	BBKED32	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 ED twin-mount branch strap kit, 6-pole, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 ED twin-mount branch strap kit	A	same as above
Kit contents	breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use 3VA41 with BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00106	BBKGB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit

OEM part number	BBKGB32	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00105	BBKNB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit

OEM part number	BBKNB32	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00110	BBKQ1	Siemens	branch-connector-kit	DISCONTINUED - QJ NOT

P2 QJ single-mount branch strap kit

OEM part number	BBKQ1	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QJ single-mount branch strap kit, 6in for one 2-p or 3-p breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QJ single-mount branch strap kit	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	discontinued - QJ not available, use new kit BBKQR1	A	same as above
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00108	BBKQR1	Siemens	branch-connector-kit	CURRENT

P2 QR 225A max single-mount branch strap kit

OEM part number	BBKQR1	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QR 225A max single-mount branch strap kit, 6in of unit space for one 2-pole or 3-pole breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QR 225A max single-mount branch strap kit	A	same as above
Current rating	225A max	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 11-D-2636-01	A	S97 p.11-53; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00103	BBKVA4P2P3	Siemens	branch-connector-kit	CURRENT

P2/P3 3VA41/xGB 125A max twin-mount strap kit

OEM part number	BBKVA4P2P3	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 3VA41/xGB 125A max twin-mount strap kit, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space) (3VA41/xGB kits also accept BSPD surge devices (s6))	A	same as above
Breaker compatibility	P2/P3 3VA41/xGB 125A max twin-mount strap kit	A	same as above
Current rating	125A max	A	same as above
Dimensions	Unit space: 3in / 6 circuits	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 13-D-2011-13	A	S97 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00112	BBKVA5262P2S	Siemens	branch-connector-kit	CURRENT

P2/P3 250A max 3VA52/61/62 single-mount branch strap kit

OEM part number	BBKVA5262P2S	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Alternate / superseded numbers	BBKVA5262S (Spelling in P3 data sheet; likely same kit)	A	S102 alias; oem_spec
Description	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit, 1ph or 3ph, 6in for one 2-pole or 3-pole breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	includes 1 BBKVA5262P2HW hardware kit	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Identification features	Drawing ref 11-D-2894-01	A	S97 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA5262P2HW (EDH-SIE-00113)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00116	**BNK2**	Neutral lug kit	—	listed (2019-2021)
EDH-SIE-00119	**BNKP2EX1**	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	—	listed (2019-2021)
EDH-SIE-00118	**LPP2NB01**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00116	BNK2	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK2	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 3-step, for P2 neutrals and others: (14x) #14-1/0 max and (14x) #14-#6 max connections, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1862	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00119	BNKP2EX1	Siemens	neutral-assembly	LISTED (2019-2021)

P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)

OEM part number	BNKP2EX1	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-1850-01 / 11-C-2011-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00118	LPP2NB01	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	LPP2NB01	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 2-step, for P2 neutrals: (3x) #6-1/0 max and (18x) #14-#6 max, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 15-A-1800-61	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00232	**SEBKP2V1**	SEB kit, P2 BL/BQD horizontal main	—	unknown
EDH-SIE-00233	**SEBKP2V2**	SEB kit, P2 xGB horizontal main	—	unknown
EDH-SIE-00234	**SEBKP2V3**	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	—	unknown
EDH-SIE-00235	**SEBKP2V4**	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	—	unknown
EDH-SIE-00236	**SEBKP2V5**	SEB kit (P2, P2 w/SEM3) ED horizontal main	—	unknown
EDH-SIE-00237	**SEBKP2V6**	SEB kit (P2, P2 w/SEM3) ED vertical main	—	unknown
EDH-SIE-00238	**SEBKP2V7**	SEB kit, P2/P3 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00232	SEBKP2V1	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 BL/BQD horizontal main

OEM part number	SEBKP2V1	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 BL/BQD horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2733-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00233	SEBKP2V2	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 xGB horizontal main

OEM part number	SEBKP2V2	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 xGB horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2734-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00234	SEBKP2V3	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main

OEM part number	SEBKP2V3	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2735-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00235	SEBKP2V4	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main

OEM part number	SEBKP2V4	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2736-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00236	SEBKP2V5	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED horizontal main

OEM part number	SEBKP2V5	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2738-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00237	SEBKP2V6	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED vertical main

OEM part number	SEBKP2V6	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2739-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00238	SEBKP2V7	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2/P3 3VA52/61/62 horizontal main

OEM part number	SEBKP2V7	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2/P3 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2898-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00086	**DFK07**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00087	**DFK08**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00085	**DFK1**	P2/P3 deadfront center strip kit	—	listed (2021)

EDH-SIE-00086	DFK07	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK07	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 21in of unit space, with hardware	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-67	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00087	DFK08	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK08	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 24in of unit space, with hardware (DFK09-DFK21 = 27in-63in in 3in steps)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-68	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00085	DFK1	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip kit

OEM part number	DFK1	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip kit: 7 lengths (3, 6, 9, 12, 15, 18, 21in of branch height) with mounting hardware, for 1in-pole breakers	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00076	**DFFP3**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00077	**DFFP6**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00078	**DFFPVA5262P2A**	3VA52/61/62 filler for single mount P2/P3 applications	—	listed (2021)
EDH-SIE-00079	**DFFPVA5262P2B**	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	—	listed (2021)
EDH-SIE-00084	**DFP3AP01**	P3 adapter plate	—	listed (2021)
EDH-SIE-00082	**P2QRFP01**	P2 QR deadfront filler	—	listed (2021)

EDH-SIE-00076	DFFP3	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP3	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 3in high blank steel plates for both P2 (11-D-3014-02) and P3 (11-D-3035-02, 2.97in); hardware & instructions included	A	same as above
Material	steel	A	S97 p.11-23; oem_spec
Dimensions	3in high (P3 plate 2.97in)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2269-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00077	DFFP6	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP6	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 6in high blank steel plates for both P2 (11-D-3014-01) and P3 (11-D-3035-01, 5.97in); hardware & instructions included	A	same as above
Material	steel	A	S97 p.11-23; oem_spec
Dimensions	6in high (P3 plate 5.97in)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2270-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00078	DFFPVA5262P2A	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 filler for single mount P2/P3 applications

OEM part number	DFFPVA5262P2A	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 filler for single mount P2/P3 applications, 1 piece	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4610-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00079	DFFPVA5262P2B	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)

OEM part number	DFFPVA5262P2B	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00084	DFP3AP01	Siemens	filler-plate	LISTED (2021)

P3 adapter plate

OEM part number	DFP3AP01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 adapter plate: fills 3in of unit space on one side of the deadfront so BL/BQD/ED/xGB/3VA41 breakers and DFFP1A fillers fit	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3033-61 (11-D-3033-01)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00082	P2QRFP01	Siemens	filler-plate	LISTED (2021)

P2 QR deadfront filler

OEM part number	P2QRFP01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 QR deadfront filler, plastic snap-in, vertical main position, 1 per package	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4564-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00113	**BBKVA5262P2HW**	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	Hardware kit for branch/main horizontal single mount or vertical mount **A**	current
EDH-SIE-00120	**P2BK1**	P2 250A max horizontal main breaker bonding strap kit	—	listed (2019-2021)
EDH-SIE-00121	**P2BK2**	P2 125A max main lug bonding strap assembly	—	listed (2019-2021)
EDH-SIE-00122	**P2BK3**	P2 250-600A MLO and all vertical MB bonding kit	—	listed (2019-2021)

EDH-SIE-00113	BBKVA5262P2HW	Siemens	hardware-kit	CURRENT

Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3

OEM part number	BBKVA5262P2HW	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 11-D-2895-61	A	S97 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00120	P2BK1	Siemens	hardware-kit	LISTED (2019-2021)

P2 250A max horizontal main breaker bonding strap kit

OEM part number	P2BK1	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250A max horizontal main breaker bonding strap kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00121	P2BK2	Siemens	hardware-kit	LISTED (2019-2021)

P2 125A max main lug bonding strap assembly

OEM part number	P2BK2	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 125A max main lug bonding strap assembly	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-02	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00122	P2BK3	Siemens	hardware-kit	LISTED (2019-2021)

P2 250-600A MLO and all vertical MB bonding kit

OEM part number	P2BK3	A	S97 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250-600A MLO and all vertical MB bonding kit	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-D-2068-03	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00080	**BBKQRP1FK**	P2 filler kit for QR	—	listed (2021)

EDH-SIE-00080	BBKQRP1FK	Siemens	conversion-kit	LISTED (2021)

P2 filler kit for QR

OEM part number	BBKQRP1FK	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 filler kit for QR, horizontal or vertical mount; all cover plates to change from QJ to QR, 2- and 3-pole	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01)	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.4 P3 — Type P3 panelboard

FAM-SIE-006 · panelboard · aka P3 · markings: Siemens

Siemens 24in wide x 7.75in deep lighting/distribution panelboard sized like a lighting panel; unit-space construction with twin-mount strap kits (BBKB32 etc.), QJ/QR twin kits and 3VA52 twin kits (max 6 large-frame breakers in unit space).

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-58; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NEB / HEB, QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S102 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)
Also fits this family (entry printed elsewhere): LNLK4X11B, LNLK6X17B, LNLK7X20B, DFFP1A, QF3, DFFPVA5363A, DFFPFD01, DFFPJD01, DFFP3, DFFP6, DFFPVA5262P2A, DFFPVA5262P2B, DFP3AP01, DFK1, DFK07, DFK08, IMK1, EGK, ECGK, IGK, ICGK, BBKB32, BBKVA4P2P3, BBKED32, BBKNB32, BBKGB32, BBKVA5262P2S, BBKVA5262P2HW, BNK350N, SEBKP1P2P3V1, SEBKP2V3, SEBKP2V4, SEBKP2V7

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00107	**BBKEB32**	P3 NEB/HEB 6-pole 3in branch breaker kit	P3 NEB/HEB 6-pole 3in branch breaker kit A	listed 2019 (p.11-67)
EDH-SIE-00111	**BBKQ2**	P3 branch breaker kit for 2- and 3-pole QJ twin mount	P3 branch breaker kit for 2- and 3-pole QJ twin mount A	listed 2019 (p.11-67); QJ superseded by QR
EDH-SIE-00109	**BBKQR2**	P3 twin breaker mounting kit for QR	P3 twin breaker mounting kit for QR A	current
EDH-SIE-00114	**BBKVA52P3T**	P3 strap kit	P3 strap kit A	current

EDH-SIE-00107 **BBKEB32** Siemens branch-connector-kit **LISTED 2019 (P.11-67)**

P3 NEB/HEB 6-pole 3in branch breaker kit

OEM part number	BBKEB32	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	listed 2019 (p.11-67)	A	same as above
Cross-links	Families: P3 · Breakers: NEB / HEB		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00111	BBKQ2	Siemens	branch-connector-kit	LISTED 2019 (P.11-67);

P3 branch breaker kit for 2- and 3-pole QJ twin mount

OEM part number	BBKQ2	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker kit for 2- and 3-pole QJ twin mount	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	P3 branch breaker kit for 2- and 3-pole QJ twin mount	**A**	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	**A**	S97 p.11-67; oem_spec
Status	listed 2019 (p.11-67); QJ superseded by QR	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00109	BBKQR2	Siemens	branch-connector-kit	CURRENT

P3 twin breaker mounting kit for QR

OEM part number	BBKQR2	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 twin breaker mounting kit for QR, 1-phase/3-phase (limit 6 QR per panel)	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	P3 twin breaker mounting kit for QR	**A**	same as above
Current rating	225A max	**A**	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	**A**	S97 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	**A**	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	**A**	same as above
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00114	BBKVA52P3T	Siemens	branch-connector-kit	CURRENT

P3 strap kit

OEM part number	BBKVA52P3T	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 strap kit, twin mount 3VA52 (TMTU) branch, 1ph or 3ph, 250A max	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	2x BBKVA52P3HW, barrier, straps, mounting hardware	A	S97 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA52P3HW (EDH-SIE-00115)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00239	**SEBKP3V1**	Service entrance barrier kit CFD, FD (P3 only)	—	unknown

EDH-SIE-00239	SEBKP3V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier kit CFD, FD (P3 only)

OEM part number	SEBKP3V1	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	Service entrance barrier kit CFD, FD (P3 only); field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec
Identification features	Drawing ref (p.11-67)	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00083	**EBF1**	NEB/HEB filler plate (EB deadfront filler)	—	listed (2021)

EDH-SIE-00083	EBF1	Siemens	filler-plate	LISTED (2021)

NEB/HEB filler plate (EB deadfront filler)

OEM part number	EBF1	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	NEB/HEB filler plate (EB deadfront filler)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4529-01	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3, P4, P5 · Breakers: NEB / HEB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00241	**EWK2**	End wall kit with knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00244	**EWK2B**	End wall kit without knockouts (24in W x 7.75in D) 24in	—	unknown

EDH-SIE-00241	EWK2	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2	A	S97 p.11-34; oem_spec
Description	End wall kit with knockouts (24in W x 7.75in D), Type 1 only	A	same as above
Dimensions	24in W x 7.75in D	A	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00244	EWK2B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2B	A	S97 p.11-34; oem_spec
Description	End wall kit without knockouts (24in W x 7.75in D), Type 1 only	A	same as above
Dimensions	24in W x 7.75in D	A	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00115	**BBKVA52P3HW**	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & A	current
EDH-SIE-00123	**P3BK1**	P3 bonding kit 800A max MLO+MB	—	listed (2019-2021)

EDH-SIE-00115	BBKVA52P3HW	Siemens	hardware-kit	CURRENT

P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws

OEM part number	BBKVA52P3HW	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	A	same as above
Kit contents	screw retainers & mounting screws	A	S97 p.11-67; oem_spec
Status	current	A	S97 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00123	P3BK1	Siemens	hardware-kit	LISTED (2019-2021)

P3 bonding kit 800A max MLO+MB

OEM part number	P3BK1	A	S97 p.11-67; oem_spec
Description	P3 bonding kit 800A max MLO+MB: bonding strap and hardware	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref (p.11-67)	A	same as above
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00081	**BBKQRP2FK**	P3 filler kit for QR	—	listed (2021)

EDH-SIE-00081	BBKQRP2FK	Siemens	conversion-kit	LISTED (2021)

P3 filler kit for QR

OEM part number	BBKQRP2FK	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 filler kit for QR, dual mount horizontal; cover plates to change from QJ to QR (1-phase panel: both breakers must change)	A	same as above
Status	listed (2021)	A	S97 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34	A	S97 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.5 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard

FAM-SIE-007 · panelboard · aka S4, SPP, Sentron SPP shallow, F1, FPP (10in) · markings: Siemens

Siemens 10in-deep distribution (power) panelboard. Branch circuit breakers mount in unit space on 'Connecting Strap Kits' (S* series, e.g. SBL, SE6, SQR, SF6, SJ1, SL6) supplied without breaker; fusible branches use F6xx kits. Same strap kit family serves Type S4 and Sentron SPP shallow panels.

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-89; oem_spec
Main ampacity	Branch devices to 800A (MG1) per strap kit table	A	S97 p.11-96; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): DFFP1A, EBF1

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00149	**MG1**	MG1 connecting strap kit - VL MG (8.75in, single)	VL MG [s1] A	listed in SpeedFax 2021
EDH-SIE-00125	**S3VA41T**	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1] A	listed in SpeedFax 2021
EDH-SIE-00129	**S3VA52T**	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1] A	listed in SpeedFax 2021
EDH-SIE-00135	**S3VA53T**	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1] A	listed in SpeedFax 2021
EDH-SIE-00142	**S3VA54T**	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1] A	listed in SpeedFax 2021
EDH-SIE-00136	**S3VA63T**	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] A	listed in SpeedFax 2021
EDH-SIE-00143	**S3VA64T**	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] A	listed in SpeedFax 2021
EDH-SIE-00124	**SBL**	SBL connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1] A	listed in SpeedFax 2021
EDH-SIE-00128	**SCE**	SCE connecting strap kit - CED (3.75in, twin)	CED [s1] A	listed in SpeedFax 2021
EDH-SIE-00134	**SCF**	SCF connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1] A	listed in SpeedFax 2021
EDH-SIE-00139	**SCJ**	SCJ connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD [s1] A	listed in SpeedFax 2021
EDH-SIE-00146	**SCL**	SCL connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1] A	listed in SpeedFax 2021
EDH-SIE-00130	**SDGD**	SDGD connecting strap kit - VL DG (5.00in, twin)	VL DG [s1] A	listed in SpeedFax 2021
EDH-SIE-00127	**SE6**	SE6 connecting strap kit - ED (3.75in, twin)	ED [s1] A	listed in SpeedFax 2021
EDH-SIE-00133	**SF6**	SF6 connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1] A	listed in SpeedFax 2021
EDH-SIE-00132	**SFG**	SFG connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] A	listed in SpeedFax 2021
EDH-SIE-00126	**SGB2**	SGB2 connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] A	listed in SpeedFax 2021
EDH-SIE-00138	**SJ1**	SJ1 connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1] A	listed in SpeedFax 2021
EDH-SIE-00137	**SJG**	SJG connecting strap kit - VL JG (6.25in, single)	VL JG [s1] A	listed in SpeedFax 2021
EDH-SIE-00145	**SL6**	SL6 connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1] A	listed in SpeedFax 2021
EDH-SIE-00144	**SLG**	SLG connecting strap kit - VL LG (6.25in, single)	VL LG [s1] A	listed in SpeedFax 2021
EDH-SIE-00131	**SQR**	SQR connecting strap kit - QR (5.00in, twin)	QR [s1] A	listed in SpeedFax 2021
EDH-SIE-00141	**SSCJ**	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	Sentron SCJD [s1] A	listed in SpeedFax 2021
EDH-SIE-00148	**SSCL**	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1] A	listed in SpeedFax 2021
EDH-SIE-00140	**SSJ1**	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	Sentron SJD [s1] A	listed in SpeedFax 2021
EDH-SIE-00147	**SSL6**	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1] A	listed in SpeedFax 2021

EDH-SIE-00149	MG1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1 connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL MG [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	800A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00125	S3VA41T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA41, xGB [s1] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	A	S97 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00129	S3VA52T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	150/250A max (table max-amp rating)	A	same as above
Kit contents	see note (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S98 oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00135	S3VA53T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53T connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA53 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00142	S3VA54T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54T connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA54 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00136	S3VA63T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63T connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA63 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00143	S3VA64T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64T connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64T	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	3VA64 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00124	SBL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBL connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBL	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	BL, BQD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Distributor listings for SBL disagree (one calls it a padlock kit / QR frame); SpeedFax p.11-96 shows BL/BQD 100A twin 3.75in - physical verification advised*		

EDH-SIE-00128	SCE	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCE connecting strap kit - CED (3.75in, twin)

OEM part number	SCE	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	CED [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00134	SCF	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCF connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCF	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron CFD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00139	SCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJ connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJ	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron CJD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00146	SCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCL connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCL	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron CLD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00130	SDGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SDGD connecting strap kit - VL DG (5.00in, twin)

OEM part number	SDGD	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL DG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL DG [s1]	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
Current rating	150A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-96 (s1) | p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same catalog number SDGD listed in both P4 (10in) and P5 (12.75in) tables - verify one kit serves both depths*		

EDH-SIE-00127	SE6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6 connecting strap kit - ED (3.75in, twin)

OEM part number	SE6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	ED [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00133	SF6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6 connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron FD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00132	SFG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFG connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFG	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL FG [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00126	SGB2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2 connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	xGB2 [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00138	SJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1 connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron JD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00137	SJG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL JG [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00145	SL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6 connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron LD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00144	SLG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLG connecting strap kit - VL LG (6.25in, single)

OEM part number	SLG	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	VL LG [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00131	SQR	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SQR connecting strap kit - QR (5.00in, twin)

OEM part number	SQR	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	QR [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00141	SSCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCJ connecting strap kit - Sentron SCJD (8.75in, single)

OEM part number	SSCJ	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SCJD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00148	SSCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCL connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCL	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SCLD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00140	SSJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSJ1 connecting strap kit - Sentron SJD (8.75in, single)

OEM part number	SSJ1	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SJD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00147	SSL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6 connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6	A	S97 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S97 p.11-96; oem_spec
Breaker compatibility	Sentron SLD [s1]	A	S97 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00217	**SEBP4V1**	Service entrance barrier for (S)JD, (S)LD, MG mains	—	unknown
EDH-SIE-00218	**SEBP4V2**	Service entrance barrier for CJD, CLD	—	unknown
EDH-SIE-00219	**SEBP4V3**	Service entrance barrier for JG, LG	—	unknown

EDH-SIE-00217	SEBP4V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)JD, (S)LD, MG mains

OEM part number	SEBP4V1	A	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)JD, (S)LD, MG mains	A	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00218	SEBP4V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for CJD, CLD

OEM part number	SEBP4V2	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for CJD, CLD	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00219	SEBP4V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for JG, LG

OEM part number	SEBP4V3	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for JG, LG	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00211	**6FPB01**	6FPB01 blank plate, 1.25in unit space	—	current
EDH-SIE-00212	**6FPB02**	6FPB02 blank plate, 2.5in unit space	—	current
EDH-SIE-00213	**6FPB03**	6FPB03 blank plate, 3.75in unit space	—	current
EDH-SIE-00214	**6FPB05**	6FPB05 blank plate, 5in unit space	—	current
EDH-SIE-00215	**6FPB10**	6FPB10 blank plate, 10in unit space	—	current

EDH-SIE-00211	6FPB01	Siemens	filler-plate	CURRENT

6FPB01 blank plate, 1.25in unit space

OEM part number	6FPB01	**A**	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 1.25in unit height	**A**	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	**A**	S97, S98, S99 oem_spec
Dimensions	1.25in unit height	**A**	same as above
Status	current	**A**	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $154.00	**A**	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00212	6FPB02	Siemens	filler-plate	CURRENT

6FPB02 blank plate, 2.5in unit space

OEM part number	6FPB02	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 2.5in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	2.5in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00213	6FPB03	Siemens	filler-plate	CURRENT

6FPB03 blank plate, 3.75in unit space

OEM part number	6FPB03	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 3.75in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	3.75in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00214	6FPB05	Siemens	filler-plate	CURRENT

6FPB05 blank plate, 5in unit space

OEM part number	6FPB05	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 5in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	5in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00215	6FPB10	Siemens	filler-plate	CURRENT

6FPB10 blank plate, 10in unit space

OEM part number	6FPB10	A	S97 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 10in unit height	A	S97, S98, S99 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S97, S98, S99 oem_spec
Dimensions	10in unit height	A	same as above
Status	current	A	S97, S98 oem_spec
Identification features	Series 6 blank plate; 2005 list price $239.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00205	**S3VA52PR**	3VA52/61/62 breaker provision hardware kit (twin mount)	—	current

EDH-SIE-00205	S3VA52PR	Siemens	hardware-kit	CURRENT

3VA52/61/62 breaker provision hardware kit (twin mount)

OEM part number	S3VA52PR	A	S97 s1 pp.11-96, 11-110; s2 p.11-14; oem_spec
Description	Only required when installing a 3VA52, 3VA61 or 3VA62 breaker to an existing provision in the field; parts included with kit S3VA52T/S3VA52TD	A	S97 pp.11-96, 11-110; oem_spec
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	S98 p.11-14; oem_spec
Status	current	A	S97, S98 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00210	**SQRC**	QR cover plate for P4/P5/SPP power panels	—	unknown

EDH-SIE-00210	SQRC	Siemens	other	STATUS UNKNOWN

QR cover plate for P4/P5/SPP power panels

OEM part number	SQRC	A	S97 pp.11-96, 11-110 'Cover Plates'; oem_spec
Description	Cover plate for QR breaker; 'To replace a QJ with a QR only a new cover is needed'	A	S97 pp.11-96, 11-110; oem_spec
Application	branch (QJ to QR conversion cover)	A	S97 p.11-96; oem_spec
Cross-links	Families: P4, P5 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.6 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard

FAM-SIE-008 · panelboard · aka S5, SPP deep, Sentron Deep, F2, FPP deep · markings: Siemens

Siemens 12.75in-deep distribution panelboard. Branch connecting strap kits carry a 'D' suffix (SBLBD, SE6D, SF6D, SJ1D, SMND...). SpeedFax footnote: these kits also fit Types FCI, FCII, SB1 and SB2 switchboards.

Attribute	Value	CI.	Sources
Status	current	A	S97 p.11-103; oem_spec
Main ampacity	Branch devices to 1200A (NG1D/SMND)	A	S97 p.11-110; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards

Also fits this family (entry printed elsewhere): DFFP1A, EBF1, SDGD, S3VA52PR, SQRC, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, SEBP4V1, SEBP4V2, SEBP4V3

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00155	**6CLE2**	6CLE2 connecting strap kit - CED (3.75in, twin)	CED [s1]; CED6 [s3]; CED6 [s2] A	listed in SpeedFax 2021, 2005 price list, Siemens Canada cat
EDH-SIE-00157	**6QR2**	6QR2 connecting strap kit - QR (5.00in, twin)	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00175	**MG1D**	MG1D connecting strap kit - VL MG (8.75in, single)	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00179	**NG1D**	NG1D connecting strap kit - VL NG (10.00in, single)	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00151	**S3VA41TD**	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00152	**S3VA41TDHD**	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00156	**S3VA52TD**	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00161	**S3VA53TD**	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1]; 3VA53, 3VA63 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00168	**S3VA54TD**	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1]; 3VA54, 3VA64 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00162	**S3VA63TD**	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] A	listed in SpeedFax 2021
EDH-SIE-00169	**S3VA64TD**	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] A	listed in SpeedFax 2021
EDH-SIE-00150	**SBLBD**	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00160	**SCFD**	SCFD connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1]; CFD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00167	**SCJD**	SCJD connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; S A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00172	**SCLD**	SCLD connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1]; CLD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00154	**SE6D**	SE6D connecting strap kit - ED (3.75in, twin)	ED [s1]; ED [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00159	**SF6D**	SF6D connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1]; FD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00158	**SFGD**	SFGD connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] A	listed in SpeedFax 2021
EDH-SIE-00153	**SGB2D**	SGB2D connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] A	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00165	**SJ1D**	SJ1D connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00166	**SJ2D**	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00164	**SJG1D**	SJG1D connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00163	**SJG2D**	SJG2D connecting strap kit - VL JG (6.25in, twin)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00171	**SL6D**	SL6D connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1]; LD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00170	**SLGD**	SLGD connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00176	**SLM1D**	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00177	**SMND**	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00174	**SSCLD**	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1]; SCLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00173	**SSL6D**	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1]; SLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00178	**SSMND**	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005

EDH-SIE-00155	**6CLE2**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6CLE2 connecting strap kit - CED (3.75in, twin)

OEM part number	6CLE2	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CED [s1]; CED6 [s3]; CED6 [s2]	**A**	same as above
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S97, S99, S98 p.11-110 | p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S98 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S99, S98 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, 2005 price list, Siemens Canada catalogue 2025	**A**	S97, S99, S98 oem_spec
Identification features	2005 list price $845.00	**A**	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00157	6QR2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6QR2 connecting strap kit - QR (5.00in, twin)

OEM part number	6QR2	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	6QR2CAN	**A**	S98 alias; p.11-15; oem_spec
	6QR2CCAN [alias]	**A**	same as above
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2]	**A**	same as above
Current rating	225A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S97, S98 p.11-110 | p.11-15; oem_spec
Material	QR filler plates only: 6QR2FKCAN; copper QR kit 6QR2CCAN (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S98 p.11-15; oem_spec
Dimensions	Unit height 5 / 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00175	MG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1D connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3]	A	same as above
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S97, S99 oem_spec
Identification features	2005 list price $2938.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 list maps NM/HM/LM (VL 800A) to MG1D while SpeedFax maps VL MG to MG1D - confirm whether 'NM/HM/LM' are VL MG-frame trip variants*		

EDH-SIE-00179	NG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

NG1D connecting strap kit - VL NG (10.00in, single)

OEM part number	NG1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL NG branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3]	A	same as above
Current rating	1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S99 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S97, S99 oem_spec
Identification features	2005 list price $3489.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00151	S3VA41TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41TD	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S97 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00152	S3VA41TDHD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)

OEM part number	S3VA41TDHD	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin, high density (six 2-pole breakers) mount, 7.50in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, high density, Twin, high density (six 2-pole breakers)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S97 p.11-110; oem_spec
Dimensions	Unit height 7.50 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00156	S3VA52TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52TD	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2]	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	150/250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	**A**	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00161	S3VA53TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53TD connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53TD	**A**	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S98 p.11-5; oem_spec
Breaker compatibility	3VA53 [s1]; 3VA53, 3VA63 [s2]	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	**A**	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00168	S3VA54TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54TD connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54TD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA54 [s1]; 3VA54, 3VA64 [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00162	S3VA63TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63TD connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63TD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	3VA63 [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00169	S3VA64TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64TD connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64TD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	3VA64 [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00150	SBLBD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBLBD connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBLBD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $768.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00160	SCFD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCFD connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCFD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron CFD [s1]; CFD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00167	SCJD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJD connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) [s1]; CJD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*P5 table pairs both CJD and SJD with SCJD; SB table pairs SJD with SSJ1D - which is correct for SJD in P5?*		

EDH-SIE-00172	SCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCLD connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCLD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron CLD [s1]; CLD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00154	SE6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6D connecting strap kit - ED (3.75in, twin)

OEM part number	SE6D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	ED [s1]; ED [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00159	SF6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6D connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron FD [s1]; FD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00158	SFGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFGD connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFGD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	VL FG [s1]	A	same as above
Current rating	250A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00153	SGB2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2D connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	xGB2 [s1]	A	same as above
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00165	SJ1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1D connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00166	SJ2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ2D connecting strap kit - Sentron JD (8.75in, twin)

OEM part number	SJ2D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), twin mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00164	SJG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG1D connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00163	SJG2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG2D connecting strap kit - VL JG (6.25in, twin)

OEM part number	SJG2D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00171	SL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6D connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron LD [s1]; LD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00170	SLGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLGD connecting strap kit - VL LG (6.25in, single)

OEM part number	SLGD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97 p.11-110 (s1); oem_spec
Breaker compatibility	VL LG [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S97 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S97 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00176	SLM1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLM1D connecting strap kit - Sentron LMD (8.75in, single)

OEM part number	SLM1D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LMD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $2938.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00177	SMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)

OEM part number	SMND	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron MD, CMD; ND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for ND)in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, HND6, CND6 [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $3489.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00174	SSCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCLD connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCLD	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron SCLD [s1]; SCLD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00173	SSL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6D connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6D	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron SLD [s1]; SLD [s2]	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S97 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S97, S98 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00178	SSMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)

OEM part number	SSMND	A	S97 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SMD; SND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for SND)in	A	S98 p.11-5; oem_spec
Breaker compatibility	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, SHND6, SCND6 [s3]	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S97, S99 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S99 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S97, S98, S99 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S97, S98, S99 oem_spec
Identification features	2005 list price $3489.00	A	S99 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00220	**SEBP5V1**	Service entrance barrier for (S)MD, (S)ND without shield	—	unknown
EDH-SIE-00221	**SEBP5V2**	Service entrance barrier for (S)MD, (S)ND with shield	—	unknown
EDH-SIE-00222	**SEBP5V3**	Service entrance barrier for Vacu-Break switches	—	unknown
EDH-SIE-00223	**SEBP5V4**	Service entrance barrier for HCP switches	—	unknown

EDH-SIE-00220 **SEBP5V1** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND without shield

OEM part number	SEBP5V1	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND without shield	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00221 **SEBP5V2** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND with shield

OEM part number	SEBP5V2	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND with shield	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00222 **SEBP5V3** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for Vacu-Break switches

OEM part number	SEBP5V3	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for Vacu-Break switches	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00223 **SEBP5V4** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for HCP switches

OEM part number	SEBP5V4	**A**	S97 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for HCP switches	**A**	S97 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.7 PUSHMATIC — Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)

FAM-SIE-011 · panelboard · aka Pushmatic, Bulldog Pushmatic, Electri-Center, Electra-Center · markings: Bulldog, Bull Dog, Pushmatic, ITE Pushmatic, Gould ITE, Siemens, Electri-Center

Bulldog Pushmatic panels use push-button (not toggle) bolt-on breakers, grease-lubricated mechanisms reported to stiffen if not exercised, thermal plus (in at least some versions) magnetic trip. Brand passed to ITE/Gould and then Siemens. Replacement 1-2 pole breakers exist (Connecticut Electric UBIP); 3-phase Pushmatic panelboards exist but replacement 3-pole breakers are scarce. Condensed-space P1515 dual breakers do not fit older ITE Pushmatic panels.

Attribute	Value	Cl.	Sources
Status	Obsolete; replacement breakers from Connecticut Electric (UBIP series, 1-2 pole 120/240 V, 10 kAIC ETL) and new-old-stock ITE/Siemens Pushmatic; 3-pole 208Y/120 replacements reported back-ordered/unavailable	C	S155, S159, S176 distributor
Era of manufacture	Bulldog Electric Products Co. (Detroit; patents from 1934-36, panelboard patent US 2,428,320 of 1947); installed mainly 1950-1970; ITE (Gould) purchase stated 1976 (forum says 1950s - conflicting); Siemens c.1982-84	C	S170, S176, S159 other
Successor	Siemens owns Pushmatic trademark (per InspectAPedia/forum); no current panelboard	D	S176, S159 other
Voltage rating	120/240 V 1-ph; some 120/208Y 3-ph panels	C	S159, S176 forum
Branch breakers accepted	Pushmatic push-button breakers (P-series e.g. P1515 dual 15 A condensed); bolt-on to bus	C	S176, S155 other

Breaker families associated: Pushmatic (Bulldog / ITE)
Key documents: S155 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S159 Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage); S170 Pushmatic / Bulldog design history; S176 Pushmatic - Bulldog panels & breakers

6.8 RP1 — Type P1 (Revised P1)

FAM-SIE-001 · panelboard · aka Revised P1, New Revised P1, NextGen P1, P1...T, P1...N · markings: Siemens

Siemens 20in wide x 5.75in deep bolt-on lighting/appliance panelboard, 250A or 400A bus, split (cross-bussed) neutral at both ends of an open-ended bus. Field-convertible mains: main lug kits (MLK*) or horizontal main/subfeed strap kits (MBK*) through 250A, vertical 400A main. Catalog numbers end in T (feed-thru/subfeed space) or N (non-feed-thru, 6in shorter box). Revised P1 kits are not interchangeable with original P1, S1/S2 or SE panels.

Attribute	Value	Cl.	Sources
Status	current	A	S97 p.11-11; oem_spec
Era of manufacture	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014' (OEM document is internally inconsistent (2014 vs 2015))	A	S97 pp.11-7, 11-11; oem_spec
Voltage rating	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V limited (factory only)	A	S97 pp.11-7, 11-24; oem_spec
Main ampacity	250A or 400A bus; 400A max mains	A	same as above
Branch breakers accepted	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	A	S97 pp.11-7, 11-16; oem_spec
branch_connection_limit	All configurations allow 125A per connection max (250A per pair); 18-circuit 250A Revised P1 limited to 100A per connection (200A per pair) with BL/BQD/xGB across from each other	A	S97 p.11-12 footnote; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QR2 / QRH2 / HQR2 / HQR2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S101 SIE_CS_P1 / Siemens SIOS 109799956 Type P1 Panelboard data sheet (SIE_CS_P1); S104 SI-LP-1633 NextGen P1 panelboard brochure (Siemens Canada)
Also fits this family (entry printed elsewhere): DFFPED01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00003	**MBKED1A**	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00004	**MBKED3A**	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00007	**MBKFD1A**	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00008	**MBKFD3A**	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00012	**MBKJD3B**	RP1 400A JD strap kit 1ph/3ph, 2 fillers	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A B	current (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00005	**MBKQR1A**	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	QR (225A max) **A**	current (2021)
EDH-SIE-00006	**MBKQR3A**	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	QR (225A max) **A**	current (2021)
EDH-SIE-00001	**MBKVA41A**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) **A**	current (2021)
EDH-SIE-00002	**MBKVA41B**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) **A**	current (2021)
EDH-SIE-00009	**MBKVA5262A**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	3VA52/61/62 (250A max) **A**	current (2021)
EDH-SIE-00010	**MBKVA5262B**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	3VA52/61/62 (250A max) **A**	current (2021)
EDH-SIE-00011	**MBKVA5363A**	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	3VA53/3VA63 **A**	current (2021)

EDH-SIE-00003 MBKED1A Siemens main-breaker-kit CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 1-ph, 125A

OEM part number	MBKED1A	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for ED (125A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00004	MBKED3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 3-ph, 125A

OEM part number	MBKED3A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for ED (125A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00007	MBKFD1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, FD, 1-ph, 250A

OEM part number	MBKFD1A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for FD (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00008	MBKFD3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, FD, 3-ph, 250A

OEM part number	MBKFD3A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for FD (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00012	MBKJD3B	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A JD strap kit 1ph/3ph, 2 fillers

OEM part number	MBKJD3B	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKJD1A [supersedes]	A	same as above
	MBKJD3A [supersedes]	A	same as above
Description	RP1 400A JD strap kit 1ph/3ph, 2 fillers; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S97, S104 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S97 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A (Table says 'JD'; frame variants from original P1 MBKJD1/3 row)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	400A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes DFFPJD02 (large) and DFFPJD01 (small) filler	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00005	MBKQR1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 1-ph, 225A

OEM part number	MBKQR1A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00006	MBKQR3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 3-ph, 225A

OEM part number	MBKQR3A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00001	MBKVA41A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A

OEM part number	MBKVA41A	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL1A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC1NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 1-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00002	MBKVA41B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A

OEM part number	MBKVA41B	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL3A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC3NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 3-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00009	MBKVA5262A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A

OEM part number	MBKVA5262A	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00010	MBKVA5262B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A

OEM part number	MBKVA5262B	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S97 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S97 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S97 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00011	MBKVA5363A	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A 3VA53/63 main strap kit, 1ph or 3ph

OEM part number	MBKVA5363A	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S97, S104 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S97 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	3VA53/3VA63	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Current rating	400A max	A	same as above
Kit contents	includes MBKVA5363JD (large) filler; 'These new 400A kits include both small and large filler plates'	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00019	**4MLKA1A**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00023	**4MLKA1B**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00020	**4MLKA3A**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00024	**4MLKA3B**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00021	**4MLKC1A**	Revised P1 400A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00022	**4MLKC3A**	Revised P1 400A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00015	**MLKA1A**	Revised P1 250A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00016	**MLKA3A**	Revised P1 250A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00017	**MLKC1A**	Revised P1 250A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00018	**MLKC3A**	Revised P1 250A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)

EDH-SIE-00019 — 4MLKA1A — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00023 — 4MLKA1B — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1B	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	same as above
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00020	4MLKA3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00024	4MLKA3B	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3B	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	same as above
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00021	4MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 1-ph

OEM part number	4MLKC1A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00022	4MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 3-ph

OEM part number	4MLKC3A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00015	MLKA1A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 1-ph				
OEM part number	MLKA1A	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S97 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 1-phase (includes neutral)	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00016	MLKA3A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 3-ph				
OEM part number	MLKA3A	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S97 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 3-phase (includes neutral)	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00017	MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 1-ph

OEM part number	MLKC1A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00018	MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 250A CU main/feed-thru lug kit, 3-ph

OEM part number	MLKC3A	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S97 equivalent; p.11-15; oem_spec
Description	Revised P1 250A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S97 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00097	**P1CONACPHAL**	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	—	unknown - may be discontinued (only CU A/C kit listed 2021,
EDH-SIE-00088	**P1CONACPHCU**	RP1 A/C-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) B	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00089	**P1CONBPHAL**	RP1 B-phase replacement aluminum branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)
EDH-SIE-00090	**P1CONBPHCU**	RP1 B-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)

EDH-SIE-00097 P1CONACPHAL — Siemens — connector-strap — UNKNOWN - MAY BE DISCO

RP1 A/C-phase replacement aluminum branch connectors, kit of 6

OEM part number	P1CONACPHAL	**A**	S97 oem_spec
Description	A- or C-phase aluminum connector kit, 6 pieces (search-summary of a Siemens spec sheet) (Not present in SpeedFax 2021 p.11-21 table; reported in a web search summary of stoneway.com Siemens spec sheet (page returned HTML, not retrievable))	**C**	S97 distributor
Status	unknown - may be discontinued (only CU A/C kit listed 2021, 'Also can be used to replace AL A/C-Phase Connectors')	**C**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm P1CONACPHAL exists as an OEM catalog number*		

EDH-SIE-00088 P1CONACPHCU — Siemens — connector-strap — LISTED (2021)

RP1 A/C-phase replacement copper branch connectors

OEM part number	P1CONACPHCU	**A**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 A/C-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware; can also replace AL A/C-phase connectors	**A**	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	**B**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	**B**	S97 p.11-16; inference
Kit contents	qty/kit 6	**A**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	**A**	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	**B**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	**A**	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2572-02	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Connector geometry differs between A/C and B phase; is AL A/C-phase kit (P1CONACPHAL) still offered? Earlier web listings name P1CONACPHAL but 2021 SpeedFax omits it.*		

EDH-SIE-00089	P1CONBPHAL	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement aluminum branch connectors

OEM part number	P1CONBPHAL	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement aluminum branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S97 p.11-16; inference
Kit contents	qty/kit 6	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	aluminum	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-01	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00090	P1CONBPHCU	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement copper branch connectors

OEM part number	P1CONBPHCU	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S97 p.11-16; inference
Kit contents	qty/kit 6	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-02	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00040	**2NLK42B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00041	**2NLK54B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00042	**42NLK54B**	RP1 400A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00038	**CNLK42B**	RP1 CU neutral lug kit 42B	—	current (2021); Revised P1 only
EDH-SIE-00039	**CNLK54B**	RP1 CU neutral lug kit 54B	—	current (2021); Revised P1 only
EDH-SIE-00035	**LNLK4X11B**	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long	—	current (2021); Revised P1 only
EDH-SIE-00033	**LNLK5X12A**	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00036	**LNLK6X17B**	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	—	current (2021); Revised P1 only
EDH-SIE-00034	**LNLK7X18A**	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00037	**LNLK7X20B**	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	—	current (2021); Revised P1 only

EDH-SIE-00040 — 2NLK42B — Siemens — neutral-assembly — CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK42B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00041	2NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK54B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (54, 66 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00042	42NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 400A 200% neutral lug kit

OEM part number	42NLK54B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	42NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	42NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
	42NLK54A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00038	CNLK42B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 42B

OEM part number	CNLK42B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	CNLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00039	CNLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 54B

OEM part number	CNLK54B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66) and 250A 54/66 ckt	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00035	LNLK4X11B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long

OEM part number	LNLK4X11B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	same as above
Dimensions	strip length 6.17 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00033	LNLK5X12A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]

OEM part number	LNLK5X12A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Dimensions	strip length 5.80 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00036	LNLK6X17B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long

OEM part number	LNLK6X17B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK42A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.67 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00034	LNLK7X18A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]

OEM part number	LNLK7X18A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.14 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00037	LNLK7X20B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long

OEM part number	LNLK7X20B	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S97, S103 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S97 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S97 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	same as above
Dimensions	strip length 9.92 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00099	**ECGK**	Copper equipment ground bus kit	—	current (2021)
EDH-SIE-00098	**EGK**	Al/Cu equipment ground bus kit	—	current (2021)
EDH-SIE-00101	**ICGK**	Insulated copper ground bus kit	—	current (2021)
EDH-SIE-00100	**IGK**	Insulated Al/Cu ground bus kit	—	current (2021)

EDH-SIE-00099	ECGK	Siemens	ground-bar	CURRENT (2021)

Copper equipment ground bus kit

OEM part number	ECGK	A	S97 pp.11-20, 11-22; oem_spec
Description	Copper equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes); CU cable only	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00098	EGK	Siemens	ground-bar	CURRENT (2021)

Al/Cu equipment ground bus kit

OEM part number	EGK	A	S97 pp.11-20, 11-22; oem_spec
Description	Al/Cu equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes)	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00101	ICGK	Siemens	ground-bar	CURRENT (2021)

Insulated copper ground bus kit

OEM part number	ICGK	A	S97 pp.11-20, 11-22; oem_spec
Description	Insulated copper ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00100	IGK	Siemens	ground-bar	CURRENT (2021)

Insulated Al/Cu ground bus kit

OEM part number	IGK	A	S97 pp.11-20, 11-22; oem_spec
Description	Insulated Al/Cu ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S97 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S97 p.11-22; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00092	**P1DFS250AFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00093	**P1DFS250ANFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00094	**P1DFS400A**	P1 400A deadfront support (new for 3VA)	—	listed (2021)

EDH-SIE-00092	P1DFS250AFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250AFT	A	S97 p.11-20; oem_spec
Description	P1 250A deadfront support, feed-thru interiors only (4 per interior); part 11-D-3323-01 replaces 11-D-3212-01	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00093	P1DFS250ANFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250ANFT	A	S97 p.11-20; oem_spec
Description	P1 250A deadfront support, non-feed-thru interiors only (4 per interior); part 11-D-3323-02 replaces 11-D-3212-02	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00094	P1DFS400A	Siemens	mounting-bracket	LISTED (2021)

P1 400A deadfront support (new for 3VA)

OEM part number	P1DFS400A	A	S97 p.11-20; oem_spec
Description	P1 400A deadfront support (new for 3VA), FT and NFT interiors; 11-D-3315-01 replaces 11-D-3004-01 (4 per interior)	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3315	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00231	**SEBKP1P2P3V1**	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	—	unknown
EDH-SIE-00224	**SEBKRP1V1**	SEB kit for RP1 with FD, QJ or QR horizontal main	—	unknown
EDH-SIE-00225	**SEBKRP1V2**	SEB kit for RP1 with ED horizontal main	—	unknown
EDH-SIE-00226	**SEBKRP1V3**	SEB kit for RP1 with back-fed BL/BQD main in unit space	—	unknown
EDH-SIE-00227	**SEBKRP1V4**	SEB kit for RP1 with back-fed xGB main in unit space	—	unknown
EDH-SIE-00228	**SEBKRP1V5**	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	—	unknown
EDH-SIE-00229	**SEBKRP1V6**	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	—	unknown
EDH-SIE-00230	**SEBKRP1V7**	SEB kit for RP1 with 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00231	SEBKP1P2P3V1	Siemens	barrier	STATUS UNKNOWN

SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main

OEM part number	SEBKP1P2P3V1	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1157-01 / 11-D-2740-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00224	SEBKRP1V1	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with FD, QJ or QR horizontal main

OEM part number	SEBKRP1V1	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with FD, QJ or QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00225	SEBKRP1V2	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with ED horizontal main

OEM part number	SEBKRP1V2	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00226	SEBKRP1V3	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed BL/BQD main in unit space

OEM part number	SEBKRP1V3	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed BL/BQD main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00227	SEBKRP1V4	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed xGB main in unit space

OEM part number	SEBKRP1V4	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed xGB main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00228	SEBKRP1V5	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets

OEM part number	SEBKRP1V5	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1165-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00229	SEBKRP1V6	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit

OEM part number	SEBKRP1V6	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1194-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00230	SEBKRP1V7	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with 3VA52/61/62 horizontal main

OEM part number	SEBKRP1V7	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S97 p.11-67; oem_spec
Identification features	Drawing ref 11-B-1060-01	A	S97 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00064	**DFFP01B**	P1 main or subfeed 250A blank filler plate	—	listed (2021)
EDH-SIE-00065	**DFFP01C**	Revised P1 400A main blank filler plate	—	listed (2021)
EDH-SIE-00062	**DFFP1A**	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 a A	current (2021)
EDH-SIE-00070	**DFFPFD01**	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	—	listed (2021)
EDH-SIE-00071	**DFFPJD01**	JD main filler plate (plastic)	—	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00072	**DFFPJD02**	JD main filler plate for Revised P1 400A with large MB opening only	—	listed (2021)
EDH-SIE-00073	**DFFPQJ01**	QJ main filler plate	—	listed (2021)
EDH-SIE-00074	**DFFPQJ02**	QJ main filler plate	—	listed (2021)
EDH-SIE-00066	**DFFPVA41A**	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	—	listed (2021)
EDH-SIE-00067	**DFFPVA5262A**	RP1 main or subfeed filler	—	listed (2021)
EDH-SIE-00068	**DFFPVA5363A**	RP1 400A main filler for 3VA53/63	—	listed (2021)
EDH-SIE-00075	**MBKQRFK**	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	—	listed (2021)

EDH-SIE-00064 **DFFP01B** Siemens filler-plate **LISTED (2021)**

P1 main or subfeed 250A blank filler plate

OEM part number	DFFP01B	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP01A [supersedes]	**A**	same as above
	11-D-4560-01 [supersedes]	**A**	same as above
	12-A-1801-01 [supersedes]	**A**	same as above
Description	P1 main or subfeed 250A blank filler plate, 1 piece (Original or Revised P1; also S1/S2/SE); installs vertical for 400A main w/ small DF opening	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4612-01	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00065 **DFFP01C** Siemens filler-plate **LISTED (2021)**

Revised P1 400A main blank filler plate

OEM part number	DFFP01C	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	Revised P1 400A main blank filler plate, 1 piece, for large MB opening only	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4600-01	**A**	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00062	DFFP1A	Siemens	filler-plate	CURRENT (2021)

1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)

OEM part number	DFFP1A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP1 (Earlier number; DFFP1 fits tighter in the opening than QF3 (stronger spring tabs))	A	S97 supersedes; pp.11-23, 11-67, 11-96; oem_spec
	12-1800-01 (old reference/drawing number)	A	S97 alias; p.11-20; oem_spec
	11-D-4554-01 [alias] (old eng. ref; current eng ref 11-D-4613-01)	A	same as above
	QF3 (QF3 is approved in all panelboards/switchboards and is the only one approved in residential products; slides out when P1-P3 deadfront removed)	A	S97 equivalent; p.11-23 footnotes a,b; oem_spec
Description	Blank filler, 1 inch snap-in; replaced old QF3 and DFFP1 in Systems products	A	S97 p.11-20; oem_spec
Application	blank 1in branch positions; also fills void where a 2-pole breaker is installed in a 3-pole position	A	S97 p.11-23 footnote a; oem_spec
Installation location	Deadfront branch openings (horizontal or vertical)	A	S97 p.11-23 row A1; oem_spec
Breaker compatibility	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 and DFFP1 in P1-P5 panelboards and switchboards	A	S97 p.11-23; oem_spec
Status	current (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng. ref 11-D-4613-01; snap-in with small spring side tabs	A	S97 pp.11-20, 11-23; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3, P4, P5, SB · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Exact outline dimensions of DFFP1A vs QF3 (distributor s13 gives QF3 12.9in x 5.2in which is likely packaging)*		

EDH-SIE-00070	DFFPFD01	Siemens	filler-plate	LISTED (2021)

FD main filler plate (plastic) for 1-ph and 3-ph P1 panels

OEM part number	DFFPFD01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels; also P2/P3 and S1/S2/SE	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S97 p.11-53; oem_spec
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1803-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00071	DFFPJD01	Siemens	filler-plate	LISTED (2021)

JD main filler plate (plastic)

OEM part number	DFFPJD01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate (plastic), 1-ph and 3-ph P1, small MB opening; also P2/P3 and S1/S2	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S97 p.11-53; oem_spec
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4522-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00072	DFFPJD02	Siemens	filler-plate	LISTED (2021)

JD main filler plate for Revised P1 400A with large MB opening only

OEM part number	DFFPJD02	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate for Revised P1 400A with large MB opening only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4598-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00073	DFFPQJ01	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 3-phase (3-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-61	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00074	DFFPQJ02	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ02	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 1-phase (2-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-62	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00066	DFFPVA41A	Siemens	filler-plate	LISTED (2021)

RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max

OEM part number	DFFPVA41A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPED01 [supersedes]	A	same as above
	12-A-1802-01 [supersedes]	A	same as above
Description	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4604-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA41, BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00067	DFFPVA5262A	Siemens	filler-plate	LISTED (2021)

RP1 main or subfeed filler

OEM part number	DFFPVA5262A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 main or subfeed filler, single mount 3VA52/61/62 (150-250A)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4617-01	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00068	DFFPVA5363A	Siemens	filler-plate	LISTED (2021)

RP1 400A main filler for 3VA53/63

OEM part number	DFFPVA5363A	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 400A main filler for 3VA53/63, large MB opening only (also used in P2/P3)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00075	MBKQRFK	Siemens	filler-plate	LISTED (2021)

P1 / Revised P1 deadfront filler for 1PH/3PH QR main

OEM part number	MBKQRFK	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	P1 / Revised P1 deadfront filler for 1PH/3PH QR main, horizontal mount only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S97 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23)	A	S97 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00240	**EWK1**	End wall kit with knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00243	**EWK1B**	End wall kit without knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00242	**EWK3**	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	—	unknown

EDH-SIE-00240	EWK1	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1	A	S97 p.11-34; oem_spec
Description	End wall kit with knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00243	EWK1B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1B	A	S97 p.11-34; oem_spec
Description	End wall kit without knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00242	EWK3	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in

OEM part number	EWK3	A	S97 p.11-34; oem_spec
Description	End wall kit - open center space - ref B74FLR (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00096	**BK1A**	Revised P1 bonding kit including service disconnect label	—	listed (2021)
EDH-SIE-00095	**IMK1**	Interior mounting kit with adjustment provisions for P1/P2/P3	—	listed (2021)
EDH-SIE-00014	**MBKBFA**	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	—	unknown

EDH-SIE-00096	BK1A	Siemens	hardware-kit	LISTED (2021)

Revised P1 bonding kit including service disconnect label

OEM part number	BK1A	A	S97 p.11-20; oem_spec
Description	Revised P1 bonding kit including service disconnect label	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00095	IMK1	Siemens	hardware-kit	LISTED (2021)

Interior mounting kit with adjustment provisions for P1/P2/P3

OEM part number	IMK1	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	Interior mounting kit with adjustment provisions for P1/P2/P3	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00014	MBKBFA	Siemens	hardware-kit	STATUS UNKNOWN

P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)

OEM part number	MBKBFA	A	S105 oem_spec
Description	KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER; field installable kit	A	same as above
Application	main (back-fed breaker in unit space; uses 2 or 3 positions of unit space)	A	S97 p.11-7 note 1; oem_spec
Kit contents	'MAIN' label and instructions for back-fed BL/BQD or GB main (s8 table: 'Label Kit # MBKBFA ... MAIN label and'; s7 lists 'MBKDFA - Back Fed Main Breaker Label and Instructions for BL/BQD or GB breaker' (likely typo of MBKBFA))	B	S104, S103 oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is 'MBKDFA' in the flyer (s7) a typo of MBKBFA?*		
Open question	*Does the kit include a hold-down/retaining clip as required for back-fed breakers? Not stated.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00091	**P1SCRWS**	P1 branch breaker mounting screws	—	listed (2021)

EDH-SIE-00091	P1SCRWS	Siemens	fastener	LISTED (2021)

P1 branch breaker mounting screws

OEM part number	P1SCRWS	A	S97 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	P1 branch breaker mounting screws, pack of 42 (part 11-A-1505-03), 10-32 x 0.312in hex washer head - do not substitute	A	same as above
Kit contents	qty/kit 42	A	same as above
Fasteners	10-32 x 0.312in hex washer head screw, part 11-A-1505-03	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2010-01	A	same as above
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00013	**MBKVA5363JD**	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	—	'to be available 2021' / 'tbd - being developed'

EDH-SIE-00013	MBKVA5363JD	Siemens	conversion-kit	'TO BE AVAILABLE 2021'

RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)

OEM part number	MBKVA5363JD	A	S97 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Allows 3VA53/63 in old 400A RP1 with small deadfront opening; no access to breaker adjustments without removing deadfront	A	same as above
Application	main (400A)	A	same as above
Status	'to be available 2021' / 'tbd - being developed'	A	S97 pp.11-13, 11-20; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Was MBKVA5363JD ever released? SpeedFax 2021 lists it as tbd/being developed*		

6.9 S1/S2 — Type S1 / S2 lighting panelboards

FAM-SIE-003 · panelboard · aka S1, S2, Sentron S1, Sentron S2 · markings: Siemens

Earlier Siemens (Sentron-era) bolt-on lighting panelboards preceding P1/P2. SpeedFax states that all original P1 kits for 250A-and-below panels work in 250A-max S1/S2 panels; 400/600A S1/S2 use the SMBK* strap kits. Revised P1 kits will not work in S1/S2.

Attribute	Value	Cl.	Sources
Status	discontinued; some kits available	A	S97 pp.11-15, 11-20; oem_spec
Successor	P1 / P2 (Implied by SpeedFax grouping; not stated explicitly)	C	S97 inference

Breaker families associated: BL, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, MLKC1, MLKC3, 4MLKA1, 4MLKA3, 4MLKC1, 4MLKC3, MBKBL1, MBKBL3, MBKBC3, MBKNB1, MBKNB3, MBKED1, MBKED3, MBKQR1, MBKQR3, MBKFD1, MBKFD3, DFFP1A, DFFP01B, DFFPFD01, DFFPJD01

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00056	**SMBKED1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	2-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00057	**SMBKED3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	3-pole ED2, ED4, ED6, HED4, HHED6 A	listed (2021)
EDH-SIE-00058	**SMBKFD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	2-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00059	**SMBKFD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	3-pole FXD6, FD6, HFXD6, HFD6 A	listed (2021)
EDH-SIE-00060	**SMBKJD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	2-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)
EDH-SIE-00061	**SMBKJD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	3-pole JD6, JXD6, HJD6, HJXD6 A	listed (2021)

EDH-SIE-00056 **SMBKED1** Siemens main-breaker-kit **LISTED (2021)**

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph

OEM part number	SMBKED1	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00057	SMBKED3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph

OEM part number	SMBKED3	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00058	SMBKFD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph

OEM part number	SMBKFD1	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00059	SMBKFD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph

OEM part number	SMBKFD3	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00060	SMBKJD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph

OEM part number	SMBKJD1	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00061	SMBKJD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph

OEM part number	SMBKJD3	A	S97 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole JD6, JXD6, HJD6, HJXD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole JD6, JXD6, HJD6, HJXD6	A	same as above
Current rating	400A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.10 SE — Type SE panelboard

FAM-SIE-004 · panelboard · aka SE panels · markings: Siemens

Legacy Siemens panelboard type grouped with S1/S2 in SpeedFax replacement tables. SMBK* strap kits fit all SE panels; only AL 250A MLO kits (MLKA1/MLKA3) available for SE. Construction details unknown.

Attribute	Value	Cl.	Sources
Status	discontinued	A	S97 p.11-15; oem_spec

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1, MLKA3, SMBKED1, SMBKED3, SMBKFD1, SMBKFD3, SMBKJD1, SMBKJD3, DFFP01B, DFFPFD01

6.11 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)

FAM-SIE-010 · switchboard · aka CDP-5, CDP-6, CDP6, SPP6, VB-5, VB-6, FC20, FC-20, FCI, FC-I, FCII, FC-II, FCRS, Class II · markings: ITE, Gould ITE, Siemens-Allis, Siemens

Legacy distribution panelboard and switchboard lines served by the Series 6 connecting strap kits (6E62, 6F62, 6JJ62, 6LL61...) and 6FPB blank plates. 2005 Siemens price list states these kits fit 'switchboards manufactured since 1974'. Equipment lineage (ITE/Gould-ITE/Siemens-Allis) for each type not confirmed in OEM documents in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued equipment; strap kits still catalogued (Canada) (Equipment status inferred from absence in current US SpeedFax)	B	S98 p.11-15; oem_spec
Era of manufacture	Strap kits fit switchboards manufactured since 1974	A	S99 p.8-13; oem_spec

Breaker families associated: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QJ2 / QJH2 / QJ2-H / HQJ2H
Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S98 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S99 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list -

Switchboard Replacement and Modificatio
Also fits this family (entry printed elsewhere): SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10, 6FPB15

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00201	**6BL2C**	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	BQ, BQH, HB, BL, BLH, HBL [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00191	**6CLF1**	6CLF1 connecting strap kit - CFD6 (5in, single)	CFD6 [s3]; CFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00194	**6CLJ1**	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	CJD6 [s3]; CJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00198	**6CLL1**	6CLL1 connecting strap kit - CLD6 (8.75in, single)	CLD6 [s3]; CLD6, SCLD [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00188	**6E62**	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00190	**6F62**	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00192	**6JJ61**	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)	JXD2, JXD6, JD6, HJD6 single branch [s3] **A**	listed in 2005 price list
EDH-SIE-00193	**6JJ62**	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00197	**6LL61**	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00203	**6M61C**	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00204	**6N61C**	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00189	**6QJ2**	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	QJ2, QJH2, QJ2-H [s3] **A**	listed in 2005 price list
EDH-SIE-00196	**6SCJ1**	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00200	**6SCL1**	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	SCLD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00202	**6SCL61C**	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00195	**6SJL1**	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00199	**6SLL1**	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	SLL, SLD6, SHLD6 [s3] **A**	listed in 2005 price list

EDH-SIE-00201	6BL2C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)

OEM part number	6BL2C	**A**	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for BQ, BQH, HB, BL, BLH, HBL branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	BQ, BQH, HB, BL, BLH, HBL [s2]	**A**	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S98 p.11-15; oem_spec
Material	copper only (footnote e) (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	**A**	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: BQ / BQH / HBQ (bolt-on, legacy), BL		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Distributor listings disagree on breaker list (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB) - Canadian OEM table lists 'BQ, BQH, HB, BL, BLH, HBL'*		

EDH-SIE-00191	6CLF1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLF1 connecting strap kit - CFD6 (5in, single)

OEM part number	6CLF1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLF1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CFD6 branch breaker(s), single (s) mount, 5in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CFD6 [s3]; CFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLF1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $1553.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00194	6CLJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLJ1 connecting strap kit - CJD6 (8.75in, single)

OEM part number	6CLJ1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLJ1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CJD6 [s3]; CJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLJ1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00198	6CLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLL1 connecting strap kit - CLD6 (8.75in, single)

OEM part number	6CLL1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLL1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CLD6 [s3]; CLD6, SCLD [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00188	6E62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)

OEM part number	6E62	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for ED2, ED4, ED6, HED4, HED6 branch breaker(s), twin (d) mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $845.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00190	6F62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)

OEM part number	6F62	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for FXD6, FD6, HFD6 branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $1529.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00192	6JJ61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)

OEM part number	6JJ61	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 single branch branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 single branch [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00193	6JJ62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)

OEM part number	6JJ62	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 double branch branch breaker(s), twin (d) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2349.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00197	6LL61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)

OEM part number	6LL61	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6LL61C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for LXD6, LD6, HLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6LL61C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00203	6M61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)

OEM part number	6M61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00204	6N61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)

OEM part number	6N61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for NXD6, ND6, HND6, CND6, SHND6, SCND6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00189	6QJ2	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)

OEM part number	6QJ2	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for QJ2, QJH2, QJ2-H branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin (D)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	QJ2, QJH2, QJ2-H [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $1529.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00196	6SCJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCJ1 connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCJ1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCJD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00200	6SCL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCL1 connecting strap kit - SCLD6 (8.75in, single)

OEM part number	6SCL1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00202	6SCL61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6SCL61C connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCL61C	A	S98 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SCJD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S98 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S98 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00195	6SJL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)

OEM part number	6SJL1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6SJL1C	A	S98 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for SJL, SJD6, SHJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S99, S98 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6SJL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S98 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99, S98 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S99, S98 oem_spec
Identification features	2005 list price $2122.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00199	6SLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)

OEM part number	6SLL1	A	S99 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SLL, SLD6, SHLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S99 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SLL, SLD6, SHLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S99 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S99 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S99 oem_spec
Identification features	2005 list price $2525.00	A	S99 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00063	**QF3**	QF3 1-pole plastic filler plate (load center / legacy switchboard)	—	still approved in panelboards/switchboards; only QF3 approve

EDH-SIE-00063	QF3	Siemens	filler-plate	STILL APPROVED IN PANE

QF3 1-pole plastic filler plate (load center / legacy switchboard)

OEM part number	QF3	**A**	S99 oem_spec
Alternate / superseded numbers	DFFP1A	**A**	S97 superseded_by; p.11-20; oem_spec
	12-1800-01 ('sub no. 12-1800-01')	**C**	S109 alias; distributor
Description	Filler plate, per pole, for BQ, BQH, HBQ, E2, E4, E6, HE4, HE6, E2-A..HE6-A and ED2, ED4, ED6, HED4, HED6 frames in Series 5/6 CDP panelboards and FC-20, Class II, FCI, FCII, SB1, SB2, SB3 switchboards	**A**	S99 p.8-13 'Filler Plates'; oem_spec
Application	blank 1-pole branch positions	**A**	S99 p.8-13; oem_spec
Status	still approved in panelboards/switchboards; only QF3 approved for residential load centers, meter combos	**A**	S97 p.11-23 footnote b-c; oem_spec
Cross-links	Families: CDP6, SB, P1, P2, P3 · Breakers: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.12 SB — Type SB1 / SB2 / SB3 distribution switchboards

FAM-SIE-009 · switchboard · aka SB1, SB2, SB3, SB4 (blank plates only) · markings: Siemens

Siemens front-accessible distribution switchboards. Branch MCCBs mount in distribution sections via 'Connection Strap Kits' (same D-suffix kits as P5: SBLBD, SE6D, SF6D, SJ1D, SMND etc. plus S3VA*TD kits), unit space covered with 6FPB blank plates.

Attribute	Value	Cl.	Sources
Status	current	**A**	S98 p.11-2; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQ / BQH / HBQ (bolt-on, legacy), BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S97 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S98 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S99 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio

Also fits this family (entry printed elsewhere): DFFP1A, QF3, SDGD, SBLBD, S3VA41TD, S3VA41TDHD, SGB2D, SE6D, 6CLE2, S3VA52TD, 6QR2, SFGD, SF6D, SCFD, S3VA53TD, S3VA63TD, SJG2D, SJG1D, SJ1D, SJ2D, SCJD, S3VA54TD, S3VA64TD, SLGD, SL6D, SCLD, SSL6D, SSCLD, MG1D, SLM1D, SMND, SSMND, NG1D, 6E62, 6QJ2, 6F62, 6CLF1, 6JJ61, 6JJ62, 6CLJ1, 6SJL1, 6SCJ1, 6LL61, 6CLL1, 6SLL1, 6SCL1, 6BL2C, 6SCL61C, 6M61C, 6N61C, S3VA52PR, 6FPB01, 6FPB02, 6FPB03, 6FPB05, 6FPB10

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00182	**S3VA53T2D**	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	3VA53, 3VA63 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00185	**S3VA54T2D**	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	3VA54, 3VA64 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00186	**S3VA55TD**	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	3VA55, 3VA65; 3VA66 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00187	**S3VA57TD**	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	3VA57, 3VA67 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00180	**SCED**	SCED connecting strap kit - CED (3.75in, twin)	CED [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00181	**SQRD**	SQRD connecting strap kit - QR (5.00in, twin)	QR [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00184	**SSCJD**	SSCJD connecting strap kit - SCJD (8.75in, single)	SCJD [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00183	**SSJ1D**	SSJ1D connecting strap kit - SJD (8.75in, single)	SJD [s2] **A**	listed in Siemens Canada catalogue 2025

EDH-SIE-00182	S3VA53T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)

OEM part number	S3VA53T2D	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53, 3VA63 branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA53, 3VA63 [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00185	S3VA54T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)

OEM part number	S3VA54T2D	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54, 3VA64 branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 46in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA54, 3VA64 [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00186	S3VA55TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)

OEM part number	S3VA55TD	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA55, 3VA65; 3VA66 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for 3VA66)in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA55, 3VA65; 3VA66 [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	800/1000A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00187	S3VA57TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)

OEM part number	S3VA57TD	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA57, 3VA67 branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S98 p.11-5; oem_spec
Breaker compatibility	3VA57, 3VA67 [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	1200A max (table max-amp rating)	A	same as above
Dimensions	Unit height 10.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00180	SCED	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SCED connecting strap kit - CED (3.75in, twin)

OEM part number	SCED	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	CED [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00181	SQRD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SQRD connecting strap kit - QR (5.00in, twin)

OEM part number	SQRD	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	QR [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00184	SSCJD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSCJD connecting strap kit - SCJD (8.75in, single)

OEM part number	SSCJD	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	SCJD [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00183	SSJ1D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSJ1D connecting strap kit - SJD (8.75in, single)

OEM part number	SSJ1D	A	S98 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S98 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S98 p.11-5; oem_spec
Breaker compatibility	SJD [s2]	A	S98 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S98 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00216	**6FPB15**	6FPB15 blank plate, 15in unit space	—	unknown

EDH-SIE-00216	6FPB15	Siemens	filler-plate	STATUS UNKNOWN

6FPB15 blank plate, 15in unit space

OEM part number	6FPB15	A	S98 p.11-15; oem_spec
Description	Blank filler plate 15.00in (381mm) for distribution switch or circuit breaker (CSA SMP / FCI / FCII)	A	S98 p.11-15 Table 17; oem_spec
Dimensions	15.00in (381mm)	A	S98 p.11-15; oem_spec
Cross-links	Families: SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00206	**S3VA53PR**	3VA53/63/54/64 single-mount breaker provision hardware kit	—	unknown

EDH-SIE-00206 **S3VA53PR** Siemens hardware-kit **STATUS UNKNOWN**

3VA53/63/54/64 single-mount breaker provision hardware kit

OEM part number	S3VA53PR	**A**	S98 p.11-14; oem_spec
Description	Provision kit for single mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers on factory-provisioned configurations	**A**	same as above
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00207	**3VA9233-0QA00**	3VA52 250A nut keeper kit (3)	—	unknown
EDH-SIE-00208	**3VA9243-0QA00**	3VA61/62 150A/250A nut keeper kit (3)	—	unknown
EDH-SIE-00209	**3VA9473-0QA00**	3VA5, 3VA6 400A/600A nut keeper kit (3)	—	unknown

EDH-SIE-00207 **3VA9233-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA52 250A nut keeper kit (3)

OEM part number	3VA9233-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA52 250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00208 **3VA9243-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA61/62 150A/250A nut keeper kit (3)

OEM part number	3VA9243-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA61/62 150A/250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00209 **3VA9473-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA5, 3VA6 400A/600A nut keeper kit (3)

OEM part number	3VA9473-0QA00	**A**	S98 p.11-14; oem_spec
Description	3VA5, 3VA6 400A/600A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6.13 Breaker-mounted terminal kits and accessories

Hardware that mounts on the breaker rather than in a specific panel family (lugs, terminal kits, shields, barriers, rear studs), grouped by the first breaker family it is documented for.

Breaker family BQ / BQH / HBQ / BQXD bolt-on

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00247	**TA1Q1**	Siemens TA1Q1 line-side lug, BQ 45-125A	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versi A	current
EDH-SIE-00245	**TC1Q1**	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD lin A	current

EDH-SIE-00247 **TA1Q1** Siemens lug **CURRENT**

Siemens TA1Q1 line-side lug, BQ 45-125A

OEM part number	TA1Q1	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side	A	S135 s6 p. 7-153; oem_spec
Breaker compatibility	BQ family line side 45-125 A; BQXD 45-60 A line (and load on QLD versions)	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #8-#1 AWG Cu / #6-#1/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00245 **TC1Q1** Siemens lug **CURRENT**

Siemens TC1Q1 line-side lug, BQ 15-40A (steel)

OEM part number	TC1Q1	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Description	Mechanical line-side lug, steel body; sold in package of six	A	same as above
Application	accessory	A	same as above
Installation location	Line side (BQ family; load-side lugs are integral)	A	S135 s6 p. 7-153; oem_spec
Breaker compatibility	BQ, BQH, BQHF, BQE, BQF, BL, BLH, HBL, HBQ line side 15-40 A; BQXD line side; NGG/HGG/LGG 15-30 A	A	S135, S136 s6 p. 7-153; 7-39; oem_spec
Kit contents	1 lug; sold in pkg of 6; wire range (1) #14-#6 AWG Cu / #12-#6 AWG Al (BQXD table: #16-#6 Cu)	A	same as above
Material	{'value': 'Steel', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-153'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on, NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00252	**BQFS2**	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	Type BQ/BQXD A	current

EDH-SIE-00252	BQFS2	Siemens	barrier	CURRENT

Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)

OEM part number	BQFS2	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Alternate / superseded numbers	BQFS1K (Bulk pack of 1000 pieces)	A	S135 equivalent; s6 p. 7-39; oem_spec
Description	Finger safe terminal shield: protects against accidental contact with lugs, 1 per lug; fits line and load end	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Application	accessory	A	same as above
Installation location	Over each lug, line or load end	A	S135 p. 7-39; oem_spec
Breaker compatibility	Type BQ/BQXD	A	S135, S136 s6 p. 7-39 and accessories page; oem_spec
Kit contents	2 pieces	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: BQ / BQH / HBQ / BQXD bolt-on		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family NGG / HGG / LGG (G-frame bolt-on/lug)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00248	**3TC1GG20**	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	NGG, HGG, LGG 35-125 A A	current
EDH-SIE-00246	**3TC1Q1**	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	NGG, HGG, LGG 15-30 A A	current

EDH-SIE-00248	3TC1GG20	Siemens	lug-kit	CURRENT

Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A

OEM part number	3TC1GG20	A	S135, S136 s6 p. 7-153; oem_spec
Description	Pack of 3 lugs	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 35-125 A	A	same as above
Kit contents	pkg of 3; wire range #8-#1/0 AWG Cu / #8-#2/0 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00246	3TC1Q1	Siemens	lug-kit	CURRENT

Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A

OEM part number	3TC1Q1	A	S135, S136 s6 p. 7-153; oem_spec
Description	Pack of 3 TC1Q1-type lugs for NGG/HGG/LGG 15-30 A	A	same as above
Application	accessory	A	same as above
Breaker compatibility	NGG, HGG, LGG 15-30 A	A	same as above
Kit contents	pkg of 3; wire range #14-#6 AWG Cu / #12-#6 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Requires	TNKG3 (EDH-SIE-00249)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00250	**TA6GG04**	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	NGG, HGG, LGG 15-125 A, 1/2/3-pole **A**	current

EDH-SIE-00250	TA6GG04	Siemens	lug	CURRENT

Siemens TA6GG04 distribution lug, NGG/HGG/LGG

OEM part number	TA6GG04	**A**	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector, not for general use	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A, 1/2/3-pole	**A**	same as above
Kit contents	1 lug per kit; wire range #6-#4 Al / #14-#4 Cu, 6 wires per lug	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00251	**TSSG3A**	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	HGG, LGG, NGG 3-pole **A**	current

EDH-SIE-00251	TSSG3A	Siemens	barrier	CURRENT

Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole

OEM part number	TSSG3A	**A**	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	HGG, LGG, NGG 3-pole	**A**	same as above
Kit contents	std pkg 1	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00249	**TNKG3**	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	NGG, HGG, LGG 15-125 A **A**	current

EDH-SIE-00249	TNKG3	Siemens	hardware-kit	CURRENT

Siemens TNKG3 nut keeper plate (pkg of 3), NGG

OEM part number	TNKG3	**A**	S135, S136 s6 p. 7-153; oem_spec
Description	Nut keeper plate; one nut keeper plate is required with each lug on the NGG breaker	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	NGG, HGG, LGG 15-125 A	**A**	same as above
Kit contents	pkg of 3	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: NGG / HGG / LGG (G-frame bolt-on/lug)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00256	**TA1Q300**	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet) C	unknown

EDH-SIE-00256 **TA1Q300** Siemens lug-kit **UNKNOWN**

Siemens TA1Q300 3-lug kit, QJ2 (distributor data)

OEM part number	TA1Q300	C	S137 distributor
Description	3-lug kit for QJ breakers; accepts Al or Cu, single wire up to 300 kcmil	C	same as above
Application	accessory	C	same as above
Breaker compatibility	QJ breakers (QJ2, QJH2, QJ2H, HQJ2H per a search snippet)	C	same as above
Kit contents	3 lugs; wire range single wire up to 300 kcmil Al/Cu	C	same as above
Status	unknown (Not in SPEEDFAX 2017. The QJ2 frame is not in the current catalog.)	D	same as above
Cross-links	Breakers: QJ2 / QJH2 / QJ2H / HQJ2H (225A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Find an OEM ITE/Siemens table for QJ2 lugs (an older SPEEDFAX of about 1995-2008 or the QJ2 instruction)*		
Open question	*Did TA1Q300 supersede, or is it superseded by, 3TA1QR300?*		

Breaker family QR2 / QRH2 / HQR2 (250A frame)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00253	**3TA1QR300**	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	QR2, QR2H, HQR2, HQR2H 100-250 A A	current
EDH-SIE-00254	**3TC1QR250**	Siemens 3TC1QR250 copper lug kit (3), QR2	QR2, QR2H, HQR2, HQR2H 100-250 A A	current

EDH-SIE-00253 **3TA1QR300** Siemens lug-kit **CURRENT**

Siemens 3TA1QR300 lug kit (3), QR2 100-250A

OEM part number	3TA1QR300	A	S135, S136 s6 p. 7-40; s6 p. 7-154; oem_spec
Description	Aluminum-body lugs, 3 per kit; load-side lugs mounted and included with QR2 (line+load with suffix 'L')	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	A	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Al/Cu	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00254	3TC1QR250	Siemens	lug-kit	CURRENT

Siemens 3TC1QR250 copper lug kit (3), QR2

OEM part number	3TC1QR250	A	S135, S136 s6 p. 7-40; s6 p. 7-155; oem_spec
Alternate / superseded numbers	3TC1QR2520 (Printed '3TC1QR2520' on p. 7-155 but '3TC1QR250' on p. 7-40. It may be a footnote run-in or a typo.)	B	S135 alias; s6 p. 7-155; oem_spec
Description	Optional copper lugs, 3 per kit	A	S135, S136 s6 p. 7-40; s6 p. 7-155; oem_spec
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A	A	same as above
Kit contents	3 lugs; wire range #3-300 kcmil Cu only	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*Which is the correct orderable number, 3TC1QR250 or 3TC1QR2520?*		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00255	**CCQ250**	Siemens CCQ250 compression lug, QR2	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole A	current

EDH-SIE-00255	CCQ250	Siemens	lug	CURRENT

Siemens CCQ250 compression lug, QR2

OEM part number	CCQ250	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug (lug and necessary hardware per kit)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	QR2, QR2H, HQR2, HQR2H 100-250 A, 2-3 pole	A	same as above
Kit contents	1 lug per kit; wire range #6-350 kcmil Al/Cu	A	same as above
Material	{'value': 'Compression (CMP)', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 'p. 7-40'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: QR2 / QRH2 / HQR2 (250A frame)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00263	**CCE125**	Siemens CCE125 compression lug, ED 15-125A	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole A	current
EDH-SIE-00260	**LD1E060**	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	ED, HED 1-pole 30-60 A; CED6 A	current
EDH-SIE-00261	**LD1E100**	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	ED, HED 1-pole 70-100 A A	current
EDH-SIE-00258	**LN1E100**	Siemens LN1E100 lug, ED 30-100A	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A A	current
EDH-SIE-00257	**SA1E025**	Siemens SA1E025 lug, ED 2/3-pole 15-25A	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A A	current
EDH-SIE-00259	**TA1E6125**	Siemens TA1E6125 lug, ED 110-125A	ED/HED/HHED 110-125 A, 2- and 3-pole A	current
EDH-SIE-00264	**TA6ED06**	Siemens TA6ED06 distribution lug, ED	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00262	**TC1ED6150**	Siemens TC1ED6150 copper-body lug, ED 30-125A	ED, HED 1-, 2-, 3-pole 30-125 A A	current

EDH-SIE-00263	CCE125	Siemens	lug	CURRENT

Siemens CCE125 compression lug, ED 15-125A

OEM part number	CCE125	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A, 1/2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #2/0 AWG Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00260	LD1E060	Siemens	lug	CURRENT

Siemens LD1E060 load-side lug, ED 1-pole 30-60A

OEM part number	LD1E060	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S135 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 30-60 A; CED6	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #10-#4 Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00261	LD1E100	Siemens	lug	CURRENT

Siemens LD1E100 load-side lug, ED 1-pole 70-100A

OEM part number	LD1E100	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Load-side lug	A	same as above
Application	accessory	A	same as above
Installation location	Load side	A	S135 s6 p. 7-154; oem_spec
Breaker compatibility	ED, HED 1-pole 70-100 A	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Kit contents	1 lug; wire range #4-#1/0 Cu/Al (ED page: #6-#1/0)	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00258	LN1E100	Siemens	lug	CURRENT

Siemens LN1E100 lug, ED 30-100A

OEM part number	LN1E100	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body lug, line side (all poles) and load side (2/3-pole)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, ED6 ETI, HED4, HHED6 30-100 A	A	same as above
Kit contents	1 lug; wire range #10-1/0 Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00257	SA1E025	Siemens	lug	CURRENT

Siemens SA1E025 lug, ED 2/3-pole 15-25A

OEM part number	SA1E025	A	S135, S136 s6 p. 7-154; oem_spec
Description	Lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6 (all 2-, 3-pole) 15-25 A	A	same as above
Kit contents	1 lug; wire range #14-#10 AWG Cu / #12-#10 AWG Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00259	TA1E6125	Siemens	lug	CURRENT

Siemens TA1E6125 lug, ED 110-125A

OEM part number	TA1E6125	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-154; oem_spec
Description	Aluminum-body line/load lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED/HED/HHED 110-125 A, 2- and 3-pole	A	same as above
Kit contents	1 lug; wire range #3-3/0 Cu / #1-2/0 Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00264	TA6ED06	Siemens	lug	CURRENT

Siemens TA6ED06 distribution lug, ED

OEM part number	TA6ED06	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug; special purpose wire connector	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED2, ED4, ED6, HED4, HHED6, CED6 15-125 A	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00262	TC1ED6150	Siemens	lug	CURRENT

Siemens TC1ED6150 copper-body lug, ED 30-125A

OEM part number	TC1ED6150	A	S135, S136 s6 ED page (ED2/ED4/ED6 lug table); s6 p. 7-155; oem_spec
Description	Optional copper-body mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ED, HED 1-, 2-, 3-pole 30-125 A	A	same as above
Kit contents	1 lug; wire range #10-#1/0 Cu only	A	same as above
Material	{'value': 'Copper body', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00301	**RS2641**	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00302	**RS2642**	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	All ED (100 A) A	current
EDH-SIE-00299	**RS2643**	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	All ED (100 A) A	current
EDH-SIE-00300	**RS2644**	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	All ED (100 A) A	current

EDH-SIE-00301	RS2641	Siemens	breaker-accessory	CURRENT

Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in

OEM part number	RS2641	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 4.88 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00302	RS2642	Siemens	breaker-accessory	CURRENT

Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in

OEM part number	RS2642	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (long). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 4.88 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00299	RS2643	Siemens	breaker-accessory	CURRENT

Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in

OEM part number	RS2643	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Line side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00300	RS2644	Siemens	breaker-accessory	CURRENT

Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in

OEM part number	RS2644	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Load side (short). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All ED (100 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 2.38 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00267	**CCF250**	Siemens CCF250 compression lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole A	current
EDH-SIE-00265	**TA1FD350A**	Siemens TA1FD350A lug, FD 70-250A	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A A	current
EDH-SIE-00268	**TA6FD04**	Siemens TA6FD04 distribution lug, FD	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole A	current
EDH-SIE-00266	**TC1FD350**	Siemens TC1FD350 copper lug, FD 70-250A	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A A	current

EDH-SIE-00267	CCF250	Siemens	lug	CURRENT

Siemens CCF250 compression lug, FD

OEM part number	CCF250	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 125-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range 350 kcmil Cu/Al	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00265	TA1FD350A	Siemens	lug	CURRENT

Siemens TA1FD350A lug, FD 70-250A

OEM part number	TA1FD350A	A	S135, S136 s6 FD page; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug; supplied with FD6/HFD6/HHFD6 complete breakers. Suffix 'L' = lugs installed.	A	same as above
Application	accessory	A	same as above
Breaker compatibility	FXD6-A, FD6-A, HFD6, HHFD6, CFD6 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu / #4 AWG-350 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00268	TA6FD04	Siemens	lug	CURRENT

Siemens TA6FD04 distribution lug, FD

OEM part number	TA6FD04	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	F(X)D6-A, HF(X)D6, HHF(X)D6, CFD6 70-250 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-#4 AWG Cu / #6-#4 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00266	TC1FD350	Siemens	lug	CURRENT

Siemens TC1FD350 copper lug, FD 70-250A

OEM part number	TC1FD350	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	HFD6, HHFD6, CFD6, F(X)D6-A 70-250 A	A	same as above
Kit contents	1 lug; wire range #6 AWG-350 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00304	**RS4755**	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	All FD (250 A) A	current
EDH-SIE-00303	**RS4756**	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	All FD (250 A) A	current

EDH-SIE-00304 **RS4755** Siemens breaker-accessory **CURRENT**

Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in

OEM part number	RS4755	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All FD (250 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 7.06 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00303 **RS4756** Siemens breaker-accessory **CURRENT**

Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in

OEM part number	RS4756	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short (line or load). Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All FD (250 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 3.12 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00274	**CCL600**	Siemens CCL600 compression lug, JD/LD	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6- A	current
EDH-SIE-00273	**TA1L6750**	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	LD/JD family 250-600 A (Q155 row) A	current
EDH-SIE-00270	**TA2J630**	Siemens TA2J630 lug, SJD6-B 65-200A	SJD6-B, SHJD6-B, SCJD6-B 65-200 A A	current
EDH-SIE-00269	**TA2J6500**	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SH A	current
EDH-SIE-00275	**TA6JD20**	Siemens TA6JD20 distribution lug, JD/LD	JD/LD families 200-600 A, 2/3-pole A	current
EDH-SIE-00271	**TC1J6600**	Siemens TC1J6600 copper lug, JD/LD (100% rated)	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00272	**TC2J6500**	Siemens TC2J6500 copper lug, JD/LD (100% rated)	JD/LD frames 200-600 A **A**	current

EDH-SIE-00274 CCL600 Siemens lug CURRENT

Siemens CCL600 compression lug, JD/LD

OEM part number	CCL600	**A**	S135, S136 s6 p. 7-155; JD page; oem_spec
Description	Compression lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	JXD2-A, J(X)D6-A, HJ(X)D6-A, HHJ(X)D6-A, CJD6, SJD6-B, SHJD6-B, SCJD6-B, L(X)D6-A, HL(X)D6-A, CLD6, SLD6-B, SHLD6-B, SCLD6-B 200-600 A, 2/3-pole	**A**	same as above
Kit contents	1 lug per kit; wire range 500 kcmil (JD page: 1 pc #1/0-500 kcmil Cu/Al)	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00273 TA1L6750 Siemens lug CURRENT

Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil

OEM part number	TA1L6750	**A**	S135, S136 s6 p. 7-155; JD/LD pages; oem_spec
Description	Optional aluminum mechanical lug	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	LD/JD family 250-600 A (Q155 row)	**A**	same as above
Kit contents	1 lug; wire range 1 x 500-750 kcmil Al or 1 x 500-600 kcmil Cu	**A**	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00270 TA2J630 Siemens lug CURRENT

Siemens TA2J630 lug, SJD6-B 65-200A

OEM part number	TA2J630	**A**	S135, S136 s6 p. 7-154; JD page; oem_spec
Description	Aluminum-body lug, 1-2 cables	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	SJD6-B, SHJD6-B, SCJD6-B 65-200 A	**A**	same as above
Kit contents	1 lug; wire range 1-2 cables #4 AWG-3/0 Cu or Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00269	TA2J6500	Siemens	lug	CURRENT

Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil

OEM part number	TA2J6500	A	S135, S136 s6 JD/LD pages; s6 p. 7-154; oem_spec
Description	Standard aluminum-body line/load lug for JD and LD frames; six lugs per 3-pole breaker; suffix 'L' = lugs installed	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JXD2(A), JXD6(A), JD6(A), SJD6-B, HJD6(A), HJXD6(A), HHJXD6, HHJD6, SHJD6-B, CJD6, SCJD6-B (200-400 A); LXD6(A), LD6(A), SLD6-B, HLD6(A), HLXD6(A), HHLXD6, HHLD6, SHLD6-B, CLD6, SCLD6-B (250-600 A)	A	same as above
Kit contents	1 lug (6 per 3-pole breaker); wire range 1-2 cables, 3/0-500 kcmil Cu / 4/0-500 kcmil Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00275	TA6JD20	Siemens	lug	CURRENT

Siemens TA6JD20 distribution lug, JD/LD

OEM part number	TA6JD20	A	S135, S136 s6 p. 7-155; oem_spec
Description	Distribution lug, 6 wires per lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD families 200-600 A, 2/3-pole	A	same as above
Kit contents	1 lug per kit; wire range #14-2/0 AWG Cu / #6-2/0 AWG Al, 6 wires	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00271	TC1J6600	Siemens	lug	CURRENT

Siemens TC1J6600 copper lug, JD/LD (100% rated)

OEM part number	TC1J6600	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD frame breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	J(X)D2(A), J(X)D6(A), HJD6(A), HHJD6, SHJD6-B, L(X)D6(A), HHLD6, HLD6(A), SHLD6-B, CJD6, CLD6 200-600 A	A	same as above
Kit contents	1 lug; wire range 1 x 3/0-600 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00272	TC2J6500	Siemens	lug	CURRENT

Siemens TC2J6500 copper lug, JD/LD (100% rated)

OEM part number	TC2J6500	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug; used for 100% rated JD/LD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD/LD frames 200-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x 3/0-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00313	**CLRSJL3**	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	CJD, SCJD, CLD, SCLD **A**	current
EDH-SIE-00276	**JDTERMSHIELD**	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	JD, LD 3-pole **A**	current

EDH-SIE-00313	CLRSJL3	Siemens	barrier	CURRENT

Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD

OEM part number	CLRSJL3	A	S135, S136 s6 p. 7-165; oem_spec
Description	Required shield kit to add with rear-connecting studs on CJD, SCJD, CLD, SCLD	A	same as above
Application	accessory	A	same as above
Breaker compatibility	CJD, SCJD, CLD, SCLD	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*What does the CLRSJL3 kit contain?*		

EDH-SIE-00276	JDTERMSHIELD	Siemens	barrier	CURRENT

Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole

OEM part number	JDTERMSHIELD	A	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	JD, LD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6), Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00306	**RS5773**	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	All JD (400 A) **A**	current
EDH-SIE-00305	**RS5774**	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	All JD (400 A) **A**	current

EDH-SIE-00306	RS5773	Siemens	breaker-accessory	CURRENT

Siemens RS5773 rear-connecting stud, All JD, long 11.20 in

OEM part number	RS5773	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00305	RS5774	Siemens	breaker-accessory	CURRENT

Siemens RS5774 rear-connecting stud, All JD, short 5.85 in

OEM part number	RS5774	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All JD (400 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00308	**RS5783**	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	All LD (600 A) A	current
EDH-SIE-00307	**RS5784**	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	All LD (600 A) A	current

EDH-SIE-00308	RS5783	Siemens	breaker-accessory	CURRENT

Siemens RS5783 rear-connecting stud, All LD, long 11.20 in

OEM part number	RS5783	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

EDH-SIE-00307	RS5784	Siemens	breaker-accessory	CURRENT

Siemens RS5784 rear-connecting stud, All LD, short 5.85 in

OEM part number	RS5784	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All LD (600 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*CJD/SCJD/CLD/SCLD also require the CLRSJL3 shield kit*		

Breaker family Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00277	**TA2K500**	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6- **A**	current
EDH-SIE-00278	**TA3K500**	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	LMD/MD families; MD 700-800 A **A**	current
EDH-SIE-00279	**TC2K500**	Siemens TC2K500 copper lug, MD 500-600A	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A **A**	current

EDH-SIE-00277	TA2K500	Siemens	lug	CURRENT

Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500

OEM part number	TA2K500	A	S135, S136 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LMD6, LMXD6, HLMD6, HLMXD6 (TA2K500 or TA3K500 only); MD6, MXD6, SMD6-B, HMD6, HMXD6, SHMD6-B, CMD6, SCMD6-B 500-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x #1-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00278	TA3K500	Siemens	lug	CURRENT

Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500

OEM part number	TA3K500	A	S135, S136 s6 p. 7-154; MD page; oem_spec
Description	Aluminum-body lug; standard line/load lug on MD/LMD (suffix 'L' = lugs installed)	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LMD/MD families; MD 700-800 A	A	same as above
Kit contents	1 lug; wire range 1-3 x 1/0-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00279	TC2K500	Siemens	lug	CURRENT

Siemens TC2K500 copper lug, MD 500-600A

OEM part number	TC2K500	A	S135, S136 s6 p. 7-155; oem_spec
Description	Optional copper mechanical lug	A	same as above
Application	accessory	A	same as above
Breaker compatibility	SMD6-B, M(X)D6, HM(X)D6, CMD6, SCMD6-B 500-600 A	A	same as above
Kit contents	1 lug; wire range 1-2 x #1 AWG-500 kcmil Cu	A	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6), Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00310	**RS5787**	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	LM(X)D6, HLM(X)D6 (800 A) A	current
EDH-SIE-00309	**RS5788**	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	LM(X)D6, HLM(X)D6 (800 A) A	current

EDH-SIE-00310	RS5787	Siemens	breaker-accessory	CURRENT

Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in

OEM part number	RS5787	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 11.20 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00309	RS5788	Siemens	breaker-accessory	CURRENT

Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in

OEM part number	RS5788	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	LM(X)D6, HLM(X)D6 (800 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.85 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00281	**2TA2N8750**	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00283	**2TA3N8750**	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00285	**2TA4N8500**	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00287	**2TA4P8500**	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00282	**3TA2N8750**	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00284	**3TA3N8750**	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00286	**3TA4N8500**	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current
EDH-SIE-00288	**3TA4P8500**	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' A	current

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00290	**CCM800K2**	Siemens CCM800K2 compression lug kit, MD 2-pole	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole **A**	current
EDH-SIE-00291	**CCM800K3**	Siemens CCM800K3 compression lug kit, MD 3-pole	MD family 500-800 A, 3-pole **A**	current

EDH-SIE-00281 **2TA2N8750** Siemens lug-kit **CURRENT**

Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA2N8750	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00283 **2TA3N8750** Siemens lug-kit **CURRENT**

Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA3N8750	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	**A**	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	**A**	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	**A**	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00285	2TA4N8500	Siemens	lug-kit	CURRENT

Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4N8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00287	2TA4P8500	Siemens	lug-kit	CURRENT

Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND

OEM part number	2TA4P8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 2 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 2-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	2 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00282	3TA2N8750	Siemens	lug-kit	CURRENT

Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA2N8750	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-2 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00284	3TA3N8750	Siemens	lug-kit	CURRENT

Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA3N8750	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-3 cables per lug, 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00286	3TA4N8500	Siemens	lug-kit	CURRENT

Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4N8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00288	3TA4P8500	Siemens	lug-kit	CURRENT

Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND

OEM part number	3TA4P8500	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Description	Connector kit, 3 connectors + 1 NDTS end barrier. 3TA4P8500/3TA2N8750 are named for 100% rated MD/ND (90 C cable sized at 75 C ampacity)	A	S135 s6 p. 7-154; MD page; oem_spec
Application	accessory	A	S135, S136 s6 p. 7-154; s6 p. 7-155; MD/ND pages; oem_spec
Breaker compatibility	MD/ND families (see table); 3-pole use: '2-' kits for 2-pole, two '3-' kits for 3-pole per footnotes	A	same as above
Kit contents	3 connectors + 1 NDTS end barrier; wire range 1-4 cables per lug, 250-500 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00290	CCM800K2	Siemens	lug-kit	CURRENT

Siemens CCM800K2 compression lug kit, MD 2-pole

OEM part number	CCM800K2	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	M(X)D6, HM(X)D6, CMD6, SMD6-B, SHMD6-B, SCMD6-B 500-800 A, 2-pole	A	same as above
Kit contents	6 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00291	CCM800K3	Siemens	lug-kit	CURRENT

Siemens CCM800K3 compression lug kit, MD 3-pole

OEM part number	CCM800K3	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD family 500-800 A, 3-pole	A	same as above
Kit contents	9 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00280	**TA2N750**	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	MD family 500-800 A (100% rated) A	current

EDH-SIE-00280	TA2N750	Siemens	lug	CURRENT

Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil

OEM part number	TA2N750	A	S135, S136 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-2 cables; used for 100% rated MD/ND frame breakers	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD family 500-800 A (100% rated)	A	same as above
Kit contents	1 lug; wire range 1-2 x 500-750 kcmil Cu/Al	A	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		
Open question	*What is the relationship between TA2N750 (single, p. 7-154) and the 2TA2N8750/3TA2N8750 kits (MD page, p. 7-155)?*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00298	**MDTERMSHIELD**	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	MD, ND, PD, RD 3-pole A	current
EDH-SIE-00289	**NDTS**	Siemens NDTS wire lug shield / end barrier, MD/ND	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families A	current

EDH-SIE-00298	MDTERMSHIELD	Siemens	barrier	CURRENT

Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole

OEM part number	MDTERMSHIELD	A	S135, S136 s6 p. 7-160; oem_spec
Description	Terminal shield	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD, ND, PD, RD 3-pole	A	same as above
Kit contents	std pkg 1	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00289	NDTS	Siemens	barrier	CURRENT

Siemens NDTS wire lug shield / end barrier, MD/ND

OEM part number	NDTS	A	S135, S136 s6 MD/ND pages; s6 p. 7-154; oem_spec
Description	Wire lug shield (NDTS); required when oversized lugs are used; included in the 2TA*/3TA* connector kits as the 'NDTS end barrier'. Breaker length increases to 24 in with lug shields (MD/ND dimension table).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	MD6, MXD6, HMD6, HMXD6, CMD6, ND6, NXD6, CND6 families	A	same as above
Dimensions	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25)	A	S135 MD page dimension table; oem_spec
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	S135, S136 s6 MD/ND pages; s6 p. 7-154; oem_spec
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is NDTS orderable on its own, or only as part of the kits?*		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00312	**RS5785**	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	All MD, ND (1200 A) A	current
EDH-SIE-00311	**RS5786**	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	All MD, ND (1200 A) A	current

EDH-SIE-00312	RS5785	Siemens	breaker-accessory	CURRENT

Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in

OEM part number	RS5785	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Long. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 8.00 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00311	RS5786	Siemens	breaker-accessory	CURRENT

Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in

OEM part number	RS5786	A	S135, S136 s6 p. 7-165; oem_spec
Description	Rear-connecting stud, Short. Price includes one current stud, insulating tube, stud nuts and terminal shields when required. For proper electrical clearance, studs must alternate between short and long lengths on the breaker poles (e.g. SLSLSL or LSLSLS). Built to order (6-8 weeks).	A	same as above
Application	accessory	A	same as above
Breaker compatibility	All MD, ND (1200 A)	A	same as above
Kit contents	1 current stud + insulating tube + stud nuts (+ terminal shields when required)	A	same as above
Dimensions	Extension behind breaker 5.50 in	A	S135 p. 7-165; oem_spec
Status	current (Listed; built to order)	B	same as above
Cross-links	Breakers: Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6), Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00292	**CCN1200K2**	Siemens CCN1200K2 compression lug kit, ND 2-pole	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole A	current
EDH-SIE-00293	**CCN1200K3**	Siemens CCN1200K3 compression lug kit, ND 3-pole	ND family 900-1200 A, 3-pole A	current

EDH-SIE-00292	CCN1200K2	Siemens	lug-kit	CURRENT

Siemens CCN1200K2 compression lug kit, ND 2-pole

OEM part number	CCN1200K2	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 2-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	N(X)D6, HN(X)D6, CND6, SND6-B, SHND6-B, SCND6-B 900-1200 A, 2-pole	A	same as above
Kit contents	8 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

EDH-SIE-00293	CCN1200K3	Siemens	lug-kit	CURRENT

Siemens CCN1200K3 compression lug kit, ND 3-pole

OEM part number	CCN1200K3	A	S135, S136 s6 p. 7-155; oem_spec
Description	Compression lug kit for complete line or load end of a 3-pole breaker	A	same as above
Application	accessory	A	same as above
Breaker compatibility	ND family 900-1200 A, 3-pole	A	same as above
Kit contents	12 lugs; wire range 500 kcmil	A	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	B	same as above
Cross-links	Breakers: Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Material, Torque values		

Breaker family Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00297	**TA4P750**	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00294	**TA5P600**	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A **A**	current
EDH-SIE-00295	**TA6R600**	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2 **A**	current

EDH-SIE-00297 **TA4P750** Siemens lug **CURRENT**

Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)

OEM part number	TA4P750	**A**	S135, S136 s6 p. 7-155; oem_spec
Description	Optional aluminum lug, built to order (6-8 weeks)	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	P(X)D6, HP(X)D6, CPD6, SPD6-B, SHPD6-B 1200-1600 A	**A**	same as above
Kit contents	1 lug; wire range 1-4 x 600-750 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00294 **TA5P600** Siemens lug **CURRENT**

Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil

OEM part number	TA5P600	**A**	S135, S136 s6 p. 7-154; PD page; oem_spec
Description	Aluminum-body lug; standard PD frame lug, 6 required per breaker	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PD6, HPD6, CPD6, PXD6, HPXD6, SPD6-B, SHPD6-B 1200-1600 A	**A**	same as above
Kit contents	1 lug (6 required); wire range 1-5 x 300-600 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

EDH-SIE-00295 **TA6R600** Siemens lug **CURRENT**

Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil

OEM part number	TA6R600	**A**	S135, S136 s6 p. 7-154; oem_spec
Description	Aluminum-body lug, 1-6 cables	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, RD6, RXD6, HRD6, HRXD6 1200-2000 A	**A**	same as above
Kit contents	1 lug; wire range 1-6 x 300-600 kcmil Cu/Al	**A**	same as above
Material	{'value': 'Aluminum body lug for copper or aluminum wire', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-154'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6), Sentron RD (RD6, RXD6, HRD6, HRXD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

Breaker family Sentron RD (RD6, RXD6, HRD6, HRXD6)

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00296	**TC5R600**	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6 **A**	current

EDH-SIE-00296	TC5R600	Siemens	lug	CURRENT

Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)

OEM part number	TC5R600	**A**	S135, S136 s6 p. 7-155; PD page; oem_spec
Description	Copper mechanical lug; standard RD frame lug; required for 100% rated PD breakers	**A**	same as above
Application	accessory	**A**	same as above
Breaker compatibility	R(X)D6, HR(X)D6 1600-2000 A; 100% rated PXD6/HPXD6	**A**	same as above
Kit contents	1 lug (6 per breaker); wire range 1-5 x 300-600 kcmil Cu	**A**	same as above
Material	{'value': 'Copper', 'conf': 'A', 'src': ['s6'], 'basis': 'oem_spec', 'page': 's6 p. 7-155'}	**A**	same as above
Status	current (Listed in SPEEDFAX 2017 (rev. pages 2018-2020) and the 2021 Section 7 revision; '(s)' built-to-order flags noted where printed)	**B**	same as above
Cross-links	Breakers: Sentron RD (RD6, RXD6, HRD6, HRXD6), Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6)		
Not yet documented	Aftermarket / reproduction, Dimensions, Fasteners, Mounting-hole pattern, Identification features, Torque values		

7 Federal Pacific Electric

Lineage / brand markings: Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)

Family	Type	Status	Era	Entries	Pg
BDP FPE BDP distribution panelboard (double-hole bus)	panelboard	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	—	6	759
CDP FPE CDP distribution panelboard (single-hole bus)	panelboard	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	FPE commercial distribution panelboard line; obsolete. Exact production years not documented in sources found.	10	762
FDP FPE FDP fusible distribution panelboard / QMQB switchboard	panelboard	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	—	19	766
NA1B FPE NA1B / NH1B lighting and appliance panelboards	panelboard	Obsolete	—	5	773
NBLP FPE NBLP / NQLP bolt-on lighting panelboards	panelboard	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	—	1	775
NDP FPE NDP panelboard	panelboard	Obsolete	—	2	775
FPE-SWBD FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	switchboard	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	—	6	776

7.1 BDP — FPE BDP distribution panelboard (double-hole bus)

FAM-FPE-002 · panelboard · aka BDP panel board, BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous) · markings: Federal Pacific, FPE

FPE BDP is a distribution panelboard with a 'double hole bus' (Superbreakers) using twin bus-connection kits KBDP1C-KBDP5C per breaker frame. Breaker King sells PCS aftermarket assemblies NEF3K/NEJ3K/NJL3K replacing KBDP1C/KBDP2C/KBDP4C. Superbreakers labels KBDP1C as 240 V 100 A for 'BDP Spectra Bolt-on' panelboards - the 'Spectra' wording appears to be a listing error (Spectra is a GE name).

Attribute	Value	Cl.	Sources
Status	Obsolete; OEM-numbered kits KBDP1C-KBDP5C and aftermarket NEF3K/NEJ3K/NJL3K still traded	C	S138, S140, S141 distributor
Branch breakers accepted	NE/NEF/HEG (KBDP1C), NEJ/NEJH/HEJ (KBDP2C), [KBDP3C frame not stated], NJL/HJL (KBDP4C), NM/HNM (KBDP5C)	C	S138, S141 distributor
history	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S146, S145 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S138 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S145 About Federal Pacific Electric Equipment (history); S146 Federal Pacific Electric Corporation
Also fits this family (entry printed elsewhere): KFDP-5C

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00007	**KBDP1C**	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	Two NE/NEF/HEG frame breakers; 'three pole and twin mount' C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00008	**KBDP2C**	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	NEJ, NEJH, HEJ frames C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00009	**KBDP3C**	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	Twin mount into BDP (double hole bus); frame not stated by source C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00010	**KBDP4C**	FPE BDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00011	**KBDP5C**	FPE BDP mounting kit, NM/HNM frame	NM and HNM breaker types C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00007	KBDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NE/NEF/HEG frame

OEM part number	KBDP1C	C	S138, S140, S141, S147 distributor
Alternate / superseded numbers	KBDP-1C	C	S140 alias; distributor
	NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	C	S138, S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141, S147 inference
Breaker compatibility	Two NE/NEF/HEG frame breakers; 'three pole and twin mount'	C	S138, S140, S141, S147 distributor
Voltage rating	240 V (Superbreakers) (Conflicts with 600 V class of family; NEF breakers are 480 V)	D	S141 distributor
Current rating	100 A	C	S141, S140 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141, S147 distributor
Cross-links	Families: BDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00008	KBDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame

OEM part number	KBDP2C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KBDP-2C	C	S140 alias; distributor
	NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	NEJ, NEJH, HEJ frames	C	S138, S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A	C	S141, S140 distributor
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: BDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00009	KBDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)

OEM part number	KBDP3C	C	S140, S141 distributor
Alternate / superseded numbers	KBDP-3C	C	S140 alias; distributor
	NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern [equivalent]	D	same as above
Description	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S141 inference
Breaker compatibility	Twin mount into BDP (double hole bus); frame not stated by source	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm KBDP3C is the NFJ/HFJ kit (pattern 1=NE,2=NEJ,3=NFJ,4=NJL,5=NM).*		

EDH-FPE-00010	KBDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP twin bus-connection kit, NJL/HJL frame

OEM part number	KBDP4C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KBDP-4C	C	S140 alias; distributor
	NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	C	S138, S140 equivalent; distributor
Description	FPE BDP twin bus-connection kit, NJL/HJL frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S138, S140, S141 distributor
Current rating	400 A max (per NJL3K)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: BDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00011	KBDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE BDP mounting kit, NM/HNM frame

OEM part number	KBDP5C	C	S141 distributor
Description	FPE BDP mounting kit, NM/HNM frame	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S141 inference
Breaker compatibility	NM and HNM breaker types	C	S141 distributor
Voltage rating	600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: BDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.2 CDP — FPE CDP distribution panelboard (single-hole bus)

FAM-FPE-001 · panelboard · aka CDP panelboard, CDP panel board · markings: Federal Pacific, FPE, American (ACBC)

FPE CDP is a commercial/industrial distribution panelboard using a 'single hole bus' (per Superbreakers description) onto which pairs of N-frame bolt-on molded-case breakers are mounted with OEM bus connection ('link') kits KCDP1C through KCDP5C, one kit per breaker frame family. Each kit (per Breaker King) includes screws, brackets and a deadfront cover plate and mounts two breakers (twin). Aftermarket equivalents NEF1K, NEJ1K, NFJ1K, NJL1K are cross-referenced to the OEM kits. NN-frame switches (e.g., NN633120NA) are also described as fitting CDP panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; aftermarket/replacement kits and recertified breakers still sold by FPE-successor (Circuit Breaker Sales / fpeparts.com) and surplus dealers	C	S144, S138, S141 distributor
Era of manufacture	FPE commercial distribution panelboard line; obsolete. Exact production years not documented in sources found.	D	S144, S138 inference
Successor	No direct OEM successor. Parts support: Federal Pacific Equipment -> Circuit Breaker Sales (fpeparts.com); aftermarket kits NEF1K/NEJ1K/NFJ1K/NJL1K (PCS) replace OEM KCDP1C-KCDP4C.	C	S138, S144, S145 distributor
Voltage rating	600 V class (kits KCDP1C, KCDP5C listed 600 V)	C	S141 distributor

Attribute	Value	Cl.	Sources
Branch breakers accepted	NE/NEF (KCDP1C), NEJ/HEJ (KCDP2C), NFJ/HFJ (KCDP3C), NJL/HJL (KCDP4C), NM/NN (KCDP5C) twin-mounted via bus connection kits	C	S138, S140, S141 distributor
bus_type	single hole bus (CDP) vs double hole bus (BDP)	C	S141 Superbreakers KCDP3C/KCDP4C/KBDP3C/KBDP4C descriptions; distributor
history	Federal Pacific Electric (Newark NJ); Stab-Lok trademark registered c.1950-51; Reliance Electric bought FPE from UV Industries in 1979; in 1986 Reliance exited breakers: breaker business to American Circuit Breaker Corp (ACBC), non-breaker parts to Electro-Mechanical Corp, Federal name -> Challenger Electric; aftermarket plant (Newark->Linden NJ) passed Challenger -> Westinghouse -> Cutler-Hammer; closed 1995 and inventory bought by John Cifrodella forming Federal Pacific Equipment Inc.; Circuit Breaker Sales (Matthews NC) acquired Federal Pacific Equipment (2007 per Wikipedia, uncited) including equipment and technical documents.	C	S146, S145 other

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class), NF / NFJ / HFJ / NFS (N-frame 225 A class), NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S138 Breaker Mounting Kits :: Federal Pacific Electric (category listing); S139 Federal Pacific CDP [BCDPNJLFPE] product page; S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S144 Federal Pacific Electric panelboard connector kits; S145 About Federal Pacific Electric Equipment (history); S146 Federal Pacific Electric Corporation
Also fits this family (entry printed elsewhere): NM34, NM36, NM38, N32

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00001	**KCDP1C**	FPE CDP twin bus-connection kit, NE/NEF frame	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00002	**KCDP2C**	FPE CDP twin bus-connection kit, NEJ/HEJ frame	Two NEJ/HEJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00003	**KCDP3C**	FPE CDP twin bus-connection kit, NFJ/HFJ frame	Two NFJ/HFJ frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00004	**KCDP4C**	FPE CDP twin bus-connection kit, NJL/HJL frame	Two NJL/HJL frame breakers C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00005	**KCDP5C**	FPE CDP link kit, NM/NN frame	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREA C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00001	KCDP1C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NE/NEF frame

OEM part number	KCDP1C	C	S138, S140, S141, S147 distributor
Alternate / superseded numbers	KCDP-1C	C	S140 alias; distributor
	NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE) (aftermarket assembly; not OEM)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NE/NEF frame	C	S138, S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141, S147 inference
Breaker compatibility	Two NE/NEF frame breakers (Breaker King); 'twin mount ... single hole bus Federal Pacific CDP panel board' (Superbreakers); 600 V tag	C	S138, S140, S141, S147 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	100 A max (per NEF1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141, S147 distributor
Cross-links	Families: CDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00002	KCDP2C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NEJ/HEJ frame

OEM part number	KCDP2C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KCDP-2C	C	S140 alias; distributor
	NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NEJ/HEJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NEJ/HEJ frame breakers	C	S138, S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A max (per NEJ1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00003	KCDP3C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NFJ/HFJ frame

OEM part number	KCDP3C	C	S138, S140, S141 distributor
Alternate / superseded numbers	KCDP-3C	C	S140 alias; distributor
	NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	C	S138, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NFJ/HFJ frame	C	S138, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S140, S141 inference
Breaker compatibility	Two NFJ/HFJ frame breakers	C	S138, S140, S141 distributor
Current rating	225 A max (per NFJ1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00004	KCDP4C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP twin bus-connection kit, NJL/HJL frame

OEM part number	KCDP4C	C	S138, S139, S140, S141 distributor
Alternate / superseded numbers	KCDP-4C	C	S140 alias; distributor
	NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	C	S138, S139, S140 equivalent; distributor
Description	FPE CDP twin bus-connection kit, NJL/HJL frame	C	S138, S139, S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S138, S139, S140, S141 inference
Breaker compatibility	Two NJL/HJL frame breakers	C	S138, S139, S140, S141 distributor
Current rating	400 A max (per NJL1K listing)	C	S140 surplus
Kit contents	Bus connection hardware: screws, brackets and a deadfront cover plate, with safety/installation instructions (stated by Breaker King for its aftermarket equivalents; Superbreakers states 'screws, brackets, a panel cover and other accessories' for OEM-numbered kits)	C	S139, S141 distributor
Dimensions	Shipping weight 7 lb (aftermarket NJL1K equivalent)	C	S139 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S138, S139, S140, S141 distributor
Cross-links	Families: CDP · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00005	KCDP5C	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE CDP link kit, NM/NN frame

OEM part number	KCDP5C	C	S140, S141 distributor
Alternate / superseded numbers	KCDP-5C	C	S140 alias; distributor
Description	FPE CDP link kit, NM/NN frame	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S141 inference
Breaker compatibility	NM and NN breaker/switch frames in CDP panel ('CDP LINK KIT NM NN BREAKERS')	C	S140, S141 distributor
Voltage rating	600 V	C	S141 distributor
Current rating	225 A (Superbreakers tag - doubtful for NM/NN frames) (Rating looks inconsistent with 400-1200 A NM/NN frames)	D	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140, S141 distributor
Cross-links	Families: CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP5C single- or twin-mount? NM frames are typically single-mount.*		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00043	**NFHARDWARE**	NF frame custom panel hardware (dealer item)	—	unknown

EDH-FPE-00043	NFHARDWARE	Federal Pacific Electric	breaker-mounting-kit	STATUS UNKNOWN

NF frame custom panel hardware (dealer item)

Description	'NF FRAME CUSTOM PANEL HARDWARE' - dealer-assigned item, not an OEM number	C	S140 surplus
Cross-links	Families: CDP · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Kit contents, Material, Torque values		

7.3 FDP — FPE FDP fusible distribution panelboard / QMQB switchboard

FAM-FPE-003 · panelboard · aka QMQB panelboard, QMQB switchboard, Federal Pacific QMQB · markings: Federal Pacific, American

FDP is FPE's fusible distribution panelboard family built around QMQB bolt-on fusible switch units ('used for QMQB and FDP style panel boards and switchgear distribution systems'). Switch units connect to the vertical bus through KFDP-series link/strap kits (KFDP2C, 3C, 4C (200 A), 46C (400 A), 66C (600 A), 7C (1200 A), plus D/S/V variants KFDPD16C, KFDPS16C, KFDPD26C, KFDPS26C, KFDPV7C) and KQB-series kits (KQB3C 15-100 A, KQB4C, KQB46C, KQB66C, KQB86C 700-800 A).

Attribute	Value	Cl.	Sources
Status	Obsolete; QMQB switches and KFDP/KQB strap/link kits still traded as recertified/new-surplus	C	S141, S140 distributor
Branch breakers accepted	QMQB fusible panelboard switches 30-1200 A, 240 V (QMQB..32..) and 600 V (QMQB..36..), 200 kA with class R/J/K/H/L fuses; single and dual/twin configurations	C	S141 distributor

Breaker families associated: QMQB fusible panelboard switch

Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S144 Federal Pacific Electric panelboard connector kits

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00015	**KFDP2C**	FPE FDP link/strap kit KFDP2C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00016	**KFDP3C**	FPE FDP link/strap kit KFDP3C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00018	**KFDP46C**	FPE FDP link/strap kit KFDP46C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00017	**KFDP4C**	FPE FDP link/strap kit KFDP4C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; sin C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00026	**KFDP-5C**	FPE FDP link kit (QMQB4036R into BDP switchgear)	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V s C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00019	**KFDP66C**	FPE FDP link/strap kit KFDP66C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00020	**KFDP7C**	FPE FDP link/strap kit KFDP7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00021	**KFDPD16C**	FPE FDP link/strap kit KFDPD16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00023	**KFDPD26C**	FPE FDP link/strap kit KFDPD26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00022	**KFDPS16C**	FPE FDP link/strap kit KFDPS16C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00024	**KFDPS26C**	FPE FDP link/strap kit KFDPS26C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00025	**KFDPV7C**	FPE FDP link/strap kit KFDPV7C for QMQB switch units	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00027	**KQB3C**	FPE QMQB switch strap/link kit KQB3C	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap ki C	discontinued (OEM); traded as new-surplus/aftermarket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00029	**KQB46C**	FPE QMQB switch strap/link kit KQB46C	QMQB link kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00028	**KQB4C**	FPE QMQB switch strap/link kit KQB4C	QMQB link kit; 200 A (relectric KQB-4C) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00030	**KQB66C**	FPE QMQB switch strap/link kit KQB66C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00031	**KQB86C**	FPE QMQB switch strap/link kit KQB86C	700-800 A, 600 V QMQB panel board switch strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00032	**KQB-D26C**	FPE QMQB switch strap/link kit KQB-D26C	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00033	**PK103T**	FPE QMQB switch strap/link kit PK103T	QMQB strap kit C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00015 KFDP2C — Federal Pacific Electric — connector-strap — DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP2C for QMQB switch units

OEM part number	KFDP2C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-2C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP2C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00016 KFDP3C — Federal Pacific Electric — connector-strap — DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP3C for QMQB switch units

OEM part number	KFDP3C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-3C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP3C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00018	KFDP46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP46C for QMQB switch units

OEM part number	KFDP46C	C	S140, S141 distributor
Alternate / superseded numbers	KFDP-46C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP46C for QMQB switch units	C	S140, S141 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (400 A, 600 V)	C	S140, S141 distributor
Current rating	400 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00017	KFDP4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP4C for QMQB switch units

OEM part number	KFDP4C	C	S140, S141, S147 distributor
Alternate / superseded numbers	KFDP-4C	C	S140 alias; distributor
Description	FPE FDP link/strap kit KFDP4C for QMQB switch units	C	S140, S141, S147 distributor
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S140, S141, S147 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches)	C	S140, S141, S147 distributor
Current rating	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00026	KFDP-5C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link kit (QMQB4036R into BDP switchgear)

OEM part number	KFDP-5C	C	S140 distributor
Description	FPE FDP link kit (QMQB4036R into BDP switchgear)	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	'QMQB4036R INTO BDP SWITCHGEAR' (relectric) - i.e., QMQB 400 A 600 V switch mounted in BDP	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP, BDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00019	KFDP66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP66C for QMQB switch units

OEM part number	KFDP66C	C	S141 distributor
Description	FPE FDP link/strap kit KFDP66C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (600 A, 600 V)	C	S141 distributor
Current rating	600 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00020	KFDP7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDP7C for QMQB switch units

OEM part number	KFDP7C	C	S141 distributor
Description	FPE FDP link/strap kit KFDP7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S141 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00021	KFDPD16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD16C for QMQB switch units

OEM part number	KFDPD16C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPD16C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S141 distributor
Current rating	100 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00023	KFDPD26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPD26C for QMQB switch units

OEM part number	KFDPD26C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPD26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00022	KFDPS16C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS16C for QMQB switch units

OEM part number	KFDPS16C	C	S141, S140 distributor
Description	FPE FDP link/strap kit KFDPS16C for QMQB switch units	C	S141 distributor
	FPE FDP link kit for QMQB (relectric listing)	C	S140 distributor
Application	branch	C	S141, S140 distributor
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (100 A, 600 V)	C	S141 distributor
	QMQB	C	S140 distributor
Current rating	100 A, 600 V	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S141, S140 distributor
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		
Open question	*Same as KFDPS16C?*		

EDH-FPE-00024	KFDPS26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPS26C for QMQB switch units

OEM part number	KFDPS26C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPS26C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00025	KFDPV7C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE FDP link/strap kit KFDPV7C for QMQB switch units

OEM part number	KFDPV7C	C	S141 distributor
Description	FPE FDP link/strap kit KFDPV7C for QMQB switch units	C	same as above
Application	branch	C	same as above
Installation location	FDP interior: connects QMQB switch line side to vertical bus	D	S141 inference
Breaker compatibility	QMQB fusible panelboard switches in FDP panelboards (1200 A, 600 V)	C	S141 distributor
Current rating	1200 A, 600 V	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Meaning of D/S/V infix (double/single/vertical?) and numeric suffix (1=100A, 2=200A, 46=400A, 66=600A, 7=1200A?) unverified*		

EDH-FPE-00027	KQB3C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB3C

OEM part number	KQB3C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB3C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	15-100 A, 600 V, dual/twin branch mounting, panelboard switch strap kit; relectric 'QMQB LINK KIT; 60A' (KQB3C) vs 'QMQB LINK KIT; 200A' (KQB-3C) - conflicting	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00029	KQB46C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB46C

OEM part number	KQB46C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB46C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	QMQB link kit	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00028	KQB4C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB4C

OEM part number	KQB4C	C	S140, S141 distributor
Description	FPE QMQB switch strap/link kit KQB4C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140, S141 inference
Breaker compatibility	QMQB link kit; 200 A (relectric KQB-4C)	C	S140, S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00030	KQB66C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB66C

OEM part number	KQB66C	C	S141 distributor
Description	FPE QMQB switch strap/link kit KQB66C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S141 inference
Breaker compatibility	QMQB strap kit	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00031	KQB86C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB86C

OEM part number	KQB86C	C	S141 distributor
Description	FPE QMQB switch strap/link kit KQB86C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S141 inference
Breaker compatibility	700-800 A, 600 V QMQB panel board switch strap kit	C	S141 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00032	KQB-D26C	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit KQB-D26C

OEM part number	KQB-D26C	C	S140 distributor
Description	FPE QMQB switch strap/link kit KQB-D26C	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140 inference
Breaker compatibility	QMQB strap kit	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00033	PK103T	Federal Pacific Electric	connector-strap	DISCONTINUED (OEM); TR

FPE QMQB switch strap/link kit PK103T

OEM part number	PK103T	C	S140 distributor
Description	FPE QMQB switch strap/link kit PK103T	C	same as above
Application	branch	C	same as above
Installation location	QMQB/FDP panelboard interior	D	S140 inference
Breaker compatibility	QMQB strap kit	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: FDP · Breakers: QMQB fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

7.4 NA1B — FPE NA1B / NH1B lighting and appliance panelboards

FAM-FPE-005 · panelboard · aka NAIB, NH1B, NHIB, NA-type panel, NH-type panel, NAB, NHB · markings: Federal Pacific, Federal Noark, Stab-Lok

NA1B ('NAIB') and NH1B ('NHIB') are FPE lighting/appliance panelboard types. A used kit KCDP-1A is labelled 'For NE/NEF frame circuit breakers, for NH1B/NA1B type panels, for (2) 3 pole breakers'. relectric lists NAIB-NEF 'NE/NEF twin kit for NA1B panel' and Superbreakers lists KNA1B1C lug kit. fpeparts.com lists 'NAIB panel board kit' and 'NHIB panel board kit'. By analogy with FPE breaker naming (NA=Stab-Lok 120/240 plug-in; NE/NEF=bolt-on 240/480 V) NA1B is likely the 120/240 or 208Y/120 panel and NH1B the 480Y/277 panel, but this is unverified.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S142, S140, S144 surplus
Branch breakers accepted	Stab-Lok NA/NB branch breakers (assumed for NA1B); NE/NEF twin-mounted feeders/mains via KCDP-1A / NAIB-NEF kit	D	S142, S140 Branch breaker type for NH1B (probably NE/NEF bolt-on, 480Y/277V) not confirmed; inference

Breaker families associated: NA / NC (Stab-Lok plug-in), NE / NEF / NEG / HEF / HEG (N-frame 100 A class)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S142 Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame); S144 Federal Pacific Electric panelboard connector kits

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00034	**KNA1B1C**	FPE NA1B panelboard lug kit	—	discontinued

EDH-FPE-00034	KNA1B1C	Federal Pacific Electric	main-lug-kit	DISCONTINUED

FPE NA1B panelboard lug kit

OEM part number	KNA1B1C	C	S141 distributor
Description	Lug kit (Superbreakers: 'used for molded case circuit breaker'); tagged Lugs; numbering suggests NA1B panel kit	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: NA1B		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		
Open question	*Is KNA1B1C a main lug kit for NA1B panels or a breaker lug kit?*		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00006	**KCDP-1A**	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label) C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00014	**NAIB-NEF**	FPE NE/NEF twin kit for NA1B panel	NE/NEF twin kit for NA1B panel C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00006	KCDP-1A	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels

OEM part number	KCDP-1A	C	S142 distributor
Description	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S142 inference
Breaker compatibility	(2) 3-pole NE/NEF frame breakers in NH1B / NA1B type panels (label)	C	S142 distributor
Dimensions	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions)	C	S142 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S142 distributor
Identification features	Label text includes 'J25 (HM1)' and 'LA25037' (meaning unknown)	C	S142 surplus
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is KCDP-1A an earlier revision of KCDP1C or a distinct NA1B/NH1B kit? Same as relectric NAIB-NEF?*		

EDH-FPE-00014	NAIB-NEF	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NE/NEF twin kit for NA1B panel

OEM part number	NAIB-NEF	C	S140 distributor
Description	FPE NE/NEF twin kit for NA1B panel	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	NE/NEF twin kit for NA1B panel	C	S140 distributor
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	same as above
Cross-links	Families: NA1B · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same item as KCDP-1A?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00042	**NCFS**	FPE filler plate for thin NC breaker space	—	unknown

EDH-FPE-00042	NCFS	Federal Pacific Electric	filler-plate	STATUS UNKNOWN

FPE filler plate for thin NC breaker space

OEM part number	NCFS	C	S141 distributor
Description	Load center filler plate used for thin type NC circuit breaker	C	same as above
Cross-links	Families: NA1B · Breakers: NA / NC (Stab-Lok plug-in)		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00041	**1LOK**	FPE handle lock for 1-pole NA/NB breakers	—	available as new (listing)

EDH-FPE-00041	1LOK	Federal Pacific Electric	handle-lock	AVAILABLE AS NEW (LIST

FPE handle lock for 1-pole NA/NB breakers

OEM part number	1LOK	C	S141 distributor
Description	Handle lock 15-50 A for 1-pole NA and NB circuit breakers	C	same as above
Status	available as new (listing)	C	same as above
Cross-links	Families: NA1B, NBLP · Breakers: NA / NC (Stab-Lok plug-in), NB (Stab-Lok bolt-on)		
Not yet documented	Dimensions, Material		

7.5 NBLP — FPE NBLP / NQLP bolt-on lighting panelboards

FAM-FPE-006 · panelboard · aka NQLP, NB panelboard · markings: Federal Pacific, Federal Pioneer (Canada)

NBLP panelboards take NB-type bolt-on Stab-Lok-style breakers (Schneider FAQ snippet; Superbreakers NB100 'installs into Federal Pacific NB and NBLP panelboards'). NQ breakers are described as fitting NBLP and NQLP panelboards. Federal Pioneer (Canadian FPE subsidiary, sold to Schneider Canada in 1988) used the same Stab-Lok NB/NBLP nomenclature; that lineage is coded SQD in this catalogue.

Attribute	Value	Cl.	Sources
Status	Obsolete; Schneider Electric states it no longer offers replacement breakers for Federal Pacific switchboards/panelboards	C	S149, S141 Schneider statement from search snippet only (page blocked); oem_web
Branch breakers accepted	NB bolt-on miniature breakers (NBLP); NQ breakers (NQLP, e.g., NQ111050)	C	S141, S149 distributor

Breaker families associated: NB (Stab-Lok bolt-on)
Key documents: S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items); S146 Federal Pacific Electric Corporation; S149 Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards;
Also fits this family (entry printed elsewhere): 1LOK

7.6 NDP — FPE NDP panelboard

FAM-FPE-004 · panelboard · aka NHDP (related?) · markings: Federal Pacific

NDP is an FPE panelboard type supported by twin mounting strap kits NDPNE and NDPNEJ (relectric). fpeparts.com also lists 'NHDP panel board kit' and 'LDP panel board kit' families; relationship of NDP/NHDP/LDP to CDP/BDP not documented.

Attribute	Value	Cl.	Sources
Status	Obsolete	C	S140, S143 surplus
Branch breakers accepted	NE/NEF and NEJ/NEJH/HEJ twin-mounted with strap kits NDPNE, NDPNEJ	C	same as above

Breaker families associated: NE / NEF / NEG / HEF / HEG (N-frame 100 A class), NEJ / NEJH / HEJ (N-frame 225 A class)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S143 NDPNEJ mounting hardware strap kit detail; S144 Federal Pacific Electric panelboard connector kits

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00013	**NDPNE**	FPE NDP twin mounting strap kit, NE/NEF	NE frame breakers, dual/twin branch mounting (relectric description du C	discontinued (OEM); traded as new-surplus/aftermarket
EDH-FPE-00012	**NDPNEJ**	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	NEJ, NEJH, HEJ frames, dual/twin branch mounting C	discontinued (OEM); traded as new-surplus/aftermarket

EDH-FPE-00013	NDPNE	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NE/NEF

OEM part number	NDPNE	C	S140 distributor
Description	FPE NDP twin mounting strap kit, NE/NEF	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140 inference
Breaker compatibility	NE frame breakers, dual/twin branch mounting (relectric description duplicates NEJ text)	C	S140 distributor
Current rating	100 A / 240 V per search snippet of relectric NDPNE page	D	S140 surplus
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140 distributor
Cross-links	Families: NDP · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-FPE-00012	NDPNEJ	Federal Pacific Electric	branch-connector-kit	DISCONTINUED (OEM); TR

FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ

OEM part number	NDPNEJ	C	S140, S143 distributor
Description	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	C	same as above
Application	branch	C	same as above
Installation location	Panelboard interior, bolted to vertical bus; mounts two breakers side by side (twin) for CDP/BDP/NDP types	D	S140, S143 inference
Breaker compatibility	NEJ, NEJH, HEJ frames, dual/twin branch mounting	C	S140, S143 distributor
Voltage rating	600 V max	C	S143 surplus
Current rating	225 A max	C	same as above
Material	copper	C	same as above
Status	discontinued (OEM); traded as new-surplus/aftermarket	C	S140, S143 distributor
Cross-links	Families: NDP · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*relectric spec table lists Panel Type 'CDP' for NDPNEJ while description says NDP - clarify.*		

7.7 FPE-SWBD — FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)

FAM-FPE-007 · switchboard · aka Federal Pacific switchgear, Fusematic · markings: Federal Pacific, FPE, American

FPE switchboards used N-frame bolt-on breakers (NJL 'designed for direct installation into legacy Federal Pacific switchboards and panelboards that accept N-frame bolt-on breakers'), larger NM (400-800 A with trip units NM031400/500/600/800, lugs NM34/NM36/NM38) and NP frames (to 1600 A), and the Fusematic line (XF breakers, XJL current limiters). Group-mounting hardware for switchboards not identified beyond the panelboard KCDP/KBDP kits.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified NJL/NJJ/NM/NP breakers and NN switches sold for legacy FPE switchboards	C	S141, S140 distributor
Branch breakers accepted	NJL/HJL, NJJ, NM/HM (trip units NM03xxxx), NN switches, NP (to 1600 A); Fusematic X-frame XF/XJL current-limiting units	C	same as above

Breaker families associated: Fusematic XF / XM / XKL / XJL, NJL / HJL / NJ / NJJ (N-frame 400 A class), NM / HM / NN / NP / NK (large N-frames)
Key documents: S140 Federal Pacific Breaker Parts & Accessories Catalog; S141 Superbreakers Federal Pacific collection (Shopify products.json, 639 items)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00038	**N32**	Lug kit for NN breaker	—	discontinued
EDH-FPE-00035	**NM34**	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	—	discontinued
EDH-FPE-00036	**NM36**	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	—	discontinued

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00037	**NM38**	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	—	discontinued

EDH-FPE-00038 **N32** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug kit for NN breaker

OEM part number	N32	C	S140 surplus
Description	Lug kit for NN breaker	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00035 **NM34** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A

OEM part number	NM34	C	S140 surplus
Description	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00036 **NM36** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A

OEM part number	NM36	C	S140 surplus
Description	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

EDH-FPE-00037 **NM38** Federal Pacific Electric lug-kit **DISCONTINUED**

Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A

OEM part number	NM38	C	S140 surplus
Description	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	C	same as above
Application	breaker terminal lugs	C	same as above
Status	discontinued	C	same as above
Cross-links	Families: FPE-SWBD, CDP · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material, Torque values		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-FPE-00039	**RP211002**	FPE handle extension for NM 800/1000 A breakers	—	unknown
EDH-FPE-00040	**RP212001**	FPE handle kit for NP frame	—	unknown

EDH-FPE-00039 **RP211002** Federal Pacific Electric breaker-accessory **STATUS UNKNOWN**

FPE handle extension for NM 800/1000 A breakers

OEM part number	RP211002	C	S141 distributor
Description	Circuit breaker handle extension used for NM 800 A and 1000 A breakers	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

EDH-FPE-00040	RP212001	Federal Pacific Electric	breaker-accessory	STATUS UNKNOWN

FPE handle kit for NP frame

OEM part number	RP212001	C	S141 distributor
Description	Handle kit used for NP frame molded case circuit breaker	C	same as above
Cross-links	Families: FPE-SWBD · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Dimensions, Material		

8 Zinsco / Sylvania

Lineage / brand markings: Zinsco, GTE-Sylvania

Family	Type	Status	Era	Entries	Pg
ZIN-DIST Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	panelboard	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	—	21	779
ZIN-Q Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	panelboard	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	4	784

8.1 ZIN-DIST — Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)

FAM-ZIN-002 · panelboard · aka QSF panelboard, Sylvania S-line panelboard, double slot, single slot split buss · markings: Zinsco, Sylvania, GTE Sylvania

Zinsco/Sylvania commercial distribution panelboards used two bus/kit styles: 'Double Slot' (Zinsco kits QSF100DS-QSF600DS and DSL* breaker kits) and 'Single Slot ... Split Buss' (Sylvania QSF100SB/200SB/400SB). DSL kits exist for FPE frames (DSLNET, DSLNEJT, DSLNFT, DSLNJT, DSLNM) supporting a forum report that FPE breakers were used in Zinsco/Sylvania equipment above 240 V; Sylvania also lists FPENEFT 'twin mounting hardware for NEF breaker'. Sylvania-branded SEH/SF/SJK bolt-on breakers are sold as fitting Sylvania, Challenger and Zinsco panelboards.

Attribute	Value	Cl.	Sources
Status	Obsolete; recertified QSF switches and DSL*/QSF* mounting kits traded	C	S164, S165, S153 surplus
Voltage rating	240 V (QSF..33) and 600 V (QSF..53) switch units	C	S153, S174 distributor
Branch breakers accepted	QSF fusible switches 30-600 A (T-prefix = twin); bolt-on breakers QB, QFB; FPE N-frame breakers NE/NEF, NEJ, NF, NJ, NM in 'DSL' double-slot kits; Sylvania SE/SEH/SC?/SJD/SKM breakers	C	S164, S165, S153 surplus

Breaker families associated: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM), Zinsco / Sylvania QSF fusible panelboard switch, Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)

Key documents: S153 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S164 Zinsco Breaker Parts & Accessories Catalog; S165 Sylvania Breaker Parts & Accessories Catalog; S174 Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00008	**DSLNEJT**	Zinsco double slot twin mounting hardware, NEJ type	—	discontinued; recertified/new-surplus
EDH-ZIN-00007	**DSLNET**	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00009	**DSLNFT**	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00010	**DSLNJT**	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00011	**DSLNM**	Zinsco double slot mounting hardware for FPE NM (inferred from name)	—	discontinued; recertified/new-surplus
EDH-ZIN-00012	**DSLNMS**	Zinsco DSLNM mounting hardware (single?)	—	discontinued; recertified/new-surplus
EDH-ZIN-00005	**DSLQB**	Zinsco double slot breaker mounting hardware for QB	—	discontinued; recertified/new-surplus
EDH-ZIN-00006	**DSLQFB**	Zinsco double slot breaker mounting hardware for QFB	—	discontinued; recertified/new-surplus
EDH-ZIN-00021	**FPENEFT**	Sylvania twin mounting hardware for FPE NEF breaker	—	discontinued; recertified/new-surplus

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00001	**QSF100DS**	Zinsco QSF switch kit 100 A, double slot, mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00014	**QSF100SB**	Sylvania QSF single slot switch kit, split buss, 100 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00013	**QSF100SS**	Sylvania QSF 100 A twin kit	—	discontinued; recertified/new-surplus
EDH-ZIN-00002	**QSF200DS**	Zinsco QSF 200 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00015	**QSF200SB**	Sylvania QSF single slot switch kit, split buss, 200 A	—	discontinued; recertified/new-surplus
EDH-ZIN-00003	**QSF400DS**	Zinsco/Sylvania QSF 400 A switch kit, double slot	—	discontinued; recertified/new-surplus
EDH-ZIN-00016	**QSF400SB**	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	—	discontinued; recertified/new-surplus
EDH-ZIN-00004	**QSF600DS**	Zinsco QSF 600 A double slot mounting hardware	—	discontinued; recertified/new-surplus
EDH-ZIN-00018	**SECT**	Sylvania 225 A twin kit (for SC? frame, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00017	**SEHT**	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	—	discontinued; recertified/new-surplus
EDH-ZIN-00019	**SJD4T**	Sylvania 400 A twin kit (SJD frame)	—	discontinued; recertified/new-surplus
EDH-ZIN-00020	**SKM8S**	Sylvania 800 A single kit (SKM frame)	—	discontinued; recertified/new-surplus

EDH-ZIN-00008 **DSLNEJT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware, NEJ type

OEM part number	DSLNEJT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware, NEJ type	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NEJ / NEJH / HEJ (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00007 **DSLNET** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)

OEM part number	DSLNET	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm frame (NE/NEF) - description only repeats part number*		

EDH-ZIN-00009 **DSLNFT** Zinsco / Sylvania branch-connector-kit **DISCONTINUED; RECERTIF**

Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)

OEM part number	DSLNFT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00010	DSLNJT	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)

OEM part number	DSLNJT	C	S164 surplus
Description	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NJL / HJL / NJ / NJJ (N-frame 400 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00011	DSLNM	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot mounting hardware for FPE NM (inferred from name)

OEM part number	DSLNM	C	S164 surplus
Description	Zinsco double slot mounting hardware for FPE NM (inferred from name)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00012	DSLNMS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco DSLNM mounting hardware (single?)

OEM part number	DSLNMS	C	S164 surplus
Description	Zinsco DSLNM mounting hardware (single?)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NM / HM / NN / NP / NK (large N-frames)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Difference between DSLNM and DSLNMS (S=single?)*		

EDH-ZIN-00005	DSLQB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QB

OEM part number	DSLQB	C	S164 surplus
Description	Zinsco double slot breaker mounting hardware for QB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00006	DSLQFB	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco double slot breaker mounting hardware for QFB

OEM part number	DSLQFB	C	S164 surplus
Description	Zinsco double slot breaker mounting hardware for QFB	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00021	FPENEFT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania twin mounting hardware for FPE NEF breaker

OEM part number	FPENEFT	C	S165 surplus
Description	Sylvania twin mounting hardware for FPE NEF breaker	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: NE / NEF / NEG / HEF / HEG (N-frame 100 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00001	QSF100DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF switch kit 100 A, double slot, mounting hardware

OEM part number	QSF100DS	C	S164 surplus
Description	Zinsco QSF switch kit 100 A, double slot, mounting hardware	C	same as above
Application	branch (QSF fusible switch)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00014	QSF100SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 100 A

OEM part number	QSF100SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss, 100 A	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00013	QSF100SS	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF 100 A twin kit

OEM part number	QSF100SS	C	S165 surplus
Description	Sylvania QSF 100 A twin kit	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00002	QSF200DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 200 A double slot mounting hardware

OEM part number	QSF200DS	C	S164 surplus
Description	Zinsco QSF 200 A double slot mounting hardware	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00015	QSF200SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss, 200 A

OEM part number	QSF200SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss, 200 A	C	same as above
Current rating	200 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00003	QSF400DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco/Sylvania QSF 400 A switch kit, double slot

OEM part number	QSF400DS	C	S164, S165 surplus
Description	Zinsco/Sylvania QSF 400 A switch kit, double slot	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00016	QSF400SB	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)

OEM part number	QSF400SB	C	S165 surplus
Description	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 400 A)	C	same as above
Current rating	listed '200A' - probably 400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Ampacity conflict 200 vs 400 A*		

EDH-ZIN-00004	QSF600DS	Zinsco / Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Zinsco QSF 600 A double slot mounting hardware

OEM part number	QSF600DS	C	S164 surplus
Description	Zinsco QSF 600 A double slot mounting hardware	C	same as above
Current rating	600 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Zinsco / Sylvania QSF fusible panelboard switch		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00018	SECT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 225 A twin kit (for SC? frame, inferred)

OEM part number	SECT	C	S165 surplus
Description	Sylvania 225 A twin kit (for SC? frame, inferred)	C	same as above
Current rating	225 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00017	SEHT	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 100 A twin kit (for SE/SEH breakers, inferred)

OEM part number	SEHT	C	S165 surplus
Description	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	C	same as above
Current rating	100 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00019	SJD4T	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 400 A twin kit (SJD frame)

OEM part number	SJD4T	C	S165 surplus
Description	Sylvania 400 A twin kit (SJD frame)	C	same as above
Current rating	400 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-ZIN-00020	SKM8S	Sylvania	branch-connector-kit	DISCONTINUED; RECERTIF

Sylvania 800 A single kit (SKM frame)

OEM part number	SKM8S	C	S165, S175 surplus
Description	Sylvania 800 A single kit (SKM frame)	C	same as above
Current rating	800 A	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-DIST · Breakers: Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

8.2 ZIN-Q — Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)

FAM-ZIN-001 · panelboard · aka Magnatrip, ML12, MLB20, MOB20, MTMB20, MT12MBB, Q-frame · markings: Zinsco, Magnatrip, Sylvania, GTE-Sylvania, GTE Sylvania Zinsco, Challenger (Zinsco-frame), Kearney (look-alike)

Zinsco (and Sylvania-labelled) panels use breakers with deep slots that clip onto flat on-edge bus bars; plug-in Q/QC/R38 branch breakers and QFP/QFL/QFB main breakers. Commercial versions with 3-phase 240 V and bolt-on QB/QCB breakers exist (QB243040 'for obsolete Zinsco commercial and industrial panelboards'). Known failure mode: loosened breaker-bus contact on aluminium bus causing arcing/fusing. Aftermarket: Connecticut Electric UBIZ breakers (10 kAIC) and UBIZRBK12 125 A replacement bus kit.

Attribute	Value	Cl.	Sources
Status	Obsolete; Connecticut Electric (UBI) makes UBIZ replacement breakers and UBIZRBK12 tin/copper replacement bus kit	C	S151, S154, S155 distributor
Era of manufacture	Zinsco Electric (Los Angeles) from 1943; Magnatrip breakers patented 1950; copper bus until early 1960s then aluminum; GTE-Sylvania from 1973; renamed Challenger 1978; new Zinsco-frame panels ended c.1981 with Challenger 200 A panels using Zinsco-frame mains 1982-1994; T&B made breakers from Zinsco molds until 2005	C	S151 Wikipedia; largely uncited, cites InterNACHI 2007 history; other
Successor	No OEM successor (tooling: GTE-Sylvania -> Challenger -> Westinghouse/Eaton; Zinsco breaker molds to Thomas & Betts, closed 2005). Aftermarket: Connecticut Electric/UBI.	C	S151, S156 other
Voltage rating	120/240 V 1-ph and 240 V 3-ph (Q24/QFP24 3-pole mains)	C	S152, S153 distributor
Main ampacity	to 225 A (e.g., MLB20(..)C 225 A max; main lug blocks LK-15 150 A and LK-22 225 A)	C	S152 other

Attribute	Value	Cl.	Sources
Branch breakers accepted	Q, QC, QCN, Q24, R38/RC38 twin, HRGF; bolt-on QB/QCB; mains QFP/QFL/QFB/QFBL	C	S152, S153 distributor

Breaker families associated: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)
Key documents: S151 Zinsco; S152 GTE Sylvania Zinsco breaker & panel identification; S153 Superbreakers Zinsco + Sylvania collections (Shopify products.json); S154 Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12; S155 Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings; S156 Challenger / GTE / Zinsco ownership discussion

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00022	**QFP2T**	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	2-pole QFP mains with offset/staggered lug or standard lug; listed for C	discontinued; recertified/new-surplus

EDH-ZIN-00022 **QFP2T** Zinsco / Sylvania main-breaker-kit **DISCONTINUED; RECERTIF**

Zinsco QFP 2-pole main breaker mounting hardware / feet (base)

OEM part number	QFP2T	C	S167 surplus
Description	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	C	same as above
Installation location	Under main breaker, mounting it to panel	C	same as above
Breaker compatibility	2-pole QFP mains with offset/staggered lug or standard lug; listed for Zinsco, Sylvania, Westinghouse, Challenger panels	C	same as above
Dimensions	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Current rating, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00023	**LK-15**	Zinsco main lug block 150 A	—	unknown
EDH-ZIN-00024	**LK-22**	Zinsco main lug block 225 A	—	unknown

EDH-ZIN-00023 **LK-15** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 150 A

OEM part number	LK-15	C	S152 reader-submitted panel label; photo
Description	Main lug block rated 150 A listed on Zinsco panel label alongside QFP24 main	C	S152 photo
Current rating	150 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

EDH-ZIN-00024 **LK-22** Zinsco / Sylvania main-lug-kit **STATUS UNKNOWN**

Zinsco main lug block 225 A

OEM part number	LK-22	C	S152 reader-submitted panel label; photo
Description	Main lug block rated 225 A listed on Zinsco panel label alongside QFP24 main	C	S152 photo
Current rating	225 A	C	same as above
Cross-links	Families: ZIN-Q		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values, wire range		

Bus Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-ZIN-00025	**UBIZRBK12**	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers	—	current (aftermarket)

EDH-ZIN-00025	UBIZRBK12	Connecticut Electric / UBI	bus-assembly	CURRENT (AFTERMARKET)

Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco load centers

OEM part number	UBIZRBK12 (aftermarket, Connecticut Electric)	C	S154 distributor
Description	Replacement buss bar kit: 2 copper-plated buss bars, lugs, screws, insulators; Wikipedia describes as tin-coated copper	C	S154, S151 distributor
Current rating	125 A	C	S154 distributor
Status	current (aftermarket)	C	same as above
Aftermarket / reproduction	Aftermarket replacement - not Zinsco OEM; buyer review reports bars may need trimming to fit	C	same as above
Cross-links	Families: ZIN-Q · Breakers: Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip)		
Not yet documented	Dimensions, listing basis, Torque values		
Open question	*Exact UL/ETL listing scope of UBIZRBK12 when installed in original Zinsco enclosures*		

9 Other manufacturers

Lineage / brand markings: Other / unassigned

Family	Type	Status	Era	Entries	Pg
COMMANDER Commander / CEB panels (Zinsco-type)	loadcenter	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	—	0	787
FA Frank Adam Electric panelboards	panelboard	Obsolete, rare	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	1	787
KINNEY Kinney panelboards	panelboard	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	—	0	788
WADSWORTH Wadsworth panelboards and breakers	panelboard	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	0	788

9.1 COMMANDER — Commander / CEB panels (Zinsco-type)

FAM-OTH-003 · loadcenter · aka CEB · markings: Commander, CEB

Commander panels are reported (opinion only) to be Zinsco/Sylvania-design panels sold under another label; manufacturer identity unconfirmed.

Attribute	Value	Cl.	Sources
Status	Obsolete; an electrician quoted by InspectAPedia says older Commander and CEB panels are 'really the same panel' as Sylvania/GTE-Sylvania (Zinsco design); newer Commander 200 A mains mounted differently	D	S152 other

Key documents: S152 GTE Sylvania Zinsco breaker & panel identification

9.2 FA — Frank Adam Electric panelboards

FAM-OTH-001 · panelboard · aka Frank Adams, FAM, PULFUZSW, KLAMPSWFUZ · markings: Frank Adam, Frank Adam Electric Co., FA

Frank Adam Electric Co. (St. Louis) made panelboards, fused switches and breakers from c.1900; its west-coast branch became Zinsco. Labels include PULFUZSW and KLAMPSWFUZ fused main panels and Fuselok switches. InspectAPedia reports some Frank Adam panelboards used Zinsco-type QSF units. A surplus 'FAM CU-NFJ hardware kit' suggests late Frank Adam panelboards accepted FPE NFJ breakers (unverified).

Attribute	Value	Cl.	Sources
Status	Obsolete, rare	C	S151, S157 other
Era of manufacture	Company founded 1891 St. Louis; panels/breakers made through the 1950s (installed c.1900-1950, possibly to 1970); patents 1906-1965	C	same as above
Successor	No known successor; West-coast business became Zinsmeyer Co. (1929/30s) -> Zinsco (1943)	C	same as above
Branch breakers accepted	Fused switches (Fuselok, PULFUZSW, KLAMPSWFUZ); Zinsco-type QSF units in some Frank Adam panelboards; FPE NFJ breakers via kit CU-NFJ (surplus listing)	C	S157, S168 other

Breaker families associated: Zinsco / Sylvania QSF fusible panelboard switch
Key documents: S151 Zinsco; S157 Frank Adam Electrical Panels; S168 Frank Adams Breaker Parts & Accessories Catalog

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-OTH-00001	**CU-NFJ**	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	—	discontinued; recertified/new-surplus

EDH-OTH-00001	CU-NFJ	Frank Adam	breaker-mounting-kit	DISCONTINUED; RECERTIF

Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)

OEM part number	CU-NFJ	C	S168 surplus
Description	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	C	same as above
Status	discontinued; recertified/new-surplus	C	same as above
Cross-links	Families: FA · Breakers: NF / NFJ / HFJ / NFS (N-frame 225 A class)		
Not yet documented	Current rating, Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

9.3 KINNEY — Kinney panelboards

FAM-OTH-004 · panelboard · markings: Kinney

Kinney (Elgin, IL) panelboards appear in older commercial buildings; breaker type and lineage unverified. Lead only.

Attribute	Value	Cl.	Sources
Status	Company reportedly still in Elgin IL; legacy breaker support possibly via Eaton vintage products (forum)	D	S173 forum

Key documents: S173 Kinney Panel (forum thread)

9.4 WADSWORTH — Wadsworth panelboards and breakers

FAM-OTH-002 · panelboard · aka Waddsworth · markings: Wadsworth, Wadsworth Electric Mfg. Co.

Wadsworth Electric (Covington KY) made residential and light commercial panels and plug-in breakers; 3-pole A-series up to at least 90 A suggests 3-phase panelboards. No mounting hardware part numbers found.

Attribute	Value	Cl.	Sources
Status	Obsolete; reconditioned/NOS Wadsworth A- and B-series breakers sold by surplus dealers; Connecticut Electric replacements mentioned	C	S172, S161 distributor
Era of manufacture	Common 1950s-1960s; forum claims no Wadsworth breakers made since c.1970 (unsourced)	D	S172 forum
Branch breakers accepted	Wadsworth A-series (A15NI, A20NI, A230NI, A240NI, A250NI, A260NI, A320, A360, A390) and B-series (B1515, B1530NI, B3020NI)	C	S172, S161 distributor

Breaker families associated: Wadsworth A / B series

Key documents: S161 Superbreakers Murray + Wadsworth collections (products.json); S172 Wadsworth breaker listings and forum discussion

10 Breaker Family Register

Breaker families referenced by the hardware entries. Mounting style and frame determine which connector and mounting kits apply.

BAB BRK-EAT-049 · Eaton lineage · aka QBHW, HQP, QPHW, BA, QBH, QBGF, QBHGF

Mounting	Bolt-on 1 in per pole; mounted on PRL1/PRL3 subchassis; KPRL1BAB connectors mount up to 12 poles	A	S14 p. 3; oem_spec
Replacement / successor	B10B/W10B/NQB BA -> BAB; NPLAB/NQP/Q10P/W10P QP -> HQP; W22B/Q22B QBH -> QBHW; W22P/Q22P QPH -> QPHW	A	S13 p. V12-T4-7; oem_spec
Used in	PRL1/PRL2, PRL3, NLAB		

BR BRK-EAT-051 · Eaton lineage · aka BW, BWH, BD, BQ, BQC

Mounting	1 in plug-on Type BR loadcenter breakers	A	S20 p. V12-T5-14; oem_spec
Used in	BR		

CA BRK-EAT-041 · Eaton lineage · aka CAH, HCA

Ampere range	100-225 A, 240 V; not recommended for motor loads	A	S14 p. 11 Table 15; oem_spec
dimensions_3p	W 4.13 x H 6.50 x D 2.69 in; frame obsolete	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRL3, PRL4		

CA/CAH/HCA 225 A frame BRK-EAT-012 · Eaton lineage · aka CA, CAH, HCA

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	CA 10, CAH 22, HCA 42 kA	A	S5 p.11; oem_spec
Status	Legacy; not recommended for motor loads	A	S5 oem_spec
Used in	PRL3A, PRL4, PRL3, CDP		

Current-limiting FCL / LCL (and FDB+LFB) BRK-EAT-014 · Eaton lineage · aka FCL, LCL, LFB

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FCL 100 A, LCL 400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FCL 15-100, LCL 125-400 A	A	same as above
Voltage rating	LCL 480 Vac	A	same as above
Interrupting ratings	LCL 200 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

DA BRK-EAT-028 · Eaton lineage · aka Westinghouse DA

Ampere range	250-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C DK (KCDPDK)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

E BRK-EAT-036 · Eaton lineage · aka EA, EH, Westinghouse E-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
dimensions_3p	E/EA: W 4.13 x H 6.00 x D 3.38 in; EH: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	Panelboard-only replacement breakers RE/REA (obsolete) -> REH (3-pole only)	A	S13 p. V12-T3-81; oem_spec
Used in	CDP, NAB		

EB BRK-EAT-020 · Eaton lineage · aka Westinghouse EB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Still manufactured as a 'replacement circuit breaker' for exact replacement (frame listed obsolete; see cross-reference)	A	S13 p. V12-T3-10 note 1; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in (3-pole)	A	S13 p. V12-T3-10; oem_spec
Replacement / successor	Series C EHD; CDP retrofit kit KCDPEHD; same X space	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

ED BRK-EAT-040 · Eaton lineage · aka EDH, EDC, EDB, EDS

Ampere range	100-225 A (EDC 15-225 A); 240 V max	A	S14 p. 11 Table 15; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

EHB BRK-EAT-021 · Eaton lineage · aka Westinghouse EHB

Ampere range	15-100 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	same as above
Replacement / successor	Series C EHD (KCDPEHD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

EHD BRK-EAT-038 · Eaton lineage

Breaker frame	100 A frame (E-frame Series C)	A	S14 p. 11 Table 15; oem_spec
Ampere range	15-100 A	A	same as above
Interrupting ratings	1P 277 V 14 kA; 2/3P 240 V 18 kA, 480 V 14 kA	A	same as above
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

F BRK-EAT-037 · Eaton lineage · aka FA, HF, HFA, Westinghouse F-frame

Status	out of production; last manufactured 1974	A	S13 p. V12-T3-10; oem_spec
dimensions_3p	F/HF: W 4.13 x H 9.38 x D 4.06 in; FA/HFA: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	RHF (F/HF), RHFA (FA/HFA), three-pole only	A	S13 p. V12-T3-81; V12-T4-4; oem_spec
Used in	CDP, NAB		

FB BRK-EAT-022 · Eaton lineage · aka Westinghouse FB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S13 p. V12-T3-10, p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FDB (KCDPFDB); PRL4B replacement FDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP, WEB, WF/WRP		

FD BRK-EAT-039 · Eaton lineage · aka FDB, HFD, FDC, FD-frame

Breaker frame	225 A F-frame Series C (FDB 15-225, FD/HFD/FDC 15-225)	A	S14 p. 11 Table 15; oem_spec
Interrupting ratings	FDB 480 V 14 kA; FD 25 kA; HFD 65 kA; FDC 100 kA at 480 V	A	same as above
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

GB BRK-EAT-050 · Eaton lineage · aka GHB, GHBS

Mounting	Bolt-on; PRL2 subchassis via KPRL2GHB; GB/GHB cannot be mixed on same subchassis as BAB/QBH	A	S14 p. 3; V12-T4-16 note 3; oem_spec
Used in	PRL1/PRL2, PRL3		

GHB family (480Y/277 bolt-on) BRK-EAT-003 · Eaton lineage · aka GB, GHB, GHQ, GHBS, HGHB, GHBGFEP, GHQRSP

Mounting	Bolt-on	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-100 A	A	S7 Table 22.2-2; oem_spec
Voltage rating	277 V 1-pole, 480Y/277 Vac multi-pole; 125/250 Vdc	A	S7 oem_spec
Interrupting ratings	GHB 65 kA @240, 14 kA @480Y/277; HGHB 25 kA @277	A	same as above
Status	Current	B	S6, S7 oem_spec
Used in	PRL2A, PRL2X, PRL3A, PRL3X, PRL1/PRL2		

HFB BRK-EAT-023 · Eaton lineage · aka Westinghouse HFB

Ampere range	15-150 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured	A	S13 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	Series C FD (KCDPFD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

JA BRK-EAT-026 · Eaton lineage · aka Westinghouse JA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C KDB (KCDPKDB); when upgrading JA to Series C K-frame in panelboard, order TAD3 spacer kit	A	S14, S13 RP01400002E p. 13 Table 18; Vol12 Tab 3 JA note; oem_spec
Used in	CDP		

JB BRK-EAT-027 · Eaton lineage · aka Westinghouse JB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JDB (KCDPJDB)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

JD BRK-EAT-042 · Eaton lineage · aka JDB, HJD, JDC

Ampere range	70-250 A	A	S14 p. 11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

KA BRK-EAT-024 · Eaton lineage · aka HKA, Westinghouse KA

Ampere range	70-225 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11 note 2; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Replacement / successor	KA -> KD (KCDPKD); HKA -> HKD (KCDPHKD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KB BRK-EAT-025 · Eaton lineage · aka HKB, Westinghouse KB

Ampere range	70-250 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JD (KCDPJD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KD BRK-EAT-043 · Eaton lineage · aka DK, KDB, HKD, KDC, CKD, CHKD

Ampere range	KD/KDB/HKD/KDC 100-400 A; DK 250-400 A 240 V	A	S14 p. 11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
adapter	Requires TAD3 adapter/spacer kit when mounted onto existing LB-frame connectors or when upgrading HLB/LBB/JA in a panelboard	A	S14, S13 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Used in	CDP, PRLC, PRL4		

LA BRK-EAT-029 · Eaton lineage · aka HLA, LAB, Westinghouse LA

Ampere range	250-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame (HLA still in panelboard-only list)	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD); LAB -> LDB	A	S14, S13 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP		

LB BRK-EAT-030 · Eaton lineage · aka LBB, HLB, Westinghouse LB

Ampere range	LB 70-400 A; LBB/HLB 125-400 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	LB/HLB -> KD (KCDPKD); LBB -> KDB (KCDPKDB); Series C K-family requires TAD3 adapter kit when mounting on existing LB connectors	A	S14 RP01400002E p. 13 Table 18 and note; oem_spec
Used in	CDP		

LC BRK-EAT-031 · Eaton lineage · aka HLC, Westinghouse LC

Ampere range	300-600 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	replacement breaker still manufactured (LC obsolete per note 2)	A	S13 p. V12-T3-11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

LD BRK-EAT-044 · Eaton lineage · aka HLD, LDC, LDB, CLD

Ampere range	300-600 A	A	S14 p. 11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	S13 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

MA BRK-EAT-032 · Eaton lineage · aka HMA, Westinghouse MA

Ampere range	125-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	MA obsolete; HMA replacement breaker	A	S13 p. V12-T3-12; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	same as above
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MC BRK-EAT-033 · Eaton lineage · aka HMC, MCC, Westinghouse MC

Ampere range	400-800 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MDL BRK-EAT-045 · Eaton lineage · aka HMDL, CMDL

Ampere range	300-800 A	A	S14 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

NB BRK-EAT-034 · Eaton lineage · aka HNB, Westinghouse NB

Ampere range	700-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	same as above
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

NC BRK-EAT-035 · Eaton lineage · aka HNC, Westinghouse NC

Ampere range	600-1200 A	A	S14 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S13 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S14 RP01400002E p. 13 Table 18; oem_spec
box_depth	In MP40 panels only NC/HNC require 11.38 in deep box (standard 10.50 in)	A	S13 p. V12-T4-12 note 3; oem_spec
Used in	CDP		

ND BRK-EAT-046 · Eaton lineage · aka HND, NDC, CND

Ampere range	600-1200 A	A	S14 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	S13 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

Power Defense frame 2 (PDG2 / PDD2) BRK-EAT-015 · Eaton lineage · aka PDG2, PD2, PG2, PDG2xF, PDG2xG, PDG2xM, PDG2xP, PDD2xG

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	225 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	S6 oem_spec
Voltage rating	600 Vac class	C	S6 inference
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frame 3 (PDG3 / PDF3 / PDD3) BRK-EAT-016 · Eaton lineage · aka PDG3, PD3, PG3, PF3, PDG3A, PDG3B, PDF3

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A and 600 A frames	A	S1 p.32 Table 46; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL1X, PRL2X, PRL3X, PRL4X		

Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) BRK-EAT-017 · Eaton lineage · aka PDG4, PDG5, PG4, PF4, PG5, PF5

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A (4) / 1200 A (5)	A	S1 p.34 Table 49; oem_spec
Poles	3	A	S1 oem_spec
Ampere range	300-1200 A	A	same as above
Status	Current	A	S6 oem_spec
Used in	PRL4X		

QUICKLAG bolt-on (BAB/QBHW family) BRK-EAT-001 · Eaton lineage · aka BA, BAB, QBH, QBHW, QBGF, QBHGF, QBGFEP, QBHGFEP, BABRP, BABRSP, BAB-D, BAB-C, QBCAF, QBHCAF

Mounting	Bolt-on (horizontal on PRL1a/1X branch connector assemblies; 100 A BAB/QBH mains also horizontal)	A	S7 p.22.1-1; oem_spec
Breaker frame	QUICKLAG 1 in per pole	C	S7 inference
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	S7 Table 22.1-2; oem_spec
Voltage rating	120/240 Vac	A	S7 oem_spec
Interrupting ratings	BAB 10 kA; QBHW 22 kA at 240 Vac	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL1X, PRL3A, PRL3X, PRL1/PRL2		

QUICKLAG plug-on (HQP/QPHW family) BRK-EAT-002 · Eaton lineage · aka HQP, QPHW, QHPX, QPGF, QPHGF, QPGFEP, QPHGFEP

Mounting	Plug-on (2C11642 connector assemblies)	A	S1 p.9; oem_spec
Poles	1, 2, 3	A	S7 oem_spec
Ampere range	15-100 A	A	same as above
Voltage rating	120/240 Vac	A	same as above
Interrupting ratings	HQP 10 kA; QPHW 22 kA	A	S7 Table 22.1-2; oem_spec
Status	Current	B	S6, S7 oem_spec
Used in	PRL1A, PRL1X		

RD BRK-EAT-047 · Eaton lineage · aka RG

Ampere range	1600/2000/2500 A	A	S13 p. V12-T3-12; oem_spec
dimensions_3p	W 15.50 x H 16.00 x D 9.75 in	A	same as above
Replacement / successor	RD replaces PC, PCC and PB breakers for 2000 and 2500 A only	A	S13 p. V12-T3-12 note 1; oem_spec
Used in	PRLC, WF/WRP		

Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) BRK-EAT-005 · Eaton lineage · aka ED, EDB, EDS, EDH, EDC

Mounting	Bolt-on; single mount 175-225 A in PRL3a	A	S1 oem_spec
Breaker frame	225 A frame	A	S7 oem_spec
Poles	2, 3	A	S5 oem_spec
Ampere range	100-225 A	A	same as above
Voltage rating	240 Vac	A	same as above
Interrupting ratings	ED 65, EDH 100, EDC 200, EDB 22, EDS 42 kA @240 V	A	S5, S7 oem_spec
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP		

Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) BRK-EAT-052 · Eaton lineage · aka FD, HFD, FDC, EHD, FDB, FDE, HFDE, FDCE, ED, EDH, EDC

Breaker frame	F-Frame	A	S116 pp.12-85..12-91; oem_spec
Ampere range	10-225 A	A	same as above

Series C F-frame (EHD/FDB/FD/HFD/FDC) BRK-EAT-004 · Eaton lineage · aka EHD, FDB, FD, HFD, FDC, FDE, HFDE, FDCE, LFD, FD/LFD

Mounting	Bolt-on to panel connectors	A	S1 oem_spec
Breaker frame	F-frame 100/150/225 A	A	S7 oem_spec
Poles	1, 2, 3	A	same as above
Ampere range	15-225 A	A	same as above
Voltage rating	FD/HFD/FDC 600 Vac; EHD 480 Vac; FDB 600 Vac	A	S5 p.11 Table 15; oem_spec
Interrupting ratings	EHD 18/14 kA; FD 65/25(35)/18; HFD 100/65/25; FDC 200/100/35 kA (240/480/600)	A	S5, S7 oem_spec
Status	Series C legacy; replaced in Xpert panels by Power Defense PDG2	B	S1, S6 inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL3, CDP, PRL5P		

Series C G-Frame (GD/GHC/GHB) BRK-EAT-059 · Eaton lineage · aka GD, GHC, GHB, GDB

Breaker frame	G-Frame	A	S116 p.12-243..12-248; oem_spec
Ampere range	15-100 A	A	same as above

Series C J-Frame (JD/HJD/JDC/JDB) BRK-EAT-053 · Eaton lineage · aka JD, HJD, JDC, JDB, JDB250

Breaker frame	J-Frame	A	S117 pp.12-87..12-91; oem_spec
Ampere range	70-250 A	A	same as above

Series C J-frame (JD/JDB/HJD/JDC) BRK-EAT-006 · Eaton lineage · aka JD, JDB, HJD, JDC, HJDDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	250 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	70-250 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	JD 65/35/18; HJD 100/65/25; JDC 200/100/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C K-Frame (KD/HKD/KDC/KDB) BRK-EAT-054 · Eaton lineage · aka KD, HKD, KDC, KDB, CKD, CHKD

Breaker frame	K-Frame	A	S116 p.12-113; oem_spec
Ampere range	70-400 A	A	same as above

Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) BRK-EAT-007 · Eaton lineage · aka DK, KD, KDB, HKD, KDC, CKD, CHKD, CKDC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	400 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	100-400 A (DK 250-400)	A	same as above
Voltage rating	600 Vac (DK 240 Vac)	A	same as above
Interrupting ratings	KD 65/35/25; HKD 100/65/35; KDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, CDP		

Series C L-Frame (LD/HLD/LDC/LDB) BRK-EAT-055 · Eaton lineage · aka LD, HLD, LDC, LDB, HLDDC

Breaker frame	L-Frame	A	S118 V4-T2-188/190; oem_spec
Ampere range	300-600 A	A	same as above

Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) BRK-EAT-008 · Eaton lineage · aka LD, LDB, HLD, LDC, CLD, CHLD, CLDC, LC, LCY, HLC, LCC, HLCC

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LD 65/35/25; HLD 100/65/35; LDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Series C M-Frame (MDL/HMDL/MDLB) BRK-EAT-056 · Eaton lineage · aka MDL, HMDL, MDLB, HMDLB

Breaker frame	M-Frame	A	S116 p.12-140; oem_spec
Ampere range	up to 800 A	A	same as above

Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) BRK-EAT-010 · Eaton lineage · aka MDL, HMDL, CMDL, CHMDL, MC, MCY, HMC, MCC, HMCC, MDS, MDSC, MA, HMA

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	800 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	MDL 65/50/25; HMDL 100/65/35 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C N-Frame (ND/HND/NDC/NB) BRK-EAT-057 · Eaton lineage · aka ND, HND, NDC, NB, NBDC

Breaker frame	N-Frame	A	S116 p.12-162; oem_spec
Ampere range	up to 1200 A	A	same as above

Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) BRK-EAT-011 · Eaton lineage · aka ND, HND, NDC, CND, CHND, CNDC, NGS, NGH, NGC, NHH, NC, NCY, HNC, NB, HNB

Mounting	Bolt-on single mount	A	S1 oem_spec
Breaker frame	1200 A frame	A	S5 oem_spec
Poles	2, 3	A	same as above
Ampere range	600-1200 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	ND 65/35/25; HND 100/65/35; NDC 200/100/50 kA	A	same as above
Status	Legacy	C	inference
Used in	PRL4, CDP, PRL5P		

Series C R-Frame (RD/RDC) BRK-EAT-058 · Eaton lineage · aka RD, RDC

Breaker frame	R-Frame	A	S116 p.12-181; oem_spec
Ampere range	800-2500 A	A	same as above

Series G E-frame (EGB/EGS/EGH) BRK-EAT-018 · Eaton lineage · aka EGB, EGS, EGH, EGE

Mounting	Bolt-on	A	S7 oem_spec
Breaker frame	125 A frame	A	same as above
Poles	1, 2, 3	A	same as above
Ampere range	15-125 A	A	same as above
Voltage rating	480 Vac	A	same as above
Interrupting ratings	EGB 25/18; EGS 85/35; EGH 100/65 kA (240/480)	A	S7 Table 22.3-9; oem_spec
Status	Current	C	inference
Used in	PRL3E		

Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) BRK-EAT-060 · Eaton lineage · aka EGB, EGE, EGS, EGH, EGC, EG

Breaker frame	EG-Frame	A	S119 V4-T2-16..27; oem_spec
Ampere range	15-125 A (160 A IEC)	A	same as above

Series G JG-Frame (JGE/JGS/JGH/JGC) BRK-EAT-061 · Eaton lineage · aka JGE, JGS, JGH, JGC, JG

Breaker frame	JG-Frame	A	S116 p.12-28; oem_spec
Ampere range	63-250 A	A	same as above

Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH BRK-EAT-009 · Eaton lineage · aka LGE, LGS, LGH, LGC, LGU, LHH

Mounting	Bolt-on	A	S1 oem_spec
Breaker frame	600 A frame (LHH 400 A)	A	S7 oem_spec
Poles	3	A	S1 oem_spec
Ampere range	up to 600 A	A	S7 oem_spec
Voltage rating	600 Vac	A	same as above
Interrupting ratings	LGE 65/35/18; LGH 100/65/35; LGC/LGU 200 kA @240	A	same as above
Status	Current/legacy	C	inference
Used in	PRL1A, PRL2A, PRL3A, PRL4, PRL4X		

Series G LG-Frame (LGE/LGS/LGH/LGC) BRK-EAT-062 · Eaton lineage · aka LGE, LGS, LGH, LGC, LG

Breaker frame	LG-Frame	A	S116 p.12-37; oem_spec
Ampere range	250-630 A (600 A UL/CSA)	A	same as above

Series G NG-Frame BRK-EAT-063 · Eaton lineage · aka NGS, NGH, NGC, NG

Breaker frame	NG-Frame	A	S116 p.12-48; oem_spec
Ampere range	up to 1250/1600 A	A	same as above

TRI-PAC integrally fused (FB-P, LA-P, NB-P) BRK-EAT-013 · Eaton lineage · aka FB-P, LA-P, NB-P

Mounting	Bolt-on	A	S5 oem_spec
Breaker frame	FB-P 100 A, LA-P 400 A, NB-P 800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	15-800 A	A	same as above
Voltage rating	600 Vac	A	same as above
Interrupting ratings	200 kA	A	S5 p.11; oem_spec
Status	Legacy	C	inference
Used in	PRL3A, PRL4, CDP		

Tri-Pac BRK-EAT-048 · Eaton lineage · aka FB-P, LA-P, NB-P, TRI-PAC

Ampere range	FB-P 15-100 A; LA-P 70-400 A; NB-P 300-800 A; 200 kA at 600 V	A	S14 p. 11 Table 15; oem_spec
Used in	CDP, PRL4		

Westinghouse pre-Series C industrial MCCBs BRK-EAT-019 · Eaton lineage · aka EB, EHB, FB, HFB, KA, HKA, KB, HKB, JA, JB, DA, LA, HLA, LB, LBB, HLB, LC, HLC, MA, HMA, MC, NB, HNB, NC, HNC

Mounting	Bolt-on to CDP chassis connectors	A	S5 oem_spec
Breaker frame	Various	A	same as above
Ampere range	15-1200 A	A	S5 p.13 Table 18; oem_spec
Status	Obsolete; Eaton cross-references each to a Series C retrofit kit using same X space	A	S5 p.13; oem_spec
Used in	CDP		

Fusematic XF / XM / XKL / XJL BRK-FPE-009 · Federal Pacific Electric · aka Fusematic, XF, XM, XKL, XJL

Mounting	bolt-on	C	S141 distributor
Ampere range	to 225 A (XJL225 limiter)	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FPE-SWBD		

NA / NC (Stab-Lok plug-in) BRK-FPE-002 · Federal Pacific Electric · aka NA (thick, 1 in/pole), NC (thin), Stab-Lok

Mounting	plug-in Stab-Lok	C	S141, S155 distributor
Ampere range	15-100 A	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIF series (e.g., UBIF15N = NA115, UBIF20N = NA120, UBIF0230N = NC230), 10 kAIC ETL	C	S155, S141 distributor
Used in	NA1B		

NB (Stab-Lok bolt-on) BRK-FPE-001 · Federal Pacific Electric · aka NB Stab-Lok, UBIF...NB (Connecticut Electric replacement)

Mounting	bolt-on (NBLP panelboards)	C	S141, S149 distributor
Ampere range	15-100 A (e.g., NB100 2P 100 A)	C	same as above
Voltage rating	120/240 VAC	C	same as above
Interrupting ratings	10 kA (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	NBLP		

NE / NEF / NEG / HEF / HEG (N-frame 100 A class) BRK-FPE-003 · Federal Pacific Electric · aka NE, NEF, NEG, HEF, HEG, NES (stab), NEF4.., NEF6..

Mounting	bolt-on; NES variants stab-type	C	S141, S138, S160 distributor
Breaker frame	NE frame (same physical size for NE/NEF per JRL Electric explainer)	C	same as above
Ampere range	15-100 A	C	same as above
Voltage rating	NE: 240 VAC/250 VDC; NEF: 480 VAC (2-3P) / 277 V (1P); HEF/HEG: 600 VAC	C	same as above
Interrupting ratings	NE 18 kA@240 (listing); NEF 14 kA@480; HEF 25 kA@480; HEF213020 1P 22 kA@277	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
kits	Twin kits: KCDP1C (CDP), KBDP1C (BDP), NDPNE (NDP), NAIB-NEF / KCDP-1A (NA1B/NH1B)	C	S138, S140, S142 distributor
Used in	CDP, BDP, NDP, NA1B		

NEJ / NEJH / HEJ (N-frame 225 A class) BRK-FPE-004 · Federal Pacific Electric · aka NEJ, NEJH, HEJ

Mounting	bolt-on	C	S141, S138, S143 distributor
Ampere range	to 225 A (NEJ233200, NEJH223225, HEJ222200)	C	same as above
Voltage rating	240 V (NEJ) / higher-IC and 600 V variants (H-prefix)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
kits	KCDP2C (CDP), KBDP2C (BDP), NDPNEJ (NDP)	C	S138, S141, S143 distributor
Used in	CDP, BDP, NDP		

NF / NFJ / HFJ / NFS (N-frame 225 A class) BRK-FPE-005 · Federal Pacific Electric · aka NF, NFJ, HFJ, NFS (stab-in)

Mounting	bolt-on; NFS stab-in	C	S141, S138 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NFJ 18 kA@480 (listing)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
kits	KCDP3C / NFJ1K (CDP); NFJ3K (BDP-style, OEM equivalent not stated)	C	S138, S140 distributor
Used in	CDP		

NJL / HJL / NJ / NJJ (N-frame 400 A class) BRK-FPE-006 · Federal Pacific Electric · aka NJL, HJL, NJ, NJJ, XJL (current limiter)

Mounting	bolt-on	C	S141, S138 distributor
Ampere range	to 400 A	C	same as above
Voltage rating	600 VAC	C	same as above
Interrupting ratings	NJ 30 kA@480; HJL 22 kA@600; NJJ 22 kA (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
kits	KCDP4C / NJL1K (CDP); KBDP4C / NJL3K (BDP)	C	S138, S141 distributor
Used in	CDP, BDP, FPE-SWBD		

NM / HM / NN / NP / NK (large N-frames) BRK-FPE-007 · Federal Pacific Electric · aka NM, HNM, HM, NN (switch), NP, NK

Mounting	bolt-on	C	S141, S140 distributor
Ampere range	NM 400-800 A (trip units NM031400-NM031800); NN 1200 A switch; NP to 1600 A	C	same as above
Voltage rating	600 VAC	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
kits	KCDP5C (CDP, NM/NN) and KBDP5C (BDP, NM/HNM)	C	same as above
lugs	NM34 (1) #1/0-600 kcmil 125-300 A; NM36 (2) 3/0-600 kcmil 350-600 A; NM38 (3) 250-500 kcmil 700-800 A; N32 lug kit for NN	C	S140 surplus
Used in	CDP, BDP, FPE-SWBD		

QMQB fusible panelboard switch BRK-FPE-008 · Federal Pacific Electric · aka QMQB

Mounting	bolt-on fusible switch unit (FDP)	C	S141 distributor
Ampere range	30-1200 A	C	same as above
Voltage rating	240 V (..32..) / 600 V (..36..)	C	same as above
Interrupting ratings	200 kA with class R/J/K/L fuses	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	FDP		

E150 line (TEB, TED, THED, TEC) BRK-GEA-017 · GE / ABB lineage · aka E-150, E150, TEB, TED, THED, TEC, THLC1, TB1

Breaker frame	E150 (150 A)	A	S130 p. 6-34 and 6-102; oem_spec
Ampere range	10-150 A	A	same as above

F225 line (TFJ, TFK, THFK, TFC) BRK-GEA-018 · GE / ABB lineage · aka F225, TFJ, TFK, THFK, TFC, THLC2

Breaker frame	F225 (225/250 A)	A	S130 p. 6-101 to 6-102; oem_spec

J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) BRK-GEA-019 · GE / ABB lineage · aka J400, J600, TJJ, TJK, THJK, TJD, TJC, TB4, TLB4, THLC4

Breaker frame	J400 / J600	A	S130 p. 6-36 to 6-37 and 6-102; oem_spec
Ampere range	200-600 A	A	same as above

K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) BRK-GEA-020 · GE / ABB lineage · aka K1200, TKM, TKMA, THKMA, TK4V, TB6, TB8

Breaker frame	K1200	A	S130, S132 p. 6-102; oem_spec
Ampere range	300-1200 A	A	same as above

Record Plus FB (FBV/FBN/FBH/FBL) BRK-GEA-010 · GE / ABB lineage · aka FB

Mounting	bolt-on	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

Record Plus FB 100 BRK-GEA-025 · GE / ABB lineage · aka FB100, FBN, FBV, FBH

Breaker frame	FB 100	A	S130 p. 6-68 to 6-73; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FC (FCS/FCV/FCN/FCH/FCL) BRK-GEA-011 · GE / ABB lineage · aka FC, FD

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 100 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FC 100 BRK-GEA-026 · GE / ABB lineage · aka FC100

Breaker frame	FC 100	A	S130 p. 6-74 to 6-78; oem_spec
Ampere range	15-100 A	A	same as above

Record Plus FE 250 BRK-GEA-027 · GE / ABB lineage · aka FE250

Breaker frame	FE 250	A	S130 p. 6-79 to 6-81; oem_spec
Ampere range	25-250 A	A	same as above

Record Plus FG (FGV/FGN/FGH/FGL/FGP) BRK-GEA-012 · GE / ABB lineage · aka FG

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 600 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FG 600 BRK-GEA-028 · GE / ABB lineage · aka FG600

Breaker frame	FG 600	A	S130 p. 6-83 to 6-88; oem_spec
Ampere range	100-600 A	A	same as above

Spectra RMS SE150 BRK-GEA-021 · GE / ABB lineage · aka SE150, SED, SEH, SEL, SEP, SE1

Breaker frame	SE150	A	S130 p. 6-44, 6-103; oem_spec
Ampere range	15-150 A	A	same as above

Spectra RMS SF250 BRK-GEA-022 · GE / ABB lineage · aka SF250, SFH, SFL, SFP

Breaker frame	SF250	A	S130 p. 6-46, 6-103; oem_spec
Ampere range	70-250 A	A	same as above

Spectra RMS SG600 BRK-GEA-023 · GE / ABB lineage · aka SG600, SG400, SGD, SGH, SGL, SGP

Breaker frame	SG600 (400/600 A)	A	S130 p. 6-48, 6-103; oem_spec
Ampere range	125-600 A	A	same as above

Spectra RMS SK1200 BRK-GEA-024 · GE / ABB lineage · aka SK1200, SK800, SKH, SKL, SKP, SKD

Breaker frame	SK1200	A	S130 p. 6-51, 6-103; oem_spec
Ampere range	300-1200 A	A	same as above

Spectra SE (SEDA/SEHA/SELA/SEPA) BRK-GEA-006 · GE / ABB lineage · aka SE-frame, Spectra RMS E

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

Spectra SF (SFHA/SFLA/SFPA) BRK-GEA-007 · GE / ABB lineage · aka SF-frame

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	70-250 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

Spectra SG (SGDA/SGHA/SGLA/SGPA) BRK-GEA-008 · GE / ABB lineage · aka SG-frame

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	125-600 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, SCP-PLUS		

Spectra SK (SKHA/SKLA/SKPA) BRK-GEA-009 · GE / ABB lineage · aka SK-frame, K

Mounting	single-mounted / center-mounted	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TEB / TED / THED / TED4 / TED6 BRK-GEA-005 · GE / ABB lineage · aka E-frame, EB

Mounting	bolt-on	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR, NHB		

TEY / TEYF / TEYD / TEYH / TEYL BRK-GEA-003 · GE / ABB lineage · aka E-frame TEY, EY

Mounting	bolt-on (AE/AEP; Spectra double-branch; ReliaGear neXT)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A (110/125 A TEYD/H/L in AS)	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

TFJ / TFK / THFK / TFL BRK-GEA-013 · GE / ABB lineage · aka F-frame, FJ

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	up to 225 A	A	same as above

Used in	A-SERIES, SPECTRA-PP, CCB-QMR		

THQB / THHQB / TXQB BRK-GEA-001 · GE / ABB lineage · aka Q-line bolt-on, QB

Mounting	bolt-on (A-Series AQ; Spectra double-branch)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A, 1-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

THQL / THHQL / TXQL BRK-GEA-002 · GE / ABB lineage · aka Q-line plug-in

Mounting	plug-in (A-Series AL)	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES		

TJD / TJJ / TJK / THJK BRK-GEA-014 · GE / ABB lineage · aka J-frame, JK

Mounting	bolt-on / module	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	250-600 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TKM / THKM BRK-GEA-015 · GE / ABB lineage · aka K-frame, KM

Mounting	single-mounted	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	SPECTRA-PP, CCB-QMR		

TQD / THQD BRK-GEA-004 · GE / ABB lineage · aka Q-frame QD

Mounting	bolt-on via strap kits / branch bases	A	S75 p.11-4 to 11-7; oem_spec
Ampere range	100-225 A, 2-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

TQD / THQD (Q-Line 225A) BRK-GEA-016 · GE / ABB lineage · aka TQD, THQD, TQC 70-100A

Breaker frame	Q-Line 225 A	A	S130 p. 6-102; oem_spec

Wadsworth A / B series BRK-OTH-001 · Other manufacturers · aka A15NI, A360, B1515

Mounting	plug-in (assumed)	C	S172, S161 distributor
Ampere range	15-90 A	C	same as above
Voltage rating	120/240 V (3-pole versions exist)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Used in	WADSWORTH		

3VA41 BRK-SIE-004 · Siemens lineage · aka 3VA41

Breaker frame	1in per pole (1-pole 1in wide; 2P 2in; 3P 3in)	A	S97 pp.11-18, 11-19; oem_spec
Ampere range	15-125A	A	S97 p.11-18; oem_spec
Interrupting ratings	SEAB/MEAB/HEAB: 25/35/65kA @277V-480Y/277V	A	S97 pp.11-18, 11-19; oem_spec
Used in	RP1, P2, P3, P4, P5, SB		

3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)

BRK-SIE-012 · Siemens lineage · aka 3VA52, 3VA53, 3VA54, 3VA61, 3VA62, 3VA63, 3VA64

Used in	RP1, P2, P3, P4, P5, SB		

BL BRK-SIE-001 · Siemens lineage · aka BL, BLH, HBL, BLF, BLE, BAF, BT twin (B1515/B2020)

Mounting	bolt-on	A	S97 p.11-16; oem_spec
Breaker frame	1in per pole bolt-on	A	same as above
Ampere range	15-100A	A	same as above
Voltage rating	120/240V	A	same as above
Interrupting ratings	BL 10kA, BLH 22kA, HBL 65kA	A	same as above
Used in	RP1, P1, S1/S2, P2, P3, P4, P5, SB		

BQ / BQH / HBQ (bolt-on, legacy) BRK-SIE-015 · Siemens lineage · aka BQ, BQH, HBQ, HB

Status	unknown	D	S97 inference
Used in	CDP6, SB		

BQ / BQH / HBQ / BQXD bolt-on BRK-SIE-016 · Siemens lineage · aka BQ, BQH, HBQ, BQHF, BQE, BQF, BL, BLH, HBL, BQXD

Ampere range	15-125 A	A	S135 p. 7-39, 7-153; oem_spec

BQD BRK-SIE-002 · Siemens lineage · aka BQD, BQD6

Mounting	bolt-on, 1in per pole	A	S97 p.11-16; oem_spec
Ampere range	15-100A	A	same as above
Voltage rating	480Y/277V	A	same as above
Interrupting ratings	14kA @480Y/277V, 65kA @240V	A	same as above
Used in	RP1, P1, P2, P3, P4, P5, SB		

BQD / CQD (incl. BQD6, CQD6) BRK-SIE-017 · Siemens lineage · aka BQD, CQD, BQD6, CQD6

Ampere range	15-100 A	A	S135 p. 7-153; oem_spec
note	SPEEDFAX p. 7-153 says the lugs are integral (line and load for BQD; line side for CQD/CQD6, load side for both). No separate lug kit is listed.	A	same as above

ED (ED2/ED4/ED6/HED4/HHED6) and CED6 BRK-SIE-005 · Siemens lineage · aka ED2, ED4, ED6, HED4, HED6, HHED6, CED6, E2, E4, E6, HE4, HE6

Ampere range	15-125A	A	S97 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P2, P4, P5, SB, CDP6		

FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) BRK-SIE-008 · Siemens lineage · aka FXD6, FD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250A	A	S97 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' BRK-SIE-003 · Siemens lineage · aka xGB, NGB, HGB, LGB, xGB2, NGB2, HGB2, LGB2

Ampere range	15-125A	A	S97 p.11-16; oem_spec
Voltage rating	480Y/277V; 600Y/347V 14kA	A	same as above
Interrupting ratings	NGB 25kA, HGB 35kA, LGB 65kA @480Y/277V; 100kA @240V	A	same as above

Used in	RP1, P2, P3, P4, P5		

JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) BRK-SIE-009 · Siemens lineage · aka JXD2, JXD6, JD6, HJD6, HJXD6, HHJXD6, CJD6, SJD6, SHJD6, SCJD6

Ampere range	200-400A	A	S97 p.11-95; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) BRK-SIE-010 · Siemens lineage · aka LXD6, LD6, HLD6, HLXD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6

Ampere range	250-600A	A	S97 p.11-95; oem_spec
Used in	P4, P5, SB, CDP6		

MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 BRK-SIE-011 · Siemens lineage · aka MXD6, MD6, HMD6, CMD6, SMD6, SHMD6, SCMD6, NXD6, ND6, HND6, CND6, SND6, SHND6, SCND6, LMD6, HLMD6

Ampere range	MD to 800A, ND to 1200A (Frame ratings from strap kit table max-amp column)	B	S97 inference
Used in	P5, SB, CDP6		

NEB / HEB BRK-SIE-014 · Siemens lineage · aka NEB, HEB

Status	legacy (replacement parts only)	B	S97 p.11-53; inference
Used in	P3, P4, P5		

NGG / HGG / LGG (G-frame bolt-on/lug) BRK-SIE-018 · Siemens lineage · aka NGG, HGG, LGG

Ampere range	15-125 A	A	S135 p. 7-153; oem_spec

Pushmatic (Bulldog / ITE) BRK-SIE-030 · Siemens lineage · aka P-series, P1515 (condensed dual 15 A), UBIP (Connecticut Electric replacement)

Mounting	bolt-on push-button	C	S176, S155 distributor
Ampere range	15-? A (UBIP replacements 15-40+ A)	C	same as above
Voltage rating	120 / 120/240 V	C	same as above
Interrupting ratings	10 kA (UBIP)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIP115, UBIP130, UBIP240 etc. classified for Pushmatic and Bulldog loadcenters	C	S155 distributor
Used in	PUSHMATIC		

QJ2 / QJH2 / QJ2-H / HQJ2H BRK-SIE-006 · Siemens lineage · aka QJ2, QJH2, QJ2-H, HQJ2H

Ampere range	60-225A	A	S100 p.10-18; oem_spec
Status	discontinued; replaced by QR (QJ kits not available, use QR)	A	S97 p.11-53; oem_spec
Used in	P1, P2, P3, CDP6		

QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) BRK-SIE-020 · Siemens lineage · aka QJ2, QJH2, QJ2H, HQJ2H

Ampere range	60-225 A (from a superbreakers.com search snippet; not OEM-verified)	C	S137 distributor

QR2 / QRH2 / HQR2 (250A frame) BRK-SIE-019 · Siemens lineage · aka QR2, QRH2, HQR2, QR2H, HQR2H

Ampere range	100-250 A	A	S135 p. 7-40; oem_spec
Voltage rating	240 Vac	A	same as above

QR2 / QRH2 / HQR2 / HQR2H BRK-SIE-007 · Siemens lineage · aka QR, QR2, QRH2, HQR2, HQR2H

Ampere range	100-225A (QR rated 250A frame but limited to 225A in panelboard)	A	S97 pp.11-94, 11-96; oem_spec
Voltage rating	240V max	A	S102 oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) BRK-SIE-021 · Siemens lineage · aka ED2, ED4, ED6, HED4, HHED6, CED6, ED

Ampere range	15-125 A	A	S135 ED pages; p. 7-154; oem_spec

Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) BRK-SIE-022 · Siemens lineage · aka FD6, FXD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250 A	A	S135 FD pages; p. 7-154; oem_spec

Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) BRK-SIE-023 · Siemens lineage · aka JD6, JXD2, JXD6, HJD6, HJXD6, HHJD6, HHJXD6, SJD6-B, SHJD6-B, SCJD6-B, CJD6

Ampere range	200-400 A	A	S135 p. 7-154; oem_spec

Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) BRK-SIE-024 · Siemens lineage · aka LD6, LXD6, HLD6, HLXD6, HHLD6, HHLXD6, SLD6-B, SHLD6-B, SCLD6-B, CLD6

Ampere range	250-600 A	A	S135 p. 7-154; oem_spec

Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) BRK-SIE-025 · Siemens lineage · aka LMD6, LMXD6, HLMD6, HLMXD6

Ampere range	500-800 A	A	S135 p. 7-154, 7-165; oem_spec

Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) BRK-SIE-026 · Siemens lineage · aka MD6, MXD6, HMD6, HMXD6, SMD6-B, SHMD6-B, SCMD6-B, CMD6

Ampere range	500-800 A	A	S135 p. 7-154; oem_spec

Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) BRK-SIE-027 · Siemens lineage · aka ND6, NXD6, HND6, HNXD6, SND6-B, SHND6-B, CND6, SCND6-B

Ampere range	800-1200 A	A	S135 p. 7-154; oem_spec

Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) BRK-SIE-028 · Siemens lineage · aka PD6, PXD6, HPD6, HPXD6, SPD6-B, SHPD6-B, CPD6

Ampere range	1200-1600 A	A	S135 p. 7-154; oem_spec

Sentron RD (RD6, RXD6, HRD6, HRXD6) BRK-SIE-029 · Siemens lineage · aka RD6, RXD6, HRD6, HRXD6

Ampere range	1600-2000 A	A	S135 p. 7-154 to 7-155; oem_spec

Sentron VL (DG, FG, JG, LG, MG, NG) BRK-SIE-013 · Siemens lineage · aka DG, FG, JG, LG, MG, NG, NF/HF/LF, NJ/HJ/LJ, NL/HL/LL, NM/HM/LM

Used in	P4, P5		

FA / FH (I-Line) BRK-SQD-001 · Square D / Schneider Electric · aka FA, FH, FY, FA 240V, FA 480V

Mounting	I-Line plug-on (bolt-on version factory-only: 3rd character 'B')	A	S27, S26, S37 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	100 A	A	same as above
Poles	1 (277 V), 2, 3	A	same as above
Ampere range	15-100 A	A	same as above
Voltage rating	240/480/600 V	A	same as above
Interrupting ratings	FA 240V 10k@240; FA 480V 25k@240/18k@480; FH 65k@240/25k@480/18k@600	A	same as above
group_mount_height	1.5 in. (1-pole); 3 in. (multi-pole) in QED-2 I-Line (Column alignment from text extraction; verify visually)	B	S26 p. 22; oem_spec
bolt_on	Bolt-on construction available only for FA/FH, LA/LH, FY, QB, QD, QG, Q4 (factory order; bus clamps torque 20 lb-in / 3 N-m)	A	S37 oem_spec
Used in	QED-2, I-LINE		

H-frame HD/HG/HJ/HL/HR (I-Line) BRK-SQD-002 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, PowerPact H

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	150 A	A	same as above
Poles	2, 3 (HR 3)	A	same as above
Ampere range	15-150 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	HD 25k@240/18k@480; HG 65/35; HJ 100/65; HL 125/100; HR 200/200	A	same as above
group_mount_height	4.5 in. (2- and 3-pole)	A	S26 p. 22; oem_spec
class	Class 611	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

I-Limiter FI / KI / LI (I-Line) BRK-SQD-007 · Square D / Schneider Electric · aka FI, KI, LI, I-Limiter

Mounting	I-Line plug-on	A	S26 p. 22; oem_spec
Breaker frame	FI 100 A; KI 250 A; LI 600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	FI 20-100 A; KI 110-250 A; LI 300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	200k@240/200k@480/100k@600	A	same as above
group_mount_height	FI 4.5 in.; KI 4.5 in.; LI 7.5 in.	A	same as above
swap_fillers	Replacing an LI with a KI requires (1) HLW4BL plus HNM1BL and HLW1BL fillers	A	S34 oem_spec
Used in	QED-2, I-LINE		

J-frame JD/JG/JJ/JL/JR (I-Line) BRK-SQD-004 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, PowerPact J

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	250 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	150-250 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	JD 25k@240/18k@480; JG 65/35; JJ 100/65; JL 125/100; JR 200/200	A	same as above
group_mount_height	4.5 in.	A	S26 p. 22; oem_spec
class	Class 611	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

LA / LH (I-Line) BRK-SQD-005 · Square D / Schneider Electric · aka LA, LH, LAL, LHL

Mounting	I-Line plug-on (bolt-on factory option)	A	S27 p. 8; oem_spec
Breaker frame	400 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	125-400 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LA 42k@240/30k@480/22k@600; LH 65/35/25	A	same as above
group_mount_height	6 in. (2- and 3-pole)	A	S26 p. 22; oem_spec
class	Class 660	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

LC (I-Line, 600 A) BRK-SQD-006 · Square D / Schneider Electric · aka LC

Mounting	I-Line plug-on	A	S26 p. 22; oem_spec
Breaker frame	600 A	A	same as above
Poles	3	A	same as above
Ampere range	300-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	100k@240/65k@480/35k@600	A	same as above
group_mount_height	7.5 in.	A	same as above
Used in	QED-2		

M-frame MG/MJ (I-Line) BRK-SQD-009 · Square D / Schneider Electric · aka MG, MJ, PowerPact M

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	800 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	300-800 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	MG 65k@240/35k@480/18k@600; MJ 100/65/25	A	same as above
group_mount_height	9 in. (per QED-2 table, shared with P-frame row) (Column alignment in text extraction ambiguous)	C	S26 p. 22; oem_spec
class	Class 612	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

P-frame PG/PJ/PK/PL (I-Line) BRK-SQD-010 · Square D / Schneider Electric · aka PG, PJ, PK, PL, PG-C, PJ-C, PK-C, PL-C, PowerPact P

Mounting	I-Line plug-on	A	S27, S26 s2 p. 8; s1 p. 22; oem_spec
Breaker frame	1200 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	100-1200 A (catalog 600-1200 A in 2110CT9701)	A	same as above
Voltage rating	600 V (PL 480 V)	A	same as above
Interrupting ratings	PG 65k@240/35k@480; PJ 100/65; PK 65/50/50 (Canada); PL 125/100	A	same as above
group_mount_height	9 in. (2-/3-pole)	A	S26 p. 22; oem_spec
note_100pct	Cannot group mount 100% rated 1000 A and 1200 A P-frame; use R-frame	A	same as above
Used in	QED-2, I-LINE		

PowerPact B-frame BD/BG/BJ/BK (I-Line) BRK-SQD-012 · Square D / Schneider Electric · aka BD, BG, BJ, BK, PowerPact B

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	125 A	A	same as above
Poles	1, 2, 3 (BK 1, 2)	A	same as above
Ampere range	15-125 A (BK 15-30 A)	A	same as above
Voltage rating	600Y/347 V	A	same as above
Interrupting ratings	BD 25k@240/18k@480; BG 65/35; BJ 100/65; BK 100/65/65	A	same as above
Used in	I-LINE		

PowerPact L-frame LD/LG/LJ/LL/LR (I-Line) BRK-SQD-008 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, PowerPact L

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	600 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	250-600 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	LD 25k@240/18k@480; LG 65/35; LJ 100/65; LL 125/100; LR 200/200	A	same as above
mount_screw	No orderable mounting screw for L-frame in I-Line; a 10-32 x 5/8 screw can be used	A	S40 oem_spec
Used in	QED-2, I-LINE		

Q-frame QB/QD/QG/QJ (I-Line) BRK-SQD-003 · Square D / Schneider Electric · aka QB, QD, QG, QJ, Q2, Q4

Mounting	I-Line plug-on	A	S27 p. 8; oem_spec
Breaker frame	225 A	A	same as above
Poles	2, 3	A	same as above
Ampere range	70-225 A	A	same as above
Voltage rating	240 V	A	same as above
Interrupting ratings	QB 10k, QD 25k, QG 65k, QJ 100k @240 V	A	same as above
group_mount_height	3 in. (single value printed in the mounting-height columns for QB/QD/QG/QJ) (Text extraction column alignment ambiguous; which pole columns the 3 in. applies to needs PDF visual check)	C	S26 p. 22; oem_spec
class	Class 734	A	S27 p. 10; oem_spec
Used in	QED-2, I-LINE		

QMB circuit breaker units (H-, J-, L-frame) BRK-SQD-013 · Square D / Schneider Electric · aka QMB breaker unit, QMB3400LA

Mounting	QMB plug-on unit with permanently attached mounting brackets	A	S28 pp. 17-18; oem_spec
Breaker frame	Twin H-frame HD/HG 15-150 A; single JD/JG 150-250 A; single LA/LH 225-400 A	A	same as above
Voltage rating	600 Vac / 250 Vdc	A	same as above
Interrupting ratings	HD 25k@240/18k@480/14k@600; HG 65/35/18; JD 25/18/14; JG 65/35/18; LA 42/30/22; LH 65/35/25	A	same as above
Used in	QMB, QED-2		

R-frame RG/RJ/RK/RL (I-Line) BRK-SQD-011 · Square D / Schneider Electric · aka RG, RJ, RK, RL, RG-C, RJ-C, RK-C, RL-C, PowerPact R

Mounting	I-Line plug-on	A	S27, S26 s2 p. 9; s1 p. 22; oem_spec
Breaker frame	1200 A (2500 A frame per QED-2 table)	A	same as above
Poles	2, 3	A	same as above
Ampere range	1000-1200 A	A	same as above
Voltage rating	600 V	A	same as above
Interrupting ratings	RG 65k@240/35k@480; RJ 100/65; RK 65/65/65 (Canada); RL 125/100/50	A	same as above
group_mount_height	15 in.	A	S26 p. 22; oem_spec
Used in	QED-2, I-LINE		

Square D FA/FH/FC/FI (F-frame 100/150 A) BRK-SQD-014 · Square D / Schneider Electric · aka FA, FAL, FH, FHL, FC, FCL, FI, FY

Breaker frame	F-Frame (FA family)	A	S114 p.3-28; oem_spec
Ampere range	15-150 A	A	same as above
note	FY not listed in the lug tables found; alias recorded for search only.	A	same as above

Square D KA/KH/KC/KI (K-frame 250 A) BRK-SQD-015 · Square D / Schneider Electric · aka KA, KAL, KH, KHL, KC, KI, KIL

Breaker frame	K-Frame (KA family)	A	S114 p.3-28; oem_spec
Ampere range	110-250 A	A	same as above

Square D LA/LH (L-frame 400 A) BRK-SQD-016 · Square D / Schneider Electric · aka LA, LAL, LH, LHL

Breaker frame	L-Frame (LA family)	A	S114 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Square D LC/LI/LE/LX/LXI (L-frame 600 A) BRK-SQD-018 · Square D / Schneider Electric · aka LC, LI, LE, LX, LXI

Breaker frame	L-Frame (LI family)	A	S114 p.3-28; oem_spec
Ampere range	100-600 A	A	same as above

Square D MA/MH/MX/ME (M-frame 1000 A) BRK-SQD-019 · Square D / Schneider Electric · aka MA, MH, MX, ME

Breaker frame	M-Frame (MA family)	A	S114 p.3-17; oem_spec
Ampere range	up to 1000 A	A	same as above
note	Only control-wire tapped lugs AL900MAT/AL1000MAT found; standard MA lug kits not located (lead).	A	same as above

Square D NA/NC/NX/NE (N-frame 1200 A) BRK-SQD-020 · Square D / Schneider Electric · aka NA, NC, NX, NE

Breaker frame	N-Frame (NA family)	A	S114 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact D-Frame (DG/DJ/DL) BRK-SQD-027 · Square D / Schneider Electric · aka DG, DJ, DL

Breaker frame	PowerPact D	A	S114 p.3-28; oem_spec
Ampere range	150-600 A	A	same as above

Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) BRK-SQD-021 · Square D / Schneider Electric · aka HD, HG, HJ, HL, HR, HDL, HGL, HJL, HLL, HRL, HDA

Breaker frame	PowerPact H	A	S112 p.124; oem_spec
Ampere range	15-150 A	A	same as above

Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) BRK-SQD-022 · Square D / Schneider Electric · aka JD, JG, JJ, JL, JR, JDL, JGL, JJL, JLL, JRL, JDA

Breaker frame	PowerPact J	A	S112 p.124; oem_spec
Ampere range	150-250 A	A	same as above

Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) BRK-SQD-023 · Square D / Schneider Electric · aka LD, LG, LJ, LL, LR, LDL, LGL, LJL, LLL, LRL, LGA

Breaker frame	PowerPact L	A	S112 p.124; oem_spec
Ampere range	250-600 A	A	same as above

Square D PowerPact M-Frame (MG/MJ) BRK-SQD-024 · Square D / Schneider Electric · aka MG, MJ

Breaker frame	PowerPact M	A	S114 p.3-17; oem_spec
Ampere range	up to 800 A	A	same as above

Square D PowerPact P-Frame (PG/PJ/PL) BRK-SQD-025 · Square D / Schneider Electric · aka PG, PJ, PL

Breaker frame	PowerPact P	A	S114 p.3-17; oem_spec
Ampere range	up to 1200 A	A	same as above

Square D PowerPact R-Frame (RG/RJ/RL) BRK-SQD-026 · Square D / Schneider Electric · aka RG, RJ, RL

Breaker frame	PowerPact R	A	S114 p.3-17; oem_spec
Ampere range	up to 3000 A (1200 A tapped lug listed)	A	same as above

Square D Q4 (400 A, LA-type lugs) BRK-SQD-017 · Square D / Schneider Electric · aka Q4, Q4L

Breaker frame	Q4	A	S114 p.3-28; oem_spec
Ampere range	125-400 A	A	same as above

Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) BRK-ZIN-003 · Zinsco / Sylvania · aka SE, SEH, SF, SJD, SJK, SKM, Challenger SF

Mounting	bolt-on	C	S153, S165 distributor
Ampere range	15-800 A (SEH to 100 A; SF to 175 A; SJK 250-600 A; SKM 800 A)	C	same as above
Voltage rating	240/480/600 V	C	same as above
Interrupting ratings	SEH 18 kA@240/14 kA@480; SF 25 kA@480; SJK 30 kA@480 (listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
cross_ref	Superbreakers lists SEH as fitting Eaton F-frame, Sylvania, Challenger and Westinghouse panelboards and crosses to Eaton EHD - sales claim only	D	S153 distributor
Used in	ZIN-DIST, CHA-PM4		

Zinsco / Sylvania QSF fusible panelboard switch BRK-ZIN-002 · Zinsco / Sylvania · aka QSF, QSF-T (twin), QSF-xx33 (240 V), QSF-xx53 (600 V)

Mounting	bolt-on panel mounted switch unit	C	S153, S174, S157 distributor
Ampere range	30-600 A	C	same as above
Voltage rating	240 V / 600 V	C	same as above
Interrupting ratings	200 kA (with RK1/RK5 fuses)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
numbering	Pattern appears to be QSF-<amp code: T3/T6 twin 30/60 A, 10=100, 20=200, 40=400, 60=600><3 poles><3=240 V, 5=600 V>	D	S153, S174 inference
Used in	ZIN-DIST, FA		

Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) BRK-ZIN-001 · Zinsco / Sylvania · aka Q, QC, QCN, Q24, QB, QCB, QCAL, QFP, QFL, QFB, QFBL, R38, RC38, Magnatrip, UBIZ (Connecticut Electric replacement)

Mounting	plug-in (Q/QC/R38, QFP mains) and bolt-on (QB/QCB/QFB) onto on-edge flat bus	C	S153, S152, S151 distributor
Ampere range	15-225 A	C	same as above
Voltage rating	120/240 V; 240 V 3-ph (Q24, QFP24, QB243xxx)	C	same as above
Interrupting ratings	10 kA (QFP24125, QCB30, QFL23225 listings)	C	same as above
Status	Obsolete (original FPE); recertified / new-surplus units sold by aftermarket	C	same as above
Aftermarket / reproduction	Connecticut Electric UBIZ series (e.g., UBIZ2100 = QCAL100; UBIZ3150 = QFP24150; UBITBFP2002 = QFP2200T/QFBL2200; UBIZ243040 = QB243040)	C	S153, S155 distributor
Used in	ZIN-Q, ZIN-DIST		

11 Cross-Reference Tables

11.1 Supersession and alternate numbers

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
0080429	alias	K80429	EDH-EAT-00408	B	175
11-D-4554-01	alias	DFFP1A	EDH-SIE-00062	A	706
11-D-4560-01	supersedes	DFFP01B	EDH-SIE-00064	A	705
12-1800-01	alias	DFFP1A	EDH-SIE-00062	A	706
12-1800-01	alias	QF3	EDH-SIE-00063	C	727
12-A-1801-01	supersedes	DFFP01B	EDH-SIE-00064	A	705
12-A-1802-01	supersedes	DFFPVA41A	EDH-SIE-00066	A	708
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96619	EDH-EAT-00250	A	170
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	1C96620	EDH-EAT-00251	A	170
1C96608G01..G63 (odd item numbers)	style_number	1C96608	EDH-EAT-00163	A	160
1C96609G01..G63 (same G scheme as 1C96608)	style_number	1C96609	EDH-EAT-00165	A	192
1C96647	supersedes	42C4050	EDH-EAT-00222	B	165
1C96650	supersedes	42C4051	EDH-EAT-00226	B	166
1C96653	supersedes	42C4052	EDH-EAT-00230	B	166
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	6554C01	EDH-EAT-00294	A	255
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	1C96652	EDH-EAT-00229	A	164
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	2C11642	EDH-EAT-00164	A	161
2NLK30A	supersedes	2NLK42B	EDH-SIE-00040	A	695
2NLK42A	supersedes	2NLK42B	EDH-SIE-00040	A	695
2NLK54A	supersedes	2NLK54B	EDH-SIE-00041	A	696
36967	alias	S36967	EDH-SQD-00188	A	467
3TC1QR2520	alias	3TC1QR250	EDH-SIE-00254	B	737
40517-407-01	style_number	HNM4BL	EDH-SQD-00138	A	361
40517-408-01	style_number	HNM1BL	EDH-SQD-00137	A	361
4176B68	supersedes	42C8076	EDH-EAT-00255	C	212
4178B06H01	supersedes	42C8083H01	EDH-EAT-00285	B	215
4178B08	supersedes	42C8078	EDH-EAT-00270	C	212
4179B39	supersedes	42C8079	EDH-EAT-00271	C	213
4179B40	supersedes	42C8080	EDH-EAT-00272	C	213
4179B41	supersedes	42C8082	EDH-EAT-00274	C	214
4179B42	supersedes	42C8081	EDH-EAT-00273	C	213
4180B03	supersedes	42C8072	EDH-EAT-00242	C	172
4180B05	supersedes	42C7982	EDH-EAT-00244	C	172
4180B61	supersedes	42C8073	EDH-EAT-00243	C	172
4180B93	supersedes	42C8077	EDH-EAT-00256	C	212

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
42C7982	superseded_by	4180B05	EDH-EAT-00247	C	171
42C8072	superseded_by	4180B03	EDH-EAT-00245	C	170
42C8073	superseded_by	4180B61	EDH-EAT-00246	C	171
42C8076	superseded_by	4176B68	EDH-EAT-00267	C	208
42C8077	superseded_by	4180B93	EDH-EAT-00268	C	211
42C8078	superseded_by	4178B08	EDH-EAT-00280	C	210
42C8079	superseded_by	4179B39	EDH-EAT-00281	C	210
42C8080	superseded_by	4179B40	EDH-EAT-00282	C	210
42C8081	superseded_by	4179B42	EDH-EAT-00284	C	211
42C8082	superseded_by	4179B41	EDH-EAT-00283	C	210
42C8083H01	superseded_by	4178B06H01	EDH-EAT-00286	B	215
42NLK30A	supersedes	42NLK54B	EDH-SIE-00042	A	696
42NLK42A	supersedes	42NLK54B	EDH-SIE-00042	A	696
42NLK54A	supersedes	42NLK54B	EDH-SIE-00042	A	696
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	42C8079	EDH-EAT-00271	A	213
4MLKA1	equivalent	4MLKA1A	EDH-SIE-00019	A	688
4MLKA3	equivalent	4MLKA3A	EDH-SIE-00020	A	689
4MLKC1	equivalent	4MLKC1A	EDH-SIE-00021	A	690
4MLKC3	equivalent	4MLKC3A	EDH-SIE-00022	A	690
5158C05G06 (boxes 30 in and above)	style_number	5158C05G05	EDH-EAT-00237	A	99
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	4176B69	EDH-EAT-00278	A	209
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	42C8078	EDH-EAT-00270	A	212
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	4176B67	EDH-EAT-00277	A	208
6CLF1C	alias	6CLF1	EDH-SIE-00191	A	717
6CLJ1C	alias	6CLJ1	EDH-SIE-00194	A	718
6CLL1C	alias	6CLL1	EDH-SIE-00198	A	719
6LL61C	alias	6LL61	EDH-SIE-00197	A	722
6QR2CAN	alias	6QR2	EDH-SIE-00157	A	662
6QR2CCAN	alias	6QR2	EDH-SIE-00157	A	662
6SJL1C	alias	6SJL1	EDH-SIE-00195	A	726
789A448G377 (as printed)	alias	789A448G3	EDH-GEA-00330	C	596
80025-067-01	supersedes	PKDFSCREW	EDH-SQD-00161	A	362
80034-187-02	style_number	HLW1BL	EDH-SQD-00142	A	359
80034-188-03	style_number	HLW4BL	EDH-SQD-00143	A	360
80121-651-01	style_number	HLN1BL	EDH-SQD-00139	A	358
80121-652-01	style_number	HLN4BL	EDH-SQD-00140	A	358
80121-653-01	style_number	HLW4EBL	EDH-SQD-00144	A	360
80121-752-01	style_number	HLN4EBL	EDH-SQD-00141	A	359
8450C62H39	equivalent	K80133	EDH-EAT-00406	C	175
ACSFPKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	510
ACSFPKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	510
ACSHKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	510
ACSHKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	510
ACTFPKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	510
ACTFPKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	511
ACTFPKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	511
ACTFPKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	511

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
ACTFPKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	512
ACTFPKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	512
ACTFPKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	512
ACTFPKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	513
ACTFPKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	513
ACTHKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	510
ACTHKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	511
ACTHKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	511
ACTHKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	511
ACTHKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	512
ACTHKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	512
ACTHKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	512
ACTHKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	513
ACTHKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	513
AL400L6IK3	alias	AL400L61K3	EDH-SQD-00221	A	456
AMC2FGM	alias	AMC2FGMFP	EDH-GEA-00181	B	537
AMC2FJ	alias	AMC2FJFP	EDH-GEA-00179	B	537
AMC2FJFPTF	alias	AMC2FJFPTF	EDH-GEA-00178	B	538
AMC2FLS	alias	AMC2FLSFP	EDH-GEA-00184	B	538
AMC2GM	alias	AMC2GMFP	EDH-GEA-00182	B	539
AMC2JK	alias	AMC2JKFP	EDH-GEA-00180	B	540
AMC2KM	alias	AMC2KMFP	EDH-GEA-00183	B	540
AMC3FGM	alias	AMC3FGMFP	EDH-GEA-00162	B	541
AMC3FJ	alias	AMC3FJFP	EDH-GEA-00160	B	541
AMC3FJFPTF	alias	AMC3FJFPTF	EDH-GEA-00159	B	542
AMC3FLS	alias	AMC3FLSFP	EDH-GEA-00165	B	542
AMC3GM	alias	AMC3GMFP	EDH-GEA-00163	B	543
AMC3JK	alias	AMC3JKFP	EDH-GEA-00161	B	543
AMC3KM	alias	AMC3KMFP	EDH-GEA-00164	B	544
AMC4EB	alias	AMC4EBFP	EDH-GEA-00167	B	544
AMC4EBS	alias	AMC4EBSFP	EDH-GEA-00176	B	545
AMC4FDB	alias	AMC4FDBFP	EDH-GEA-00166	B	545
AMC4FDS	alias	AMC4FDSFP	EDH-GEA-00175	B	546
AMC4FGB	alias	AMC4FGBFP	EDH-GEA-00173	B	546
AMC4FJ	alias	AMC4FJFP	EDH-GEA-00171	B	547
AMC4FJFPTF	alias	AMC4FJFPTF	EDH-GEA-00170	B	548
AMC4FLS	alias	AMC4FLSFP	EDH-GEA-00177	B	548
AMC4GB	alias	AMC4GBFP	EDH-GEA-00174	B	549
AMC4JK	alias	AMC4JKFP	EDH-GEA-00172	B	549
AMC4QD	alias	AMC4QDFP	EDH-GEA-00169	B	550
AMC4SE	alias	AMC4SEFP	EDH-GEA-00168	B	551
AMC6EB	alias	AMC6EBFP	EDH-GEA-00149	B	551
AMC6EBS	alias	AMC6EBSFP	EDH-GEA-00157	B	552
AMC6EY	alias	AMC6EYFP	EDH-GEA-00146	B	552
AMC6FB	alias	AMC6FBFP	EDH-GEA-00147	B	553
AMC6FDB	alias	AMC6FDBFP	EDH-GEA-00148	B	553
AMC6FDSPF	alias	AMC6FDSPF	EDH-GEA-00156	B	554
AMC6FGB	alias	AMC6FGBFP	EDH-GEA-00154	B	554
AMC6FJ	alias	AMC6FJFP	EDH-GEA-00152	B	555
AMC6FJFPTF	alias	AMC6FJFPTF	EDH-GEA-00151	B	555
AMC6FLS	alias	AMC6FLSFP	EDH-GEA-00158	B	556
AMC6GB	alias	AMC6GBFP	EDH-GEA-00155	B	556

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMC6JK	alias	AMC6JKFP	EDH-GEA-00153	B	557
AMC6QB	alias	AMC6QBFP	EDH-GEA-00145	B	557
AMC6QD	alias	AMC6QDFP	EDH-GEA-00150	B	558
AMCB2FGM	alias	AMCB2FGMFP	EDH-GEA-00119	B	520
AMCB2FJ	alias	AMCB2FJFP	EDH-GEA-00117	B	521
AMCB2FJTF	alias	AMCB2FJFPTF	EDH-GEA-00118	B	521
AMCB2GM	alias	AMCB2GMFP	EDH-GEA-00120	B	522
AMCB2KM	alias	AMCB2KMFP	EDH-GEA-00126	B	522
AMCB3FGM	alias	AMCB3FGMFP	EDH-GEA-00123	B	523
AMCB3FJ	alias	AMCB3FJFP	EDH-GEA-00121	B	523
AMCB3FJTF	alias	AMCB3FJFPTF	EDH-GEA-00122	B	524
AMCB3GM	alias	AMCB3GMFP	EDH-GEA-00124	B	524
AMCB3KM	alias	AMCB3KMFP	EDH-GEA-00127	B	525
AMCB3LB	alias	AMCB3LBFP	EDH-GEA-00125	B	525
AMCB4EB	alias	AMCB4EBFP	EDH-GEA-00098	B	526
AMCB4EY	alias	AMCB4EYFP	EDH-GEA-00099	B	526
AMCB4FB	alias	AMCB4FBFP	EDH-GEA-00100	B	527
AMCB4FDB	alias	AMCB4FDBFP	EDH-GEA-00101	B	527
AMCB4FGB	alias	AMCB4FGBFP	EDH-GEA-00113	B	527
AMCB4FJ	alias	AMCB4FJFP	EDH-GEA-00109	B	528
AMCB4FJTF	alias	AMCB4FJFPTF	EDH-GEA-00111	B	528
AMCB4GB	alias	AMCB4GBFP	EDH-GEA-00114	B	529
AMCB4QD	alias	AMCB4QDFP	EDH-GEA-00102	B	529
AMCB4SE	alias	AMCB4SEFP	EDH-GEA-00103	B	530
AMCB6EB	alias	AMCB6EBFP	EDH-GEA-00104	B	530
AMCB6EY	alias	AMCB6EYFP	EDH-GEA-00105	B	531
AMCB6FB	alias	AMCB6FBFP	EDH-GEA-00106	B	531
AMCB6FDB	alias	AMCB6FDBFP	EDH-GEA-00107	B	532
AMCB6FGB	alias	AMCB6FGBFP	EDH-GEA-00115	B	532
AMCB6FJ	alias	AMCB6FJFP	EDH-GEA-00110	B	533
AMCB6FJTF	alias	AMCB6FJFPTF	EDH-GEA-00112	B	533
AMCB6GB	alias	AMCB6GBFP	EDH-GEA-00116	B	534
AMCB6QD	alias	AMCB6QDFP	EDH-GEA-00108	B	534
BBKVA5262S	alias	BBKVA5262P2S	EDH-SIE-00112	A	632
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	4176B79	EDH-EAT-00265	A	209
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B61	EDH-EAT-00260	A	208
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	4176B51	EDH-EAT-00261	A	207
BQFS1K	equivalent	BQFS2	EDH-SIE-00252	A	734
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	6574C74	EDH-EAT-00298	A	255
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	6559C59	EDH-EAT-00254	A	214
CNLK30A	supersedes	CNLK42B	EDH-SIE-00038	A	697
CNLK42A	supersedes	CNLK42B	EDH-SIE-00038	A	697
CNLK54A	supersedes	CNLK54B	EDH-SIE-00039	A	697
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	4180B91	EDH-EAT-00279	A	211

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
DFFP01A	supersedes	DFFP01B	EDH-SIE-00064	A	705
DFFP1	supersedes	DFFP1A	EDH-SIE-00062	A	706
DFFP1A	superseded_by	QF3	EDH-SIE-00063	A	727
DFFPED01	supersedes	DFFPVA41A	EDH-SIE-00066	A	708
DFFPVA41A	superseded_by	DFFPED01	EDH-SIE-00069	A	627
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	1C96638	EDH-EAT-00241	A	170
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	2C11296	EDH-EAT-00236	A	167
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	5158C05	EDH-EAT-00235	A	167
GCWTK	alias	5652B38G01	EDH-EAT-00576	A	339
GTIN 785901798019	alias	QMB15BLW	EDH-SQD-00092	A	370
H01	style_number	4176B57	EDH-EAT-00263	A	207
H01	style_number	42C8080	EDH-EAT-00272	A	213
H01	style_number	42C8081	EDH-EAT-00273	A	213
H01	style_number	42C8082	EDH-EAT-00274	A	214
H01	style_number	4176B66	EDH-EAT-00275	A	208
H01	style_number	4176B80	EDH-EAT-00276	A	209
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	4180B08	EDH-EAT-00249	A	173
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	5156C10	EDH-EAT-00289	A	100
H01 = 1X ... H12 = 12X	style_number	4176B72	EDH-EAT-00269	A	215
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	4176B60	EDH-EAT-00259	A	207
H01 FCL; H02 FB-P	style_number	4176B70	EDH-EAT-00262	A	209
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	4176B56	EDH-EAT-00264	A	207
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4176B68	EDH-EAT-00267	A	208
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	4180B93	EDH-EAT-00268	A	211
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	5156C09	EDH-EAT-00290	A	100
H01 (top and bottom)	style_number	4180B03	EDH-EAT-00245	A	170
H01 (top and bottom)	style_number	4180B61	EDH-EAT-00246	A	171
H01 top, H02 bottom	style_number	42C8072	EDH-EAT-00242	A	172
H01 top, H02 bottom	style_number	42C7982	EDH-EAT-00244	A	172
H01 top, H02 bottom	style_number	4180B05	EDH-EAT-00247	A	171
H01 top, H02 bottom	style_number	4180B04	EDH-EAT-00248	A	171
H01 top, H02 bottom	style_number	42C8077	EDH-EAT-00256	A	212
H01 top, H02 bottom	style_number	42C8055	EDH-EAT-00258	A	226
H01 top, H02 bottom (same with/without lock-offs)	style_number	42C8076	EDH-EAT-00255	A	212
H01 top, H04 bottom	style_number	42C8073	EDH-EAT-00243	A	172
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	42C7980	EDH-EAT-00257	A	226
KBDP-1C	alias	KBDP1C	EDH-FPE-00007	C	760
KBDP-2C	alias	KBDP2C	EDH-FPE-00008	C	761
KBDP-3C	alias	KBDP3C	EDH-FPE-00009	C	761

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
KBDP-4C	alias	KBDP4C	EDH-FPE-00010	C	762
KCDP-1C	alias	KCDP1C	EDH-FPE-00001	C	763
KCDP-2C	alias	KCDP2C	EDH-FPE-00002	C	764
KCDP-3C	alias	KCDP3C	EDH-FPE-00003	C	764
KCDP-4C	alias	KCDP4C	EDH-FPE-00004	C	765
KCDP-5C	alias	KCDP5C	EDH-FPE-00005	C	765
KCDPFD100H	alias	KCDPFB100-H	EDH-EAT-00423	C	69
KFDP-2C	alias	KFDP2C	EDH-FPE-00015	C	767
KFDP-3C	alias	KFDP3C	EDH-FPE-00016	C	767
KFDP-46C	alias	KFDP46C	EDH-FPE-00018	C	768
KFDP-4C	alias	KFDP4C	EDH-FPE-00017	C	768
KPRL45X	supersedes	KPRL45X1	EDH-EAT-00332	C	229
KPRL45X1	superseded_by	KPRL45X	EDH-EAT-00333	C	228
KPRL4ED	supersedes	KPRL4X32	EDH-EAT-00301	C	251
KPRL4ED2	supersedes	KPRL4X22	EDH-EAT-00300	C	250
KPRL4FD	supersedes	KPRL4X32	EDH-EAT-00301	C	251
KPRL4FD1	supersedes	KPRL4X12	EDH-EAT-00299	C	249
KPRL4FD2	supersedes	KPRL4X22	EDH-EAT-00300	C	250
KPRL4LC	superseded_by	KPRL4LD	EDH-EAT-00330	C	245
KPRL4LD	supersedes	KPRL4LC	EDH-EAT-00314	C	243
KPRL4MC	supersedes	KPRL4X34	EDH-EAT-00305	C	253
KPRL4ND	supersedes	KPRL4X35	EDH-EAT-00306	C	254
KPRL4X12	superseded_by	KPRL4FD1	EDH-EAT-00325	C	238
KPRL4X22	superseded_by	KPRL4FD2	EDH-EAT-00326	C	239
KPRL4X22	superseded_by	KPRL4ED2	EDH-EAT-00327	C	236
KPRL4X32	superseded_by	KPRL4FD	EDH-EAT-00328	C	237
KPRL4X32	superseded_by	KPRL4ED	EDH-EAT-00329	C	235
KPRL4X34	superseded_by	KPRL4MC	EDH-EAT-00316	C	246
KPRL4X35	superseded_by	KPRL4ND	EDH-EAT-00321	C	249
LNLK30A	supersedes	LNLK4X11B	EDH-SIE-00035	A	698
LNLK42A	supersedes	LNLK6X17B	EDH-SIE-00036	A	699
LNLK54A	supersedes	LNLK7X20B	EDH-SIE-00037	A	700
MBKBC1NBA	supersedes	MBKVA41A	EDH-SIE-00001	A	684
MBKBC3NBA	supersedes	MBKVA41B	EDH-SIE-00002	A	685
MBKBL1A	supersedes	MBKVA41A	EDH-SIE-00001	A	684
MBKBL3A	supersedes	MBKVA41B	EDH-SIE-00002	A	685
MBKJD1A	supersedes	MBKJD3B	EDH-SIE-00012	A	681
MBKJD3A	supersedes	MBKJD3B	EDH-SIE-00012	A	681
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	5078A98	EDH-EAT-00220	A	216
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	4180B62	EDH-EAT-00219	A	176
MLKA1	equivalent	MLKA1A	EDH-SIE-00015	A	691
MLKA3	equivalent	MLKA3A	EDH-SIE-00016	A	691
MLKC1	equivalent	MLKC1A	EDH-SIE-00017	A	692
MLKC3	equivalent	MLKC3A	EDH-SIE-00018	A	692

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	KCDP1C	EDH-FPE-00001	C	763
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	KBDP1C	EDH-FPE-00007	C	760
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	KCDP2C	EDH-FPE-00002	C	764
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	KBDP2C	EDH-FPE-00008	C	761
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	KCDP3C	EDH-FPE-00003	C	764
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	KBDP3C	EDH-FPE-00009	D	761
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	KCDP4C	EDH-FPE-00004	C	765
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	KBDP4C	EDH-FPE-00010	C	762
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C04G01	EDH-EAT-00240	A	99
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G02	EDH-EAT-00438	A	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G01	EDH-EAT-00439	A	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G04	EDH-EAT-00440	A	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G03	EDH-EAT-00441	A	98
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	4180B79	EDH-EAT-00266	A	211
QF3	equivalent	DFFP1A	EDH-SIE-00062	A	706
QMB200EK-1	alias	QMB200EK	EDH-SQD-00062	A	404
QMB200EK-2	alias	QMB200EK	EDH-SQD-00062	A	404
QMB300EK-1	alias	QMB300EK	EDH-SQD-00060	A	404
QMB300EK-2	alias	QMB300EK	EDH-SQD-00060	A	404
QMB-320-EX	alias	QMB320EX	EDH-SQD-00110	A	411
QMB322TD	alias	QMB322TW	EDH-SQD-00012	C	387
QMB323TD	alias	QMB323TW	EDH-SQD-00014	C	388
QMB362T	alias	QMB362TW	EDH-SQD-00031	C	394
QMB610EK-1	alias	QMB610EK	EDH-SQD-00061	A	406
QMB610EK-2	alias	QMB610EK	EDH-SQD-00061	A	406
S29348	alias	29348	EDH-SQD-00181	D	467
S32508	alias	32508	EDH-SQD-00268	D	441
S32510	alias	32510	EDH-SQD-00269	D	442
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	6554C02	EDH-EAT-00295	A	256
SG1BCK4 (as printed 2019)	alias	SG1BCK	EDH-GEA-00351	B	612
SK1LCK3 (as printed 2019)	alias	SK1LCK	EDH-GEA-00352	B	616
SKLVK6 / SKLVK8 (as printed)	alias	SKLVK	EDH-GEA-00333	B	596

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	42C4050	EDH-EAT-00222	A	165
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	1C96645	EDH-EAT-00233	A	162
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	42C4051	EDH-EAT-00226	A	166
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	1C96653	EDH-EAT-00231	A	164
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	42C4052	EDH-EAT-00230	A	166
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	1C96650	EDH-EAT-00227	A	163
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	1C97022	EDH-EAT-00234	A	165
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	1C96647	EDH-EAT-00223	A	162
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	1C96646	EDH-EAT-00221	A	162
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	1C96649	EDH-EAT-00225	A	163
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	1C96654	EDH-EAT-00232	A	165
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	1C96648	EDH-EAT-00224	A	163
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	1C96651	EDH-EAT-00228	A	164
TA401LD	alias	2TA401LDK	EDH-EAT-00500	D	311
TA401LD	alias	3TA401LDK	EDH-EAT-00501	D	312
TA401LD	alias	4TA401LDK	EDH-EAT-00502	D	314
TA603LD	alias	2TA603LDK	EDH-EAT-00505	D	311
TA603LD	alias	3TA603LDK	EDH-EAT-00506	D	313
TA603LD	alias	4TA603LDK	EDH-EAT-00507	D	314
TC0416 / TC0414	alias	TC041	EDH-GEA-00303	B	590
TCAL1214 / TCAL1212	alias	TCAL121	EDH-GEA-00312	B	592
TCAL1225 / TCAL1223	alias	TCAL122	EDH-GEA-00316	B	592
TCAL1314 / TCAL1312	alias	TCAL131	EDH-GEA-00322	B	593
TCAL433	alias	TCAL43	EDH-GEA-00292	B	582
TCAL812 / TCAL811	alias	TCAL81	EDH-GEA-00308	B	594
TCAL912 / TCAL911	alias	TCAL91	EDH-GEA-00319	B	594
TCALK21214 / TCALK21212	alias	TCALK2121	EDH-GEA-00313	B	585
TCALK21225 / TCALK21223	alias	TCALK2122	EDH-GEA-00317	B	585
TCALK2812 / TCALK2811	alias	TCALK281	EDH-GEA-00309	B	586
TCALK2912 / TCALK2911	alias	TCALK291	EDH-GEA-00320	B	586
TCALK31214 / TCALK31212	alias	TCALK3121	EDH-GEA-00314	B	586
TCALK31225 / TCALK31223	alias	TCALK3122	EDH-GEA-00318	B	587
TCALK3812 / TCALK3811	alias	TCALK381	EDH-GEA-00310	B	588
TCALK3912 / TCALK3911	alias	TCALK391	EDH-GEA-00321	B	588
TCLK2652 / TCLK2651 (as printed)	alias	TCLK265	EDH-GEA-00339	B	610
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	TCLK365	EDH-GEA-00340	B	610

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
TCO121	alias	TC0121	EDH-GEA-00315	B	589
TCO18	alias	TC018	EDH-GEA-00354	B	604
TCO81A	alias	TC081A	EDH-GEA-00311	B	591
TJLVK8 (as printed)	alias	TJLVK	EDH-GEA-00334	B	584
UPC 782114795996	alias	KPRL4KDS	EDH-EAT-00312	A	241
UPC 782114796412	alias	KPRL4KDT	EDH-EAT-00313	A	242
VCEL021-14S1	alias	VCEL02114S1	EDH-SQD-00074	A	367
VCEL030-516H1	alias	VCEL030516H1	EDH-SQD-00071	A	367
VCEL050-12H1	alias	VCEL05012H1	EDH-SQD-00072	A	367
VCEL060-12H1	alias	VCEL06012H1	EDH-SQD-00079	A	368
VCEL075-12H1	alias	VCEL07512H1	EDH-SQD-00073	A	368
VCELC021-14S1	alias	VCELC02114S1	EDH-SQD-00075	A	368
VCELC030-38H1	alias	VCELC03038H1	EDH-SQD-00076	A	368
VCELC050-12H1	alias	VCELC05012H1	EDH-SQD-00077	A	369
VCELC075-12H1	alias	VCELC07512H1	EDH-SQD-00078	A	369
Westinghouse DA breaker	supersedes	KCDPDK	EDH-EAT-00361	A	70
Westinghouse EB, EHB breaker	supersedes	KCDPEHD	EDH-EAT-00353	A	71
Westinghouse FB breaker	supersedes	KCDPFDB	EDH-EAT-00354	A	73
Westinghouse HFB breaker	supersedes	KCDPFD	EDH-EAT-00355	A	72
Westinghouse HKA breaker	supersedes	KCDPHKD	EDH-EAT-00357	A	74
Westinghouse JA breaker	supersedes	KCDPKDB	EDH-EAT-00359	A	78
Westinghouse JB breaker	supersedes	KCDPJDB	EDH-EAT-00360	A	76
Westinghouse KA breaker	supersedes	KCDPKD	EDH-EAT-00356	A	77
Westinghouse KB, HKB breaker	supersedes	KCDPJD	EDH-EAT-00358	A	75
Westinghouse LA, HLA breaker	supersedes	KCDPLD	EDH-EAT-00362	A	79
Westinghouse MA, HMA breaker	supersedes	KCDPMDL	EDH-EAT-00363	A	80
Westinghouse NB, HNB breaker	supersedes	KCDPND	EDH-EAT-00364	A	81

11.2 Replacement and successor statements

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00343	KCDPCA	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00341	KCDPED225	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00340	KCDPFB100	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00342	KCDPFBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00344	KCDPKB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00346	KCDPLA400	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00347	KCDPLA600	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00345	KCDPLB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00348	KCDPLCL	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00349	KCDPMC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00351	KCDPNBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00350	KCDPNC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00329	KPRL4ED	KPRL4X32 covers the same frames in the April 2021 table	D

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00327	KPRL4ED2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00328	KPRL4FD	KPRL4X32 covers the same frames in the April 2021 table	D
EDH-EAT-00325	KPRL4FD1	KPRL4X12 covers the same frames in the April 2021 table	D
EDH-EAT-00326	KPRL4FD2	KPRL4X22 covers the same frames in the April 2021 table	D
EDH-EAT-00330	KPRL4LD	KPRL4LC covers the same frames in the April 2021 table	D
EDH-SIE-00004	MBKED3A	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4)	A
EDH-SIE-00008	MBKFD3A	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6)	A
EDH-SIE-00005	MBKQR1A	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA)	A
EDH-SIE-00006	MBKQR3A	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2)	A
EDH-SIE-00010	MBKVA5262B	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA)	A
EDH-SQD-00101	QMB210T	QM (31 in., 1961-Oct 1984) or QW (pre-1984): QMB323TD in outside poles; QW with flat bus may need QMB310LEX	A
EDH-SQD-00104	QMB2240	No direct switch; QMB3400LA 3P 400 A breaker unit (QMB interiors 1961-Oct 1984); QMB310EX for QW; QW1BL/QW3BL fillers obsolete	A
EDH-SQD-00135	QMB303T	QMB321T (+ QMB306LEX in QW interior 1961-Oct 1984); QMB321T cannot go in QM pre-1961 or current Series E1 interiors	C
EDH-SQD-00136	QMB306T	QMB322TD in QMB interiors 1961-Oct 1984; QMB306LEX for QW with flat bus	C
EDH-SQD-00100	QMB310T	No replacement if round bus bars; QM (31 in., 1961-Oct 1984) or QW (38 in., pre-1984): QMB323TD (use outside poles); QW flat bus may also need QMB310LEX	A
EDH-SQD-00103	QMB3240	No renewal parts; replace with QMB3400LA (7.5 in.) + QMB310EX + QW1BL and QW3BL fillers (obsolete; fabricate)	A
EDH-SQD-00105	QMB3260	600 A fusible no longer available; if load allows 400 A breaker use QMB3400LA (7.5 in.) + QMB310EX; old-design fillers obsolete - fabricate locally	A
EDH-SQD-00099	QMB3606T	No replacement on QM interior (31 in.) built before 1961; QM 1961-1984: QMB362T; QW (38 in.) pre-1984: QMB362T + QMB306EX	A
EDH-SQD-00102	QMB3620	Pre-1961 interior: none; 1961-1984: QMB364; QW panelboard/switchboard also needs QMB-320-EX	A
EDH-SQD-00034	QMB363TW	Field-replaceable Series E1 parts listed in FAQ FA92305; see separate part records	A
EDH-SQD-00134	QMB3640	QM 1961-1984: QMB3400LA; QW: QMB3400LA + QMB310EX; QM pre-1961: none	C
EDH-SQD-00042	QMB367W	Field-replaceable Series E1 parts listed in FAQ FA92286; see separate part records	A

11.3 Companion parts required for installation

Part	Requires
3TA631LK (EDH-EAT-00543)	LTS3K
4TA631LK (EDH-EAT-00544)	LTS4K
3T631LK (EDH-EAT-00545)	LTS3K
4T631LK (EDH-EAT-00546)	LTS4K
3TA632LK (EDH-EAT-00547)	LTS3K
4TA632LK (EDH-EAT-00548)	LTS4K
3T632LK (EDH-EAT-00549)	LTS3K
4T632LK (EDH-EAT-00550)	LTS4K
FCWTK (EDH-EAT-00617)	3T100FB
ASPP6QD6D (EDH-GEA-00001)	139C5702AQDG1, 139C5702BQDG1, 139C5702CQDG1, 139C5500P81, 139C5503P64
ASPP6SE6D (EDH-GEA-00002)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5500P82, 139C5503P77
ASPP6SF3S (EDH-GEA-00003)	139C5702ASFG1, 139C5702BSFG1, 139C5702CSFG1, 139C5500P84, 139C5503P90
ASPP6SG3S (EDH-GEA-00004)	315A7046P7, 315A7046P8, 315A7046P9, 139C5500P83, 139C5503P103
ASPP6FB6D (EDH-GEA-00005)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5700P86, 139C5503P77
ASPP6QB6D (EDH-GEA-00006)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2

Part	Requires
ASPP6QB12D (EDH-GEA-00007)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6EY6D (EDH-GEA-00008)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
ASPP6EY12D (EDH-GEA-00009)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
AMCB4QDFP (EDH-GEA-00102)	AFP2QDD
AMCB6QDFP (EDH-GEA-00108)	AFP3QDD
AMC6EYFP (EDH-GEA-00146)	AFP3EYD
AMC6FBFP (EDH-GEA-00147)	AFP3FBD
AMC6EBFP (EDH-GEA-00149)	AFP3SED
AMC6QDFP (EDH-GEA-00150)	AFP3QDD
AMC6FJFPTF (EDH-GEA-00151)	AFP3TFD
AMC6FJFP (EDH-GEA-00152)	AFP3SFD
AMC6FGBFP (EDH-GEA-00154)	AFP4FGD
AMC6GBFP (EDH-GEA-00155)	AFP4SGD
AMC3FJFPTF (EDH-GEA-00159)	AFP3TFS
AMC3FJFP (EDH-GEA-00160)	AFP3SFS
AMC3FGMFP (EDH-GEA-00162)	AFP4FGS
AMC3GMFP (EDH-GEA-00163)	AFP4SGS
AMC3KMFP (EDH-GEA-00164)	AFP6SKS
AMC4EBFP (EDH-GEA-00167)	AFP2TED
AMC4SEFP (EDH-GEA-00168)	AFP3SED
AMC4QDFP (EDH-GEA-00169)	AFP2QDD
AMC4FJFPTF (EDH-GEA-00170)	AFP3TFD
AMC4FJFP (EDH-GEA-00171)	AFP3SFD
AMC4FGBFP (EDH-GEA-00173)	AFP4FGD
AMC4GBFP (EDH-GEA-00174)	AFP4SGD
AMC2FJFPTF (EDH-GEA-00178)	AFP3TFS
AMC2FJFP (EDH-GEA-00179)	AFP3SFS
AMC2FGMFP (EDH-GEA-00181)	AFP4FGS
AMC2GMFP (EDH-GEA-00182)	AFP4SGS
AMC2KMFP (EDH-GEA-00183)	AFP6SKS
TCAL61 (EDH-GEA-00304)	789A448G1
TC061 (EDH-GEA-00307)	789A448G1
TCAL81 (EDH-GEA-00308)	789A448G1
TC081A (EDH-GEA-00311)	789A448G1
TCAL121 (EDH-GEA-00312)	789A448G2
TC0121 (EDH-GEA-00315)	789A448G2
P1CONACPHCU (EDH-SIE-00088)	P1SCRWS
P1CONBPHAL (EDH-SIE-00089)	P1SCRWS
P1CONBPHCU (EDH-SIE-00090)	P1SCRWS
P1CONACPHAL (EDH-SIE-00097)	P1SCRWS
BBKVA5262P2S (EDH-SIE-00112)	BBKVA5262P2HW
BBKVA52P3T (EDH-SIE-00114)	BBKVA52P3HW
TC1Q1 (EDH-SIE-00245)	TNKG3
3TC1Q1 (EDH-SIE-00246)	TNKG3
3TC1GG20 (EDH-SIE-00248)	TNKG3
AL150HD (EDH-SQD-00082)	S37446, S37447
AL175JD (EDH-SQD-00083)	S37448
AL250JD (EDH-SQD-00084)	S37448
4051749901 (EDH-SQD-00159)	8011417101
YA060HD (EDH-SQD-00195)	S37449
YA150HD (EDH-SQD-00196)	S37449
YA150JD (EDH-SQD-00197)	S37450

Part	Requires
YA250J35 (EDH-SQD-00198)	S37450
CYA060HD (EDH-SQD-00208)	S37449
CYA150HD (EDH-SQD-00209)	S37449
CYA150JD (EDH-SQD-00210)	S37450
CYA250J3 (EDH-SQD-00211)	S37450
S432475 (EDH-SQD-00241)	S36967
S432476 (EDH-SQD-00242)	S36967
32508 (EDH-SQD-00268)	29348

12 Indexes

12.1 Manufacturer index

Code	Lineage	Brand markings	Families	Parts	Pg
EAT	Eaton lineage	Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant	28	788	16
SQD	Square D / Schneider Electric	Square D, Schneider Electric, Federal Pioneer (Canada)	5	312	353
GEA	GE / ABB lineage	General Electric Industrial Solutions; ABB from 2018; ReliaGear	10	395	473
SIE	Siemens lineage	Siemens, ITE, ITE Imperial, Gould, Murray	12	313	618
FPE	Federal Pacific Electric	Federal Pacific Electric (Stab-Lok, NA/NE/NF/NH panelboards)	7	43	759
ZIN	Zinsco / Sylvania	Zinsco, GTE-Sylvania	2	25	779
OTH	Other manufacturers	Other / unassigned	4	1	787

12.2 Equipment family index (including aliases)

Name / alias	Family	Mfr	Type	ID	Pg
5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	258
A Series	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
A-SERIES	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
A-Series Column Panelboards (ALC, AQC, AEC)	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	490
A-Series II	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
A-Series II Powerpanel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
A-SERIES-COL	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	490
A-SERIES-PWR	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
A2B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
ABH	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
AD	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AD Plus	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AD/AE/AQ Type P & N Power Panel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
ADP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
AE	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AEC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	490

Name / alias	Family	Mfr	Type	ID	Pg
AEF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AEP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
AL	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
ALC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	490
APN	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
APNB	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
AQ	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AQC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	490
AQF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AQP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	490
AS	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
AV Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	574
AV-LINE	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	574
AV-Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	574
AV-Line switchboards (legacy)	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	574
BDP	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	759
BDP panel board	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	759
BDP Spectra bolt-on (as listed by Superbreakers - likely erroneous)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	759
BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	18
Bryant BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	18
Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
Bulldog Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
CCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	503
CCB-QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	503
CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54
CDP	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	762
CDP panel board	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	762
CDP panelboard	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	762
CDP-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
CDP-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
CDP/HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54

Name / alias	Family	Mfr	Type	ID	Pg
CDP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
CDP?	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	503
CEB	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	787
CH-BR-RETRO	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	21
CHA-PM4	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	81
Challenger BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	18
Challenger distribution panelboards (PM4a / PM4b)	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	81
Challenger panelboard	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	81
Class 2110	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
Class 4620	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	363
Class II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
column panelboard	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
COMMANDER	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	787
Commander / CEB panels (Zinsco-type)	Commander / CEB panels (Zinsco-type)	OTH	loadcenter	FAM-OTH-003	787
CPD	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54
Crouse-Hinds MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	618
Cutler-Hammer Type ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	266
double slot	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	21
Electra-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
Electri-Center	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	266
ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	266
F1	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
F2	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
FA	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
FAM	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
FC-20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FC-I	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FC-II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714

Name / alias	Family	Mfr	Type	ID	Pg
FC20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FCI	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FCII	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FCRS	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	88
FDP	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	766
Federal Pacific QMQB	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	766
Federal Pacific switchgear	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	776
FPE BDP distribution panelboard (double-hole bus)	FPE BDP distribution panelboard (double-hole bus)	FPE	panelboard	FAM-FPE-002	759
FPE CDP distribution panelboard (single-hole bus)	FPE CDP distribution panelboard (single-hole bus)	FPE	panelboard	FAM-FPE-001	762
FPE FDP fusible distribution panelboard / QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	766
FPE NA1B / NH1B lighting and appliance panelboards	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
FPE NBLP / NQLP bolt-on lighting panelboards	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	775
FPE NDP panelboard	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	775
FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	776
FPE-SWBD	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	776
FPP (10in)	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
FPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
Frank Adam Electric panelboards	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
Frank Adams	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
Fusematic	FPE switchboards (N-frame bolt-on / NM-NN-NP / Fusematic)	FPE	switchboard	FAM-FPE-007	776
GE-Trumbull	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	574
HCDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54
HCJ	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HCM	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HCN	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HCP	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HCP-SU	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HCR-U	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353

Name / alias	Family	Mfr	Type	ID	Pg
HCW	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
HWFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
I Line	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
I-LINE	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
I-Line Circuit Breaker Panelboard / I-Line distribution section	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
IFS	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	267
IFS switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	267
ILine	I-Line Circuit Breaker Panelboard / I-Line distribution section	SQD	panelboard	FAM-SQD-004	353
Integrated Facility Switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	267
Integrated Facility System switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-022	267
KINNEY	Kinney panelboards	OTH	panelboard	FAM-OTH-004	788
Kinney panelboards	Kinney panelboards	OTH	panelboard	FAM-OTH-004	788
KLAMPSWFUZ	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
Legacy QMB distribution (pre-October-1984 QM and QW interiors)	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
Lincoln Flex Center retrofit	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	21
Magnatrip	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
ML12	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
MLB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
MOB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
MP-HT	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	618
MT12MBB	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
MTMB20	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
MURRAY	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	618
Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	618
Murray MP	Murray / Crouse-Hinds panelboards and loadcenters (pre-Siemens)	SIE	loadcenter	FAM-SIE-012	618
NA-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NA1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NA1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NAB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NAB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NAB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	508

Name / alias	Family	Mfr	Type	ID	Pg
NAB / NHB bolt-on panelboards (legacy)	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	508
NAIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NB panelboard	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	775
NBLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	775
NDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NDP	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	775
NEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
New Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
NextGen P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
NH-type panel	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NH1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NH1B	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NHB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NHB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NHB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	508
NHDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NHDP (related?)	FPE NDP panelboard	FPE	panelboard	FAM-FPE-004	775
NHEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
NHIB	FPE NA1B / NH1B lighting and appliance panelboards	FPE	panelboard	FAM-FPE-005	773
NLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NLAB-AB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NLAB-ABH	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NLAB-LX	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NLAB?	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	508
NPLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NQB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NQC	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
NQLP	FPE NBLP / NQLP bolt-on lighting panelboards	FPE	panelboard	FAM-FPE-006	775
NQP	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
old style QMB	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
Original P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	619
P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	619
P1 (pre-2014/2015)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	619
P1...N	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
P1...T	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
P2	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	628
P3	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	640
P4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
P5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
PM4a	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	81

Name / alias	Family	Mfr	Type	ID	Pg
PM4b	Challenger distribution panelboards (PM4a / PM4b)	EAT	panelboard	FAM-EAT-028	81
Pow-R-Command	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	95
Pow-R-Command lighting control panelboard	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	95
POW-R-LINE	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
Pow-R-Line 1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
Pow-R-Line 1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	103
POW-R-LINE 1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	103
Pow-R-Line 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	178
Pow-R-Line 2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
Pow-R-Line 2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	191
Pow-R-Line 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	192
Pow-R-Line 3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	193
Pow-R-Line 3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	195
Pow-R-Line 3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	216
Pow-R-Line 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	217
Pow-R-Line 4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
Pow-R-Line 4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
Pow-R-Line 4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
Pow-R-Line 4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
Pow-R-Line 4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258
Pow-R-Line 5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	258
Pow-R-Line 5P plug-on distribution panelboard	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	258
POW-R-LINE C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
Pow-R-Line C switchboard	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
Pow-R-Line CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	268
Pow-R-Line CS switchboard	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	268
Pow-R-Line i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	268
Pow-R-Line I	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	268
Pow-R-Line i switchboard	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	268
Pow-R-Line Xpert	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	178
Pow-R-Line Xpert 1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	178
Pow-R-Line Xpert 2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	192
Pow-R-Line Xpert 3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	217
Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258
Pow-R-Xpress PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258
Power-Style QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
Power-Style QED-2 Switchboard	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
PRC	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	95

Name / alias	Family	Mfr	Type	ID	Pg
PRCE	Pow-R-Command lighting control panelboard	EAT	panelboard	FAM-EAT-016	95
PRL CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	268
PRL i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	268
PRL-1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	103
PRL-2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	191
PRL-3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	195
PRL-4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL-C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
PRL-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
PRL1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
PRL1-LX	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
PRL1/PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
PRL1a	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	103
PRL1A	Pow-R-Line 1a	EAT	panelboard	FAM-EAT-001	103
PRL1a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
PRL1x	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	178
PRL1X	Pow-R-Line Xpert 1X	EAT	panelboard	FAM-EAT-006	178
PRL1X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
PRL2a	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	191
PRL2A	Pow-R-Line 2a	EAT	panelboard	FAM-EAT-002	191
PRL2a-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
PRL2X	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	192
PRL2x	Pow-R-Line Xpert 2X	EAT	panelboard	FAM-EAT-007	192
PRL2X-LX	Pow-R-Line column-type (PRL1a-LX, PRL2a-LX, PRL1X-LX, PRL2X-LX)	EAT	panelboard	FAM-EAT-010	95
PRL3	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	193
PRL3-LX	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	193
PRL3A	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	195
PRL3a	Pow-R-Line 3a	EAT	panelboard	FAM-EAT-003	195
PRL3E	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	216
PRL3e	Pow-R-Line 3E	EAT	panelboard	FAM-EAT-004	216
PRL3x	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	217
PRL3X	Pow-R-Line Xpert 3X	EAT	panelboard	FAM-EAT-008	217
PRL4	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL4B	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL4D	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL4DX	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258
PRL4F	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL4X	Pow-R-Line 4 (PRL4B breaker / PRL4F fusible / PRL4D drawout)	EAT	panelboard	FAM-EAT-005	227
PRL4x	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258
PRL4X	Pow-R-Line Xpert 4X (incl. PRL4DX, PRL4F)	EAT	panelboard	FAM-EAT-009	258

Name / alias	Family	Mfr	Type	ID	Pg
PRL5P	Pow-R-Line 5P plug-on distribution panelboard	EAT	panelboard	FAM-EAT-015	258
PRLC	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
PRLCS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-021	268
PRLi	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-020	268
Pro-Stock	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	473
PULFUZSW	Frank Adam Electric panelboards	OTH	panelboard	FAM-OTH-001	787
PUSHMATIC	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
Pushmatic	Bulldog / ITE Pushmatic panelboards and Electri-Centers (incl. 3-phase versions)	SIE	panelboard	FAM-SIE-011	678
Q-frame	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
QED 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
QED-2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
QED-2 Series 2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
QED-2/S	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
QED2	Power-Style QED-2 Switchboard	SQD	switchboard	FAM-SQD-001	414
QM interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
QMB	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	363
QMB fusible	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	363
QMB Fusible Panelboard / QMB distribution (current design, Series E1)	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	363
QMB Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
QMB Series 1-4	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
QMB-LEGACY	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
QMB-QMJ	QMB Fusible Panelboard / QMB distribution (current design, Series E1)	SQD	panelboard	FAM-SQD-003	363
QMQB panelboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	766
QMQB switchboard	FPE FDP fusible distribution panelboard / QMQB switchboard	FPE	panelboard	FAM-FPE-003	766
QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	503
QSF panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
QW interior	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
RA/RB/RC/RD/RE/RAA retrofit kits	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	21
ReliaGear neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	509
ReliaGear neXT Power Panelboards	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	509
ReliaGear OEM neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	509
Retro Size A-E	Eaton / Cutler-Hammer Type CH and Type BR panelboard retrofit kits (reuse of existing box)	EAT	other	FAM-EAT-027	21
Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
RG-NEXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	509
RP1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712

Name / alias	Family	Mfr	Type	ID	Pg
S1/S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712
S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712
S4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
S5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
Saflex	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
Saflex panelboard	Legacy QMB distribution (pre-October-1984 QM and QW interiors)	SQD	panelboard	FAM-SQD-005	408
SB	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
SB1	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
SB2	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
SB3	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
SB4 (blank plates only)	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
SCP	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	509
SCP+	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	509
SCP-PLUS	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	509
SE	Type SE panelboard	SIE	panelboard	FAM-SIE-004	714
SE panels	Type SE panelboard	SIE	panelboard	FAM-SIE-004	714
Sentron Deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
Sentron S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712
Sentron S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712
Sentron SPP shallow	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
single slot split buss	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
Spectra	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Spectra Bolt-On (SBO)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Spectra Plug-In	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Spectra Series	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Spectra Series Type SCP Plus panelboards	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	509
SPECTRA-PP	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
SpectraRMS	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	514
Speed D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	423
SPEED-D	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	423
Speed-D Merchandised Service Section Switchboard	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	423
SpeedD	Speed-D Merchandised Service Section Switchboard	SQD	switchboard	FAM-SQD-002	423

Name / alias	Family	Mfr	Type	ID	Pg
SPP	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
SPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
SPP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
Sylvania S-line panelboard	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
Trumbell (misspelling)	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	574
TRUMBULL	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	574
Trumbull Electric (Plainville CT) panelboards and switches	Trumbull Electric (Plainville CT) panelboards and switches	GEA	panelboard	FAM-GEA-010	574
Type 1 Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-017	267
Type BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	18
Type BR loadcenter	Type BR loadcenter	EAT	loadcenter	FAM-EAT-026	18
Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	503
Type ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-019	266
Type P1 (original)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	619
Type P1 (Revised P1)	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	678
Type P2 panelboard	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	628
Type P3 panelboard	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	640
Type P4 / S4 / Sentron SPP (10in deep) power panelboard	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	645
Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	660
Type S1 / S2 lighting panelboards	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	712
Type SB1 / SB2 / SB3 distribution switchboards	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	727
Type SE panelboard	Type SE panelboard	SIE	panelboard	FAM-SIE-004	714
Type WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
Type WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
VB-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
VB-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	714
Waddsworth	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	788
WADSWORTH	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	788
Wadsworth panelboards and breakers	Wadsworth panelboards and breakers	OTH	panelboard	FAM-OTH-002	788
WCA	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
WEB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
WEHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
Westinghouse CDP	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54
Westinghouse CDP / HCDP distribution panelboard	Westinghouse CDP / HCDP distribution panelboard	EAT	panelboard	FAM-EAT-013	54

Name / alias	Family	Mfr	Type	ID	Pg
Westinghouse FDP	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	88
Westinghouse FDP fusible distribution panelboard	Westinghouse FDP fusible distribution panelboard	EAT	panelboard	FAM-EAT-014	88
Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-025	94
Westinghouse NLAB lighting panelboard	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-024	95
Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 (vintage)	EAT	panelboard	FAM-EAT-011	96
Westinghouse Pow-R-Line 3 (vintage)	Westinghouse Pow-R-Line 3 (vintage)	EAT	panelboard	FAM-EAT-012	193
Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
Westinghouse WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
WF/WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
WFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
WGB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
WGHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-023	266
WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-018	268
ZIN-DIST	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
ZIN-Q	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784
Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	Zinsco / Sylvania distribution panelboards and QSF fusible switch panelboards (double-slot / single-slot split bus)	ZIN	panelboard	FAM-ZIN-002	779
Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	Zinsco / Sylvania Q-type plug-in panels and lighting panelboards (Magnatrip)	ZIN	panelboard	FAM-ZIN-001	784

12.3 Part-number index (primary and alternate numbers)

Sorted by normalised number (punctuation and spaces removed). Search a partial number by its leading characters.

Number	Type	Mfr	Description	Catalogue ID	Pg
0080429	alias	EAT	T-handle lock	EDH-EAT-00408	175
0080429	primary	EAT	Panelboard trim lock — T-handle lock	EDH-EAT-00445	68
114C247G01	primary	EAT	Vintage lighting/small power panel trim lock	EDH-EAT-00411	101
11-D-4554-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	706
11-D-4560-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	705
12-1800-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	706
12-1800-01	alias	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	727
1253C72G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 50 A	EDH-EAT-00683	273
1253C72G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 50 A	EDH-EAT-00684	274
1253C73G01	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 150 A	EDH-EAT-00687	274

Number	Type	Mfr	Description	Catalogue ID	Pg
1253C73G03	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 3.50 in, 100 A	EDH-EAT-00685	274
1253C73G05	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 150 A	EDH-EAT-00688	274
1253C73G06	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 3.50 in, 100 A	EDH-EAT-00686	275
1256C42G01	primary	EAT	BAB 2- and 3-pole lock-off	EDH-EAT-00422	177
1256C42G02	primary	EAT	BAB 1-pole lock-off	EDH-EAT-00421	177
1266C07G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, line end	EDH-EAT-00635	288
12-A-1801-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	705
12-A-1802-01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	708
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	170
12 ckt H01 (1); 18 H02 (1); 30 H04 (1); 42 H06 (1); 48 H03 (2); 54 H03+H04; 72 H05 (2); 96 H07 (2)	style_number	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	170
139C5362P2	primary	GEA	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	EDH-GEA-00035	501
139C5500P81	primary	GEA	3P breaker support bracket (ASPP6QD6D)	EDH-GEA-00022	499
139C5500P82	primary	GEA	3P breaker support bracket (ASPP6SE6D)	EDH-GEA-00023	500
139C5500P83	primary	GEA	3P breaker support bracket (ASPP6SG3S)	EDH-GEA-00024	500
139C5500P84	primary	GEA	3P breaker support bracket (ASPP6SF3S)	EDH-GEA-00025	500
139C5503P103	primary	GEA	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	EDH-GEA-00033	502
139C5503P129	primary	GEA	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	EDH-GEA-00034	502
139C5503P64	primary	GEA	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	EDH-GEA-00030	502
139C5503P77	primary	GEA	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	EDH-GEA-00031	503
139C5503P90	primary	GEA	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	EDH-GEA-00032	503
139C5700P86	primary	GEA	3P breaker support bracket (ASPP6FB6D)	EDH-GEA-00026	500
139C5702AQDG1	primary	GEA	Branch base, A phase, TQD (A-Series II)	EDH-GEA-00010	495
139C5702ASEG1	primary	GEA	Branch base, A phase, SE/TED/FB (A-Series II)	EDH-GEA-00011	496
139C5702ASFG1	primary	GEA	Branch base, A phase, SF (A-Series II)	EDH-GEA-00012	496
139C5702BQDG1	primary	GEA	Branch base, B phase, TQD (A-Series II)	EDH-GEA-00013	496
139C5702BSEG1	primary	GEA	Branch base, B phase, SE/TED/FB (A-Series II)	EDH-GEA-00014	496
139C5702BSFG1	primary	GEA	Branch base, B phase, SF (A-Series II)	EDH-GEA-00015	497
139C5702CQDG1	primary	GEA	Branch base, C phase, TQD (A-Series II)	EDH-GEA-00016	497
139C5702CSEG1	primary	GEA	Branch base, C phase, SE/TED/FB (A-Series II)	EDH-GEA-00017	497
139C5702CSFG1	primary	GEA	Branch base, C phase, SF (A-Series II)	EDH-GEA-00018	497
139C5720G3	primary	GEA	A-Series AE front mounting kit	EDH-GEA-00090	488
139C5720G6	primary	GEA	A-Series AQ/AL front mounting kit	EDH-GEA-00091	488
139C5720G9	primary	GEA	A-Series AD front mounting kit	EDH-GEA-00092	488
1A32258H03	primary	EAT	Standard trim lock for PRL4X and PRL4 lighting and power panels	EDH-EAT-00404	256
1A85194G01	primary	EAT	EZ Trim lock keyed WEM-2	EDH-EAT-00410	174
1C96608	primary	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	160
1C96608G01..G63 (odd item numbers)	style_number	EAT	PRL1a/PRL1X bolt-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00163	160
1C96609	primary	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	192

Number	Type	Mfr	Description	Catalogue ID	Pg
1C96609G01..G63 (same G scheme as 1C96608)	style_number	EAT	PRL2a/PRL2X GHB-family horizontal branch connector assembly (12-96 circuits)	EDH-EAT-00165	192
1C96619	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (BA family)	EDH-EAT-00250	170
1C96620	primary	EAT	PRL1a/2a/1X/2X horizontal branch deadfront cover (GB family)	EDH-EAT-00251	170
1C96638	primary	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	170
1C96645	primary	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	162
1C96646	primary	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	162
1C96647	supersedes	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	165
1C96647	primary	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	162
1C96648	primary	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	163
1C96649	primary	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	163
1C96650	supersedes	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	166
1C96650	primary	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	163
1C96651	primary	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	164
1C96652	primary	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	164
1C96653	supersedes	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	166
1C96653	primary	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	164
1C96654	primary	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	165
1C97022	primary	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	165
1LOK	primary	FPE	FPE handle lock for 1-pole NA/NB breakers	EDH-FPE-00041	775
1X H01; 2X H02; 3X H03; 4X H13; 5X H14; 6X H04; 7X H05; 9X H06; 10X H07; 11X H08; 12X H09; 13X H10; 15X H11; 20X H12	style_number	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	255
208B264H01	primary	EAT	Series C K-frame panelboard strap mounting bracket	EDH-EAT-00703	304
208B297H01	primary	EAT	Series C L-frame panelboard strap mounting bracket	EDH-EAT-00704	317
208B966G01	primary	EAT	Series C M-frame terminal shield	EDH-EAT-00643	324
2142720241	primary	SQD	QMB367W Series E1 renewal part: Load base mounting screw	EDH-SQD-00129	372
21427-20401	primary	SQD	QED cover screw 21427-20401	EDH-SQD-00163	421
2150720200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2150720200: Door leaf bolt (2 per set)	EDH-SQD-00169	422
2152620361	primary	SQD	FA/FH I-Line breaker mounting bracket screw 2152620361	EDH-SQD-00158	362
21590-20241	primary	SQD	PowerPact H/J I-Line mounting bracket screw 21590-20241	EDH-SQD-00157	362
21593-20100	primary	SQD	I-Line blank filler mounting screw 21593-20100	EDH-SQD-00145	362
225/400 A: STD G01/G03 4/0-500 kcmil x2; SFL/TFL G05/G07; OVS G09/G11 3/0-750 kcmil x2. 600 A (<=42 ckt): STD G02/G03/G04, TFL G06/G07/G08, OVS G10/G11/G12, OVS w/TFL G26/G27/G28 (bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL1a/2a neutral assembly 1C96652 - 225 A 200% / 400 A 100% / 600 A 100% neutral	EDH-EAT-00229	164
2271020200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2271020200: Frame leaf bolt (2 per set	EDH-SQD-00168	422

Number	Type	Mfr	Description	Catalogue ID	Pg
2300100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2300100200: Nut	EDH-SQD-00170	422
2330241601	primary	SQD	QMB363TW Series E1 renewal part: Push nut for arc suppression assembly	EDH-SQD-00120	372
2342702001	primary	SQD	QMB363TW Series E1 renewal part: Lug mounting nut	EDH-SQD-00125	372
2342702400	primary	SQD	QMB367W Series E1 renewal part: Lug mounting nut	EDH-SQD-00132	373
2370100200	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 2370100200: Washer	EDH-SQD-00171	422
2600D26G01	primary	EAT	Series C J-frame panelboard connecting strap, center pole, 3.50 in, 250 A	EDH-EAT-00689	287
2600D26G02	primary	EAT	Series C J-frame panelboard connecting strap, outside pole, 3.50 in, 250 A	EDH-EAT-00690	287
286A8066G1	primary	GEA	GE 286A8066G1 lug cover, TH4V/THK9V	EDH-GEA-00331	595
29348	primary	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00181	467
2C11296	primary	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	167
2C11641G02	primary	EAT	Fastrim trim clamps, PRL1a/2a/3a and 1X/2X/3X	EDH-EAT-00413	176
2C11642	primary	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	161
2C11642G03, G07, G11, G15 ... G59, G63 (silver-plated copper only)	style_number	EAT	PRL1a/PRL1X plug-on QUICKLAG horizontal branch connector assembly (12-96 circuit	EDH-EAT-00164	161
2NLK30A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	695
2NLK42A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	695
2NLK42B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	695
2NLK54A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	696
2NLK54B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	696
2T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00479	293
2T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2T400K)	EDH-EAT-00494	294
2T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00488	294
2TA2N8750	primary	SIE	Siemens 2TA2N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00281	751
2TA3N8750	primary	SIE	Siemens 2TA3N8750 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00283	751
2TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00474	294
2TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA400K)	EDH-EAT-00491	295
2TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00482	295
2TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (2TA401K)	EDH-EAT-00497	295
2TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	311
2TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00485	296
2TA4N8500	primary	SIE	Siemens 2TA4N8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00285	752
2TA4P8500	primary	SIE	Siemens 2TA4P8500 lug kit (2 connectors + NDTS end barrier), MD/ND	EDH-SIE-00287	752
2TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	311
2TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (2TA603LDK)	EDH-EAT-00510	312
314C420G05	primary	EAT	Series C L-frame terminal shield	EDH-EAT-00642	318
314C960G01	primary	EAT	Series C M-frame rear connecting stud (225 A)	EDH-EAT-00667	325
314C960G04	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00668	325
314C960G05	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00669	325
314C960G06	primary	EAT	Series C M-frame rear connecting stud (400 A)	EDH-EAT-00670	326
314C960G07	primary	EAT	Series C L/M-frame rear connecting stud (L: stud length 5.47 in)	EDH-EAT-00664	318

Number	Type	Mfr	Description	Catalogue ID	Pg
314C960G08	primary	EAT	Series C L/M-frame rear connecting stud (L: 7.97 in)	EDH-EAT-00665	319
314C960G09	primary	EAT	Series C L/M-frame rear connecting stud (L: 10.47 in)	EDH-EAT-00666	319
314C960G10	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00671	326
314C960G11	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00672	326
314C960G12	primary	EAT	Series C M-frame rear connecting stud (800 A)	EDH-EAT-00673	327
314C996G01	primary	EAT	Series C M-frame panelboard connecting strap, short, 3.50 in, 800 A	EDH-EAT-00695	323
314C996G02	primary	EAT	Series C M-frame panelboard connecting strap, medium, 3.50 in, 800 A	EDH-EAT-00696	323
314C996G03	primary	EAT	Series C M-frame panelboard connecting strap, long, 3.50 in, 800 A	EDH-EAT-00697	324
315A7046P7	primary	GEA	SG breaker strap, A phase (A-Series II)	EDH-GEA-00019	498
315A7046P8	primary	GEA	SG breaker strap, B phase (A-Series II)	EDH-GEA-00020	498
315A7046P9	primary	GEA	SG breaker strap, C phase (A-Series II)	EDH-GEA-00021	498
315A7048P20	primary	GEA	Center (B phase) strap (THQB/TEY, A-Series II)	EDH-GEA-00028	499
315A7049P10	primary	GEA	A & C phase 200A strap (THQB/TEY, A-Series II)	EDH-GEA-00027	499
315C270H01	primary	EAT	Series C M/N-frame panelboard strap mounting bracket	EDH-EAT-00705	324
32508	primary	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00268	441
32510	primary	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00269	442
3456B35H01	primary	EAT	Vintage PRL1/PRL2 blank cover 6.00 in	EDH-EAT-00292	100
3456B99H01	primary	EAT	Vintage PRL1/PRL2 blank cover 3.00 in	EDH-EAT-00291	101
3456B99H05	primary	EAT	Vintage PRL1/PRL2 blank cover 15.00 in	EDH-EAT-00293	101
3457B16G01	primary	EAT	Vintage lighting and small panel standard trim lock	EDH-EAT-00412	102
36965	primary	SQD	PowerPact D-frame terminal shield 3P	EDH-SQD-00270	443
36967	alias	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00188	467
373B375G03	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00678	331
373B375G04	primary	EAT	Series C N-frame rear connecting stud (1200 A)	EDH-EAT-00677	331
374D883G01	primary	EAT	Series C F-frame rear connecting stud, 225 A short stud (110-225 A breakers)	EDH-EAT-00654	281
374D883G02	primary	EAT	Series C F-frame rear connecting stud, 225 A long stud	EDH-EAT-00655	281
3BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00452	18
3BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00451	19
3T100FB	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00462	269
3T125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu	EDH-EAT-00536	335
3T150FB	primary	EAT	Series C F-frame line/load terminals, 200 A, Cu only (pkg of 3)	EDH-EAT-00466	270
3T20FB	primary	EAT	Series C F-frame line/load terminals, 20 (EHD) A, Cu/Al (pkg of 3)	EDH-EAT-00461	270
3T225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu only (pkg of 3)	EDH-EAT-00468	270
3T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00480	296
3T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3T400K)	EDH-EAT-00495	296
3T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00489	297
3T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00545	345
3T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00549	345
3T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, copper	EDH-EAT-00556	346
3TA100FD	primary	EAT	Series C F-frame line/load terminals, 100 A, Cu/Al (pkg of 3)	EDH-EAT-00465	271
3TA100G3K	primary	EAT	Series C G-frame multiwire connector, 3 wires/terminal	EDH-EAT-00620	284
3TA100G6K	primary	EAT	Series C G-frame multiwire connector, 6 wires/terminal	EDH-EAT-00621	285
3TA125E3K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00577	335
3TA125E6K	primary	EAT	Series G EG-frame multiwire connector	EDH-EAT-00578	335
3TA125EF	primary	EAT	Series G EG-frame line/load terminals, 125 A, Cu/Al	EDH-EAT-00537	336
3TA150EF	primary	EAT	Series G EG-frame line/load terminals, 125/160 A, Cu/Al	EDH-EAT-00538	336

Number	Type	Mfr	Description	Catalogue ID	Pg
3TA150F3K	primary	EAT	Series C F-frame multiwire connector, 3 wires/terminal	EDH-EAT-00622	271
3TA150F6K	primary	EAT	Series C F-frame multiwire connector, 6 wires/terminal	EDH-EAT-00623	271
3TA150FB	primary	EAT	Series C F-frame line/load terminals, 150 A, Cu/Al, Q18	EDH-EAT-00469	272
3TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00539	336
3TA1QR300	primary	SIE	Siemens 3TA1QR300 lug kit (3), QR2 100-250A	EDH-SIE-00253	736
3TA225FD	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00463	272
3TA225FDK	primary	EAT	Series C F-frame line/load terminals, 225 A, Cu/Al (pkg of 3)	EDH-EAT-00467	272
3TA250FJ3	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00579	341
3TA250FJ6	primary	EAT	Series G JG-frame multiwire connector	EDH-EAT-00580	341
3TA250J3K	primary	EAT	Series C J-frame multiwire connector, 3 wires/terminal	EDH-EAT-00624	286
3TA250J6K	primary	EAT	Series C J-frame multiwire connector, 6 wires/terminal	EDH-EAT-00625	286
3TA2N8750	primary	SIE	Siemens 3TA2N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00282	752
3TA3N8750	primary	SIE	Siemens 3TA3N8750 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00284	753
3TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00475	297
3TA400K3K	primary	EAT	Series C K-frame multiwire connector, 3 wires/terminal	EDH-EAT-00626	297
3TA400K6K	primary	EAT	Series C K-frame multiwire connector, 6 wires/terminal	EDH-EAT-00627	298
3TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA400K)	EDH-EAT-00492	298
3TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00483	298
3TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (3TA401K)	EDH-EAT-00498	299
3TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	312
3TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00486	299
3TA4N8500	primary	SIE	Siemens 3TA4N8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00286	753
3TA4P8500	primary	SIE	Siemens 3TA4P8500 lug kit (3 connectors + NDTS end barrier), MD/ND	EDH-SIE-00288	753
3TA50FB	primary	EAT	Series C F-frame line/load terminals, 50 A, Cu/Al (pkg of 3)	EDH-EAT-00464	273
3TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	313
3TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (3TA603LDK)	EDH-EAT-00511	313
3TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00543	346
3TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00547	346
3TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 3P, aluminum	EDH-EAT-00554	347
3TC1GG20	primary	SIE	Siemens 3TC1GG20 lug pack of 3, NGG/HGG/LGG 35-125A	EDH-SIE-00248	734
3TC1Q1	primary	SIE	Siemens 3TC1Q1 lug pack of 3, NGG/HGG/LGG 15-30A	EDH-SIE-00246	734
3TC1QR250	primary	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	737
3TC1QR2520	alias	SIE	Siemens 3TC1QR250 copper lug kit (3), QR2	EDH-SIE-00254	737
3VA9233-0QA00	primary	SIE	3VA52 250A nut keeper kit (3)	EDH-SIE-00207	732
3VA9243-0QA00	primary	SIE	3VA61/62 150A/250A nut keeper kit (3)	EDH-SIE-00208	732
3VA9473-0QA00	primary	SIE	3VA5, 3VA6 400A/600A nut keeper kit (3)	EDH-SIE-00209	732
4020506501	primary	SQD	QMB363TW Series E1 renewal part: Load base mounting screw	EDH-SQD-00122	373
40251-016-51	primary	SQD	QMB/QMJ switch terminal lug 40251-016-51	EDH-SQD-00063	365
40251-018-50	primary	SQD	QMB/QMJ switch terminal lug 40251-018-50	EDH-SQD-00065	365
4025101851	primary	SQD	QMB363TW Series E1 renewal part: Lug assembly	EDH-SQD-00124	365
40251-162-50	primary	SQD	QMB/QMJ switch terminal lug 40251-162-50	EDH-SQD-00067	365
40251-287-50	primary	SQD	QMB/QMJ switch terminal lug 40251-287-50	EDH-SQD-00069	419
40256-014-50	primary	SQD	QMB/QMJ switch terminal lug 40256-014-50	EDH-SQD-00066	366
40256-034-50	primary	SQD	QMB/QMJ switch terminal lug 40256-034-50	EDH-SQD-00064	366
40256-039-50	primary	SQD	QMB/QMJ switch terminal lug 40256-039-50	EDH-SQD-00070	366
4028343250	primary	SQD	QMB367W Series E1 renewal part: Switch mounting hardware kit:	EDH-SQD-00133	371

Number	Type	Mfr	Description	Catalogue ID	Pg
4028343550	primary	SQD	QMB367W Series E1 renewal part: Handle knob kit	EDH-SQD-00131	371
4028343750	primary	SQD	QMB363TW Series E1 renewal part: Handle knob kit	EDH-SQD-00123	372
40517-407-01	style_number	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	361
40517-408-01	style_number	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	361
4051749901	primary	SQD	I-Line deadfront (trim) support bracket 4051749901	EDH-SQD-00159	357
4052017302	primary	SQD	QMB363TW Series E1 renewal part: Arc shield	EDH-SQD-00119	406
4052021450	primary	SQD	QMB363TW Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00118	406
4052021650	primary	SQD	QMB363TW Series E1 renewal part: Load base assembly	EDH-SQD-00121	407
4052031850	primary	SQD	QMB367W Series E1 renewal part: Arc suppressor assembly	EDH-SQD-00126	407
4052036750	primary	SQD	QMB367W Series E1 renewal part: Load base assembly	EDH-SQD-00128	407
4052085601	primary	SQD	QMB367W Series E1 renewal part: Arc shield	EDH-SQD-00127	407
4052098601	primary	SQD	QMB367W Series E1 renewal part: Load base side insulator	EDH-SQD-00130	369
40560-270-50	primary	SQD	QMB/QMJ switch terminal lug 40560-270-50	EDH-SQD-00068	367
414A380G01	primary	EAT	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	EDH-EAT-00446	102
414A380G02	primary	EAT	Trim clamp for CDP, FDP and NQB	EDH-EAT-00420	69
4176B51	primary	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	207
4176B56	primary	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	207
4176B57	primary	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	207
4176B60	primary	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	207
4176B61	primary	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	208
4176B66	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	208
4176B67	primary	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	208
4176B68	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	212
4176B68	primary	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	208
4176B69	primary	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	209
4176B70	primary	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	209
4176B72	primary	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	215
4176B79	primary	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	209
4176B80	primary	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	209
4178B06H01	supersedes	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	215
4178B06H01	primary	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	215
4178B08	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	212
4178B08	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	210
4179B39	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	213
4179B39	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	210
4179B40	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	213
4179B40	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	210

Number	Type	Mfr	Description	Catalogue ID	Pg
4179B41	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	214
4179B41	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	210
4179B42	supersedes	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	213
4179B42	primary	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	211
4180B03	supersedes	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	172
4180B03	primary	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	170
4180B04	primary	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	171
4180B05	supersedes	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	172
4180B05	primary	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	171
4180B08	primary	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	173
4180B52H01	primary	EAT	PRL1a/2a filler cover for F, J, K frame vertical device spaces	EDH-EAT-00252	173
4180B61	supersedes	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	172
4180B61	primary	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	171
4180B62	primary	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	176
4180B79	primary	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	211
4180B91	primary	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	211
4180B93	supersedes	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	212
4180B93	primary	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	211
4210B95G01	primary	EAT	Series C F-frame special terminal shield 3-pole for use with electrical operator	EDH-EAT-00633	277
4210B95G02	primary	EAT	Series C F-frame special terminal shield 4-pole for use with electrical operator	EDH-EAT-00634	277
4212B77G01	primary	EAT	Series C K-frame panelboard connecting strap, outside pole, 3.50 in, 400 A	EDH-EAT-00692	303
4212B78G02	primary	EAT	Series C K-frame panelboard connecting strap, center pole, 3.50 in, 400 A	EDH-EAT-00691	304
42C1129H02	primary	EAT	Chassis mounting hardware, PRL1a/2a/3a	EDH-EAT-00416	177
42C4050	primary	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	165
42C4051	primary	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	166
42C4052	primary	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	166
42C7980	primary	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	226
42C7982	primary	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	172
42C7982	superseded_by	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	171
42C8055	primary	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	226
42C8072	primary	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	172
42C8072	superseded_by	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	170

Number	Type	Mfr	Description	Catalogue ID	Pg
42C8073	primary	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	172
42C8073	superseded_by	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	171
42C8076	primary	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	212
42C8076	superseded_by	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	208
42C8077	primary	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	212
42C8077	superseded_by	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	211
42C8078	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	212
42C8078	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-3 pole horiz	EDH-EAT-00280	210
42C8079	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	213
42C8079	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-2 pole horiz	EDH-EAT-00281	210
42C8080	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	213
42C8080	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): F-frame twin-mounted 1-pole horizon	EDH-EAT-00282	210
42C8081	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	213
42C8081	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00284	211
42C8082	primary	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	214
42C8082	superseded_by	EAT	PRL3a horizontal deadfront cover (pre-2021): FD/HFD/FDC/ED/EDH/EDC single-mounte	EDH-EAT-00283	210
42C8083H01	primary	EAT	PRL3a/PRL3X F-frame / PDG2 deadfront blank filler (panels built after April 2019	EDH-EAT-00285	215
42C8083H01	superseded_by	EAT	PRL3a F-frame 1-pole provision filler (panels built before April 2019)	EDH-EAT-00286	215
42NLK30A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	696
42NLK42A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	696
42NLK54A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	696
42NLK54B	primary	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	696
451D874G01	primary	EAT	Series C F-frame rear connecting stud, 100 A short stud (15-100 A breakers)	EDH-EAT-00652	281
451D874G02	primary	EAT	Series C F-frame rear connecting stud, 100 A long stud	EDH-EAT-00653	282
4 ckt 2X H01; 8/4X H02; ... 32/16X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-2 pole horizo	EDH-EAT-00271	213
4MLKA1	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	688
4MLKA1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00029	624
4MLKA1A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	688
4MLKA1B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00023	688
4MLKA3	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	689
4MLKA3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00030	625
4MLKA3A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	689
4MLKA3B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00024	689
4MLKC1	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	690
4MLKC1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00031	625
4MLKC1A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	690
4MLKC3	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	690
4MLKC3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00032	625

Number	Type	Mfr	Description	Catalogue ID	Pg
4MLKC3A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	690
4T400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00481	299
4T400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4T400K)	EDH-EAT-00496	300
4T402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00490	300
4T631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu	EDH-EAT-00546	347
4T632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu	EDH-EAT-00550	347
4T632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, copper	EDH-EAT-00557	348
4TA160EFK	primary	EAT	Series G EG-frame line/load terminals, 160 A, Cu/Al	EDH-EAT-00540	337
4TA400K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00476	300
4TA400KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA400K)	EDH-EAT-00493	301
4TA401K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00484	301
4TA401KCW	primary	EAT	Series C K-frame terminal kit with control wire termination (4TA401K)	EDH-EAT-00499	301
4TA401LDK	primary	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	314
4TA402K	primary	EAT	Series C K-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00487	302
4TA603LDK	primary	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	314
4TA603LDKCW	primary	EAT	Series C L-frame terminal with control wire termination (4TA603LDK)	EDH-EAT-00512	315
4TA631LK	primary	EAT	Series G LG-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00544	348
4TA632LK	primary	EAT	Series G LG-frame line/load terminal kit, 630 A, Cu/Al	EDH-EAT-00548	348
4TA632LKW	primary	EAT	Series G LG-frame control wire terminal kit, 4P, aluminum	EDH-EAT-00555	349
5010D23G01	primary	EAT	Series C J-frame rear connecting stud, 250 A short stud	EDH-EAT-00656	290
5010D23G02	primary	EAT	Series C J-frame rear connecting stud, 250 A long stud	EDH-EAT-00657	291
50552-108-01	primary	SQD	NEMA 3R QED-2 switchboard replacement door handle 50552-108-01	EDH-SQD-00164	423
505C606G04	primary	EAT	Series C N-frame panelboard connecting strap, short, 3.50 in, 1200 A	EDH-EAT-00698	330
505C606G05	primary	EAT	Series C N-frame panelboard connecting strap, medium, 3.50 in, 1200 A	EDH-EAT-00699	330
505C606G06	primary	EAT	Series C N-frame panelboard connecting strap, long, 3.50 in, 1200 A	EDH-EAT-00700	330
506C052G01	primary	EAT	Series C L-frame panelboard connecting strap, outside pole, 600 A	EDH-EAT-00694	317
5078A98	primary	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	216
5081A08G02	primary	EAT	PRL4 chassis mounting hardware	EDH-EAT-00417	256
5081A09G02	primary	EAT	PRL4 gutter cover mounting hardware	EDH-EAT-00418	257
5155C62H01	primary	EAT	QUICKLAG / GB / GHB 1-pole filler (branch space filler)	EDH-EAT-00253	173
5155C81G01	primary	EAT	Standard trim lock, PRL1/2/3, PRL1a/2a/3a, PRL1X/2X/3X lighting panels	EDH-EAT-00403	174
5155C81G03	primary	EAT	EZ Trim lock, 24-48 in	EDH-EAT-00409	174
5156C09	primary	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	100
5156C10	primary	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	100
5157C83G06	primary	EAT	Trim screws	EDH-EAT-00414	177
5158C03	primary	EAT	Vintage PRL1/PRL2 neutral bar, 100 A and 225 A	EDH-EAT-00239	98
5158C03G01	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	98
5158C03G02	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	98
5158C03G03	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	98
5158C03G04	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	98
5158C04G01	primary	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	99

Number	Type	Mfr	Description	Catalogue ID	Pg
5158C05	primary	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	167
5158C05G01	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00443	99
5158C05G02	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00442	99
5158C05G05	primary	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	99
5158C05G06	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00444	100
5158C05G06 (boxes 30 in and above)	style_number	EAT	Vintage PRL1/PRL2 isolated ground bar, boxes under 30 in	EDH-EAT-00237	99
5652B38G01	primary	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	339
5PCGBLD600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A LD main breaker, single bus	EDH-EAT-00398	265
5PCGBLUG1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A main lugs, double bus	EDH-EAT-00401	265
5PCGBLUG400S	primary	EAT	PRL5P grounded B-phase adapter kit, 400 A main lugs, single bus	EDH-EAT-00396	265
5PCGBLUG600S	primary	EAT	PRL5P grounded B-phase adapter kit, 600 A main lugs, single bus	EDH-EAT-00397	265
5PCGBLUG800S	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A main lugs, single bus	EDH-EAT-00399	265
5PCGBMD800T	primary	EAT	PRL5P grounded B-phase adapter kit, 800 A MD main breaker, double bus	EDH-EAT-00400	266
5PCGBND1200T	primary	EAT	PRL5P grounded B-phase adapter kit, 1200 A ND main breaker, double bus	EDH-EAT-00402	266
5PFP1S	primary	EAT	PRL5P 1X deadfront filler plate, single-bus chassis	EDH-EAT-00384	262
5PFP1T	primary	EAT	PRL5P 1X deadfront filler plate, double-bus chassis	EDH-EAT-00385	262
5PFP2S	primary	EAT	PRL5P 2X deadfront filler plate, single-bus chassis	EDH-EAT-00386	262
5PFP2T	primary	EAT	PRL5P 2X deadfront filler plate, double-bus chassis	EDH-EAT-00387	262
5PFP3S	primary	EAT	PRL5P 3X deadfront filler plate, single-bus chassis	EDH-EAT-00388	263
5PFP3T	primary	EAT	PRL5P 3X deadfront filler plate, double-bus chassis	EDH-EAT-00389	263
5PFP4S	primary	EAT	PRL5P 4X deadfront filler plate, single-bus chassis	EDH-EAT-00390	263
5PFP4T	primary	EAT	PRL5P 4X deadfront filler plate, double-bus chassis	EDH-EAT-00391	263
5PFP5S	primary	EAT	PRL5P 5X deadfront filler plate, single-bus chassis	EDH-EAT-00392	264
5PFP5T	primary	EAT	PRL5P 5X deadfront filler plate, double-bus chassis	EDH-EAT-00393	264
5PFP6S	primary	EAT	PRL5P 6X deadfront filler plate, single-bus chassis	EDH-EAT-00394	264
5PFP6T	primary	EAT	PRL5P 6X deadfront filler plate, double-bus chassis	EDH-EAT-00395	264
5PG1200A	primary	EAT	PRL5P 1200 A ground bar, Al/Cu	EDH-EAT-00382	261
5PG1200C	primary	EAT	PRL5P 1200 A ground bar, copper	EDH-EAT-00383	261
5PLUG31200TC	primary	EAT	PRL5P 600-1200 A lug unit, double-bus chassis	EDH-EAT-00377	259
5PLUG3400SC	primary	EAT	PRL5P 400 A main/through-feed lug unit, single-bus chassis	EDH-EAT-00374	259
5PLUG3600SC	primary	EAT	PRL5P 600 A lug unit, single-bus chassis	EDH-EAT-00375	259
5PLUG3800SC	primary	EAT	PRL5P 800 A lug unit, single-bus chassis	EDH-EAT-00376	260
5PN1200A	primary	EAT	PRL5P 1200 A neutral assembly, Al/Cu	EDH-EAT-00380	260
5PN1200C	primary	EAT	PRL5P 1200 A neutral assembly, copper	EDH-EAT-00381	260
5PN800A	primary	EAT	PRL5P 800 A neutral assembly, Al/Cu, (4) 250-500 kcmil	EDH-EAT-00378	260
5PN800C	primary	EAT	PRL5P 800 A neutral assembly, copper, (4) 250-500 kcmil	EDH-EAT-00379	261
623B222G01	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00674	332
623B222G02	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00675	332
623B222G03	primary	EAT	Series C N-frame rear connecting stud (800 A)	EDH-EAT-00676	332
624B600H01	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00702	276
624B600H02	primary	EAT	Series C F-frame panelboard strap mounting bracket	EDH-EAT-00701	276
624B609G01	primary	EAT	Series C L-frame panelboard connecting strap, center pole, 600 A	EDH-EAT-00693	317

Number	Type	Mfr	Description	Catalogue ID	Pg
625B229G06	primary	EAT	Series C F-frame terminal shield 1-pole, line	EDH-EAT-00629	277
625B229G07	primary	EAT	Series C F-frame terminal shield 2-pole, line	EDH-EAT-00630	278
625B229G08	primary	EAT	Series C F-frame terminal shield 3-pole, line	EDH-EAT-00631	278
625B229G09	primary	EAT	Series C F-frame terminal shield 4-pole, line	EDH-EAT-00632	278
6554C01	primary	EAT	PRL4/PRL4X blank cover for 24 in wide box (1X-20X)	EDH-EAT-00294	255
6554C02	primary	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	256
6555C40H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 2-pole deadfront blank filler	EDH-EAT-00287	215
6555C41H01	primary	EAT	PRL3a C-frame (CA/CAH/HCA) 3-pole deadfront blank filler	EDH-EAT-00288	216
6559C59	primary	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	214
6572C746G01	primary	EAT	PRL4 standard ground bus	EDH-EAT-00238	255
6574C74	primary	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	255
6631C01G01	primary	EAT	Series C J-frame terminal shield 4-pole, line end	EDH-EAT-00636	288
6641C16G01	primary	EAT	Series C J-frame terminal shield 2/3-pole, load end	EDH-EAT-00637	288
6641C16G02	primary	EAT	Series C J-frame terminal shield 4-pole, load end	EDH-EAT-00638	289
6642C14G02	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .75-1 in	EDH-EAT-00658	307
6642C14G03	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .75-1 in	EDH-EAT-00661	307
6642C14G04	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .50-.75 in	EDH-EAT-00659	308
6642C14G05	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .50-.75 in	EDH-EAT-00662	308
6642C14G06	primary	EAT	Series C K-frame rear connecting stud, 400 A short stud, panel .25-.5 in	EDH-EAT-00660	308
6642C14G07	primary	EAT	Series C K-frame rear connecting stud, 400 A long stud, panel .25-.5 in	EDH-EAT-00663	309
673B142G02	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in bus spacing,	EDH-EAT-00679	275
673B142G03	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 150 A	EDH-EAT-00682	275
673B142G04	primary	EAT	Series C F-frame panelboard connecting strap, center pole, 2.75 in, 150 A	EDH-EAT-00681	275
673B142G10	primary	EAT	Series C F-frame panelboard connecting strap, outside pole, 2.75 in, 100 A	EDH-EAT-00680	276
6BL2C	primary	SIE	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	EDH-SIE-00201	716
6 ckt 3X H01; 12/5X H02; 18/8X H03; 24/10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: GB/GHB/GHBS/GHBGFEP/HGHB/GHQ horizontal cov	EDH-EAT-00278	209
6 ckt 3X H01; 12/6X H02; 18/9X H03; 24/12X H04; 30/15X H05; 36/18X H06; 42/21X H07; 48/24X H08	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / EHD-FD-FDB-HFD-FDC twin-mounted 1-3	EDH-EAT-00270	212
6 ckt 3X H01; 12 ckt 5X H02; 18 ckt 8X H03; 24 ckt 10X H04	style_number	EAT	PRL3a/3X horizontal deadfront cover: BA/BAB/BABRP/BABRSP/QBH/QBGF/QBGFEP/QBHGFEP	EDH-EAT-00277	208
6CLE2	primary	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	661
6CLF1	primary	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	717
6CLF1C	alias	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	717
6CLJ1	primary	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	718
6CLJ1C	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	718
6CLL1	primary	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	719
6CLL1C	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	719
6E62	primary	SIE	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	EDH-SIE-00188	720
6F62	primary	SIE	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	EDH-SIE-00190	720
6FPB01	primary	SIE	6FPB01 blank plate, 1.25in unit space	EDH-SIE-00211	657
6FPB02	primary	SIE	6FPB02 blank plate, 2.5in unit space	EDH-SIE-00212	658

Number	Type	Mfr	Description	Catalogue ID	Pg
6FPB03	primary	SIE	6FPB03 blank plate, 3.75in unit space	EDH-SIE-00213	658
6FPB05	primary	SIE	6FPB05 blank plate, 5in unit space	EDH-SIE-00214	658
6FPB10	primary	SIE	6FPB10 blank plate, 10in unit space	EDH-SIE-00215	659
6FPB15	primary	SIE	6FPB15 blank plate, 15in unit space	EDH-SIE-00216	731
6JJ61	primary	SIE	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single	EDH-SIE-00192	721
6JJ62	primary	SIE	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	EDH-SIE-00193	721
6LL61	primary	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	722
6LL61C	alias	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	722
6M61C	primary	SIE	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	EDH-SIE-00203	723
6N61C	primary	SIE	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	EDH-SIE-00204	723
6QJ2	primary	SIE	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	EDH-SIE-00189	724
6QR2	primary	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	662
6QR2CAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	662
6QR2CCAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	662
6SCJ1	primary	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	724
6SCL1	primary	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	725
6SCL61C	primary	SIE	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00202	725
6SJL1	primary	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	726
6SJL1C	alias	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	726
6SLL1	primary	SIE	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	EDH-SIE-00199	726
7494A11G02	primary	EAT	Vintage Fastrim trim clamps for B10B and PRL1/2/3	EDH-EAT-00419	102
7499A48G04	primary	EAT	Chassis mounting hardware bag, PRL1a/2a/3a/1X/2X/3X	EDH-EAT-00415	177
75C145005G703	primary	GEA	QMR panelboard filler plate 3X	EDH-GEA-00275	507
75C145005G711	primary	GEA	CCB panelboard filler plate 2X	EDH-GEA-00270	507
75C145005G715	primary	GEA	CCB panelboard filler plate 6X	EDH-GEA-00271	507
789A448G1	primary	GEA	GE 789A448G1 lug cover, TKM (for TC061/TCAL61/TCAL81/TC081A)	EDH-GEA-00328	595
789A448G2	primary	GEA	GE 789A448G2 lug cover, TKM (for TC0121/TCAL121)	EDH-GEA-00329	596
789A448G3	primary	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	596
789A448G377 (as printed)	alias	GEA	GE 789A448G3 lug cover, TKM (for TC041/TCAL41) - number uncertain	EDH-GEA-00330	596
8000602001	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602001: Hinge pin	EDH-SQD-00167	422
8000602003	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8000602003: Hinge frame leaf	EDH-SQD-00165	421
80025-067-01	supersedes	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	362
80031-024-02	primary	SQD	QED plug-button for unused holes 80031-024-02	EDH-SQD-00162	423
80034-187-02	style_number	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	359
80034-188-03	style_number	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	360
8011417101	primary	SQD	Slotted Roberts-head screw 8011417101 for I-Line deadfront bracket	EDH-SQD-00160	362
80121-651-01	style_number	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	358
80121-652-01	style_number	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	358
80121-653-01	style_number	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	360
80121-752-01	style_number	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	359
8023317701	primary	SQD	NEMA 3R QED-2/CMM/Speed-D door hinge part 8023317701: Hinge door leaf	EDH-SQD-00166	421
8450C62H39	equivalent	EAT	Trim lock for right-handed door	EDH-EAT-00406	175
8450C62H39	primary	EAT	Trim lock for right-handed door	EDH-EAT-00407	175

Number	Type	Mfr	Description	Catalogue ID	Pg
8712C73H01	primary	EAT	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	EDH-EAT-00447	102
911E347P3	primary	GEA	3X branch base (THQB/TEY, A-Series II)	EDH-GEA-00029	501
ACSFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	510
ACSFPKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	510
ACSHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	510
ACSHKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	510
ACSMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	510
ACSMKSK	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	510
ACTFPKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	510
ACTFPKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	511
ACTFPKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	511
ACTFPKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	511
ACTFPKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	512
ACTFPKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	512
ACTFPKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	512
ACTFPKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	513
ACTFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	513
ACTHKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	510
ACTHKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	511
ACTHKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	511
ACTHKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	511
ACTHKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	512
ACTHKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	512
ACTHKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	512
ACTHKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	513
ACTHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	513
ACTMKEB1P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	510
ACTMKEB2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	511
ACTMKEB3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	511
ACTMKJD	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	511
ACTMKQD2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	512

Number	Type	Mfr	Description	Catalogue ID	Pg
ACTMKQD3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	512
ACTMKSE	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	512
ACTMKSF	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	513
ACTMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	513
AEG10	primary	GEA	Spectra equipment ground kit AEG10	EDH-GEA-00236	559
AEG21	primary	GEA	Spectra equipment ground kit AEG21	EDH-GEA-00237	559
AEG21S	primary	GEA	Spectra equipment ground kit AEG21S	EDH-GEA-00238	559
AEG31S	primary	GEA	Spectra equipment ground kit AEG31S	EDH-GEA-00239	560
AEG47	primary	GEA	Spectra equipment ground kit AEG47	EDH-GEA-00240	560
AEG47S	primary	GEA	Spectra equipment ground kit AEG47S	EDH-GEA-00241	560
AFL120	primary	GEA	Spectra feed-thru lug cover plate kit AFL120	EDH-GEA-00243	519
AFL600	primary	GEA	Spectra feed-thru lug cover plate kit AFL600	EDH-GEA-00242	519
AFP2FBD	primary	GEA	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00131	561
AFP2QDD	primary	GEA	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	EDH-GEA-00128	562
AFP2TED	primary	GEA	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	EDH-GEA-00129	562
AFP3EYD	primary	GEA	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	EDH-GEA-00130	562
AFP3FBD	primary	GEA	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00132	563
AFP3QDD	primary	GEA	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	EDH-GEA-00133	563
AFP3SED	primary	GEA	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, du	EDH-GEA-00134	563
AFP3SFD	primary	GEA	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	EDH-GEA-00135	563
AFP3SFS	primary	GEA	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	EDH-GEA-00139	564
AFP3TFD	primary	GEA	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	EDH-GEA-00136	564
AFP3TFS	primary	GEA	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	EDH-GEA-00140	564
AFP4FGD	primary	GEA	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	EDH-GEA-00137	564
AFP4FGS	primary	GEA	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	EDH-GEA-00141	565
AFP4SGD	primary	GEA	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	EDH-GEA-00138	565
AFP4SGS	primary	GEA	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	EDH-GEA-00142	565
AFP5LCS	primary	GEA	Spectra breaker filler plate kit AFP5LCS (SKP, single)	EDH-GEA-00143	565
AFP6SKS	primary	GEA	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	EDH-GEA-00144	566
AHKBE1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	EDH-GEA-00194	570
AHKBF1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	EDH-GEA-00195	571
AHKBFB1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	EDH-GEA-00200	571
AHKBFD1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	EDH-GEA-00198	571
AHKBFG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	EDH-GEA-00199	571
AHKBG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	EDH-GEA-00196	571
AHKBQ1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	EDH-GEA-00197	571
AHKE1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKE1	EDH-GEA-00185	572
AHKEL1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKEL1	EDH-GEA-00186	572

Number	Type	Mfr	Description	Catalogue ID	Pg
AHKF1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKF1	EDH-GEA-00187	572
AHKFD1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFD1	EDH-GEA-00192	572
AHKFG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFG1	EDH-GEA-00193	573
AHKG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKG1	EDH-GEA-00188	573
AHKJ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKJ1	EDH-GEA-00189	573
AHKLB1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKLB1	EDH-GEA-00190	573
AHKQ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKQ1	EDH-GEA-00191	574
AL1000MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00300	440
AL100FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00252	424
AL100FA4	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FC	EDH-SQD-00251	425
AL100TF	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00253	425
AL1200NE6T	primary	SQD	Square D control wire terminal / tapped lug (NA)	EDH-SQD-00301	441
AL1200P24TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00306	471
AL1200P25TK	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00307	471
AL1200P25TK4	primary	SQD	PowerPact P tapped (control-wire) lug kit 1200 A	EDH-SQD-00308	471
AL1200R53TK	primary	SQD	PowerPact R tapped (control-wire) lug kit 1200 A	EDH-SQD-00309	472
AL150FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00254	425
AL150HD	primary	SQD	Standard aluminum mechanical lug kit AL150HD (HD/HG 15-150 A)	EDH-SQD-00082	415
AL175JD	primary	SQD	Standard aluminum mechanical lug kit AL175JD (JD/JG 150-175 A)	EDH-SQD-00083	415
AL250JD	primary	SQD	Standard aluminum mechanical lug kit AL250JD (JD/JG 200-250 A)	EDH-SQD-00084	416
AL250KA	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00255	429
AL250KI	primary	SQD	Square D KA mechanical lug kit (Al lugs) - KI	EDH-SQD-00256	429
AL250KIT	primary	SQD	Square D control wire terminal / tapped lug (KI)	EDH-SQD-00295	431
AL400L61K3	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00221	456
AL400L61K4	primary	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 4P	EDH-SQD-00222	456
AL400L6IK3	alias	SQD	PowerPact L-frame 250 A mechanical lug kit, Al, 3P	EDH-SQD-00221	456
AL400LA	primary	SQD	Standard aluminum mechanical lug kit AL400LA (LA 125-400 A)	EDH-SQD-00085	417
AL400LAT	primary	SQD	Square D control wire terminal / tapped lug (Q4)	EDH-SQD-00296	435
AL400LH7	primary	SQD	Square D LA mechanical lug kit (Al lugs) - Q4	EDH-SQD-00257	432
AL50FA	primary	SQD	Square D FA mechanical lug kit (Al lugs) - FA	EDH-SQD-00250	426
AL600IN	primary	SQD	Square D LC/LI/LE/LX/LXI threaded terminal clip kit	EDH-SQD-00310	439
AL600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (short shield, I-Line)	EDH-SQD-00225	457
AL600LI35	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LE	EDH-SQD-00258	436
AL600LI35T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00297	439
AL600LI5	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LI	EDH-SQD-00259	436
AL600LI5T	primary	SQD	Square D control wire terminal / tapped lug (LC)	EDH-SQD-00298	440
AL600LI7	primary	SQD	Square D LI mechanical lug kit (Al lugs) - LC	EDH-SQD-00260	436
AL600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 3P (medium shield)	EDH-SQD-00223	457
AL600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Al, 4P (medium shield)	EDH-SQD-00224	457
AL800M23K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al	EDH-SQD-00311	469
AL800M23TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00302	469
AL800M23TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00304	469
AL800P6TK	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00303	470
AL800P6TK4	primary	SQD	PowerPact M/P tapped (control-wire) lug kit 800 A	EDH-SQD-00305	470
AL800P7K	primary	SQD	PowerPact M/P-frame 800 A mechanical lug kit, Al (750 kcmil)	EDH-SQD-00312	470
AL900MAT	primary	SQD	Square D control wire terminal / tapped lug (MA)	EDH-SQD-00299	440

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC2FGM	alias	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	537
AMC2FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	537
AMC2FJ	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	537
AMC2FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	537
AMC2FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	538
AMC2FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	538
AMC2FLS	alias	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	538
AMC2FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	538
AMC2GM	alias	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	539
AMC2GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	539
AMC2JK	alias	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	540
AMC2JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	540
AMC2KM	alias	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	540
AMC2KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	540
AMC3FGM	alias	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	541
AMC3FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	541
AMC3FJ	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	541
AMC3FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	541
AMC3FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	542
AMC3FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	542
AMC3FLS	alias	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	542
AMC3FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	542
AMC3GM	alias	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	543
AMC3GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	543
AMC3JK	alias	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	543
AMC3JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	543
AMC3KM	alias	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	544
AMC3KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	544
AMC4EB	alias	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	544
AMC4EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	544

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC4EBS	alias	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	545
AMC4EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	545
AMC4FDB	alias	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	545
AMC4FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	545
AMC4FDS	alias	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	546
AMC4FDSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	546
AMC4FGB	alias	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	546
AMC4FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	546
AMC4FJ	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	547
AMC4FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	547
AMC4FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	548
AMC4FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	548
AMC4FLS	alias	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	548
AMC4FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	548
AMC4GB	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	549
AMC4GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	549
AMC4JK	alias	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	549
AMC4JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	549
AMC4QD	alias	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	550
AMC4QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	550
AMC4SE	alias	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	551
AMC4SEFP	primary	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	551
AMC6EB	alias	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	551
AMC6EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	551
AMC6EBS	alias	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	552
AMC6EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	552
AMC6EY	alias	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	552
AMC6EYFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	552
AMC6FB	alias	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	553
AMC6FBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	553

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC6FDB	alias	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	553
AMC6FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	553
AMC6FDSPF	primary	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	554
AMC6FDSPF	alias	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	554
AMC6FGB	alias	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	554
AMC6FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	554
AMC6FJ	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	555
AMC6FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	555
AMC6FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	555
AMC6FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	555
AMC6FLS	alias	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	556
AMC6FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	556
AMC6GB	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	556
AMC6GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	556
AMC6JK	alias	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	557
AMC6JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	557
AMC6QB	alias	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	557
AMC6QBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	557
AMC6QD	alias	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	558
AMC6QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	558
AMCB2FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	520
AMCB2FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	520
AMCB2FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	521
AMCB2FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	521
AMCB2FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	521
AMCB2FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	521
AMCB2GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	522
AMCB2GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	522
AMCB2KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	522
AMCB2KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	522

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB3FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	523
AMCB3FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	523
AMCB3FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	523
AMCB3FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	523
AMCB3FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	524
AMCB3FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	524
AMCB3GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	524
AMCB3GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	524
AMCB3KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	525
AMCB3KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	525
AMCB3LB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	525
AMCB3LBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	525
AMCB4EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	526
AMCB4EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	526
AMCB4EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	526
AMCB4EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	526
AMCB4FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	527
AMCB4FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	527
AMCB4FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	527
AMCB4FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	527
AMCB4FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	527
AMCB4FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	527
AMCB4FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	528
AMCB4FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	528
AMCB4FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	528
AMCB4FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	528
AMCB4GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	529
AMCB4GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	529
AMCB4QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	529
AMCB4QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	529

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB4SE	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	530
AMCB4SEFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	530
AMCB6EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	530
AMCB6EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	530
AMCB6EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	531
AMCB6EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	531
AMCB6FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	531
AMCB6FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	531
AMCB6FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	532
AMCB6FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	532
AMCB6FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	532
AMCB6FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	532
AMCB6FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	533
AMCB6FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	533
AMCB6FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	533
AMCB6FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	533
AMCB6GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	534
AMCB6GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	534
AMCB6QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	534
AMCB6QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	534
AMCB6TEDL	primary	GEA	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	EDH-GEA-00244	566
AML3120CFP	primary	GEA	Spectra main lug module AML3120CFP (1200 A compression)	EDH-GEA-00231	515
AML3120FP	primary	GEA	Spectra main lug module AML3120FP (1200 A mechanical)	EDH-GEA-00226	515
AML3250CFP	primary	GEA	Spectra main lug module AML3250CFP (250 A compression)	EDH-GEA-00227	516
AML3250FP	primary	GEA	Spectra main lug module AML3250FP (250 A mechanical)	EDH-GEA-00220	516
AML3250SFP	primary	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	516
AML3400CFP	primary	GEA	Spectra main lug module AML3400CFP (400 A compression)	EDH-GEA-00228	516
AML3400FP	primary	GEA	Spectra main lug module AML3400FP (400 A mechanical)	EDH-GEA-00222	517
AML3400SFP	primary	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	517
AML3600CFP	primary	GEA	Spectra main lug module AML3600CFP (600 A compression)	EDH-GEA-00229	517
AML3600FP	primary	GEA	Spectra main lug module AML3600FP (600 A mechanical)	EDH-GEA-00224	517
AML3600SFP	primary	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	518
AML3800CFP	primary	GEA	Spectra main lug module AML3800CFP (800 A compression)	EDH-GEA-00230	518
AML3800FP	primary	GEA	Spectra main lug module AML3800FP (800 A mechanical)	EDH-GEA-00225	518
ANK120D	primary	GEA	Spectra neutral kit ANK120D	EDH-GEA-00235	558
ANK800D	primary	GEA	Spectra neutral kit ANK800D	EDH-GEA-00234	558
ANKN120	primary	GEA	Spectra neutral kit ANKN120	EDH-GEA-00233	559

Number	Type	Mfr	Description	Catalogue ID	Pg
ANKN400	primary	GEA	Spectra neutral kit ANKN400	EDH-GEA-00232	559
APHBL	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	EDH-GEA-00084	488
APHBQ	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	EDH-GEA-00083	489
APN48	primary	GEA	A-Series Permanent circuit number kit, Nos 1-48	EDH-GEA-00093	489
APN84	primary	GEA	A-Series Permanent circuit number kit, Nos 43-84	EDH-GEA-00094	490
APP1	primary	GEA	Spectra blank filler plate 1X (36, 40 in box)	EDH-GEA-00202	566
APP1S	primary	GEA	Spectra blank filler plate 1X (27, 31 in box)	EDH-GEA-00201	566
APP1W	primary	GEA	Spectra blank filler plate 1X (44 in box)	EDH-GEA-00203	567
APP2	primary	GEA	Spectra blank filler plate 2X (36, 40 in box)	EDH-GEA-00205	567
APP2S	primary	GEA	Spectra blank filler plate 2X (27, 31 in box)	EDH-GEA-00204	567
APP2W	primary	GEA	Spectra blank filler plate 2X (44 in box)	EDH-GEA-00206	567
APP3	primary	GEA	Spectra blank filler plate 3X (36, 40 in box)	EDH-GEA-00208	567
APP3S	primary	GEA	Spectra blank filler plate 3X (27, 31 in box)	EDH-GEA-00207	568
APP3W	primary	GEA	Spectra blank filler plate 3X (44 in box)	EDH-GEA-00209	568
APP4	primary	GEA	Spectra blank filler plate 4X (36, 40 in box)	EDH-GEA-00211	568
APP4S	primary	GEA	Spectra blank filler plate 4X (27, 31 in box)	EDH-GEA-00210	568
APP4W	primary	GEA	Spectra blank filler plate 4X (44 in box)	EDH-GEA-00212	568
APP5	primary	GEA	Spectra blank filler plate 5X (36, 40 in box)	EDH-GEA-00214	569
APP5S	primary	GEA	Spectra blank filler plate 5X (27, 31 in box)	EDH-GEA-00213	569
APP5W	primary	GEA	Spectra blank filler plate 5X (44 in box)	EDH-GEA-00215	569
APP6	primary	GEA	Spectra blank filler plate 6X (36, 40 in box)	EDH-GEA-00217	569
APP6S	primary	GEA	Spectra blank filler plate 6X (27, 31 in box)	EDH-GEA-00216	569
APP6W	primary	GEA	Spectra blank filler plate 6X (44 in box)	EDH-GEA-00218	570
ASP25AD65KA	primary	GEA	A-Series AD 25 to 65 kAIC barrier kit	EDH-GEA-00087	487
ASP2PTFJ3P	primary	GEA	A-Series 2P to 3P SF conversion kit for horizontal subfeed	EDH-GEA-00086	489
ASP2PTQD3P	primary	GEA	A-Series 2P to 3P TQD conversion kit	EDH-GEA-00085	489
ASPAQLEBKT	primary	GEA	A-Series AQ/AL/AE rail bracket	EDH-GEA-00089	487
ASPFB12P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	EDH-GEA-00038	484
ASPFB3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	EDH-GEA-00039	484
ASPP6EY12D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	EDH-GEA-00009	491
ASPP6EY6D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	EDH-GEA-00008	491
ASPP6FB6D	primary	GEA	A-Series II power panel FB three-phase circuit breaker kit, six-pole	EDH-GEA-00005	492
ASPP6QB12D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	EDH-GEA-00007	492
ASPP6QB6D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	EDH-GEA-00006	493
ASPP6QD6D	primary	GEA	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-br	EDH-GEA-00001	493
ASPP6SE6D	primary	GEA	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	EDH-GEA-00002	494
ASPP6SF3S	primary	GEA	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	EDH-GEA-00003	494
ASPP6SG3S	primary	GEA	A-Series II power panel SG three-phase circuit breaker kit, three-pole	EDH-GEA-00004	495
ASPTED3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	EDH-GEA-00036	484
ASPTQD3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	EDH-GEA-00037	484
B2016RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00533	334

Number	Type	Mfr	Description	Catalogue ID	Pg
B2016RDL	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00534	334
B2500RD	primary	EAT	Series C R-frame copper rear connector	EDH-EAT-00535	334
BBKB32	primary	SIE	P2/P3 BL/BQD 100A max twin-mount branch strap kit	EDH-SIE-00102	629
BBKEB32	primary	SIE	P3 NEB/HEB 6-pole 3in branch breaker kit	EDH-SIE-00107	640
BBKED32	primary	SIE	P2/P3 ED twin-mount branch strap kit	EDH-SIE-00104	629
BBKGB32	primary	SIE	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	EDH-SIE-00106	630
BBKNB32	primary	SIE	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	EDH-SIE-00105	630
BBKQ1	primary	SIE	P2 QJ single-mount branch strap kit	EDH-SIE-00110	631
BBKQ2	primary	SIE	P3 branch breaker kit for 2- and 3-pole QJ twin mount	EDH-SIE-00111	641
BBKQR1	primary	SIE	P2 QR 225A max single-mount branch strap kit	EDH-SIE-00108	631
BBKQR2	primary	SIE	P3 twin breaker mounting kit for QR	EDH-SIE-00109	641
BBKQRP1FK	primary	SIE	P2 filler kit for QR	EDH-SIE-00080	639
BBKQRP2FK	primary	SIE	P3 filler kit for QR	EDH-SIE-00081	644
BBKVA4P2P3	primary	SIE	P2/P3 3VA41/xGB 125A max twin-mount strap kit	EDH-SIE-00103	631
BBKVA5262P2HW	primary	SIE	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/	EDH-SIE-00113	638
BBKVA5262P2S	primary	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	632
BBKVA5262S	alias	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	632
BBKVA52P3HW	primary	SIE	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting	EDH-SIE-00115	644
BBKVA52P3T	primary	SIE	P3 strap kit	EDH-SIE-00114	642
BHT	primary	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00458	20
BINA	primary	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00456	20
BK1A	primary	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	710
BNDKT	primary	GEA	A-Series Service entrance kit 225 A	EDH-GEA-00081	488
BNDKT6	primary	GEA	A-Series Service entrance kit 400/600 A	EDH-GEA-00082	488
BNK2	primary	SIE	Neutral lug kit	EDH-SIE-00116	632
BNK350N	primary	SIE	Neutral lug kit	EDH-SIE-00117	628
BNKP2EX1	primary	SIE	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/G	EDH-SIE-00119	633
Bottom H01 (no L/O), H02 (2 L/O), H03 (1 L/O RT), H04 (1 L/O LT); top H05, H07 (1 L/O RT), H08 (1 L/O LT)	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame sub-feed twin cover 20X	EDH-EAT-00265	209
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: K-Frame vertical cover 15X (PRL3a)	EDH-EAT-00260	208
Bottom T-M H01/H02, bottom electronic H03/H04, top T-M H05/H06, top electronic H07/H08	style_number	EAT	PRL3a/3X deadfront device cover: L-Frame vertical cover 17X (PRL3a)	EDH-EAT-00261	207
BQFS1K	equivalent	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	734
BQFS2	primary	SIE	Siemens BQFS2 finger-safe terminal shield, BQ/BQXD (2 pcs)	EDH-SIE-00252	734
BRFP	primary	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00454	20
BRL200	primary	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00453	18
BRLW	primary	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00459	21
BRLW1	primary	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00460	21
BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00450	19
BRSF125	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00448	19
BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00449	19

Number	Type	Mfr	Description	Catalogue ID	Pg
BWFP	primary	EAT	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware	EDH-EAT-00455	20
BX2457 G02; BX2473 G03; BX2490 G04; BX3673/BX4473 G05; BX3690/BX4490 G06	style_number	EAT	PRL4 vented cover assembly (side rails + top/bottom vented covers)	EDH-EAT-00298	255
CCA4K	primary	EAT	Challenger twin mounting hardware kit CCA4K, 225 A max, 240 V	EDH-EAT-00766	82
CCBFP1	primary	GEA	CCB panelboard filler plate 1X	EDH-GEA-00267	507
CCBFP3	primary	GEA	CCB panelboard filler plate 3X	EDH-GEA-00268	507
CCBFP5	primary	GEA	CCB panelboard filler plate 5X	EDH-GEA-00269	508
CCE125	primary	SIE	Siemens CCE125 compression lug, ED 15-125A	EDH-SIE-00263	738
CCF250	primary	SIE	Siemens CCF250 compression lug, FD	EDH-SIE-00267	742
CCL600	primary	SIE	Siemens CCL600 compression lug, JD/LD	EDH-SIE-00274	744
CCM800K2	primary	SIE	Siemens CCM800K2 compression lug kit, MD 2-pole	EDH-SIE-00290	754
CCM800K3	primary	SIE	Siemens CCM800K3 compression lug kit, MD 3-pole	EDH-SIE-00291	754
CCN1200K2	primary	SIE	Siemens CCN1200K2 compression lug kit, ND 2-pole	EDH-SIE-00292	756
CCN1200K3	primary	SIE	Siemens CCN1200K3 compression lug kit, ND 3-pole	EDH-SIE-00293	756
CCQ250	primary	SIE	Siemens CCQ250 compression lug, QR2	EDH-SIE-00255	737
CED3K	primary	EAT	Challenger twin mounting hardware kit CED3K, 225 A max, 600 V	EDH-EAT-00767	83
CED4BK	primary	EAT	Challenger twin (PM4b) mounting hardware kit CED4BK, 225 A max, 600 V	EDH-EAT-00769	83
CED4K	primary	EAT	Challenger twin mounting hardware kit CED4K, 225 A max, 240 V	EDH-EAT-00768	83
CF16RJ63C36	primary	SQD	OEM QED-2 I-Line switchboard interior CF16RJ63C36	EDH-SQD-00176	419
CF20R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20R63C	EDH-SQD-00172	420
CF20RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF20RJ63C	EDH-SQD-00174	420
CF25R63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF25R63C	EDH-SQD-00173	420
CF30RJ63C	primary	SQD	OEM QED-2 I-Line switchboard interior CF30RJ63C	EDH-SQD-00175	420
CFD3K	primary	EAT	Challenger twin mounting hardware kit CFD3K, 150 A max, 600 V	EDH-EAT-00770	83
CFD4BK	primary	EAT	Challenger twin mounting hardware kit CFD4BK, 150 A max, 600 V	EDH-EAT-00772	84
CFD4K	primary	EAT	Challenger twin mounting hardware kit CFD4K, 150 A max, 600 V	EDH-EAT-00771	84
Chassis height 14X G01; 23X G02; 31X G03; 40X G04; 53X G05	style_number	EAT	PRL3a/3X deadfront assembly frame (rails and end covers)	EDH-EAT-00254	214
CJD4K	primary	EAT	Challenger twin mounting hardware kit CJD4K, 250 A max, 600 V	EDH-EAT-00773	84
CJDS4BK	primary	EAT	Challenger single mounting hardware kit CJDS4BK, 250 A max, 600 V	EDH-EAT-00775	84
CJDS4K	primary	EAT	Challenger listed 'twin' (name suggests single) mounting hardware kit CJDS4K, 25	EDH-EAT-00774	85
CKD4K	primary	EAT	Challenger PM4a (no further description) mounting hardware kit CKD4K	EDH-EAT-00776	85
CKDS4BK	primary	EAT	Challenger single mounting hardware kit CKDS4BK, 400 A max, 600 V	EDH-EAT-00778	85
CKDS4K	primary	EAT	Challenger single mounting hardware kit CKDS4K, 400 A max, 600 V	EDH-EAT-00777	85
CLD4K	primary	EAT	Challenger single mounting hardware kit CLD4K, 600 A max, 600 V	EDH-EAT-00779	86
CLDS4BK	primary	EAT	Challenger single mounting hardware kit CLDS4BK, 600 A max, 600 V	EDH-EAT-00780	86
CLRSJL3	primary	SIE	Siemens CLRSJL3 rear-stud shield kit, CJD/SCJD/CLD/SCLD	EDH-SIE-00313	746
CMD4K	primary	EAT	Challenger single mounting hardware kit CMD4K, 800 A max, 600 V	EDH-EAT-00781	86

Number	Type	Mfr	Description	Catalogue ID	Pg
CND4K	primary	EAT	Challenger single mounting hardware kit CND4K, 1200 A max, 600 V	EDH-EAT-00782	86
CNLK30A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	697
CNLK42A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	697
CNLK42B	primary	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	697
CNLK54A	supersedes	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	697
CNLK54B	primary	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	697
Controller 5X H01; Expansion 7X H02, 16X H03	style_number	EAT	PRL3a/3X horizontal deadfront cover: Pow-R-Command controller / expansion cover	EDH-EAT-00279	211
CU100FA	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00262	426
CU100TF	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FA	EDH-SQD-00263	426
CU150HD	primary	SQD	Optional copper mechanical lug kit CU150HD (HD/HG 15-150 A)	EDH-SQD-00086	417
CU250JD	primary	SQD	Optional copper mechanical lug kit CU250JD (JD/JG 150-250 A)	EDH-SQD-00087	418
CU250KA	primary	SQD	Square D KA mechanical lug kit (Cu lugs) - KI	EDH-SQD-00264	430
CU30FA4	primary	SQD	Square D FA mechanical lug kit (Cu lugs) - FC	EDH-SQD-00261	427
CU400L61K3	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 3P	EDH-SQD-00226	458
CU400L61K4	primary	SQD	PowerPact L-frame 250/400 A mechanical lug kit, Cu, 4P	EDH-SQD-00227	458
CU400LA	primary	SQD	Optional copper mechanical lug kit CU400LA (LA 125-400 A)	EDH-SQD-00088	418
CU600LF52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00230	458
CU600LI35	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00265	437
CU600LI5	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00266	437
CU600LI7	primary	SQD	Square D LI mechanical lug kit (Cu lugs) - LI	EDH-SQD-00267	437
CU600LS52K3	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 3P	EDH-SQD-00228	459
CU600LS52K4	primary	SQD	PowerPact L-frame 400/600 A mechanical lug kit, Cu, 4P	EDH-SQD-00229	459
CU-NFJ	primary	OTH	Frank Adam hardware kit CU-NFJ (copper, for NFJ breakers? - inferred)	EDH-OTH-00001	788
CVC100FA	primary	SQD	Square D FA Cu compression lug kit	EDH-SQD-00282	427
CVC250KA3	primary	SQD	Square D KA Cu compression lug kit	EDH-SQD-00283	430
CVC400LA3	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00284	432
CVC400LA5	primary	SQD	Square D LA Cu compression lug kit	EDH-SQD-00285	432
CVC600LI5	primary	SQD	Square D LI Cu compression lug kit	EDH-SQD-00286	438
CYA060HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00208	443
CYA150HD	primary	SQD	PowerPact H-frame Cu compression lug kit	EDH-SQD-00209	444
CYA150JD	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00210	450
CYA250J3	primary	SQD	PowerPact J-frame Cu compression lug kit	EDH-SQD-00211	450
CYA400L31K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00212	459
CYA400L31K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00217	460
CYA400L51K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00214	460
CYA400L51K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00219	460
CYA400L71K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00216	461
CYA600L32K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00213	461
CYA600L32K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00218	461
CYA600L52K3	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00215	462
CYA600L52K4	primary	SQD	PowerPact L-frame Cu compression lug kit	EDH-SQD-00220	462
DFFP01A	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	705
DFFP01B	primary	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	705
DFFP01C	primary	SIE	Revised P1 400A main blank filler plate	EDH-SIE-00065	705
DFFP1	supersedes	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	706
DFFP1A	primary	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	706

Number	Type	Mfr	Description	Catalogue ID	Pg
DFFP1A	superseded_by	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	727
DFFP3	primary	SIE	Deadfront filler kit	EDH-SIE-00076	637
DFFP6	primary	SIE	Deadfront filler kit	EDH-SIE-00077	637
DFFPED01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	708
DFFPED01	primary	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	627
DFFPFD01	primary	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	706
DFFPJD01	primary	SIE	JD main filler plate (plastic)	EDH-SIE-00071	707
DFFPJD02	primary	SIE	JD main filler plate for Revised P1 400A with large MB opening only	EDH-SIE-00072	707
DFFPQJ01	primary	SIE	QJ main filler plate	EDH-SIE-00073	707
DFFPQJ02	primary	SIE	QJ main filler plate	EDH-SIE-00074	708
DFFPVA41A	primary	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	708
DFFPVA41A	superseded_by	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	627
DFFPVA5262A	primary	SIE	RP1 main or subfeed filler	EDH-SIE-00067	708
DFFPVA5262P2A	primary	SIE	3VA52/61/62 filler for single mount P2/P3 applications	EDH-SIE-00078	637
DFFPVA5262P2B	primary	SIE	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or	EDH-SIE-00079	637
DFFPVA5363A	primary	SIE	RP1 400A main filler for 3VA53/63	EDH-SIE-00068	709
DFK07	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00086	636
DFK08	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00087	636
DFK1	primary	SIE	P2/P3 deadfront center strip kit	EDH-SIE-00085	636
DFP3AP01	primary	SIE	P3 adapter plate	EDH-SIE-00084	638
DSLNEJT	primary	ZIN	Zinsco double slot twin mounting hardware, NEJ type	EDH-ZIN-00008	780
DSLNET	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NE breakers (inferred from nam	EDH-ZIN-00007	780
DSLNFT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NF/NFJ (inferred from name)	EDH-ZIN-00009	780
DSLNJT	primary	ZIN	Zinsco double slot twin mounting hardware for FPE NJ/NJL (inferred from name)	EDH-ZIN-00010	781
DSLNM	primary	ZIN	Zinsco double slot mounting hardware for FPE NM (inferred from name)	EDH-ZIN-00011	781
DSLNMS	primary	ZIN	Zinsco DSLNM mounting hardware (single?)	EDH-ZIN-00012	781
DSLQB	primary	ZIN	Zinsco double slot breaker mounting hardware for QB	EDH-ZIN-00005	781
DSLQFB	primary	ZIN	Zinsco double slot breaker mounting hardware for QFB	EDH-ZIN-00006	781
EBF1	primary	SIE	NEB/HEB filler plate (EB deadfront filler)	EDH-SIE-00083	643
ECGK	primary	SIE	Copper equipment ground bus kit	EDH-SIE-00099	700
EEC3K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.25 in conductor opening	EDH-EAT-00573	337
EEC4K	primary	EAT	Series G EG-frame terminal end cover (gas barrier) 0.41 in conductor opening	EDH-EAT-00574	337
EF2RTDK	primary	EAT	Series G EG end cap kit, 2-pole, imperial	EDH-EAT-00584	339
EF2RTWK	primary	EAT	Series G EG end cap kit, 2-pole, metric	EDH-EAT-00581	339
EF3RTDK	primary	EAT	Series G EG end cap kit, 3-pole, imperial	EDH-EAT-00585	339
EF3RTWK	primary	EAT	Series G EG end cap kit, 3-pole, metric	EDH-EAT-00582	340
EF4RTDK	primary	EAT	Series G EG end cap kit, 4-pole, imperial	EDH-EAT-00586	340
EF4RTWK	primary	EAT	Series G EG end cap kit, 4-pole, metric	EDH-EAT-00583	340
EFTS3K	primary	EAT	Series G EG-frame terminal shield IP30 3-pole (line terminal area)	EDH-EAT-00570	338
EFTS4K	primary	EAT	Series G EG-frame terminal shield IP30 4-pole	EDH-EAT-00571	338
EGK	primary	SIE	Al/Cu equipment ground bus kit	EDH-SIE-00098	700
EGS12	primary	GEA	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	EDH-GEA-00097	486
EIPBK	primary	EAT	Series G EG-frame interphase barriers (package of 12 priced individually)	EDH-EAT-00572	338

Number	Type	Mfr	Description	Catalogue ID	Pg
Enclosure height 24 in G01; 36 in G02; 42 in G07; 48 in G03; 60 in G04; 72 in G05; 90 in G06	style_number	EAT	PRL1a/2a/1X/2X deadfront cover assembly	EDH-EAT-00241	170
EWK1	primary	SIE	End wall kit with knockouts (20in W x 5.75in D) 20in	EDH-SIE-00240	709
EWK1B	primary	SIE	End wall kit without knockouts (20in W x 5.75in D) 20in	EDH-SIE-00243	710
EWK2	primary	SIE	End wall kit with knockouts (24in W x 7.75in D) 24in	EDH-SIE-00241	643
EWK2B	primary	SIE	End wall kit without knockouts (24in W x 7.75in D) 24in	EDH-SIE-00244	643
EWK3	primary	SIE	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	EDH-SIE-00242	710
FAT	primary	SQD	Square D control wire terminal / tapped lug (FA)	EDH-SQD-00294	428
FCAL12	primary	GEA	GE FCAL12 single lug, Record Plus FB/FC 100, 15-20 A	EDH-GEA-00369	599
FCAL13	primary	GEA	GE FCAL13 single lug, Record Plus FB/FC 100, 25-60 A	EDH-GEA-00371	599
FCAL14	primary	GEA	GE FCAL14 single lug, Record Plus FB/FC 100, 70-100 A	EDH-GEA-00373	599
FCAL15	primary	GEA	GE FCAL15 single lug, Record Plus FE 250 (150 A)	EDH-GEA-00375	601
FCAL16	primary	GEA	GE FCAL16 single lug, Record Plus FE 250 (250 A)	EDH-GEA-00378	601
FCALK12	primary	GEA	GE FCALK12 lug kit (set of 3), Record Plus FB/FC 100, 15-20 A	EDH-GEA-00370	598
FCALK13	primary	GEA	GE FCALK13 lug kit (set of 3), Record Plus FB/FC 100, 25-60 A	EDH-GEA-00372	598
FCALK14	primary	GEA	GE FCALK14 lug kit (set of 3), Record Plus FB/FC 100, 70-100 A	EDH-GEA-00374	598
FCALK15	primary	GEA	GE FCALK15 lug kit (3 lugs + lug cover), Record Plus FE (150 A)	EDH-GEA-00376	600
FCALK15LV	primary	GEA	GE FCALK15LV lug kit with control wire terminal, Record Plus FE (150 A)	EDH-GEA-00377	600
FCALK16	primary	GEA	GE FCALK16 lug kit (3 lugs + lug cover), Record Plus FE (250 A)	EDH-GEA-00379	600
FCALK16LV	primary	GEA	GE FCALK16LV lug kit with control wire terminal, Record Plus FE (250 A)	EDH-GEA-00380	601
FCALK218H	primary	GEA	GE FCALK218H 2-pole lug kit, Record Plus FG 600	EDH-GEA-00381	602
FCALK318H	primary	GEA	GE FCALK318H 3-pole lug kit, Record Plus FG 600	EDH-GEA-00382	602
FCWTK	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00617	282
FCWTK225	primary	EAT	Series C F-frame control wire terminal kit	EDH-EAT-00618	282
FGH1LCK	primary	GEA	GE FGH1LCK lug cover kit, Record Plus FG	EDH-GEA-00383	603
FGJN3	primary	GEA	GE FGJN3 nut plate / terminal shoe, Record Plus FG	EDH-GEA-00385	603
FGJS3	primary	GEA	GE FGJS3 terminal shield fin cover, Record Plus FG	EDH-GEA-00384	602
FJ3RTDK	primary	EAT	Series G JG end cap kit, 3-pole, imperial	EDH-EAT-00589	343
FJ3RTWK	primary	EAT	Series G JG end cap kit, 3-pole, metric	EDH-EAT-00587	343
FJ4RTDK	primary	EAT	Series G JG end cap kit, 4-pole, imperial	EDH-EAT-00590	344
FJ4RTWK	primary	EAT	Series G JG end cap kit, 4-pole, metric	EDH-EAT-00588	344
FJCWTK	primary	EAT	Series G JG-frame control wire terminal kit (package of 14	EDH-EAT-00575	344
FJIPBK	primary	EAT	Series G JG-frame interphase barriers 3-pole (package of 2)	EDH-EAT-00568	342
FJIPBK4	primary	EAT	Series G JG-frame interphase barriers 4-pole (package of 2)	EDH-EAT-00569	342
FJTS3K	primary	EAT	Series G JG-frame terminal shield IP30 2/3-pole	EDH-EAT-00566	343
FJTS4K	primary	EAT	Series G JG-frame terminal shield IP30 4-pole	EDH-EAT-00567	343
FPENEFT	primary	ZIN	Sylvania twin mounting hardware for FPE NEF breaker	EDH-ZIN-00021	782
G01 24 in Al/Cu; G02 24 in Cu; G03 36-90 in Al/Cu; G04 36-90 in Cu	style_number	EAT	Isolated ground bar assembly (PRL1a/2a/3a/1X/2X/3X)	EDH-EAT-00236	167
G01 24 in encl Al/Cu; G03 24 in Cu; G02 36-90 in encl Al/Cu; G04 36-90 in Cu (vintage PRL: G02 boxes >=30 in, G01 boxes <30 in)	style_number	EAT	Standard ground bar assembly (PRL1a/2a/3a/1X/2X/3X, also vintage PRL1/2/3)	EDH-EAT-00235	167
GCWTK	alias	EAT	Series G Series G / G-frame control wire terminal kit (package of 12); for steel	EDH-EAT-00576	339

Number	Type	Mfr	Description	Catalogue ID	Pg
GTIN 785901798019	alias	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	370
GTSK3	primary	EAT	Series C G-frame terminal shield	EDH-EAT-00628	285
GYT	primary	SQD	Square D G-frame terminal shield 3P	EDH-SQD-00271	472
H01	style_number	EAT	PRL3a/3X deadfront device cover: LA-P vertical cover 21X, top only	EDH-EAT-00263	207
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / F-frame twin-mounted 1-pole horizont	EDH-EAT-00272	213
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00273	213
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: PDG2 / FD-HFD-FDC-ED-EDH-EDC single-mounted	EDH-EAT-00274	214
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 3-pole horizontal cover 3X (PRL3	EDH-EAT-00275	208
H01	style_number	EAT	PRL3a/3X horizontal deadfront cover: CA/CAH/HCA 2-pole horizontal cover 2X (PRL3	EDH-EAT-00276	209
H01 = 1.00 in (25.4 mm) ... H16 = 16.00 in (406.4 mm), 1 in increments	style_number	EAT	PRL1a/2a/1X/2X deadfront blank covers 1-16 in	EDH-EAT-00249	173
H01 12 ckt 10 in; H02 18/13 in; H03 24/16 in; H04 30/19 in; H05 36/22 in; H06 42/25 in; H07 48/28 in; H08 54/31 in; H09 60/34 in	style_number	EAT	Vintage PRL1 branch section deadfront cover	EDH-EAT-00289	100
H01 = 1X ... H12 = 12X	style_number	EAT	PRL3a/3X neutral / blank cover 1X-12X	EDH-EAT-00269	215
H01 bottom/H02 with lock-offs; H03 top/H04 with lock-offs	style_number	EAT	PRL3a/3X deadfront device cover: J-Frame vertical cover 14X (PRL3a)	EDH-EAT-00259	207
H01 FCL; H02 FB-P	style_number	EAT	PRL3a/3X deadfront device cover: FCL (H01) and FB-P top-only (H02) vertical cove	EDH-EAT-00262	209
H01/H02 top; H03/H04 bottom (without/with lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: LCL vertical cover 21X	EDH-EAT-00264	207
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: EHD/FD/FDB/HFD/FDC/ED/EDH/EDC vertical cover 7X (P	EDH-EAT-00267	208
H01/H03 top; H04/H05 bottom (without / with lock-offs)	style_number	EAT	PRL3a deadfront device cover: FD/HFD/FDC/ED/EDH vertical cover 10X (PRL3a, pre-2	EDH-EAT-00268	211
H01-H09 (12-60 circuits, 10-34 in high; same heights as 5156C10)	style_number	EAT	Vintage PRL2 branch section deadfront cover	EDH-EAT-00290	100
H01 (top and bottom)	style_number	EAT	PRL1a/2a 100 A MLO/SFL/TFL or F-Frame (100 A max) vertical device cover (pre-202	EDH-EAT-00245	170
H01 (top and bottom)	style_number	EAT	PRL1a/2a 225 A MLO/SFL/TFL or F-Frame (225 A max) vertical device cover (pre-202	EDH-EAT-00246	171
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 100 A MLO, SFL, TFL or F-Frame/PD2 (100 A max) vertical device co	EDH-EAT-00242	172
H01 top, H02 bottom	style_number	EAT	PRL1a/2a/1X/2X 400 A MLO, TFL, K-Frame or PDG3 vertical device cover	EDH-EAT-00244	172
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO/TFL or K-Frame vertical device cover (pre-2021 drawing)	EDH-EAT-00247	171
H01 top, H02 bottom	style_number	EAT	PRL1a/2a 400 A MLO, SFL, TFL or J-Frame vertical device cover	EDH-EAT-00248	171
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG2xG/M/P (PRL3X) / FD, HFD, FDC, ED, EDH (PRL	EDH-EAT-00256	212
H01 top, H02 bottom	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 600 A vertical cover, 18X (PRL3X), no lock	EDH-EAT-00258	226
H01 top, H02 bottom (same with/without lock-offs)	style_number	EAT	PRL3a/3X deadfront device cover: PDG2 (PRL3X) / EHD, FD, FDB, HFD, FDC, ED, EDH,	EDH-EAT-00255	212

Number	Type	Mfr	Description	Catalogue ID	Pg
H01 top, H04 bottom	style_number	EAT	PRL1a/2a/1X/2X 225 A MLO, SFL, TFL or F-Frame/PD2 (225 A max) vertical device co	EDH-EAT-00243	172
H01 top (thermal-magnetic), H02 bottom (PXR)	style_number	EAT	PRL3a/3X deadfront device cover: PDG3 400 A vertical cover, 15X (PRL3X)	EDH-EAT-00257	226
HLN1BL	primary	SQD	I-Line blank extension HLN1BL	EDH-SQD-00139	358
HLN4BL	primary	SQD	I-Line blank extension HLN4BL	EDH-SQD-00140	358
HLN4EBL	primary	SQD	I-Line blank extension HLN4EBL	EDH-SQD-00141	359
HLW1BL	primary	SQD	I-Line blank extension HLW1BL	EDH-SQD-00142	359
HLW4BL	primary	SQD	I-Line blank extension HLW4BL	EDH-SQD-00143	360
HLW4EBL	primary	SQD	I-Line blank extension HLW4EBL	EDH-SQD-00144	360
HNM1BL	primary	SQD	I-Line blank filler HNM1BL	EDH-SQD-00137	361
HNM4BL	primary	SQD	I-Line blank filler HNM4BL	EDH-SQD-00138	361
HQO306	primary	SQD	Plug-on QO distribution panel HQO306 for I-Line	EDH-SQD-00155	363
HRK1020	primary	SQD	QMB Class R fuse kit HRK1020	EDH-SQD-00056	403
HRK30	primary	SQD	QMB Class R fuse kit HRK30	EDH-SQD-00052	403
ICGK	primary	SIE	Insulated copper ground bus kit	EDH-SIE-00101	701
IGK	primary	SIE	Insulated Al/Cu ground bus kit	EDH-SIE-00100	701
IMK1	primary	SIE	Interior mounting kit with adjustment provisions for P1/P2/P3	EDH-SIE-00095	710
IPB1	primary	EAT	Series C interphase barrier (F)	EDH-EAT-00647	279
IPB2	primary	EAT	Series C interphase barrier (J, K per newer table)	EDH-EAT-00651	289
IPB3	primary	EAT	Series C interphase barrier (J, K)	EDH-EAT-00648	289
IPB4	primary	EAT	Series C interphase barrier (L, M)	EDH-EAT-00649	318
IPB5	primary	EAT	Series C interphase barrier (N; NG)	EDH-EAT-00650	330
JDTERMSHIELD	primary	SIE	Siemens JDTERMSHIELD terminal shield, JD/LD 3-pole	EDH-SIE-00276	746
K80133	primary	EAT	Trim lock for right-handed door	EDH-EAT-00406	175
K80429	primary	EAT	T-handle lock	EDH-EAT-00408	175
K80522	primary	EAT	Trim lock for left-handed door	EDH-EAT-00405	176
KB11A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00038	180
KB11A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00037	180
KB11AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00006	105
KB11AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00005	106
KB11S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00040	180
KB11S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), single-phase,	EDH-EAT-00039	181
KB11SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00008	106
KB11SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), single-phas	EDH-EAT-00007	107
KB13A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00034	181
KB13A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00033	181
KB13AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00002	107
KB13AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00001	108
KB13S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, b	EDH-EAT-00036	182
KB13S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (100 A maximum), three-phase, t	EDH-EAT-00035	182

Number	Type	Mfr	Description	Catalogue ID	Pg
KB13SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00004	108
KB13SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (100 A maximum), three-phase	EDH-EAT-00003	109
KB21A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00046	182
KB21A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00045	183
KB21AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00014	109
KB21AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00013	110
KB21S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00048	183
KB21S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), single-phase,	EDH-EAT-00047	183
KB21SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00016	110
KB21SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), single-phas	EDH-EAT-00015	111
KB23A2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00042	184
KB23A2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00041	184
KB23AFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00010	111
KB23AFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00009	112
KB23S2B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, b	EDH-EAT-00044	184
KB23S2T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG2 (225 A maximum), three-phase, t	EDH-EAT-00043	185
KB23SFB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00012	112
KB23SFT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, F-Frame (225 A maximum), three-phase	EDH-EAT-00011	113
KB41A14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00054	185
KB41A14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00053	186
KB41AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, t	EDH-EAT-00022	113
KB41AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, tin-	EDH-EAT-00021	114
KB41AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, t	EDH-EAT-00030	114
KB41AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, tin-	EDH-EAT-00029	115
KB41S14B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00056	186
KB41S14T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), single-ph	EDH-EAT-00055	187
KB41SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, bottom fed, s	EDH-EAT-00024	115
KB41SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, single-phase, top fed, silv	EDH-EAT-00023	116
KB41SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, bottom fed, s	EDH-EAT-00032	116
KB41SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, single-phase, top fed, silv	EDH-EAT-00031	117

Number	Type	Mfr	Description	Catalogue ID	Pg
KB43A34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00050	187
KB43A34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00049	188
KB43AJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, ti	EDH-EAT-00018	117
KB43AJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, tin-p	EDH-EAT-00017	118
KB43AKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, ti	EDH-EAT-00026	118
KB43AKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, tin-p	EDH-EAT-00025	119
KB43S34B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00052	188
KB43S34T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3A (400 A, adjustable), three-pha	EDH-EAT-00051	189
KB43SJB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, bottom fed, si	EDH-EAT-00020	119
KB43SJT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, J-Frame, three-phase, top fed, silve	EDH-EAT-00019	120
KB43SKB	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, bottom fed, si	EDH-EAT-00028	120
KB43SKT	primary	EAT	PRL1a/PRL2a vertical breaker connector kit, K-Frame, three-phase, top fed, silve	EDH-EAT-00027	121
KB61S16B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00060	189
KB61S16T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00059	190
KB63S36B	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00058	190
KB63S36T	primary	EAT	PRL1X/PRL2X vertical breaker connector kit, PDG3B (600 A, electronic trip unit),	EDH-EAT-00057	191
KBDP1C	primary	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	760
KBDP-1C	alias	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	760
KBDP2C	primary	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	761
KBDP-2C	alias	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	761
KBDP3C	primary	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	761
KBDP-3C	alias	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	761
KBDP4C	primary	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	762
KBDP-4C	alias	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	762
KBDP5C	primary	FPE	FPE BDP mounting kit, NM/HNM frame	EDH-FPE-00011	762
KCDP-1A	primary	FPE	FPE twin mounting kit for NE/NEF frames in NA1B/NH1B panels	EDH-FPE-00006	774
KCDP1C	primary	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	763
KCDP-1C	alias	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	763
KCDP2C	primary	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	764
KCDP-2C	alias	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	764
KCDP3C	primary	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	764
KCDP-3C	alias	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	764
KCDP4C	primary	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	765
KCDP-4C	alias	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	765
KCDP5C	primary	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	765
KCDP-5C	alias	FPE	FPE CDP link kit, NM/NN frame	EDH-FPE-00005	765
KCDPCA	primary	EAT	Westinghouse CDP breaker connector kit KCDPCA (CA...)	EDH-EAT-00343	59
KCDPDK	primary	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	70

Number	Type	Mfr	Description	Catalogue ID	Pg
KCDPED225	primary	EAT	Westinghouse CDP breaker connector kit KCDPED225 (FD...)	EDH-EAT-00341	60
KCDPEHD	primary	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	71
KCDPFB100	primary	EAT	Westinghouse CDP breaker connector kit KCDPFB100 (EHD...)	EDH-EAT-00340	61
KCDPFB100-H	primary	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	69
KCDPFBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPFBP (FB-P...)	EDH-EAT-00342	61
KCDPFD	primary	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	72
KCDPFD100H	alias	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00423	69
KCDPFDB	primary	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	73
KCDPHKD	primary	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	74
KCDPJD	primary	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	75
KCDPJDB	primary	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	76
KCDPKB	primary	EAT	Westinghouse CDP breaker connector kit KCDPKB (JD...)	EDH-EAT-00344	62
KCDPKD	primary	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	77
KCDPKDB	primary	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	78
KCDPLA400	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA400 (LA-P 3-pole...)	EDH-EAT-00346	63
KCDPLA600	primary	EAT	Westinghouse CDP breaker connector kit KCDPLA600 (LD...)	EDH-EAT-00347	63
KCDPLB	primary	EAT	Westinghouse CDP breaker connector kit KCDPLB (DK...)	EDH-EAT-00345	64
KCDPLCL	primary	EAT	Westinghouse CDP breaker connector kit KCDPLCL (LCL 3-pole...)	EDH-EAT-00348	65
KCDPLD	primary	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	79
KCDPMC	primary	EAT	Westinghouse CDP breaker connector kit KCDPMC (MDL...)	EDH-EAT-00349	65
KCDPMDL	primary	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	80
KCDPNBP	primary	EAT	Westinghouse CDP breaker connector kit KCDPNBP (NB-P 3-pole...)	EDH-EAT-00351	66
KCDPNC	primary	EAT	Westinghouse CDP breaker connector kit KCDPNC (ND...)	EDH-EAT-00350	66
KCDPND	primary	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	81
KCDP_X	primary	EAT	CDP filler cover (any X increment)	EDH-EAT-00352	68
KCWTK	primary	EAT	Series C J/K-frame control wire terminal kit	EDH-EAT-00619	291
KFDP2C	primary	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	767
KFDP-2C	alias	FPE	FPE FDP link/strap kit KFDP2C for QMQB switch units	EDH-FPE-00015	767
KFDP3C	primary	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	767
KFDP-3C	alias	FPE	FPE FDP link/strap kit KFDP3C for QMQB switch units	EDH-FPE-00016	767
KFDP46C	primary	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	768
KFDP-46C	alias	FPE	FPE FDP link/strap kit KFDP46C for QMQB switch units	EDH-FPE-00018	768
KFDP4C	primary	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	768
KFDP-4C	alias	FPE	FPE FDP link/strap kit KFDP4C for QMQB switch units	EDH-FPE-00017	768
KFDP4XT	primary	EAT	Westinghouse FDP switch connector kit KFDP4XT	EDH-EAT-00366	55
KFDP-5C	primary	FPE	FPE FDP link kit (QMQB4036R into BDP switchgear)	EDH-FPE-00026	768
KFDP5XT	primary	EAT	Westinghouse FDP switch connector kit KFDP5XT	EDH-EAT-00367	56
KFDP66C	primary	FPE	FPE FDP link/strap kit KFDP66C for QMQB switch units	EDH-FPE-00019	769
KFDP7C	primary	FPE	FPE FDP link/strap kit KFDP7C for QMQB switch units	EDH-FPE-00020	769
KFDPB6X-2	primary	EAT	Westinghouse FDP switch connector kit KFDPB6X-2	EDH-EAT-00368	56

Number	Type	Mfr	Description	Catalogue ID	Pg
KFDPBS324R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	EDH-EAT-00430	90
KFDPBS364R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	EDH-EAT-00431	90
KFDPD16C	primary	FPE	FPE FDP link/strap kit KFDPD16C for QMQB switch units	EDH-FPE-00021	769
KFDPD26C	primary	FPE	FPE FDP link/strap kit KFDPD26C for QMQB switch units	EDH-FPE-00023	770
KFDPS16C	primary	FPE	FPE FDP link/strap kit KFDPS16C for QMQB switch units	EDH-FPE-00022	770
KFDPS26C	primary	FPE	FPE FDP link/strap kit KFDPS26C for QMQB switch units	EDH-FPE-00024	770
KFDPV7C	primary	FPE	FPE FDP link/strap kit KFDPV7C for QMQB switch units	EDH-FPE-00025	771
KFDPW11X-6	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-6	EDH-EAT-00370	57
KFDPW11X-8	primary	EAT	Westinghouse FDP switch connector kit KFDPW11X-8	EDH-EAT-00371	57
KFDPW15X-12	primary	EAT	Westinghouse FDP switch connector kit KFDPW15X-12	EDH-EAT-00372	58
KFDPW325R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	EDH-EAT-00432	90
KFDPW326R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	EDH-EAT-00434	91
KFDPW365R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	EDH-EAT-00433	91
KFDPW366R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	EDH-EAT-00435	91
KFDPW367	primary	EAT	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	EDH-EAT-00436	92
KFDPW368	primary	EAT	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	EDH-EAT-00437	92
KFDPW9X-4	primary	EAT	Westinghouse FDP switch connector kit KFDPW9X-4	EDH-EAT-00369	58
KFDPWT3211R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	EDH-EAT-00424	92
KFDPWT3222R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	EDH-EAT-00426	93
KFDPWT3233R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	EDH-EAT-00428	93
KFDPWT3611R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	EDH-EAT-00425	93
KFDPWT3622R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	EDH-EAT-00427	94
KFDPWT3633R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	EDH-EAT-00429	94
KFDP_X	primary	EAT	FDP filler cover (any X increment)	EDH-EAT-00373	89
KL11AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00067	153
KL11AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00071	125
KL11AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00063	125
KL11AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00079	154
KL11AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00083	126
KL11AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00075	126
KL11SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00088	154
KL11SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00090	126
KL11SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00086	127
KL11SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00068	154

Number	Type	Mfr	Description	Catalogue ID	Pg
KL11SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00072	127
KL11SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00064	127
KL11SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00080	155
KL11SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00084	128
KL11SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00076	128
KL13AMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00065	155
KL13AMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00069	128
KL13AMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00061	129
KL13AVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00077	155
KL13AVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00081	129
KL13AVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00073	129
KL13SCF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00087	156
KL13SCO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00089	130
KL13SCS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00085	130
KL13SMF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00066	156
KL13SMO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00070	130
KL13SMS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00062	131
KL13SVF	primary	EAT	PRL1a/2a/1X/2X 100 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00078	156
KL13SVO	primary	EAT	PRL1a/2a/1X/2X 100 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00082	131
KL13SVS	primary	EAT	PRL1a/2a/1X/2X 100 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00074	131
KL21AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00097	157
KL21AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00101	132
KL21AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00093	132
KL21AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00109	157
KL21AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00113	132
KL21AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00105	133
KL21SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00118	157
KL21SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00120	133
KL21SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00116	133
KL21SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00098	158

Number	Type	Mfr	Description	Catalogue ID	Pg
KL21SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00102	134
KL21SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00094	134
KL21SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00110	158
KL21SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00114	134
KL21SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00106	135
KL23AMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00095	158
KL23AMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00099	135
KL23AMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00091	135
KL23AVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00107	159
KL23AVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00111	136
KL23AVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00103	136
KL23SCF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00117	159
KL23SCO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00119	136
KL23SCS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00115	137
KL23SMF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00096	159
KL23SMO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00100	137
KL23SMS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00092	137
KL23SVF	primary	EAT	PRL1a/2a/1X/2X 225 A SFL lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00108	160
KL23SVO	primary	EAT	PRL1a/2a/1X/2X 225 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00112	138
KL23SVS	primary	EAT	PRL1a/2a/1X/2X 225 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00104	138
KL41AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00127	138
KL41AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00123	139
KL41AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00135	139
KL41AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00131	139
KL41SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, single-phase, silver-plated	EDH-EAT-00138	140
KL41SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00128	140
KL41SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00124	140
KL41SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00136	141
KL41SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00132	141
KL43AMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00125	141

Number	Type	Mfr	Description	Catalogue ID	Pg
KL43AMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00121	142
KL43AVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00133	142
KL43AVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, tin-plated a	EDH-EAT-00129	142
KL43SCO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, copper mechanical, three-phase, silver-plated	EDH-EAT-00137	143
KL43SMO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00126	143
KL43SMS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00122	143
KL43SVO	primary	EAT	PRL1a/2a/1X/2X 400 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00134	144
KL43SVS	primary	EAT	PRL1a/2a/1X/2X 400 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00130	144
KL61CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00148	144
KL61CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, bare	EDH-EAT-00142	145
KL61CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00160	145
KL61CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, bare copper	EDH-EAT-00154	145
KL61SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00149	146
KL61SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, silv	EDH-EAT-00143	146
KL61SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00161	146
KL61SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, silver-plat	EDH-EAT-00155	147
KL61TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00150	147
KL61TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, single-phase, tin-	EDH-EAT-00144	147
KL61TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00162	148
KL61TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), single-phase, tin-plated	EDH-EAT-00156	148
KL63CMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00145	148
KL63CMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, bare	EDH-EAT-00139	149
KL63CVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00157	149
KL63CVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, bare copper	EDH-EAT-00151	149
KL63SMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00146	150
KL63SMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, silve	EDH-EAT-00140	150
KL63SVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00158	150
KL63SVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, silver-plate	EDH-EAT-00152	151
KL63TMO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00147	151
KL63TMS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, aluminum/copper mechanical, three-phase, tin-p	EDH-EAT-00141	151

Number	Type	Mfr	Description	Catalogue ID	Pg
KL63TVO	primary	EAT	PRL1a/2a/1X/2X 600 A OVS lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00159	152
KL63TVS	primary	EAT	PRL1a/2a/1X/2X 600 A STD lug kit, crimp (compression), three-phase, tin-plated c	EDH-EAT-00153	152
KNA1B1C	primary	FPE	FPE NA1B panelboard lug kit	EDH-FPE-00034	773
KPEK1	primary	EAT	Series C F-frame end cap kit, 3-pole, 10-32	EDH-EAT-00593	282
KPEK12	primary	EAT	Series C F-frame end cap kit, 2-pole, 10-32	EDH-EAT-00591	283
KPEK14	primary	EAT	Series C F-frame end cap kit, 4-pole, 10-32	EDH-EAT-00595	283
KPEK2	primary	EAT	Series C J-frame end cap kit, 3-pole, .312-18	EDH-EAT-00597	291
KPEK24	primary	EAT	Series C J-frame end cap kit, 4-pole, .312-18	EDH-EAT-00599	291
KPEK3	primary	EAT	Series C K-frame end cap kit, 3-pole, .312-18	EDH-EAT-00601	309
KPEK34	primary	EAT	Series C K-frame end cap kit, 4-pole, .312-18	EDH-EAT-00603	309
KPEK4	primary	EAT	Series C L-frame end cap kit, 3-pole, .312-18	EDH-EAT-00605	319
KPEK44	primary	EAT	Series C L-frame end cap kit, 4-pole, .312-18	EDH-EAT-00607	320
KPEKM1	primary	EAT	Series C F-frame end cap kit, 3-pole, M5	EDH-EAT-00594	283
KPEKM12	primary	EAT	Series C F-frame end cap kit, 2-pole, M5	EDH-EAT-00592	284
KPEKM14	primary	EAT	Series C F-frame end cap kit, 4-pole, M5	EDH-EAT-00596	284
KPEKM2	primary	EAT	Series C J-frame end cap kit, 3-pole, M8	EDH-EAT-00598	292
KPEKM24	primary	EAT	Series C J-frame end cap kit, 4-pole, M8	EDH-EAT-00600	292
KPEKM3	primary	EAT	Series C K-frame end cap kit, 3-pole, M8	EDH-EAT-00602	310
KPEKM34	primary	EAT	Series C K-frame end cap kit, 4-pole, M8	EDH-EAT-00604	310
KPEKM4	primary	EAT	Series C L-frame end cap kit, 3-pole, M8	EDH-EAT-00606	320
KPEKM44	primary	EAT	Series C L-frame end cap kit, 4-pole, M8	EDH-EAT-00608	320
KPR1A	primary	EAT	Series C F-frame keeper nut (10-32, line or load end)	EDH-EAT-00609	280
KPR1AM	primary	EAT	Series C F-frame keeper nut (M5, line or load end)	EDH-EAT-00610	280
KPR3A	primary	EAT	Series C K-frame keeper nut (.375-16, line end)	EDH-EAT-00611	305
KPR3AM	primary	EAT	Series C K-frame keeper nut (M8, line end)	EDH-EAT-00613	306
KPR3B	primary	EAT	Series C K-frame keeper nut (.375-16, load end)	EDH-EAT-00612	306
KPR3BM	primary	EAT	Series C K-frame keeper nut (M8, load end)	EDH-EAT-00614	306
KPRL1BAB	primary	EAT	Vintage Westinghouse PRL1 replacement branch connector kit (12 poles)	EDH-EAT-00166	97
KPRL2GHB	primary	EAT	Vintage Westinghouse PRL2 replacement branch connector kit (12 poles)	EDH-EAT-00167	97
KPRL3ABA06	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00184	197
KPRL3ABA06-1	primary	EAT	PRL3a horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00185	197
KPRL3ABA12	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00186	198
KPRL3ABA12-1	primary	EAT	PRL3a horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00187	198
KPRL3ABA18	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00188	199
KPRL3ABA18-1	primary	EAT	PRL3a horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00189	199
KPRL3ABA24	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00190	200
KPRL3ABA24-1	primary	EAT	PRL3a horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00191	200
KPRL3AED2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00209	200
KPRL3AED3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (FD...)	EDH-EAT-00208	201
KPRL3AFD1	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00207	201
KPRL3AFD2	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00206	201
KPRL3AFD3	primary	EAT	PRL3a horizontal F-frame breaker connector kit (EHD...)	EDH-EAT-00205	202
KPRL3AGB06	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00192	202
KPRL3AGB06-1	primary	EAT	PRL3a horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00193	202

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL3AGB12	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00194	203
KPRL3AGB12-1	primary	EAT	PRL3a horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00195	203
KPRL3AGB18	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00196	204
KPRL3AGB18-1	primary	EAT	PRL3a horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00197	204
KPRL3AGB24	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00198	205
KPRL3AGB24-1	primary	EAT	PRL3a horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00199	205
KPRL3CA	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (CA, CAH, HCA)	EDH-EAT-00212	194
KPRL3CF3	primary	EAT	Challenger twin mounting hardware kit KPRL3CF3, 150 A max	EDH-EAT-00788	87
KPRL3ED	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (ED, EDH, EDC)	EDH-EAT-00211	194
KPRL3FD	primary	EAT	Vintage Westinghouse PRL3 replacement breaker connector kit (EHD, FDB, FD, HFD,	EDH-EAT-00210	195
KPRL3X21T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 1-pole twin mount...)	EDH-EAT-00204	218
KPRL3X22	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole...)	EDH-EAT-00201	218
KPRL3X22T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 2-pole twin mount...)	EDH-EAT-00203	219
KPRL3X23	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole...)	EDH-EAT-00200	219
KPRL3X23T	primary	EAT	PRL3X horizontal PDG2 breaker connector kit (PDG2 3-pole twin mount...)	EDH-EAT-00202	219
KPRL3XBA06	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00168	220
KPRL3XBA06-1	primary	EAT	PRL3X horizontal 6-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00169	220
KPRL3XBA12	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00170	220
KPRL3XBA12-1	primary	EAT	PRL3X horizontal 12-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00171	221
KPRL3XBA18	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00172	221
KPRL3XBA18-1	primary	EAT	PRL3X horizontal 18-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00173	221
KPRL3XBA24	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 3-phase	EDH-EAT-00174	222
KPRL3XBA24-1	primary	EAT	PRL3X horizontal 24-circuit QUICKLAG BAB connector kit, 1-phase	EDH-EAT-00175	222
KPRL3XGB06	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 3-phase	EDH-EAT-00176	222
KPRL3XGB06-1	primary	EAT	PRL3X horizontal 6-circuit GHB connector kit, 1-phase	EDH-EAT-00177	223
KPRL3XGB12	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 3-phase	EDH-EAT-00178	223
KPRL3XGB12-1	primary	EAT	PRL3X horizontal 12-circuit GHB connector kit, 1-phase	EDH-EAT-00179	223
KPRL3XGB18	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 3-phase	EDH-EAT-00180	224
KPRL3XGB18-1	primary	EAT	PRL3X horizontal 18-circuit GHB connector kit, 1-phase	EDH-EAT-00181	224
KPRL3XGB24	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 3-phase	EDH-EAT-00182	224
KPRL3XGB24-1	primary	EAT	PRL3X horizontal 24-circuit GHB connector kit, 1-phase	EDH-EAT-00183	225
KPRL44X	primary	EAT	PRL4F fusible switch connector kit KPRL44X	EDH-EAT-00331	228
KPRL45X	supersedes	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	229
KPRL45X	primary	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	228
KPRL45X1	primary	EAT	PRL4F fusible switch connector kit KPRL45X1	EDH-EAT-00332	229
KPRL45X1	superseded_by	EAT	PRL4F fusible switch connector kit KPRL45X	EDH-EAT-00333	228
KPRL45XS	primary	EAT	PRL4F fusible switch connector kit KPRL45XS	EDH-EAT-00334	229
KPRL4B6XS	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XS	EDH-EAT-00335	230
KPRL4B6XT	primary	EAT	PRL4F fusible switch connector kit KPRL4B6XT	EDH-EAT-00336	230
KPRL4CA	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CA (CA/CAH/HCA 2-pole (2X) or 3-pole (3X))	EDH-EAT-00308	233
KPRL4CD	primary	EAT	Challenger twin mounting hardware kit KPRL4CD, 225 A max	EDH-EAT-00784	87

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4CED	primary	EAT	Challenger twin mounting hardware kit KPRL4CED, 225 A max	EDH-EAT-00783	87
KPRL4CKD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CKD (100% rated CKD/CHKD/CKDC 3-pole)	EDH-EAT-00322	234
KPRL4CND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4CND (100% rated CND/CHND/CNDC/NGS-C/NGH-C/	EDH-EAT-00324	235
KPRL4CSL	primary	EAT	Challenger single mounting hardware kit KPRL4CSL, 600 A max	EDH-EAT-00785	87
KPRL4CSM	primary	EAT	Challenger single mounting hardware kit KPRL4CSM, 800 A max	EDH-EAT-00786	88
KPRL4CSN	primary	EAT	Challenger single mounting hardware kit KPRL4CSN, 1200 A max	EDH-EAT-00787	88
KPRL4ED	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	251
KPRL4ED	primary	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	235
KPRL4ED2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	250
KPRL4ED2	primary	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	236
KPRL4FBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FBP (FCL, FB-P, FD/LFD 3-pole)	EDH-EAT-00311	237
KPRL4FD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	251
KPRL4FD	primary	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	237
KPRL4FD1	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	249
KPRL4FD1	primary	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	238
KPRL4FD2	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	250
KPRL4FD2	primary	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	239
KPRL4FDCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4FDCL (FD current limiter, 3-pole)	EDH-EAT-00307	239
KPRL4JDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDS (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00309	240
KPRL4JDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4JDT (JD, JDB, HJD, JDC 2-/3-pole)	EDH-EAT-00310	241
KPRL4KDS	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	241
KPRL4KDT	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	242
KPRL4LAP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LAP (LA-P 3-pole)	EDH-EAT-00317	243
KPRL4LC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	243
KPRL4LC	superseded_by	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	245
KPRL4LCL	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LCL (LCL 3-pole)	EDH-EAT-00318	244
KPRL4LD	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4LC (LC/LCY/HLC/LD/HLD/LDC/LDB [LA])	EDH-EAT-00314	243
KPRL4LD	primary	EAT	PRL4 breaker connector kit KPRL4LD (pre-Xpert numbering)	EDH-EAT-00330	245
KPRL4LG	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4LG (LHH 3-pole)	EDH-EAT-00315	245
KPRL4MC	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	253
KPRL4MC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	246
KPRL4MD	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4MD (100% rated CMDL/CHMDL 3-pole (2021))	EDH-EAT-00323	247
KPRL4NBP	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NBP (NB-P 3-pole)	EDH-EAT-00319	247
KPRL4NC	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4NC (NC/NCY/HNC [NB/HNB] 3-pole)	EDH-EAT-00320	248
KPRL4ND	supersedes	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	254
KPRL4ND	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	249
KPRL4W11X	primary	EAT	PRL4F fusible switch connector kit KPRL4W11X	EDH-EAT-00338	231
KPRL4W15X	primary	EAT	PRL4F fusible switch connector kit KPRL4W15X	EDH-EAT-00339	231
KPRL4W9X	primary	EAT	PRL4F fusible switch connector kit KPRL4W9X	EDH-EAT-00337	232

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4X12	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X12 (PDG2 1-pole (two sets of twin-mounted	EDH-EAT-00299	249
KPRL4X12	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD1 (pre-Xpert numbering)	EDH-EAT-00325	238
KPRL4X22	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X22 (PDG2 2-pole)	EDH-EAT-00300	250
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD2 (pre-Xpert numbering)	EDH-EAT-00326	239
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED2 (pre-Xpert numbering)	EDH-EAT-00327	236
KPRL4X32	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X32 (PDG2 3-pole)	EDH-EAT-00301	251
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4FD (pre-Xpert numbering)	EDH-EAT-00328	237
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit KPRL4ED (pre-Xpert numbering)	EDH-EAT-00329	235
KPRL4X334S	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334S (PDG3 400 A frame, 3-pole, single mo	EDH-EAT-00302	251
KPRL4X334T	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X334T (PDG3 400 A frame, 3-pole, twin moun	EDH-EAT-00303	252
KPRL4X336	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X336 (PDG3 600 A frame)	EDH-EAT-00304	252
KPRL4X34	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X34 (PDG4)	EDH-EAT-00305	253
KPRL4X34	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4MC (MDS/MC/MCY/HMC [MA/HMA])	EDH-EAT-00316	246
KPRL4X35	primary	EAT	PRL4/PRL4X breaker connector kit KPRL4X35 (PDG5)	EDH-EAT-00306	254
KPRL4X35	superseded_by	EAT	PRL4/PRL4X breaker connector kit KPRL4ND (NHH 3-pole (2021))	EDH-EAT-00321	249
KQB3C	primary	FPE	FPE QMQB switch strap/link kit KQB3C	EDH-FPE-00027	771
KQB46C	primary	FPE	FPE QMQB switch strap/link kit KQB46C	EDH-FPE-00029	771
KQB4C	primary	FPE	FPE QMQB switch strap/link kit KQB4C	EDH-FPE-00028	772
KQB66C	primary	FPE	FPE QMQB switch strap/link kit KQB66C	EDH-FPE-00030	772
KQB86C	primary	FPE	FPE QMQB switch strap/link kit KQB86C	EDH-FPE-00031	772
KQB-D26C	primary	FPE	FPE QMQB switch strap/link kit KQB-D26C	EDH-FPE-00032	772
L3RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 3-pole	EDH-EAT-00560	351
L4RTWK	primary	EAT	Series G LG-frame end cap kit (metric nuts), 4-pole	EDH-EAT-00561	351
LD1E060	primary	SIE	Siemens LD1E060 load-side lug, ED 1-pole 30-60A	EDH-SIE-00260	738
LD1E100	primary	SIE	Siemens LD1E100 load-side lug, ED 1-pole 70-100A	EDH-SIE-00261	738
LGTES3	primary	EAT	Series G LG-frame terminal spreader, 3-pole	EDH-EAT-00564	351
LGTES4	primary	EAT	Series G LG-frame terminal spreader, 4-pole	EDH-EAT-00565	351
LGTEW3	primary	EAT	Series G LG-frame terminal extension, 3-pole	EDH-EAT-00562	352
LGTEW4	primary	EAT	Series G LG-frame terminal extension, 4-pole	EDH-EAT-00563	352
LK-15	primary	ZIN	Zinsco main lug block 150 A	EDH-ZIN-00023	785
LK-22	primary	ZIN	Zinsco main lug block 225 A	EDH-ZIN-00024	785
LN1E100	primary	SIE	Siemens LN1E100 lug, ED 30-100A	EDH-SIE-00258	739
LNLK30A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	698
LNLK42A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	699
LNLK4X11B	primary	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	698
LNLK54A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	700
LNLK5X12A	primary	SIE	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	EDH-SIE-00033	698
LNLK6X17B	primary	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	699
LNLK7X18A	primary	SIE	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	EDH-SIE-00034	699
LNLK7X20B	primary	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	700
LPP2NB01	primary	SIE	Neutral lug kit	EDH-SIE-00118	633
LTS3K	primary	EAT	Series G LG-frame terminal cover, 3-pole	EDH-EAT-00558	350
LTS4K	primary	EAT	Series G LG-frame terminal cover, 4-pole	EDH-EAT-00559	350
MB133	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133	EDH-GEA-00059	474

Number	Type	Mfr	Description	Catalogue ID	Pg
MB133WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	EDH-GEA-00060	475
MB233	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233	EDH-GEA-00051	475
MB2332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332	EDH-GEA-00053	475
MB2332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	EDH-GEA-00054	476
MB233WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	EDH-GEA-00052	476
MB332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332	EDH-GEA-00045	476
MB332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	EDH-GEA-00046	477
MB333	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333	EDH-GEA-00055	477
MB333WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	EDH-GEA-00056	477
MB423	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB423	EDH-GEA-00057	478
MB426	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB426	EDH-GEA-00058	478
MB512	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB512	EDH-GEA-00044	478
MB513	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB513	EDH-GEA-00049	479
MB516	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB516	EDH-GEA-00050	479
MB612	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB612	EDH-GEA-00042	479
MB613	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB613	EDH-GEA-00047	480
MB614	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB614	EDH-GEA-00043	480
MB616	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB616	EDH-GEA-00048	480
MBKBC1NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	684
MBKBC3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	EDH-SIE-00045	620
MBKBC3NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	685
MBKBFA	primary	SIE	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	EDH-SIE-00014	711
MBKBL1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	EDH-SIE-00043	620
MBKBL1A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	684
MBKBL3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	EDH-SIE-00044	620
MBKBL3A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	685
MBKED1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	EDH-SIE-00048	621
MBKED1A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	679
MBKED3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	EDH-SIE-00049	621
MBKED3A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	680
MBKFD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00052	621
MBKFD1A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	680
MBKFD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00053	622
MBKFD3A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	681
MBKJD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00054	622
MBKJD1A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	681
MBKJD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00055	622
MBKJD3A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	681
MBKJD3B	primary	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	681
MBKNB1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00046	623
MBKNB3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00047	623

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKQR1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00050	623
MBKQR1A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	682
MBKQR3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00051	624
MBKQR3A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	683
MBKQRFK	primary	SIE	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	EDH-SIE-00075	709
MBKVA41A	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	684
MBKVA41B	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	685
MBKVA5262A	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	686
MBKVA5262B	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	687
MBKVA5363A	primary	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	687
MBKVA5363JD	primary	SIE	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	EDH-SIE-00013	711
MDTERMSHIELD	primary	SIE	Siemens MDTERMSHIELD terminal shield, MD/ND/PD/RD 3-pole	EDH-SIE-00298	755
Mechanical: 100 A G01-G04, 250-600 A G13-G16; Crimp: 100 A G05-G08, 250-600 A G17-G20; Copper lugs: 100 A G09-G12, 250-600 A G21-G24 (order tin Al / bare Cu / silver Cu / tin Cu)	style_number	EAT	PRL3a/PRL3X service entrance bonding jumper kit	EDH-EAT-00220	216
Mechanical main lugs/main breakers: 100-225 A G01 (tin Al) G02 (bare Cu) G03 (silver Cu) G04 (tin Cu); 400-600 A G05-G08. Crimp main lugs: 100-225 A G09-G12; 400-600 A G13-G16. Copper main lugs: 100-225 A G18-G20; 400-600 A G22-G24	style_number	EAT	PRL1a/2a/1X/2X service entrance bonding jumper kit	EDH-EAT-00219	176
MG1	primary	SIE	MG1 connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00149	646
MG1D	primary	SIE	MG1D connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00175	663
MLA1	primary	GEA	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	EDH-GEA-00061	481
MLA2	primary	GEA	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	EDH-GEA-00062	481
MLA41	primary	GEA	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	EDH-GEA-00063	481
MLA61	primary	GEA	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	EDH-GEA-00064	482
MLA62	primary	GEA	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	EDH-GEA-00065	482
MLKA1	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	691
MLKA1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00025	626
MLKA1A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	691
MLKA3	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	691
MLKA3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00026	626
MLKA3A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	691
MLKC1	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	692
MLKC1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00027	626
MLKC1A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	692
MLKC3	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	692
MLKC3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00028	627
MLKC3A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	692
MLR1	primary	GEA	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	EDH-GEA-00066	482

Number	Type	Mfr	Description	Catalogue ID	Pg
MLR2	primary	GEA	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	EDH-GEA-00067	482
MLR41	primary	GEA	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	EDH-GEA-00068	482
MLR61	primary	GEA	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	EDH-GEA-00069	483
MLT1	primary	GEA	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	EDH-GEA-00070	483
MLT2	primary	GEA	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	EDH-GEA-00071	483
MLT41	primary	GEA	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	EDH-GEA-00073	483
MLT42	primary	GEA	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	EDH-GEA-00072	483
N32	primary	FPE	Lug kit for NN breaker	EDH-FPE-00038	777
NAIB-NEF	primary	FPE	FPE NE/NEF twin kit for NA1B panel	EDH-FPE-00014	774
NCFS	primary	FPE	FPE filler plate for thin NC breaker space	EDH-FPE-00042	774
NDPNE	primary	FPE	FPE NDP twin mounting strap kit, NE/NEF	EDH-FPE-00013	776
NDPNEJ	primary	FPE	FPE NDP twin mounting strap kit, NEJ/NEJH/HEJ	EDH-FPE-00012	776
NDTS	primary	SIE	Siemens NDTS wire lug shield / end barrier, MD/ND	EDH-SIE-00289	755
NEF1K (PCS aftermarket; Breaker King SKU BCDPNEF10FPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NE/NEF frame	EDH-FPE-00001	763
NEF3K (PCS aftermarket assembly; Breaker King SKU BBDPNEF10FPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NE/NEF/HEG frame	EDH-FPE-00007	760
NEJ1K (PCS aftermarket; Breaker King SKU BCDPNEJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NEJ/HEJ frame	EDH-FPE-00002	764
NEJ3K (PCS aftermarket; Breaker King SKU BBDPNEJFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NEJ/NEJH/HEJ frame	EDH-FPE-00008	761
NFHARDWARE	primary	FPE	NF frame custom panel hardware (dealer item)	EDH-FPE-00043	765
NFJ1K (PCS aftermarket; Breaker King SKU BCDPNFJFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NFJ/HFJ frame	EDH-FPE-00003	764
NFJ3K (PCS aftermarket, 225 A max) - probable equivalent by numbering pattern	equivalent	FPE	FPE BDP twin bus-connection kit (frame not stated; probably NFJ/HFJ)	EDH-FPE-00009	761
NG1D	primary	SIE	NG1D connecting strap kit - VL NG (10.00in, single)	EDH-SIE-00179	663
NHB150PK	primary	GEA	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	EDH-GEA-00280	509
NJL1K (PCS aftermarket; Breaker King SKU BCDPNJLFPE)	equivalent	FPE	FPE CDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00004	765
NJL3K (PCS aftermarket; Breaker King SKU BBDPNJLFPE)	equivalent	FPE	FPE BDP twin bus-connection kit, NJL/HJL frame	EDH-FPE-00010	762
NKA	primary	GEA	A-Series 200% neutral kit NKA (225 A)	EDH-GEA-00074	485
NKA42	primary	GEA	A-Series 200% neutral kit NKA42 (400 A)	EDH-GEA-00075	485
NKA4FT	primary	GEA	A-Series 200% neutral kit NKA4FT (400 A)	EDH-GEA-00080	485
NKR	primary	GEA	A-Series 200% neutral kit NKR (225 A)	EDH-GEA-00076	485
NKR4	primary	GEA	A-Series 200% neutral kit NKR4 (400 A)	EDH-GEA-00077	485
NKT	primary	GEA	A-Series 200% neutral kit NKT (225 A)	EDH-GEA-00078	486
NKT4	primary	GEA	A-Series 200% neutral kit NKT4 (400 A)	EDH-GEA-00079	486
NL300	primary	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00457	19
NM34	primary	FPE	Lug for FPE type NM breaker, (1) #1/0-600 kcmil, 125-300 A	EDH-FPE-00035	777
NM36	primary	FPE	Lug for FPE type NM breaker, (2) 3/0-600 kcmil, 350-600 A	EDH-FPE-00036	777
NM38	primary	FPE	Lug for FPE type NM breaker, (3) 250-500 kcmil, 700-800 A	EDH-FPE-00037	777
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	Vintage PRL1/PRL2 400/600 A neutral bar	EDH-EAT-00240	99

Number	Type	Mfr	Description	Catalogue ID	Pg
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00438	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00439	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00440	98
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00441	98
NTS3K	primary	EAT	Series C N-frame terminal shield	EDH-EAT-00644	331
P1CONACPHAL	primary	SIE	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	EDH-SIE-00097	693
P1CONACPHCU	primary	SIE	RP1 A/C-phase replacement copper branch connectors	EDH-SIE-00088	693
P1CONBPHAL	primary	SIE	RP1 B-phase replacement aluminum branch connectors	EDH-SIE-00089	694
P1CONBPHCU	primary	SIE	RP1 B-phase replacement copper branch connectors	EDH-SIE-00090	694
P1DFS250AFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00092	701
P1DFS250ANFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00093	701
P1DFS400A	primary	SIE	P1 400A deadfront support (new for 3VA)	EDH-SIE-00094	702
P1SCRWS	primary	SIE	P1 branch breaker mounting screws	EDH-SIE-00091	711
P2BK1	primary	SIE	P2 250A max horizontal main breaker bonding strap kit	EDH-SIE-00120	639
P2BK2	primary	SIE	P2 125A max main lug bonding strap assembly	EDH-SIE-00121	639
P2BK3	primary	SIE	P2 250-600A MLO and all vertical MB bonding kit	EDH-SIE-00122	639
P2QRFP01	primary	SIE	P2 QR deadfront filler	EDH-SIE-00082	638
P3BK1	primary	SIE	P3 bonding kit 800A max MLO+MB	EDH-SIE-00123	644
P41X25	primary	EAT	PRL4 / switchboard 1X blank filler, 25 in wide (36/44/45 in enclosures)	EDH-EAT-00296	256
PDC12DG4	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00293	442
PDC12DG4L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00194	462
PDC12LA4	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00290	433
PDC3FA2	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00288	427
PDC3HD2	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00190	444
PDC3JD20	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00192	450
PDC4LA250	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00291	433
PDC5DG20	primary	SQD	PowerPact D-frame power distribution connector	EDH-SQD-00292	442
PDC5DG20L3	primary	SQD	PowerPact L-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00193	463
PDC6FA6	primary	SQD	Square D FA power distribution connector (multi-wire load lug)	EDH-SQD-00287	428
PDC6HD6	primary	SQD	PowerPact H-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00189	444
PDC6JD4	primary	SQD	PowerPact J-Frame power distribution connector (multi-wire load lug)	EDH-SQD-00191	451
PDC6LA20	primary	SQD	Square D LA power distribution connector (multi-wire load lug)	EDH-SQD-00289	433
PK103T	primary	FPE	FPE QMQB switch strap/link kit PK103T	EDH-FPE-00033	773
PK32DGTA	primary	SQD	Equipment ground bar kit PK32DGTA (I-Line)	EDH-SQD-00156	356

Number	Type	Mfr	Description	Catalogue ID	Pg
PKDFSCREW	primary	SQD	Panelboard deadfront screw kit PKDFSCREW (replaces 80025-067-01)	EDH-SQD-00161	362
PLN2	primary	EAT	Series C J-frame plug nut (.250-20)	EDH-EAT-00615	290
PLN2M	primary	EAT	Series C J-frame plug nut (M6)	EDH-EAT-00616	290
PRLSEBFD	primary	EAT	Service entrance barrier kit for FD main breaker	EDH-EAT-00215	168
PRLSEBGHB	primary	EAT	Service entrance barrier kit for GHB main breaker	EDH-EAT-00216	168
PRLSEBJD	primary	EAT	Service entrance barrier kit for JD main breaker	EDH-EAT-00214	168
PRLSEBLGKD	primary	EAT	Service entrance barrier kit for LG and KD main breaker	EDH-EAT-00213	169
PRLSEBPD2	primary	EAT	Service entrance barrier kit for PDG2 main breaker	EDH-EAT-00218	225
PRLSEBPD3	primary	EAT	Service entrance barrier kit for PDF3/PDG3 main breaker	EDH-EAT-00217	226
PRXP4PD2FILL1	primary	EAT	Pow-R-Xpress PRL4X PD2 1-pole filler	EDH-EAT-00297	258
PT363 top H01 / bottom H02 (7X); PT364 top H03 / bottom H04 (9X)	style_number	EAT	PRL3a/3X deadfront device cover: PT363 (100 A) / PT364 (200 A) pullout bolt swit	EDH-EAT-00266	211
QF3	equivalent	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	706
QF3	primary	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	727
QFP2T	primary	ZIN	Zinsco QFP 2-pole main breaker mounting hardware / feet (base)	EDH-ZIN-00022	785
QMB100R	primary	SQD	QMB Class R fuse kit QMB100R	EDH-SQD-00055	404
QMB12CLA	primary	SQD	QMB main lug compression adaptor kit QMB12CLA (1200 A)	EDH-SQD-00081	363
QMB15BLW	primary	SQD	QMB blank filler plate QMB15BLW (15 in.)	EDH-SQD-00092	370
QMB1BLW	primary	SQD	QMB blank filler plate QMB1BLW (1.5 in.)	EDH-SQD-00089	370
QMB1IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB1IMA	EDH-SQD-00093	374
QMB200EK	primary	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	404
QMB200EK-1	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	404
QMB200EK-2	alias	SQD	QMB electrical interlock kit QMB200EK	EDH-SQD-00062	404
QMB210T	primary	SQD	Legacy QMB switch QMB210T (obsolete)	EDH-SQD-00101	411
QMB221HW	primary	SQD	QMB fusible switch unit QMB221HW (2P 240 Vac, 30-blank A)	EDH-SQD-00002	378
QMB221TW	primary	SQD	QMB fusible switch unit QMB221TW (2P 240 Vac, 30-30 A)	EDH-SQD-00001	378
QMB222HW	primary	SQD	QMB fusible switch unit QMB222HW (2P 240 Vac, 60-blank A)	EDH-SQD-00004	379
QMB222TW	primary	SQD	QMB fusible switch unit QMB222TW (2P 240 Vac, 60-60 A)	EDH-SQD-00003	379
QMB223HW	primary	SQD	QMB fusible switch unit QMB223HW (2P 240 Vac, 100-blank A)	EDH-SQD-00006	380
QMB223TW	primary	SQD	QMB fusible switch unit QMB223TW (2P 240 Vac, 100-100 A)	EDH-SQD-00005	380
QMB2240	primary	SQD	Legacy QMB switch QMB2240 (obsolete)	EDH-SQD-00104	411
QMB224W	primary	SQD	QMB fusible switch unit QMB224W (2P 240 Vac, 200 A)	EDH-SQD-00007	381
QMB225W	primary	SQD	QMB fusible switch unit QMB225W (2P 240 Vac, 400 A)	EDH-SQD-00008	381
QMB225WT3	primary	SQD	QMB fusible switch unit QMB225WT3 (2P 240 Vac, 400 A)	EDH-SQD-00009	382
QMB261HW	primary	SQD	QMB fusible switch unit QMB261HW (2P 600 Vac, 30-blank A)	EDH-SQD-00023	382
QMB261TW	primary	SQD	QMB fusible switch unit QMB261TW (2P 600 Vac, 30-30 A)	EDH-SQD-00022	383
QMB262HW	primary	SQD	QMB fusible switch unit QMB262HW (2P 600 Vac, 60-blank A)	EDH-SQD-00025	383
QMB262TW	primary	SQD	QMB fusible switch unit QMB262TW (2P 600 Vac, 60-60 A)	EDH-SQD-00024	384
QMB263HW	primary	SQD	QMB fusible switch unit QMB263HW (2P 600 Vac, 100-blank A)	EDH-SQD-00027	384
QMB263TW	primary	SQD	QMB fusible switch unit QMB263TW (2P 600 Vac, 100-100 A)	EDH-SQD-00026	385
QMB264W	primary	SQD	QMB fusible switch unit QMB264W (2P 600 Vac, 200 A)	EDH-SQD-00028	385
QMB2IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB2IMA	EDH-SQD-00094	374
QMB300EK	primary	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	404
QMB300EK-1	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	404
QMB300EK-2	alias	SQD	QMB electrical interlock kit QMB300EK	EDH-SQD-00060	404
QMB303T	primary	SQD	Legacy QMB switch QMB303T (obsolete)	EDH-SQD-00135	412
QMB306EX	primary	SQD	QMB plug-on extension assembly QMB306EX (legacy QW retrofit)	EDH-SQD-00106	410

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB306LEX	primary	SQD	QMB plug-on extension assembly QMB306LEX (legacy QW retrofit)	EDH-SQD-00107	410
QMB306T	primary	SQD	Legacy QMB switch QMB306T (obsolete)	EDH-SQD-00136	412
QMB310EX	primary	SQD	QMB plug-on extension assembly QMB310EX (legacy QW retrofit)	EDH-SQD-00108	410
QMB310LEX	primary	SQD	QMB plug-on extension assembly QMB310LEX (legacy QW retrofit)	EDH-SQD-00109	410
QMB310T	primary	SQD	Legacy QMB switch QMB310T (obsolete)	EDH-SQD-00100	412
QMB320EX	primary	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	411
QMB-320-EX	alias	SQD	QMB plug-on extension assembly QMB320EX (legacy QW retrofit)	EDH-SQD-00110	411
QMB321HW	primary	SQD	QMB fusible switch unit QMB321HW (3P 240 Vac, 30-blank A)	EDH-SQD-00011	386
QMB321TW	primary	SQD	QMB fusible switch unit QMB321TW (3P 240 Vac, 30-30 A)	EDH-SQD-00010	386
QMB322HW	primary	SQD	QMB fusible switch unit QMB322HW (3P 240 Vac, 60-blank A)	EDH-SQD-00013	387
QMB322TD	alias	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	387
QMB322TW	primary	SQD	QMB fusible switch unit QMB322TW (3P 240 Vac, 60-60 A)	EDH-SQD-00012	387
QMB323HW	primary	SQD	QMB fusible switch unit QMB323HW (3P 240 Vac, 100-blank A)	EDH-SQD-00015	388
QMB323TD	alias	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	388
QMB323TD	primary	SQD	QMB replacement switch QMB323TD for legacy interiors	EDH-SQD-00117	412
QMB323TW	primary	SQD	QMB fusible switch unit QMB323TW (3P 240 Vac, 100-100 A)	EDH-SQD-00014	388
QMB3240	primary	SQD	Legacy QMB switch QMB3240 (obsolete)	EDH-SQD-00103	412
QMB324W	primary	SQD	QMB fusible switch unit QMB324W (3P 240 Vac, 200 A)	EDH-SQD-00016	389
QMB325W	primary	SQD	QMB fusible switch unit QMB325W (3P 240 Vac, 400 A)	EDH-SQD-00017	389
QMB325WT3	primary	SQD	QMB fusible switch unit QMB325WT3 (3P 240 Vac, 400 A)	EDH-SQD-00018	390
QMB3260	primary	SQD	Legacy QMB switch QMB3260 (obsolete)	EDH-SQD-00105	413
QMB326W	primary	SQD	QMB fusible switch unit QMB326W (3P 240 Vac, 600 A)	EDH-SQD-00019	390
QMB326WT3	primary	SQD	QMB fusible switch unit QMB326WT3 (3P 240 Vac, 600 A)	EDH-SQD-00020	391
QMB327WT3	primary	SQD	QMB fusible switch unit QMB327WT3 (3P 240 Vac, 800 A)	EDH-SQD-00021	391
QMB3300LA	primary	SQD	QMB circuit breaker unit QMB3300LA	EDH-SQD-00112	408
QMB3400LA	primary	SQD	QMB circuit breaker unit QMB3400LA	EDH-SQD-00111	408
QMB3606T	primary	SQD	Legacy QMB switch QMB3606T (obsolete)	EDH-SQD-00099	413
QMB361HW	primary	SQD	QMB fusible switch unit QMB361HW (3P 600 Vac, 30-blank A)	EDH-SQD-00030	392
QMB361TW	primary	SQD	QMB fusible switch unit QMB361TW (3P 600 Vac, 30-30 A)	EDH-SQD-00029	392
QMB3620	primary	SQD	Legacy QMB switch QMB3620 (obsolete)	EDH-SQD-00102	413
QMB362HW	primary	SQD	QMB fusible switch unit QMB362HW (3P 600 Vac, 60-blank A)	EDH-SQD-00032	393
QMB362T	alias	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	394
QMB362T	primary	SQD	QMB replacement switch QMB362T for legacy interiors	EDH-SQD-00115	413
QMB362T21W	primary	SQD	QMB fusible switch unit QMB362T21W (3P 600 Vac, 60-30 A)	EDH-SQD-00033	393
QMB362TW	primary	SQD	QMB fusible switch unit QMB362TW (3P 600 Vac, 60-60 A)	EDH-SQD-00031	394
QMB363HW	primary	SQD	QMB fusible switch unit QMB363HW (3P 600 Vac, 100-blank A)	EDH-SQD-00035	394
QMB363T31W	primary	SQD	QMB fusible switch unit QMB363T31W (3P 600 Vac, 100-30 A)	EDH-SQD-00036	395
QMB363T32W	primary	SQD	QMB fusible switch unit QMB363T32W (3P 600 Vac, 100-60 A)	EDH-SQD-00037	395
QMB363TW	primary	SQD	QMB fusible switch unit QMB363TW (3P 600 Vac, 100-100 A)	EDH-SQD-00034	396
QMB364	primary	SQD	QMB replacement switch QMB364 for legacy interiors	EDH-SQD-00116	413
QMB3640	primary	SQD	Legacy QMB switch QMB3640 (obsolete)	EDH-SQD-00134	414
QMB364W	primary	SQD	QMB fusible switch unit QMB364W (3P 600 Vac, 200 A)	EDH-SQD-00038	396
QMB365W	primary	SQD	QMB fusible switch unit QMB365W (3P 600 Vac, 400 A)	EDH-SQD-00039	397
QMB365WT6	primary	SQD	QMB fusible switch unit QMB365WT6 (3P 600 Vac, 400 A)	EDH-SQD-00040	397
QMB366W	primary	SQD	QMB fusible switch unit QMB366W (3P 600 Vac, 600 A)	EDH-SQD-00041	398
QMB367W	primary	SQD	QMB fusible switch unit QMB367W (3P 600 Vac, 800 A)	EDH-SQD-00042	398

Number	Type	Mfr	Description	Catalogue ID	Pg
QMB368W	primary	SQD	QMB fusible switch unit QMB368W (3P 600 Vac, 1200 A, 24 in.)	EDH-SQD-00043	423
QMB36R	primary	SQD	QMB Class R fuse kit QMB36R	EDH-SQD-00053	405
QMB3BLW	primary	SQD	QMB blank filler plate QMB3BLW (3 in.)	EDH-SQD-00090	370
QMB3IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB3IMA	EDH-SQD-00095	374
QMB4060R	primary	SQD	QMB Class R fuse kit QMB4060R	EDH-SQD-00057	405
QMB4IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB4IMA	EDH-SQD-00096	375
QMB600T6	primary	SQD	QMB Class T fuse adapter kit QMB600T6	EDH-SQD-00058	373
QMB60R	primary	SQD	QMB Class R fuse kit QMB60R	EDH-SQD-00054	405
QMB610EK	primary	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	406
QMB610EK-1	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	406
QMB610EK-2	alias	SQD	QMB electrical interlock kit QMB610EK	EDH-SQD-00061	406
QMB6BLW	primary	SQD	QMB blank filler plate QMB6BLW (6 in.)	EDH-SQD-00091	371
QMB800T6	primary	SQD	QMB Class T fuse adapter kit QMB800T6	EDH-SQD-00059	373
QMB8CLA	primary	SQD	QMB main lug compression adaptor kit QMB8CLA (800 A)	EDH-SQD-00080	364
QMB8IMA_	primary	SQD	QMB Surgelogic IMA TVSS unit QMB8IMA	EDH-SQD-00097	375
QMJ361T	primary	SQD	QMJ fusible switch unit QMJ361T (30-30 A)	EDH-SQD-00044	399
QMJ362T	primary	SQD	QMJ fusible switch unit QMJ362T (60-60 A)	EDH-SQD-00045	399
QMJ363H	primary	SQD	QMJ fusible switch unit QMJ363H (100-blank A)	EDH-SQD-00047	400
QMJ363T	primary	SQD	QMJ fusible switch unit QMJ363T (100-100 A)	EDH-SQD-00046	400
QMJ364H	primary	SQD	QMJ fusible switch unit QMJ364H (200-blank A)	EDH-SQD-00049	401
QMJ364T	primary	SQD	QMJ fusible switch unit QMJ364T (200-200 A)	EDH-SQD-00048	401
QMJ365	primary	SQD	QMJ fusible switch unit QMJ365 (400 A)	EDH-SQD-00050	402
QMJ366	primary	SQD	QMJ fusible switch unit QMJ366 (600 A)	EDH-SQD-00051	402
QMRFP1	primary	GEA	QMR panelboard filler plate 1X	EDH-GEA-00272	508
QMRFP2	primary	GEA	QMR panelboard filler plate 2X	EDH-GEA-00273	508
QMRFP5	primary	GEA	QMR panelboard filler plate 5X	EDH-GEA-00274	508
QSF100DS	primary	ZIN	Zinsco QSF switch kit 100 A, double slot, mounting hardware	EDH-ZIN-00001	782
QSF100SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 100 A	EDH-ZIN-00014	782
QSF100SS	primary	ZIN	Sylvania QSF 100 A twin kit	EDH-ZIN-00013	782
QSF200DS	primary	ZIN	Zinsco QSF 200 A double slot mounting hardware	EDH-ZIN-00002	782
QSF200SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss, 200 A	EDH-ZIN-00015	783
QSF400DS	primary	ZIN	Zinsco/Sylvania QSF 400 A switch kit, double slot	EDH-ZIN-00003	783
QSF400SB	primary	ZIN	Sylvania QSF single slot switch kit, split buss (listed 200 A; number implies 40	EDH-ZIN-00016	783
QSF600DS	primary	ZIN	Zinsco QSF 600 A double slot mounting hardware	EDH-ZIN-00004	783
QW1BL	primary	SQD	Legacy QW interior blank filler QW1BL	EDH-SQD-00113	409
QW3BL	primary	SQD	Legacy QW interior blank filler QW3BL	EDH-SQD-00114	409
RAABR10BXXX	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXX	EDH-EAT-00764	25
RAABR10BXXXA	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR10BXXXA	EDH-EAT-00765	25
RAABR12L125	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125	EDH-EAT-00762	25
RAABR12L125A	primary	EAT	Cutler-Hammer compact BR retrofit kit RAABR12L125A	EDH-EAT-00763	26
RABR12B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12B3XXX	EDH-EAT-00748	26
RABR12H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR12H3XXX	EDH-EAT-00749	27
RABR12L3125	primary	EAT	Cutler-Hammer BR retrofit kit RABR12L3125	EDH-EAT-00756	27
RABR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20BXXX	EDH-EAT-00737	28
RABR20HXXX	primary	EAT	Cutler-Hammer BR retrofit kit RABR20HXXX	EDH-EAT-00738	28
RABR20L125	primary	EAT	Cutler-Hammer BR retrofit kit RABR20L125	EDH-EAT-00744	29
RACH18B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH18B3XXX	EDH-EAT-00722	29
RACH22BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RACH22BXXX	EDH-EAT-00706	30
RACH24L125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L125	EDH-EAT-00712	30
RACH24L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH24L3125	EDH-EAT-00725	31
RACH30L3125	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3125	EDH-EAT-00726	31

Number	Type	Mfr	Description	Catalogue ID	Pg
RACH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RACH30L3225	EDH-EAT-00727	32
RBBR20BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR20BXXX	EDH-EAT-00741	32
RBBR24L3150	primary	EAT	Cutler-Hammer BR retrofit kit RBBR24L3150	EDH-EAT-00758	33
RBBR30BCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BCXXX	EDH-EAT-00739	33
RBBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30BXXX	EDH-EAT-00750	33
RBBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30H3XXX	EDH-EAT-00751	34
RBBR30HCXXX	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30HCXXX	EDH-EAT-00740	35
RBBR30L200	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L200	EDH-EAT-00745	35
RBBR30L3100	primary	EAT	Cutler-Hammer BR retrofit kit RBBR30L3100	EDH-EAT-00757	36
RBCH24BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24BXXX	EDH-EAT-00708	36
RBCH24D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D225	EDH-EAT-00718	37
RBCH24D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH24D3225	EDH-EAT-00733	37
RBCH30BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30BXXX	EDH-EAT-00707	38
RBCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30D3225	EDH-EAT-00734	38
RBCH30L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH30L3225	EDH-EAT-00728	39
RBCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32D225	EDH-EAT-00719	39
RBCH32L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH32L225	EDH-EAT-00714	40
RBCH42L125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L125	EDH-EAT-00713	40
RBCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L225	EDH-EAT-00715	41
RBCH42L3125	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3125	EDH-EAT-00729	41
RBCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RBCH42L3225	EDH-EAT-00730	42
RCBR30BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30BXXX	EDH-EAT-00742	42
RCBR30L3200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR30L3200	EDH-EAT-00759	43
RCBR40L200	primary	EAT	Cutler-Hammer BR retrofit kit RCBR40L200	EDH-EAT-00746	43
RCCH30D3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH30D3225	EDH-EAT-00735	44
RCCH32BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32BXXX	EDH-EAT-00709	44
RCCH32D225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH32D225	EDH-EAT-00720	45
RCCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L225	EDH-EAT-00716	45
RCCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RCCH42L3225	EDH-EAT-00731	46
RDBR30B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30B3XXX	EDH-EAT-00752	46
RDBR30H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR30H3XXX	EDH-EAT-00753	47
RDBR40BXXX	primary	EAT	Cutler-Hammer BR retrofit kit RDBR40BXXX	EDH-EAT-00743	47
RDBR42L225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L225	EDH-EAT-00747	48
RDBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit RDBR42L3225	EDH-EAT-00760	48
RDCH42B3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42B3XXX	EDH-EAT-00723	49
RDCH42BXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42BXXX	EDH-EAT-00710	49
RDCH42D225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D225	EDH-EAT-00721	50
RDCH42D3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42D3225	EDH-EAT-00736	50
RDCH42H3XXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42H3XXX	EDH-EAT-00724	51
RDCH42HXXX	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42HXXX	EDH-EAT-00711	51
RDCH42L225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L225	EDH-EAT-00717	52
RDCH42L3225	primary	EAT	Cutler-Hammer CH retrofit kit RDCH42L3225	EDH-EAT-00732	52
REBR42B3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42B3XXX	EDH-EAT-00754	53
REBR42H3XXX	primary	EAT	Cutler-Hammer BR retrofit kit REBR42H3XXX	EDH-EAT-00755	53
REBR42L3225	primary	EAT	Cutler-Hammer BR retrofit kit REBR42L3225	EDH-EAT-00761	54
RP211002	primary	FPE	FPE handle extension for NM 800/1000 A breakers	EDH-FPE-00039	777
RP212001	primary	FPE	FPE handle kit for NP frame	EDH-FPE-00040	778
RS2641	primary	SIE	Siemens RS2641 rear-connecting stud, All ED, line side (long) 4.88 in	EDH-SIE-00301	740
RS2642	primary	SIE	Siemens RS2642 rear-connecting stud, All ED, load side (long) 4.88 in	EDH-SIE-00302	740
RS2643	primary	SIE	Siemens RS2643 rear-connecting stud, All ED, line side (short) 2.38 in	EDH-SIE-00299	741

Number	Type	Mfr	Description	Catalogue ID	Pg
RS2644	primary	SIE	Siemens RS2644 rear-connecting stud, All ED, load side (short) 2.38 in	EDH-SIE-00300	741
RS4755	primary	SIE	Siemens RS4755 rear-connecting stud, All FD, long (line or load) 7.06 in	EDH-SIE-00304	743
RS4756	primary	SIE	Siemens RS4756 rear-connecting stud, All FD, short (line or load) 3.12 in	EDH-SIE-00303	743
RS5773	primary	SIE	Siemens RS5773 rear-connecting stud, All JD, long 11.20 in	EDH-SIE-00306	747
RS5774	primary	SIE	Siemens RS5774 rear-connecting stud, All JD, short 5.85 in	EDH-SIE-00305	747
RS5783	primary	SIE	Siemens RS5783 rear-connecting stud, All LD, long 11.20 in	EDH-SIE-00308	748
RS5784	primary	SIE	Siemens RS5784 rear-connecting stud, All LD, short 5.85 in	EDH-SIE-00307	748
RS5785	primary	SIE	Siemens RS5785 rear-connecting stud, All MD, ND, long 8.00 in	EDH-SIE-00312	755
RS5786	primary	SIE	Siemens RS5786 rear-connecting stud, All MD, ND, short 5.50 in	EDH-SIE-00311	756
RS5787	primary	SIE	Siemens RS5787 rear-connecting stud, LM(X)D6, HLM(X)D6, long 11.20 in	EDH-SIE-00310	750
RS5788	primary	SIE	Siemens RS5788 rear-connecting stud, LM(X)D6, HLM(X)D6, short 5.85 in	EDH-SIE-00309	750
S29348	alias	SQD	PowerPact L-frame / D-frame control tap takeoff (voltage takeoff)	EDH-SQD-00181	467
S32477	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00239	467
S32478	primary	SQD	PowerPact L-frame mixed rear connection kit	EDH-SQD-00240	468
S32508	alias	SQD	PowerPact D-frame 400 A field-installable lug kit (with terminal cover)	EDH-SQD-00268	441
S32510	alias	SQD	PowerPact D-frame 600 A field-installable lug kit (with terminal cover)	EDH-SQD-00269	442
S32562	primary	SQD	PowerPact L-frame short terminal cover 3p	EDH-SQD-00243	466
S32563	primary	SQD	PowerPact L-frame short terminal cover 4p	EDH-SQD-00244	466
S33930	primary	SQD	I-Line plug-on sub-feed lug kit S33930	EDH-SQD-00152	354
S36967	primary	SQD	PowerPact L/D-frame terminal screw set, M10 x 25 (4 pcs, one side)	EDH-SQD-00188	467
S37423	primary	SQD	PowerPact H-frame control wire terminal for mechanical lugs	EDH-SQD-00177	448
S37424	primary	SQD	PowerPact J-frame control wire terminal for mechanical lugs	EDH-SQD-00178	453
S37425	primary	SQD	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00182	448
S37426	primary	SQD	PowerPact H-frame terminal nut insert (M6) for bus bar connection	EDH-SQD-00184	448
S37427	primary	SQD	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00185	453
S37428	primary	SQD	PowerPact J-frame terminal nut insert (M8) for bus bar connection	EDH-SQD-00187	453
S37429	primary	SQD	PowerPact H-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00179	448
S37430	primary	SQD	PowerPact J-frame control wire terminal for terminal nut (busbar connection)	EDH-SQD-00180	454
S37432	primary	SQD	PowerPact H-frame mixed rear connection kit	EDH-SQD-00231	446
S37433	primary	SQD	PowerPact H-frame short rear connections (set of 2)	EDH-SQD-00232	449
S37434	primary	SQD	PowerPact H-frame long rear connections (set of 2)	EDH-SQD-00233	449
S37436	primary	SQD	PowerPact H-frame short terminal cover 3p	EDH-SQD-00234	446
S37437	primary	SQD	PowerPact J-frame mixed rear connection kit	EDH-SQD-00235	454
S37438	primary	SQD	PowerPact J-frame short rear connections (set of 2)	EDH-SQD-00236	454
S37439	primary	SQD	PowerPact J-frame long rear connections (set of 2)	EDH-SQD-00237	454
S37440	primary	SQD	PowerPact J-frame short terminal cover 3p	EDH-SQD-00238	452
S37444	primary	SQD	PowerPact H-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00183	449
S37445	primary	SQD	PowerPact J-frame terminal nut insert (1/4-20) for bus bar connection	EDH-SQD-00186	455
S37446	primary	SQD	PowerPact H-frame 60 A short lug shield	EDH-SQD-00245	446

Number	Type	Mfr	Description	Catalogue ID	Pg
S37447	primary	SQD	PowerPact H-frame 150 A short lug shield	EDH-SQD-00246	447
S37448	primary	SQD	PowerPact J-frame short lug shield	EDH-SQD-00247	452
S37449	primary	SQD	PowerPact H-frame long lug shield	EDH-SQD-00248	447
S37450	primary	SQD	PowerPact J-frame long lug shield	EDH-SQD-00249	452
S3VA41T	primary	SIE	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00125	646
S3VA41TD	primary	SIE	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00151	664
S3VA41TDHD	primary	SIE	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	EDH-SIE-00152	664
S3VA52PR	primary	SIE	3VA52/61/62 breaker provision hardware kit (twin mount)	EDH-SIE-00205	659
S3VA52T	primary	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	647
S3VA52TD	primary	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	665
S3VA53PR	primary	SIE	3VA53/63/54/64 single-mount breaker provision hardware kit	EDH-SIE-00206	732
S3VA53T	primary	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	647
S3VA53T2D	primary	SIE	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	EDH-SIE-00182	728
S3VA53TD	primary	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	665
S3VA54T	primary	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	648
S3VA54T2D	primary	SIE	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	EDH-SIE-00185	728
S3VA54TD	primary	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	666
S3VA55TD	primary	SIE	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	EDH-SIE-00186	729
S3VA57TD	primary	SIE	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	EDH-SIE-00187	729
S3VA63T	primary	SIE	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00136	648
S3VA63TD	primary	SIE	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00162	666
S3VA64T	primary	SIE	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00143	649
S3VA64TD	primary	SIE	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00169	667
S432475	primary	SQD	PowerPact L-frame short rear connections (set of 2)	EDH-SQD-00241	468
S432476	primary	SQD	PowerPact L-frame long rear connections (set of 2)	EDH-SQD-00242	468
SA1E025	primary	SIE	Siemens SA1E025 lug, ED 2/3-pole 15-25A	EDH-SIE-00257	739
Same H scheme as 6554C01 (4X = H13, 5X = H14)	style_number	EAT	PRL4/PRL4X blank cover for 36/44 in wide box (1X-20X)	EDH-EAT-00295	256
SBL	primary	SIE	SBL connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00124	649
SBLBD	primary	SIE	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00150	667
SCE	primary	SIE	SCE connecting strap kit - CED (3.75in, twin)	EDH-SIE-00128	650
SCED	primary	SIE	SCED connecting strap kit - CED (3.75in, twin)	EDH-SIE-00180	730
SCF	primary	SIE	SCF connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00134	650
SCFD	primary	SIE	SCFD connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00160	668
SCJ	primary	SIE	SCJ connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00139	650
SCJD	primary	SIE	SCJD connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00167	668
SCL	primary	SIE	SCL connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00146	651
SCLD	primary	SIE	SCLD connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00172	669
SCPFP1	primary	GEA	SCP+ panelboard filler plate 1X	EDH-GEA-00276	513
SCPFP2	primary	GEA	SCP+ panelboard filler plate 2X	EDH-GEA-00277	513
SCPFP3	primary	GEA	SCP+ panelboard filler plate 3X	EDH-GEA-00278	514
SCPFP5	primary	GEA	SCP+ panelboard filler plate 5X	EDH-GEA-00279	514
SDGD	primary	SIE	SDGD connecting strap kit - VL DG (5.00in, twin)	EDH-SIE-00130	651
SE3LCK	primary	GEA	GE SE3LCK lug cover kit, SE150 line end	EDH-GEA-00347	606
SE3LCKL	primary	GEA	GE SE3LCKL lug cover kit, SE150 (modified for SEFR1 handle)	EDH-GEA-00348	606
SE6	primary	SIE	SE6 connecting strap kit - ED (3.75in, twin)	EDH-SIE-00127	652
SE6D	primary	SIE	SE6D connecting strap kit - ED (3.75in, twin)	EDH-SIE-00154	669

Number	Type	Mfr	Description	Catalogue ID	Pg
SEBKP1P2P3V1	primary	SIE	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	EDH-SIE-00231	702
SEBKP2V1	primary	SIE	SEB kit, P2 BL/BQD horizontal main	EDH-SIE-00232	633
SEBKP2V2	primary	SIE	SEB kit, P2 xGB horizontal main	EDH-SIE-00233	634
SEBKP2V3	primary	SIE	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	EDH-SIE-00234	634
SEBKP2V4	primary	SIE	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	EDH-SIE-00235	634
SEBKP2V5	primary	SIE	SEB kit (P2, P2 w/SEM3) ED horizontal main	EDH-SIE-00236	635
SEBKP2V6	primary	SIE	SEB kit (P2, P2 w/SEM3) ED vertical main	EDH-SIE-00237	635
SEBKP2V7	primary	SIE	SEB kit, P2/P3 3VA52/61/62 horizontal main	EDH-SIE-00238	635
SEBKP3V1	primary	SIE	Service entrance barrier kit CFD, FD (P3 only)	EDH-SIE-00239	642
SEBKRP1V1	primary	SIE	SEB kit for RP1 with FD, QJ or QR horizontal main	EDH-SIE-00224	702
SEBKRP1V2	primary	SIE	SEB kit for RP1 with ED horizontal main	EDH-SIE-00225	703
SEBKRP1V3	primary	SIE	SEB kit for RP1 with back-fed BL/BQD main in unit space	EDH-SIE-00226	703
SEBKRP1V4	primary	SIE	SEB kit for RP1 with back-fed xGB main in unit space	EDH-SIE-00227	703
SEBKRP1V5	primary	SIE	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	EDH-SIE-00228	704
SEBKRP1V6	primary	SIE	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	EDH-SIE-00229	704
SEBKRP1V7	primary	SIE	SEB kit for RP1 with 3VA52/61/62 horizontal main	EDH-SIE-00230	704
SEBP4V1	primary	SIE	Service entrance barrier for (S)JD, (S)LD, MG mains	EDH-SIE-00217	656
SEBP4V2	primary	SIE	Service entrance barrier for CJD, CLD	EDH-SIE-00218	657
SEBP4V3	primary	SIE	Service entrance barrier for JG, LG	EDH-SIE-00219	657
SEBP5V1	primary	SIE	Service entrance barrier for (S)MD, (S)ND without shield	EDH-SIE-00220	677
SEBP5V2	primary	SIE	Service entrance barrier for (S)MD, (S)ND with shield	EDH-SIE-00221	677
SEBP5V3	primary	SIE	Service entrance barrier for Vacu-Break switches	EDH-SIE-00222	677
SEBP5V4	primary	SIE	Service entrance barrier for HCP switches	EDH-SIE-00223	677
SECT	primary	ZIN	Sylvania 225 A twin kit (for SC? frame, inferred)	EDH-ZIN-00018	783
SEHT	primary	ZIN	Sylvania 100 A twin kit (for SE/SEH breakers, inferred)	EDH-ZIN-00017	784
SF2DPK	primary	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	504
SF3LCK	primary	GEA	GE SF3LCK lug cover kit, SF250 line end	EDH-GEA-00349	609
SF6	primary	SIE	SF6 connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00133	652
SF6D	primary	SIE	SF6D connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00159	670
SFG	primary	SIE	SFG connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00132	652
SFGD	primary	SIE	SFGD connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00158	670
SG1BCK	primary	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	612
SG1BCK4 (as printed 2019)	alias	GEA	GE SG1BCK 3-pole lug/bus cover, SG600 (required for line-end bus connection)	EDH-GEA-00351	612
SG1LCK	primary	GEA	GE SG1LCK 3-pole lug cover, SG600	EDH-GEA-00350	612
SGB2	primary	SIE	SGB2 connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00126	653
SGB2D	primary	SIE	SGB2D connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00153	671
SGBCS1	primary	GEA	GE SGBCS1 back-connected line/load stud, SG600, 2 13/16 in (short)	EDH-GEA-00392	612
SGBCS2	primary	GEA	GE SGBCS2 back-connected line/load stud, SG600, 6 1/16 in (long)	EDH-GEA-00393	613
SGLVK	primary	GEA	GE SGLVK line voltage control wire kit, SG600	EDH-GEA-00362	613
SJ1	primary	SIE	SJ1 connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00138	653
SJ1D	primary	SIE	SJ1D connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00165	671
SJ2D	primary	SIE	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	EDH-SIE-00166	672
SJD4T	primary	ZIN	Sylvania 400 A twin kit (SJD frame)	EDH-ZIN-00019	784
SJG	primary	SIE	SJG connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00137	653
SJG1D	primary	SIE	SJG1D connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00164	672
SJG2D	primary	SIE	SJG2D connecting strap kit - VL JG (6.25in, twin)	EDH-SIE-00163	673

Number	Type	Mfr	Description	Catalogue ID	Pg
SK12SPK	primary	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	504
SK1LCK	primary	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	616
SK1LCK3 (as printed 2019)	alias	GEA	GE SK1LCK lug cover, SK1200	EDH-GEA-00352	616
SK8SPK	primary	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	504
SKLVK	primary	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	596
SKLVK6 / SKLVK8 (as printed)	alias	GEA	GE SKLVK line voltage control wire kit, K1200/SK1200	EDH-GEA-00333	596
SKM8S	primary	ZIN	Sylvania 800 A single kit (SKM frame)	EDH-ZIN-00020	784
SKPSHLD	primary	GEA	GE SKPSHLD lug cover/arc shield, SKPA upper end	EDH-GEA-00353	616
SL100	primary	SQD	I-Line plug-on sub-feed lug kit SL100	EDH-SQD-00153	354
SL1200P5	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P5	EDH-SQD-00149	354
SL1200P6	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P6	EDH-SQD-00150	355
SL1200P7	primary	SQD	I-Line plug-on sub-feed lug kit SL1200P7	EDH-SQD-00151	355
SL250	primary	SQD	I-Line plug-on sub-feed lug kit SL250	EDH-SQD-00146	355
SL400	primary	SQD	I-Line plug-on sub-feed lug kit SL400	EDH-SQD-00147	356
SL6	primary	SIE	SL6 connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00145	654
SL6D	primary	SIE	SL6D connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00171	673
SL800	primary	SQD	I-Line plug-on sub-feed lug kit SL800	EDH-SQD-00154	356
SL800M5	primary	SQD	I-Line plug-on sub-feed lug kit SL800M5	EDH-SQD-00148	356
SLG	primary	SIE	SLG connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00144	654
SLGD	primary	SIE	SLGD connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00170	674
SLM1D	primary	SIE	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	EDH-SIE-00176	674
SMBKED1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	EDH-SIE-00056	712
SMBKED3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	EDH-SIE-00057	713
SMBKFD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	EDH-SIE-00058	713
SMBKFD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	EDH-SIE-00059	713
SMBKJD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	EDH-SIE-00060	714
SMBKJD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	EDH-SIE-00061	714
SMND	primary	SIE	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	EDH-SIE-00177	675
SQR	primary	SIE	SQR connecting strap kit - QR (5.00in, twin)	EDH-SIE-00131	654
SQRC	primary	SIE	QR cover plate for P4/P5/SPP power panels	EDH-SIE-00210	659
SQRD	primary	SIE	SQRD connecting strap kit - QR (5.00in, twin)	EDH-SIE-00181	730
SSCJ	primary	SIE	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	EDH-SIE-00141	655
SSCJD	primary	SIE	SSCJD connecting strap kit - SCJD (8.75in, single)	EDH-SIE-00184	731
SSCL	primary	SIE	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00148	655
SSCLD	primary	SIE	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00174	675
SSJ1	primary	SIE	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	EDH-SIE-00140	656
SSJ1D	primary	SIE	SSJ1D connecting strap kit - SJD (8.75in, single)	EDH-SIE-00183	731
SSL6	primary	SIE	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00147	656
SSL6D	primary	SIE	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00173	676
SSMND	primary	SIE	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	EDH-SIE-00178	676
STD G01/G03 #1-1/0; SFL/TFL G05/G07; OVS G09/G11 2/0-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4050 - 100 A main, 100% neutral, crimp lugs	EDH-EAT-00222	165

Number	Type	Mfr	Description	Catalogue ID	Pg
STD G01/G03 #14-1/0; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C96645 - 100 A main 100% neutral, mechanical, 21-27 i	EDH-EAT-00233	162
STD G01/G03 2/0-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 42C4051 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00226	166
STD G01/G03 2/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2	style_number	EAT	PRL1a/2a neutral assembly 1C96653 - 225 A 200% neutral, crimp lugs (2009 drawing	EDH-EAT-00231	164
STD G01/G03 4/0-500 kcmil x2; OVS G09/G11 500-750 kcmil x2; 600 A Burndy G02-G12	style_number	EAT	PRL1a/2a neutral assembly 42C4052 - 225 A 200% / 400 A 100% neutral crimp; 600 A	EDH-EAT-00230	166
STD G01/G03 #4-300 kcmil; SFL/TFL G05/G07; OVS G09/G11 2/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96650 - 100 A 200% / 225 A 100% neutral, crimp lugs	EDH-EAT-00227	163
STD G01/G03 #6-300 kcmil; SFL/TFL G05/G07 x2	style_number	EAT	PRL1a/2a neutral assembly 1C97022 - 100 A main 200% neutral, mechanical, 21-27 i	EDH-EAT-00234	165
STD G01/G03 #8-1/0; SFL/TFL G05/G07 #8-1/0 x2; OVS G09/G11 #4-300 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96647 - 100 A main, 100% neutral, crimp lugs (2009 d	EDH-EAT-00223	162
STD G02/G03 #14-1/0 x1; SFL/TFL G05/G07 #14-1/0 x2; OVS G09/G11 #6-300 kcmil x1	style_number	EAT	PRL1a/2a neutral assembly 1C96646 - 100 A main, 100% neutral, mechanical lugs (3	EDH-EAT-00221	162
STD G02/G03 #6-300 kcmil; SFL/TFL G06/G07 x2; OVS G09/G11 4/0-500 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96649 - 100 A main 200% neutral / 225 A main 100% ne	EDH-EAT-00225	163
STD G03 1/0-600 kcmil x1; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96654 - 225 A 200% / 400 A 100% neutral, copper mech	EDH-EAT-00232	165
STD G03 #14-1/0; SFL/TFL G07; OVS G11 #6-250 kcmil (silver-plated Cu only)	style_number	EAT	PRL1a/2a neutral assembly 1C96648 - 100 A main, 100% neutral, copper mechanical	EDH-EAT-00224	163
STD G03 #6-250 kcmil; SFL/TFL G07; OVS G11 1/0-600 kcmil	style_number	EAT	PRL1a/2a neutral assembly 1C96651 - 100 A 200% / 225 A 100% neutral, copper mech	EDH-EAT-00228	164
T1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu	EDH-EAT-00527	327
T1200NB3	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu	EDH-EAT-00528	328
T1200NB3M	primary	EAT	Series G NG-frame line/load terminal, 1250 A, Cu (metric)	EDH-EAT-00529	352
T1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu	EDH-EAT-00531	333
T250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu (standard)	EDH-EAT-00541	341
T250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu only (optional)	EDH-EAT-00471	286
T300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu	EDH-EAT-00477	302
T350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu	EDH-EAT-00478	302
T350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu	EDH-EAT-00552	349
T600MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu	EDH-EAT-00517	321
T602LD	primary	EAT	Series C L-frame line/load terminal, 600 A, Cu	EDH-EAT-00508	315
T602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (T602LD)	EDH-EAT-00513	315
T700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu	EDH-EAT-00526	328
T800MA1	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu	EDH-EAT-00518	321
TA1000NB1	primary	EAT	Series C N-frame line/load terminal, 1000 A, Cu/Al	EDH-EAT-00523	328
TA1200NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00524	329
TA1201NB1	primary	EAT	Series C N-frame line/load terminal, 1200 A, Cu/Al	EDH-EAT-00525	329
TA1600RD	primary	EAT	Series C R-frame line/load terminal, 1600 A, Cu/Al	EDH-EAT-00530	333

Number	Type	Mfr	Description	Catalogue ID	Pg
TA1E6125	primary	SIE	Siemens TA1E6125 lug, ED 110-125A	EDH-SIE-00259	739
TA1FD350A	primary	SIE	Siemens TA1FD350A lug, FD 70-250A	EDH-SIE-00265	742
TA1L6750	primary	SIE	Siemens TA1L6750 lug, LD 250-600A, 1 x 500-750 kcmil	EDH-SIE-00273	744
TA1Q1	primary	SIE	Siemens TA1Q1 line-side lug, BQ 45-125A	EDH-SIE-00247	733
TA1Q300	primary	SIE	Siemens TA1Q300 3-lug kit, QJ2 (distributor data)	EDH-SIE-00256	736
TA2000RD	primary	EAT	Series C R-frame line/load terminal, 2000 A, Cu/Al	EDH-EAT-00532	333
TA250FJ	primary	EAT	Series G JG-frame line/load terminal, 250 A, Cu/Al	EDH-EAT-00542	342
TA250KB	primary	EAT	Series C J-frame line/load terminal, 250 A, Cu/Al (standard)	EDH-EAT-00470	287
TA2J630	primary	SIE	Siemens TA2J630 lug, SJD6-B 65-200A	EDH-SIE-00270	744
TA2J6500	primary	SIE	Siemens TA2J6500 lug, JD/LD 200-600A, 1-2 x 3/0-500 kcmil	EDH-SIE-00269	745
TA2K500	primary	SIE	Siemens TA2K500 lug, LMD/MD 500-600A, 1-2 x #1-500	EDH-SIE-00277	749
TA2N750	primary	SIE	Siemens TA2N750 lug, MD 500-800A (100% rated), 500-750 kcmil	EDH-SIE-00280	754
TA300K	primary	EAT	Series C K-frame line/load terminal , 225 A, Cu/Al	EDH-EAT-00472	303
TA350K	primary	EAT	Series C K-frame line/load terminal , 350 A, Cu/Al	EDH-EAT-00473	303
TA350LK	primary	EAT	Series G LG-frame line/load terminal, 400 A, Cu/Al	EDH-EAT-00551	349
TA3K500	primary	SIE	Siemens TA3K500 lug, LMD/MD 500-800A, 1-3 x 1/0-500	EDH-SIE-00278	749
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00500	311
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00501	312
TA401LD	alias	EAT	Series C L-frame line/load terminal kit, 400 A, Cu/Al	EDH-EAT-00502	314
TA450LD	primary	EAT	Series C L-frame line/load terminal, 450 A, Cu/Al	EDH-EAT-00503	316
TA4P750	primary	SIE	Siemens TA4P750 lug, PD 1200-1600A, 600-750 kcmil (built to order)	EDH-SIE-00297	757
TA5P600	primary	SIE	Siemens TA5P600 lug, PD 1200-1600A, 1-5 x 300-600 kcmil	EDH-SIE-00294	757
TA602LD	primary	EAT	Series C L-frame line/load terminal, 500 A, Cu/Al	EDH-EAT-00504	316
TA602LDCW	primary	EAT	Series C L-frame terminal with control wire termination (TA602LD)	EDH-EAT-00509	316
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00505	311
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00506	313
TA603LD	alias	EAT	Series C L-frame line/load terminal kit, 600 A, Cu/Al	EDH-EAT-00507	314
TA632L	primary	EAT	Series G LG-frame single terminal, 630 A, Cu/Al	EDH-EAT-00553	350
TA6ED06	primary	SIE	Siemens TA6ED06 distribution lug, ED	EDH-SIE-00264	739
TA6FD04	primary	SIE	Siemens TA6FD04 distribution lug, FD	EDH-SIE-00268	742
TA6GG04	primary	SIE	Siemens TA6GG04 distribution lug, NGG/HGG/LGG	EDH-SIE-00250	735
TA6JD20	primary	SIE	Siemens TA6JD20 distribution lug, JD/LD	EDH-SIE-00275	745
TA6R600	primary	SIE	Siemens TA6R600 lug, PD/RD 1200-2000A, 1-6 x 300-600 kcmil	EDH-SIE-00295	757
TA700MA1	primary	EAT	Series C M-frame line/load terminal, 600 A, Cu/Al	EDH-EAT-00514	321
TA700MA1CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA700MA1)	EDH-EAT-00519	322
TA700NB1	primary	EAT	Series C N-frame line/load terminal, 700 A, Cu/Al	EDH-EAT-00522	329
TA800MA2	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00515	322
TA800MA2CWT	primary	EAT	Series C M-frame terminal with control wire termination (TA800MA2)	EDH-EAT-00520	322
TA801MA	primary	EAT	Series C M-frame line/load terminal, 800 A, Cu/Al	EDH-EAT-00516	322
TA801MACWT	primary	EAT	Series C M-frame terminal with control wire termination (TA801MA)	EDH-EAT-00521	323
TAD3	primary	EAT	TAD3 adapter kit - KD breaker onto existing Westinghouse LB-frame connectors	EDH-EAT-00365	257
TC012	primary	GEA	GE TC012 copper-only lug, E150/TB1 thru 150A	EDH-GEA-00287	575
TC0121	primary	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	589
TC0131	primary	GEA	GE TC0131 copper lug, TK4V load end	EDH-GEA-00324	589
TC018	primary	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	604
TC024	primary	GEA	GE TC024 copper-only lug, TFJ 250A	EDH-GEA-00290	579

Number	Type	Mfr	Description	Catalogue ID	Pg
TC041	primary	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	590
TC0416 / TC0414	alias	GEA	GE TC041 copper-only lug, K1200/TB6 300-400A	EDH-GEA-00303	590
TC043	primary	GEA	GE TC043 copper-only lug, J400/TB4	EDH-GEA-00297	582
TC061	primary	GEA	GE TC061 copper-only lug, K1200/TB6 300-600A	EDH-GEA-00307	590
TC063	primary	GEA	GE TC063 copper-only lug, J600	EDH-GEA-00298	582
TC081A	primary	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	591
TC091	primary	GEA	GE TC091 copper lug, TK4V load end	EDH-GEA-00323	591
TC1ED6150	primary	SIE	Siemens TC1ED6150 copper-body lug, ED 30-125A	EDH-SIE-00262	740
TC1FD350	primary	SIE	Siemens TC1FD350 copper lug, FD 70-250A	EDH-SIE-00266	742
TC1J6600	primary	SIE	Siemens TC1J6600 copper lug, JD/LD (100% rated)	EDH-SIE-00271	745
TC1Q1	primary	SIE	Siemens TC1Q1 line-side lug, BQ 15-40A (steel)	EDH-SIE-00245	733
TC2J6500	primary	SIE	Siemens TC2J6500 copper lug, JD/LD (100% rated)	EDH-SIE-00272	746
TC2K500	primary	SIE	Siemens TC2K500 copper lug, MD 500-600A	EDH-SIE-00279	749
TC5R600	primary	SIE	Siemens TC5R600 copper lug, RD 1600-2000A (also 100% PD)	EDH-SIE-00296	758
TCAL12	primary	GEA	GE TCAL12 lug, E150/THLC1/TB1 15-60A	EDH-GEA-00284	575
TCAL121	primary	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	592
TCAL1214 / TCAL1212	alias	GEA	GE TCAL121 lug, K1200/TKMA 1000-1200A, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00312	592
TCAL122	primary	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	592
TCAL1225 / TCAL1223	alias	GEA	GE TCAL122 lug, K1200 1200A, (3) 750 kcmil Cu-Al	EDH-GEA-00316	592
TCAL124	primary	GEA	GE TCAL124 lug, Spectra SK1200, (3) 350-750 kcmil	EDH-GEA-00341	615
TCAL125	primary	GEA	GE TCAL125 lug, Spectra SK1200, (4) 250-500 kcmil	EDH-GEA-00344	615
TCAL12A	primary	GEA	GE TCAL12A lug, E150/THLC1/TB1 70-90A	EDH-GEA-00285	575
TCAL131	primary	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	593
TCAL1314 / TCAL1312	alias	GEA	GE TCAL131 lug, TK4V load end, (4) 250-350 Cu / 250-500 Al	EDH-GEA-00322	593
TCAL14	primary	GEA	GE TCAL14 lug, E150/THLC1/TB1 15-30A, (1) #14-8	EDH-GEA-00283	576
TCAL15	primary	GEA	GE TCAL15 lug, E150/THLC1/TB1 100-150A	EDH-GEA-00286	576
TCAL18	primary	GEA	GE TCAL18 lug, Spectra SE150, (1) #12-3/0	EDH-GEA-00335	605
TCAL18LV	primary	GEA	GE TCAL18LV lug with control-voltage quick connect, SE150	EDH-GEA-00360	605
TCAL19PD1	primary	GEA	GE TCAL19PD1 power distribution lug, SE1/TED 125A	EDH-GEA-00363	605
TCAL19PD3	primary	GEA	GE TCAL19PD3 3-lug power distribution kit, SE1/TED	EDH-GEA-00364	603
TCAL24	primary	GEA	GE TCAL24 lug, F225, (1) #4-300 kcmil Cu-Al	EDH-GEA-00288	579
TCAL25	primary	GEA	GE TCAL25 lug, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00281	617
TCAL27	primary	GEA	GE TCAL27 lug, THLC2, (1) #4-300 kcmil Cu-Al	EDH-GEA-00291	579
TCAL28PD1	primary	GEA	GE TCAL28PD1 power distribution lug, SF 250A	EDH-GEA-00365	607
TCAL28PD3	primary	GEA	GE TCAL28PD3 3-lug power distribution kit, SF	EDH-GEA-00366	606
TCAL29	primary	GEA	GE TCAL29 lug, Spectra SF250, (1) #8-350 kcmil	EDH-GEA-00337	608
TCAL29LV	primary	GEA	GE TCAL29LV lug with control-voltage quick connect, SF250	EDH-GEA-00361	608
TCAL40PD1	primary	GEA	GE TCAL40PD1 power distribution lug, SG 400A	EDH-GEA-00367	611
TCAL40PD3	primary	GEA	GE TCAL40PD3 3-lug power distribution kit, SG	EDH-GEA-00368	609
TCAL41	primary	GEA	GE TCAL41 lug, K1200/TB6 300-400A	EDH-GEA-00301	593
TCAL43	primary	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	582
TCAL433	alias	GEA	GE TCAL43 lug, J400/TB4/J600 thru 400A/TJD	EDH-GEA-00292	582
TCAL47	primary	GEA	GE TCAL47 lug, J400/TJD, (1) 750 kcmil Cu-Al	EDH-GEA-00293	583
TCAL61	primary	GEA	GE TCAL61 lug, K1200/TB6 300-600A, (2) 2/0-500	EDH-GEA-00304	593
TCAL63	primary	GEA	GE TCAL63 lug, J600 450-600A	EDH-GEA-00295	583
TCAL81	primary	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	594
TCAL812 / TCAL811	alias	GEA	GE TCAL81 lug, K1200/TB8/TKMA/SK1200 300-800A, (3) 3/0-500	EDH-GEA-00308	594
TCAL91	primary	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	594
TCAL912 / TCAL911	alias	GEA	GE TCAL91 lug, TK4V load end, (3) 3/0-500	EDH-GEA-00319	594

Number	Type	Mfr	Description	Catalogue ID	Pg
TCALK2121	primary	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	585
TCALK21214 / TCALK21212	alias	GEA	GE TCALK2121 2-lug kit with wrench (TCAL121)	EDH-GEA-00313	585
TCALK2122	primary	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	585
TCALK21225 / TCALK21223	alias	GEA	GE TCALK2122 2-lug kit (TCAL122)	EDH-GEA-00317	585
TCALK2124	primary	GEA	GE TCALK2124 2-lug kit with wrench (TCAL124)	EDH-GEA-00342	613
TCALK2125	primary	GEA	GE TCALK2125 2-lug kit with wrench (TCAL125)	EDH-GEA-00345	614
TCALK261	primary	GEA	GE TCALK261 2-lug kit with wrench, K1200/TB6	EDH-GEA-00305	585
TCALK281	primary	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	586
TCALK2812 / TCALK2811	alias	GEA	GE TCALK281 2-lug kit with wrench (TCAL81)	EDH-GEA-00309	586
TCALK291	primary	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	586
TCALK2912 / TCALK2911	alias	GEA	GE TCALK291 2-lug kit, TK4V load end	EDH-GEA-00320	586
TCALK3121	primary	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	586
TCALK31214 / TCALK31212	alias	GEA	GE TCALK3121 3-lug kit with wrench (TCAL121)	EDH-GEA-00314	586
TCALK3122	primary	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	587
TCALK31225 / TCALK31223	alias	GEA	GE TCALK3122 3-lug kit (TCAL122)	EDH-GEA-00318	587
TCALK3124	primary	GEA	GE TCALK3124 3-lug kit with wrench (TCAL124)	EDH-GEA-00343	614
TCALK3125	primary	GEA	GE TCALK3125 3-lug kit with wrench (TCAL125)	EDH-GEA-00346	614
TCALK318	primary	GEA	GE TCALK318 3-lug kit, Spectra SE150	EDH-GEA-00336	604
TCALK324	primary	GEA	GE TCALK324 3-lug kit, F225	EDH-GEA-00289	578
TCALK325	primary	GEA	GE TCALK325 3-lug kit, TQD, (1) #4-300 kcmil Cu-Al	EDH-GEA-00282	617
TCALK329	primary	GEA	GE TCALK329 3-lug kit, Spectra SF250	EDH-GEA-00338	607
TCALK341	primary	GEA	GE TCALK341 3-lug kit, K1200/TB6 300-400A	EDH-GEA-00302	587
TCALK343	primary	GEA	GE TCALK343 3-lug kit, TLB4/THLC4	EDH-GEA-00300	581
TCALK347	primary	GEA	GE TCALK347 3-lug kit, J400/TJD 750 kcmil	EDH-GEA-00294	581
TCALK361	primary	GEA	GE TCALK361 3-lug kit with wrench, K1200/TB6	EDH-GEA-00306	587
TCALK363	primary	GEA	GE TCALK363 3-lug kit, J600 450-600A	EDH-GEA-00296	581
TCALK381	primary	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	588
TCALK3812 / TCALK3811	alias	GEA	GE TCALK381 3-lug kit with wrench (TCAL81)	EDH-GEA-00310	588
TCALK391	primary	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	588
TCALK3912 / TCALK3911	alias	GEA	GE TCALK391 3-lug kit, TK4V load end	EDH-GEA-00321	588
TCLK265	primary	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	610
TCLK2652 / TCLK2651 (as printed)	alias	GEA	GE TCLK265 2-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00339	610
TCLK365	primary	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	610
TCLK3652 / TCLK3653 / TCLK3654 (as printed)	alias	GEA	GE TCLK365 3-pole lug kit, Spectra SG600 (with lug cover)	EDH-GEA-00340	610
TCLK43	primary	GEA	GE TCLK43 lug, TLB4/THLC4	EDH-GEA-00299	583
TCO121	alias	GEA	GE TC0121 (TCO121) copper lug, K1200/SK1200 1000-1200A	EDH-GEA-00315	589
TCO124	primary	GEA	GE TCO124 plated copper lug, SK1200 (3) 350-750	EDH-GEA-00358	615
TCO125	primary	GEA	GE TCO125 plated copper lug, SK1200 (4) 250-500	EDH-GEA-00359	616
TCO18	alias	GEA	GE TC018 (TCO18) plated copper lug, SE150	EDH-GEA-00354	604
TCO29	primary	GEA	GE TCO29 plated copper lug, SF250	EDH-GEA-00355	608
TCO81A	alias	GEA	GE TC081A copper lug, K1200/TB8/SK1200 600-800A	EDH-GEA-00311	591
TCOK265	primary	GEA	GE TCOK265 2-pole copper lug kit, SG600	EDH-GEA-00356	611
TCOK365	primary	GEA	GE TCOK365 3-pole copper lug kit, SG600	EDH-GEA-00357	611
TEC1	primary	EAT	Series C F-frame terminal end cover, 0.25 opening	EDH-EAT-00645	279
TEC2	primary	EAT	Series C F-frame terminal end cover, 0.41 opening	EDH-EAT-00646	279
TED1DPK	primary	GEA	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	EDH-GEA-00256	505
TEDFP1	primary	GEA	A-Series filler plate for TQD/THQD/TED4/SE/FB	EDH-GEA-00040	487

Number	Type	Mfr	Description	Catalogue ID	Pg
TEDLS	primary	GEA	GE TEDLS line shield, TEB/TEC/TED/THED	EDH-GEA-00325	576
TEF1	primary	GEA	GE TEF1 back-connected line/load stud, E150 2-pole, TB1, THLC1, 2 25/32 in (shor	EDH-GEA-00386	577
TEF2	primary	GEA	GE TEF2 back-connected line/load stud, E150 2-pole, TB1, THLC1, 4 13/32 in (long	EDH-GEA-00387	577
TEF3	primary	GEA	GE TEF3 back-connected line/load stud, E150 2-pole, TB1, THLC1, 3 13/32 in (shor	EDH-GEA-00388	577
TEF4	primary	GEA	GE TEF4 back-connected line/load stud, E150 2-pole, TB1, THLC1, 5 25/32 in (long	EDH-GEA-00389	578
TEL1DPK	primary	GEA	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	EDH-GEA-00261	505
TF2DPK	primary	GEA	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	EDH-GEA-00257	505
TFK1	primary	GEA	GE TFK1 back-connected line/load stud, TFJ, TFK, THFK, 2 23/32 in (short)	EDH-GEA-00390	580
TFK2	primary	GEA	GE TFK2 back-connected line/load stud, TFJ, TFK, THFK, 5 31/32 in (long)	EDH-GEA-00391	580
TFKLS	primary	GEA	GE TFKLS line shield, TFJ/TFK/TFC	EDH-GEA-00326	580
TGL2	primary	GEA	A-Series Equipment ground, standard bonded to box, per 12 branch positions	EDH-GEA-00096	486
TGL20	primary	GEA	A-Series Main lug for equipment ground terminal kits	EDH-GEA-00095	486
TJ4DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	EDH-GEA-00259	505
TJ6DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	EDH-GEA-00260	506
TJKLS	primary	GEA	GE TJKLS line shield, TJJ/TJK/TJC	EDH-GEA-00327	584
TJLVK	primary	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	584
TJLVK8 (as printed)	alias	GEA	GE TJLVK line voltage control wire kit, J600	EDH-GEA-00334	584
TK12SPK	primary	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	506
TK8SPK	primary	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	506
TKM11	primary	GEA	GE TKM11 back-connected line/load stud, K1200, TB6, TB8, 5 1/2 in	EDH-GEA-00394	597
TKM12	primary	GEA	GE TKM12 back-connected line/load stud, K1200, TB6, TB8, 8 in	EDH-GEA-00395	597
TKMC1	primary	GEA	GE TKMC1 connector (back strap), TKM	EDH-GEA-00332	595
TNKG3	primary	SIE	Siemens TNKG3 nut keeper plate (pkg of 3), NGG	EDH-SIE-00249	735
TQ2DPK	primary	GEA	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	EDH-GEA-00258	506
TQDFM1	primary	GEA	A-Series 2-3 pole TQD mechanical interlock	EDH-GEA-00088	489
TQLFP1	primary	GEA	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	EDH-GEA-00041	487
TS33LD	primary	EAT	Series C K-frame terminal shield 3-pole, load	EDH-EAT-00641	304
TS33LN	primary	EAT	Series C K-frame terminal shield 2/3-pole, line	EDH-EAT-00639	305
TS34LN	primary	EAT	Series C K-frame terminal shield 4-pole, line	EDH-EAT-00640	305
TSSG3A	primary	SIE	Siemens TSSG3A terminal shield, HGG/LGG/NGG 3-pole	EDH-SIE-00251	735
TVS12RMU	primary	SQD	Surgelogic TVSS remote monitor TVS12RMU	EDH-SQD-00098	375
UBIZRBK12	primary	ZIN	Connecticut Electric / UBI 125 A Type RBK replacement buss bar kit for Zinsco lo	EDH-ZIN-00025	786
UPC 782114795996	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDS (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00312	241
UPC 782114796412	alias	EAT	PRL4/PRL4X breaker connector kit KPRL4KDT (DK, KD, KDB, HKD, KDC 2-/3-pole)	EDH-EAT-00313	242
VC100FA	primary	SQD	Square D FA Al compression lug kit	EDH-SQD-00272	428
VC250KA3	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00273	430
VC250KA35	primary	SQD	Square D KA Al compression lug kit	EDH-SQD-00274	431
VC400LA3	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00276	434
VC400LA35	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00275	434

Number	Type	Mfr	Description	Catalogue ID	Pg
VC400LA5	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00277	434
VC400LA7	primary	SQD	Square D LA Al compression lug kit	EDH-SQD-00278	435
VC600LI3	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00279	438
VC600LI5	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00280	438
VC600LI7	primary	SQD	Square D LI Al compression lug kit	EDH-SQD-00281	439
VCEL02114S1	primary	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	367
VCEL021-14S1	alias	SQD	VERSA-CRIMP compression lug VCEL02114S1	EDH-SQD-00074	367
VCEL030516H1	primary	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	367
VCEL030-516H1	alias	SQD	VERSA-CRIMP compression lug VCEL030516H1	EDH-SQD-00071	367
VCEL05012H1	primary	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	367
VCEL050-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL05012H1	EDH-SQD-00072	367
VCEL06012H1	primary	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	368
VCEL060-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL06012H1	EDH-SQD-00079	368
VCEL07512H1	primary	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	368
VCEL075-12H1	alias	SQD	VERSA-CRIMP compression lug VCEL07512H1	EDH-SQD-00073	368
VCELC02114S1	primary	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	368
VCELC021-14S1	alias	SQD	VERSA-CRIMP compression lug VCELC02114S1	EDH-SQD-00075	368
VCELC03038H1	primary	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	368
VCELC030-38H1	alias	SQD	VERSA-CRIMP compression lug VCELC03038H1	EDH-SQD-00076	368
VCELC05012H1	primary	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	369
VCELC050-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC05012H1	EDH-SQD-00077	369
VCELC07512H1	primary	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	369
VCELC075-12H1	alias	SQD	VERSA-CRIMP compression lug VCELC07512H1	EDH-SQD-00078	369
Westinghouse DA breaker	supersedes	EAT	CDP Series C DK breaker retrofit kit (replaces Westinghouse DA)	EDH-EAT-00361	70
Westinghouse EB, EHB breaker	supersedes	EAT	CDP Series C EHD breaker retrofit kit (replaces Westinghouse EB, EHB)	EDH-EAT-00353	71
Westinghouse FB breaker	supersedes	EAT	CDP Series C FDB breaker retrofit kit (replaces Westinghouse FB)	EDH-EAT-00354	73
Westinghouse HFB breaker	supersedes	EAT	CDP Series C FD breaker retrofit kit (replaces Westinghouse HFB)	EDH-EAT-00355	72
Westinghouse HKA breaker	supersedes	EAT	CDP Series C HKD breaker retrofit kit (replaces Westinghouse HKA)	EDH-EAT-00357	74
Westinghouse JA breaker	supersedes	EAT	CDP Series C KDB breaker retrofit kit (replaces Westinghouse JA)	EDH-EAT-00359	78
Westinghouse JB breaker	supersedes	EAT	CDP Series C JDB breaker retrofit kit (replaces Westinghouse JB)	EDH-EAT-00360	76
Westinghouse KA breaker	supersedes	EAT	CDP Series C KD breaker retrofit kit (replaces Westinghouse KA)	EDH-EAT-00356	77
Westinghouse KB, HKB breaker	supersedes	EAT	CDP Series C JD breaker retrofit kit (replaces Westinghouse KB, HKB)	EDH-EAT-00358	75
Westinghouse LA, HLA breaker	supersedes	EAT	CDP Series C LD breaker retrofit kit (replaces Westinghouse LA, HLA)	EDH-EAT-00362	79
Westinghouse MA, HMA breaker	supersedes	EAT	CDP Series C MDL breaker retrofit kit (replaces Westinghouse MA, HMA)	EDH-EAT-00363	80
Westinghouse NB, HNB breaker	supersedes	EAT	CDP Series C ND breaker retrofit kit (replaces Westinghouse NB, HNB)	EDH-EAT-00364	81
YA060HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00195	445
YA150HD	primary	SQD	PowerPact H-frame Al/Cu compression lug kit	EDH-SQD-00196	445
YA150JD	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00197	451
YA250J35	primary	SQD	PowerPact J-frame Al/Cu compression lug kit	EDH-SQD-00198	451
YA400L31K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00199	463
YA400L51K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00201	463
YA400L51K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00205	464
YA400L71K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00203	464
YA400L71K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00207	464

Number	Type	Mfr	Description	Catalogue ID	Pg
YA600L32K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00200	465
YA600L32K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00204	465
YA600L52K3	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00202	465
YA600L52K4	primary	SQD	PowerPact L-frame Al/Cu compression lug kit	EDH-SQD-00206	466

12.4 Breaker compatibility index

Parts linked to each breaker family. The confidence shown is that of the part's breaker-compatibility claim.

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	631
3VA41 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	706
3VA41 (SIE)	DFFPVA41A	filler-plate	RP1	—	708
3VA41 (SIE)	DFK1	deadfront	P2, P3	—	636
3VA41 (SIE)	DFP3AP01	filler-plate	P2, P3	—	638
3VA41 (SIE)	MBKVA41A	main-breaker-kit	RP1	A	684
3VA41 (SIE)	MBKVA41B	main-breaker-kit	RP1	A	685
3VA41 (SIE)	P1CONACPHAL	connector-strap	RP1	—	693
3VA41 (SIE)	P1CONACPHCU	connector-strap	RP1	B	693
3VA41 (SIE)	P1CONBPHAL	connector-strap	RP1	B	694
3VA41 (SIE)	P1CONBPHCU	connector-strap	RP1	B	694
3VA41 (SIE)	P1SCRWS	fastener	RP1, P1	—	711
3VA41 (SIE)	S3VA41T	branch-connector-kit	P4	A	646
3VA41 (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	664
3VA41 (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	664
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9233-0QA00	fastener	SB	—	732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9243-0QA00	fastener	SB	—	732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9473-0QA00	fastener	SB	—	732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2HW	hardware-kit	P2, P3	A	638
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2S	branch-connector-kit	P2, P3	A	632
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3HW	hardware-kit	P3	A	644
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3T	branch-connector-kit	P3	A	642

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262A	filler-plate	RP1	—	708
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2A	filler-plate	P2, P3	—	637
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2B	filler-plate	P2, P3	—	637
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5363A	filler-plate	RP1, P2, P3	—	709
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262A	main-breaker-kit	RP1	A	686
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262B	main-breaker-kit	RP1	A	687
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363A	main-breaker-kit	RP1	A	687
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	711
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52PR	hardware-kit	P4, P5, SB	—	659
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52T	branch-connector-kit	P4	A	647
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52TD	branch-connector-kit	P5, SB, CDP6	A	665
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53PR	hardware-kit	SB	—	732
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T	branch-connector-kit	P4	A	647

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T2D	branch-connector-kit	SB	A	728
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53TD	branch-connector-kit	P5, SB, CDP6	A	665
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T	branch-connector-kit	P4	A	648
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T2D	branch-connector-kit	SB	A	728
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54TD	branch-connector-kit	P5, SB, CDP6	A	666
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA55TD	branch-connector-kit	SB	A	729
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA57TD	branch-connector-kit	SB	A	729
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63T	branch-connector-kit	P4	A	648
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63TD	branch-connector-kit	P5, SB, CDP6	A	666
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64T	branch-connector-kit	P4	A	649
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64TD	branch-connector-kit	P5, SB, CDP6	A	667
BAB (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	97
BL (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	716
BL (SIE)	BBKB32	branch-connector-kit	P2, P3	A	629
BL (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	706
BL (SIE)	DFFPED01	filler-plate	P1, RP1	—	627
BL (SIE)	DFFPVA41A	filler-plate	RP1	—	708
BL (SIE)	DFK1	deadfront	P2, P3	—	636
BL (SIE)	DFP3AP01	filler-plate	P2, P3	—	638
BL (SIE)	MBKBFA	hardware-kit	RP1	—	711
BL (SIE)	MBKBL1	main-breaker-kit	P1, S1/S2	A	620

Breaker family	Part	Component	Equipment family	Cl.	Pg
BL (SIE)	MBKBL3	main-breaker-kit	P1, S1/S2	A	620
BL (SIE)	MBKVA41A	main-breaker-kit	RP1	A	684
BL (SIE)	MBKVA41B	main-breaker-kit	RP1	A	685
BL (SIE)	P1CONACPHAL	connector-strap	RP1	—	693
BL (SIE)	P1CONACPHCU	connector-strap	RP1	B	693
BL (SIE)	P1CONBPHAL	connector-strap	RP1	B	694
BL (SIE)	P1CONBPHCU	connector-strap	RP1	B	694
BL (SIE)	P1SCRWS	fastener	RP1, P1	—	711
BL (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	727
BL (SIE)	SBL	branch-connector-kit	P4	A	649
BL (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	667
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	716
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	727
BQ / BQH / HBQ / BQXD bolt-on (SIE)	BQFS2	barrier		A	734
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TA1Q1	lug		A	733
BQ / BQH / HBQ / BQXD bolt-on (SIE)	TC1Q1	lug		A	733
BQD (SIE)	BBKB32	branch-connector-kit	P2, P3	A	629
BQD (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	706
BQD (SIE)	DFFPED01	filler-plate	P1, RP1	—	627
BQD (SIE)	DFFPVA41A	filler-plate	RP1	—	708
BQD (SIE)	DFK1	deadfront	P2, P3	—	636
BQD (SIE)	DFP3AP01	filler-plate	P2, P3	—	638
BQD (SIE)	MBKBC3	main-breaker-kit	P1, S1/S2	A	620
BQD (SIE)	MBKBFA	hardware-kit	RP1	—	711
BQD (SIE)	MBKVA41A	main-breaker-kit	RP1	A	684
BQD (SIE)	MBKVA41B	main-breaker-kit	RP1	A	685
BQD (SIE)	P1CONACPHAL	connector-strap	RP1	—	693
BQD (SIE)	P1CONACPHCU	connector-strap	RP1	B	693
BQD (SIE)	P1CONBPHAL	connector-strap	RP1	B	694
BQD (SIE)	P1CONBPHCU	connector-strap	RP1	B	694
BQD (SIE)	P1SCRWS	fastener	RP1, P1	—	711
BQD (SIE)	SBL	branch-connector-kit	P4	A	649
BQD (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	667
BR (EAT)	3BRS225	sub-feed-lug-kit	BR	—	18
BR (EAT)	3BRSF150	sub-feed-lug-kit	BR	—	19
BR (EAT)	BHT	handle-lock	BR	—	20
BR (EAT)	BINA	neutral-assembly	BR	—	20
BR (EAT)	BRFP	filler-plate	BR	—	20
BR (EAT)	BRL200	main-lug-kit	BR	—	18
BR (EAT)	BRLW	padlock-attachment	BR	—	21
BR (EAT)	BRLW1	padlock-attachment	BR	—	21
BR (EAT)	BRS225	sub-feed-lug-kit	BR	—	19
BR (EAT)	BRSF125	sub-feed-lug-kit	BR	—	19
BR (EAT)	BRSF150	sub-feed-lug-kit	BR	—	19
BR (EAT)	BWFP	filler-plate	BR	—	20
BR (EAT)	NL300	lug	BR	—	19
CA (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	59
CA (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	194
CA (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X	A	233

Breaker family	Part	Component	Equipment family	Cl.	Pg
CA/CAH/HCA 225 A frame (EAT)	4176B66	deadfront	PRL3A	—	208
CA/CAH/HCA 225 A frame (EAT)	4176B80	deadfront	PRL3A	—	209
CA/CAH/HCA 225 A frame (EAT)	6555C40H01	filler-plate	PRL3A	—	215
CA/CAH/HCA 225 A frame (EAT)	6555C41H01	filler-plate	PRL3A	—	216
CA/CAH/HCA 225 A frame (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	59
CA/CAH/HCA 225 A frame (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	194
CA/CAH/HCA 225 A frame (EAT)	KPRL4CA	breaker-mounting-kit	PRL4, PRL4X	A	233
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B56	deadfront	PRL3A	—	207
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	4176B70	deadfront	PRL3A	—	209
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	61
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	65
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	237
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	239
Current-limiting FCL / LCL (and FDB+LFB) (EAT)	KPRL4LCL	breaker-mounting-kit	PRL4, PRL4X	A	244
DA (EAT)	KCDPDK	conversion-kit	CDP	A	70
DA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
E150 line (TEB, TED, THED, TEC) (GEA)	TC012	lug		A	575
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12	lug		A	575
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL12A	lug		A	575
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL14	lug		A	576
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL15	lug		A	576
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD1	lug		A	605
E150 line (TEB, TED, THED, TEC) (GEA)	TCAL19PD3	lug-kit		A	603
E150 line (TEB, TED, THED, TEC) (GEA)	TEDLS	barrier		A	576
E150 line (TEB, TED, THED, TEC) (GEA)	TEF1	breaker-accessory		A	577
E150 line (TEB, TED, THED, TEC) (GEA)	TEF2	breaker-accessory		A	577
E150 line (TEB, TED, THED, TEC) (GEA)	TEF3	breaker-accessory		A	577
E150 line (TEB, TED, THED, TEC) (GEA)	TEF4	breaker-accessory		A	578
EB (EAT)	KCDPEHD	conversion-kit	CDP	A	71
EB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
ED (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	60
ED (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	194
ED (EAT)	KPRL4ED	breaker-mounting-kit	PRL4	A	235
ED (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4	A	236

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
ED (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	251
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	661
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6E62	branch-connector-kit	CDP6, SB	A	720
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	BBKED32	branch-connector-kit	P2, P3	A	629
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	706
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPED01	filler-plate	P1, RP1	—	627
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPVA41A	filler-plate	RP1	—	708
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFK1	deadfront	P2, P3	—	636
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFP3AP01	filler-plate	P2, P3	—	638
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1	main-breaker-kit	P1, S1/S2	A	621
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1A	main-breaker-kit	RP1	A	679
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3	main-breaker-kit	P1, S1/S2	A	621
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3A	main-breaker-kit	RP1	A	680
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	727
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCE	branch-connector-kit	P4	A	650
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCED	branch-connector-kit	SB	A	730
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6	branch-connector-kit	P4	A	652
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6D	branch-connector-kit	P5, SB, CDP6	A	669
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED1	main-breaker-kit	S1/S2, SE	A	712
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED3	main-breaker-kit	S1/S2, SE	A	713
EHB (EAT)	KCDPEHD	conversion-kit	CDP	A	71
EHB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
EHD (EAT)	KCDPEHD	conversion-kit	CDP	A	71
EHD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61

Breaker family	Part	Component	Equipment family	Cl.	Pg
EHD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	69
EHD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	195
EHD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4	A	237
EHD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4	A	238
EHD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4	A	239
EHD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	249
EHD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TC024	lug		A	579
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL24	lug		A	579
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCAL27	lug		A	579
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TCALK324	lug-kit		A	578
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK1	breaker-accessory		A	580
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFK2	breaker-accessory		A	580
F225 line (TFJ, TFK, THFK, TFC) (GEA)	TFKLS	barrier		A	580
FA / FH (I-Line) (SQD)	2152620361	fastener	I-LINE, QED-2	A	362
FB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
FB (EAT)	KCDPFDB	conversion-kit	CDP	A	73
FD (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	60
FD (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
FD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	69
FD (EAT)	KCDPFD	conversion-kit	CDP	A	72
FD (EAT)	KCDPFDB	conversion-kit	CDP	A	73
FD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	195
FD (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	237
FD (EAT)	KPRL4FD	breaker-mounting-kit	PRL4	A	237
FD (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4	A	238
FD (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4	A	239
FD (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	239
FD (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	249
FD (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
FD (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	251
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	CDP6, SB	A	717
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	CDP6, SB	A	720
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	706
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1	main-breaker-kit	P1, S1/S2	A	621
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1A	main-breaker-kit	RP1	A	680
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3	main-breaker-kit	P1, S1/S2	A	622

Breaker family	Part	Component	Equipment family	Cl.	Pg
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3A	main-breaker-kit	RP1	A	681
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCF	branch-connector-kit	P4	A	650
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCFD	branch-connector-kit	P5, SB, CDP6	A	668
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6	branch-connector-kit	P4	A	652
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6D	branch-connector-kit	P5, SB, CDP6	A	670
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD1	main-breaker-kit	S1/S2, SE	A	713
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD3	main-breaker-kit	S1/S2, SE	A	713
GB (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	97
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKGB32	branch-connector-kit	P2, P3	A	630
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKNB32	branch-connector-kit	P2, P3	A	630
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	631
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	706
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPED01	filler-plate	P1, RP1	—	627
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPVA41A	filler-plate	RP1	—	708
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFK1	deadfront	P2, P3	—	636
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFP3AP01	filler-plate	P2, P3	—	638
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKBFA	hardware-kit	RP1	—	711
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB1	main-breaker-kit	P1, S1/S2	A	623
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB3	main-breaker-kit	P1, S1/S2	A	623
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41A	main-breaker-kit	RP1	A	684
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41B	main-breaker-kit	RP1	A	685
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHAL	connector-strap	RP1	—	693

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHCU	connector-strap	RP1	B	693
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHAL	connector-strap	RP1	B	694
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHCU	connector-strap	RP1	B	694
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1SCRWS	fastener	RP1, P1	—	711
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41T	branch-connector-kit	P4	A	646
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	664
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	664
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2	branch-connector-kit	P4	A	653
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2D	branch-connector-kit	P5, SB, CDP6	A	671
GHB family (480Y/277 bolt-on) (EAT)	1C96609	branch-connector-kit	PRL2A, PRL2X	A	192
GHB family (480Y/277 bolt-on) (EAT)	1C96620	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	170
GHB family (480Y/277 bolt-on) (EAT)	4176B69	deadfront	PRL3A, PRL3X	—	209
GHB family (480Y/277 bolt-on) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	173
GHB family (480Y/277 bolt-on) (EAT)	5156C09	deadfront	PRL1/PRL2	—	100
GHB family (480Y/277 bolt-on) (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	C	97
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06	branch-connector-kit	PRL3A, PRC	A	202
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB06-1	branch-connector-kit	PRL3A, PRC	A	202
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12	branch-connector-kit	PRL3A, PRC	A	203
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB12-1	branch-connector-kit	PRL3A, PRC	A	203
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18	branch-connector-kit	PRL3A, PRC	A	204
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB18-1	branch-connector-kit	PRL3A, PRC	A	204
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24	branch-connector-kit	PRL3A, PRC	A	205
GHB family (480Y/277 bolt-on) (EAT)	KPRL3AGB24-1	branch-connector-kit	PRL3A, PRC	A	205
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06	branch-connector-kit	PRL3X	A	222
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB06-1	branch-connector-kit	PRL3X	A	223
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12	branch-connector-kit	PRL3X	A	223

Breaker family	Part	Component	Equipment family	Cl.	Pg
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB12-1	branch-connector-kit	PRL3X	A	223
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18	branch-connector-kit	PRL3X	A	224
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB18-1	branch-connector-kit	PRL3X	A	224
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24	branch-connector-kit	PRL3X	A	224
GHB family (480Y/277 bolt-on) (EAT)	KPRL3XGB24-1	branch-connector-kit	PRL3X	A	225
GHB family (480Y/277 bolt-on) (EAT)	PRLSEBGHB	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X, PRL3X	A	168
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	362
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	415
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	417
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	359
H-frame HD/HG/HJ/HL/HR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	360
HFB (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
HFB (EAT)	KCDPFD	conversion-kit	CDP	A	72
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	21590-20241	fastener	I-LINE, QED-2	A	362
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	415
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	416
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	418
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLN4EBL	filler-plate	I-LINE, QED-2	A	359
J-frame JD/JG/JJ/JL/JR (I-Line) (SQD)	HLW4EBL	filler-plate	I-LINE, QED-2	A	360
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC043	lug		A	582
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TC063	lug		A	582
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL43	lug		A	582
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL47	lug		A	583
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCAL63	lug		A	583
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK343	lug-kit		A	581
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK347	lug-kit		A	581
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCALK363	lug-kit		A	581
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TCLK43	lug		A	583
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJKLS	barrier		A	584
J400 / J600 line (TJJ, TJK, THJK, TJD, TJC) (GEA)	TJLVK	breaker-accessory		A	584
JA (EAT)	KCDPKDB	conversion-kit	CDP	A	78
JA (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257

Breaker family	Part	Component	Equipment family	Cl.	Pg
JB (EAT)	KCDPJDB	conversion-kit	CDP	A	76
JB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	62
JD (EAT)	KCDPJD	conversion-kit	CDP	A	75
JD (EAT)	KCDPJDB	conversion-kit	CDP	A	76
JD (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	62
JD (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X	A	240
JD (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X	A	241
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6CLJ1	branch-connector-kit	CDP6, SB	A	718
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ61	branch-connector-kit	CDP6, SB	A	721
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ62	branch-connector-kit	CDP6, SB	A	721
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCJ1	branch-connector-kit	CDP6, SB	A	724
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCL61C	branch-connector-kit	CDP6, SB	A	725
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SJL1	branch-connector-kit	CDP6, SB	A	726
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD01	filler-plate	RP1, P1, S1/S2, P2, P3	—	707
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD02	filler-plate	RP1	—	707
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD1	main-breaker-kit	P1	A	622
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3	main-breaker-kit	P1	A	622
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3B	main-breaker-kit	RP1	B	681
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	711
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJ	branch-connector-kit	P4	A	650
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJD	branch-connector-kit	P5, SB, CDP6	A	668
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1	branch-connector-kit	P4	A	653
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1D	branch-connector-kit	P5, SB, CDP6	A	671
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	672
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD1	main-breaker-kit	S1/S2, SE	A	714

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD3	main-breaker-kit	S1/S2, SE	A	714
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	655
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJD	branch-connector-kit	SB	A	731
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	656
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1D	branch-connector-kit	SB	A	731
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	286A8066G1	breaker-accessory		A	595
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G1	breaker-accessory		A	595
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G2	breaker-accessory		A	596
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	789A448G3	breaker-accessory		C	596
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	SKLVK	breaker-accessory		A	596
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0121	lug		A	589
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC0131	lug		A	589
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC041	lug		A	590
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC061	lug		A	590
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC081A	lug		A	591
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TC091	lug		A	591
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL121	lug		A	592
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL122	lug		B	592
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL131	lug		B	593
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL41	lug		A	593
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL61	lug		A	593

Breaker family	Part	Component	Equipment family	Cl.	Pg
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL81	lug		A	594
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCAL91	lug		B	594
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2121	lug-kit		B	585
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK2122	lug-kit		B	585
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK261	lug-kit		A	585
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK281	lug-kit		A	586
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK291	lug-kit		B	586
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3121	lug-kit		B	586
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK3122	lug-kit		B	587
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK341	lug-kit		A	587
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK361	lug-kit		A	587
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK381	lug-kit		A	588
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TCALK391	lug-kit		B	588
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM11	breaker-accessory		A	597
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKM12	breaker-accessory		A	597
K1200 line (TKM, TKMA, THKMA, TK4V, TB6, TB8) (GEA)	TKMC1	connector-strap		A	595
KA (EAT)	KCDPHKD	conversion-kit	CDP	A	74
KA (EAT)	KCDPKD	conversion-kit	CDP	A	77
KA (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
KB (EAT)	KCDPJD	conversion-kit	CDP	A	75
KB (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	62
KD (EAT)	KCDPDK	conversion-kit	CDP	A	70
KD (EAT)	KCDPHKD	conversion-kit	CDP	A	74
KD (EAT)	KCDPKD	conversion-kit	CDP	A	77
KD (EAT)	KCDPKDB	conversion-kit	CDP	A	78
KD (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
KD (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	234
KD (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X	A	241
KD (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	242

Breaker family	Part	Component	Equipment family	Cl.	Pg
KD (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257
LA (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	63
LA (EAT)	KCDPLD	conversion-kit	CDP	A	79
LA (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	243
LA / LH (I-Line) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	417
LA / LH (I-Line) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	418
LA / LH (I-Line) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	408
LA / LH (I-Line) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	408
LB (EAT)	KCDPKD	conversion-kit	CDP	A	77
LB (EAT)	KCDPKDB	conversion-kit	CDP	A	78
LB (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
LB (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257
LC (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	63
LC (EAT)	KCDPLD	conversion-kit	CDP	A	79
LC (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	243
LD (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	63
LD (EAT)	KCDPLD	conversion-kit	CDP	A	79
LD (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	243
LD (EAT)	KPRL4LD	breaker-mounting-kit	PRL4	A	245
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6CLL1	branch-connector-kit	CDP6, SB	A	719
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6LL61	branch-connector-kit	CDP6, SB	A	722
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SCL1	branch-connector-kit	CDP6, SB	A	725
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SLL1	branch-connector-kit	CDP6, SB	A	726
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCL	branch-connector-kit	P4	A	651
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCLD	branch-connector-kit	P5, SB, CDP6	A	669
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6	branch-connector-kit	P4	A	654
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6D	branch-connector-kit	P5, SB, CDP6	A	673
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCL	branch-connector-kit	P4	A	655
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCLD	branch-connector-kit	P5, SB, CDP6	A	675
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6	branch-connector-kit	P4	A	656
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6D	branch-connector-kit	P5, SB, CDP6	A	676
MA (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	65
MA (EAT)	KCDPMDL	conversion-kit	CDP	A	80
MC (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	65
MC (EAT)	KCDPMDL	conversion-kit	CDP	A	80

Breaker family	Part	Component	Equipment family	Cl.	Pg
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6M61C	branch-connector-kit	CDP6, SB	A	723
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6N61C	branch-connector-kit	CDP6, SB	A	723
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	663
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	663
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SLM1D	branch-connector-kit	P5, SB, CDP6	A	674
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	675
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	676
MDL (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	65
MDL (EAT)	KCDPMDL	conversion-kit	CDP	A	80
MDL (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	246
MDL (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X	A	247
MDL (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	253
NA / NC (Stab-Lok plug-in) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	775
NA / NC (Stab-Lok plug-in) (FPE)	NCFS	filler-plate	NA1B	—	774
NB (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	66
NB (EAT)	KCDPND	conversion-kit	CDP	A	81
NB (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	248
NB (Stab-Lok bolt-on) (FPE)	1LOK	handle-lock	NA1B, NBLP	—	775
NC (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	66
NC (EAT)	KCDPND	conversion-kit	CDP	A	81
NC (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	248
ND (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	66
ND (EAT)	KCDPND	conversion-kit	CDP	A	81
ND (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	235
ND (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X	A	249
ND (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	254
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	DSLNET	branch-connector-kit	ZIN-DIST	—	780
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	FPENEFT	branch-connector-kit	ZIN-DIST	—	782
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KBDP1C	branch-connector-kit	BDP	C	760
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP-1A	branch-connector-kit	NA1B	C	774
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	KCDP1C	branch-connector-kit	CDP	C	763

Breaker family	Part	Component	Equipment family	Cl.	Pg
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NAIB-NEF	branch-connector-kit	NA1B	C	774
NE / NEF / NEG / HEF / HEG (N-frame 100 A class) (FPE)	NDPNE	branch-connector-kit	NDP	C	776
NEB / HEB (SIE)	BBKEB32	branch-connector-kit	P3	A	640
NEB / HEB (SIE)	EBF1	filler-plate	P3, P4, P5	—	643
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	DSLNEJT	branch-connector-kit	ZIN-DIST	—	780
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KBDP2C	branch-connector-kit	BDP	C	761
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	KCDP2C	branch-connector-kit	CDP	C	764
NEJ / NEJH / HEJ (N-frame 225 A class) (FPE)	NDPNEJ	branch-connector-kit	NDP	C	776
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	CU-NFJ	breaker-mounting-kit	FA	—	788
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	DSLNFT	branch-connector-kit	ZIN-DIST	—	780
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KBDP3C	branch-connector-kit	BDP	C	761
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	KCDP3C	branch-connector-kit	CDP	C	764
NF / NFJ / HFJ / NFS (N-frame 225 A class) (FPE)	NFHARDWARE	breaker-mounting-kit	CDP	—	765
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1GG20	lug-kit		A	734
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	3TC1Q1	lug-kit		A	734
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TA6GG04	lug		A	735
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TC1Q1	lug		A	733
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TNKG3	hardware-kit		A	735
NGG / HGG / LGG (G-frame bolt-on/lug) (SIE)	TSSG3A	barrier		A	735
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	DSLNJT	branch-connector-kit	ZIN-DIST	—	781
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KBDP4C	branch-connector-kit	BDP	C	762
NJL / HJL / NJ / NJJ (N-frame 400 A class) (FPE)	KCDP4C	branch-connector-kit	CDP	C	765
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNM	branch-connector-kit	ZIN-DIST	—	781
NM / HM / NN / NP / NK (large N-frames) (FPE)	DSLNMS	branch-connector-kit	ZIN-DIST	—	781
NM / HM / NN / NP / NK (large N-frames) (FPE)	KBDP5C	branch-connector-kit	BDP	C	762
NM / HM / NN / NP / NK (large N-frames) (FPE)	KCDP5C	branch-connector-kit	CDP	C	765
NM / HM / NN / NP / NK (large N-frames) (FPE)	N32	lug-kit	FPE-SWBD, CDP	—	777
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM34	lug-kit	FPE-SWBD, CDP	—	777
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM36	lug-kit	FPE-SWBD, CDP	—	777
NM / HM / NN / NP / NK (large N-frames) (FPE)	NM38	lug-kit	FPE-SWBD, CDP	—	777
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP211002	breaker-accessory	FPE-SWBD	—	777

Breaker family	Part	Component	Equipment family	Cl.	Pg
NM / HM / NN / NP / NK (large N-frames) (FPE)	RP212001	breaker-accessory	FPE-SWBD	—	778
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	212
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	212
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	212
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	213
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	213
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	213
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	214
Power Defense frame 2 (PDG2 / PDD2) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	215
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2B	main-breaker-kit	PRL1X, PRL2X	A	180
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11A2T	main-breaker-kit	PRL1X, PRL2X	A	180
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2B	main-breaker-kit	PRL1X, PRL2X	A	180
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB11S2T	main-breaker-kit	PRL1X, PRL2X	A	181
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2B	main-breaker-kit	PRL1X, PRL2X	A	181
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13A2T	main-breaker-kit	PRL1X, PRL2X	A	181
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2B	main-breaker-kit	PRL1X, PRL2X	A	182
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB13S2T	main-breaker-kit	PRL1X, PRL2X	A	182
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2B	main-breaker-kit	PRL1X, PRL2X	A	182
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21A2T	main-breaker-kit	PRL1X, PRL2X	A	183
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2B	main-breaker-kit	PRL1X, PRL2X	A	183
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB21S2T	main-breaker-kit	PRL1X, PRL2X	A	183
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2B	main-breaker-kit	PRL1X, PRL2X	A	184
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23A2T	main-breaker-kit	PRL1X, PRL2X	A	184
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2B	main-breaker-kit	PRL1X, PRL2X	A	184
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KB23S2T	main-breaker-kit	PRL1X, PRL2X	A	185
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X21T	branch-connector-kit	PRL3X	A	218
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22	branch-connector-kit	PRL3X	A	218
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X22T	branch-connector-kit	PRL3X	A	219

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23	branch-connector-kit	PRL3X	A	219
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL3X23T	branch-connector-kit	PRL3X	A	219
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	249
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
Power Defense frame 2 (PDG2 / PDD2) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	251
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	168
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRLSEBPD2	barrier	PRL3X	A	225
Power Defense frame 2 (PDG2 / PDD2) (EAT)	PRXP4PD2FILL1	filler-plate	PRL4X	—	258
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7980	deadfront	PRL3X	—	226
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	42C8055	deadfront	PRL3X	—	226
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14B	main-breaker-kit	PRL1X, PRL2X	A	185
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41A14T	main-breaker-kit	PRL1X, PRL2X	A	186
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14B	main-breaker-kit	PRL1X, PRL2X	A	186
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB41S14T	main-breaker-kit	PRL1X, PRL2X	A	187
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34B	main-breaker-kit	PRL1X, PRL2X	A	187
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43A34T	main-breaker-kit	PRL1X, PRL2X	A	188
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34B	main-breaker-kit	PRL1X, PRL2X	A	188
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB43S34T	main-breaker-kit	PRL1X, PRL2X	A	189
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16B	main-breaker-kit	PRL1X, PRL2X	A	189
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB61S16T	main-breaker-kit	PRL1X, PRL2X	A	190
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36B	main-breaker-kit	PRL1X, PRL2X	A	190
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KB63S36T	main-breaker-kit	PRL1X, PRL2X	A	191
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334S	breaker-mounting-kit	PRL4, PRL4X	A	251
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X334T	breaker-mounting-kit	PRL4, PRL4X	A	252
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	252
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	169
Power Defense frame 3 (PDG3 / PDF3 / PDD3) (EAT)	PRLSEBPD3	barrier	PRL3X	A	226
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	253

Breaker family	Part	Component	Equipment family	Cl.	Pg
Power Defense frames 4/5 (PDG4, PDG5, PF4, PF5) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	254
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	6QJ2	branch-connector-kit	CDP6, SB	A	724
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ1	branch-connector-kit	P2	A	631
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ2	branch-connector-kit	P3	A	641
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	639
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	644
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	707
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	708
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	SQRC	other	P4, P5	—	659
QJ2 / QJH2 / QJ2H / HQJ2H (225A frame) (SIE)	TA1Q300	lug-kit		C	736
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	415
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	415
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	416
QMB circuit breaker units (H-, J-, L-frame) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	417
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	417
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	418
QMB circuit breaker units (H-, J-, L-frame) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	418
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3300LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	408
QMB circuit breaker units (H-, J-, L-frame) (SQD)	QMB3400LA	breaker-mounting-kit	QMB-LEGACY, QMB	—	408
QMQB fusible panelboard switch (FPE)	KFDP2C	connector-strap	FDP	C	767
QMQB fusible panelboard switch (FPE)	KFDP3C	connector-strap	FDP	C	767
QMQB fusible panelboard switch (FPE)	KFDP46C	connector-strap	FDP	C	768
QMQB fusible panelboard switch (FPE)	KFDP4C	connector-strap	FDP	C	768
QMQB fusible panelboard switch (FPE)	KFDP-5C	connector-strap	FDP, BDP	C	768
QMQB fusible panelboard switch (FPE)	KFDP66C	connector-strap	FDP	C	769
QMQB fusible panelboard switch (FPE)	KFDP7C	connector-strap	FDP	C	769
QMQB fusible panelboard switch (FPE)	KFDPD16C	connector-strap	FDP	C	769
QMQB fusible panelboard switch (FPE)	KFDPD26C	connector-strap	FDP	C	770
QMQB fusible panelboard switch (FPE)	KFDPS16C	connector-strap	FDP	C	770
QMQB fusible panelboard switch (FPE)	KFDPS26C	connector-strap	FDP	C	770

Breaker family	Part	Component	Equipment family	Cl.	Pg
QMQB fusible panelboard switch (FPE)	KFDPV7C	connector-strap	FDP	C	771
QMQB fusible panelboard switch (FPE)	KQB3C	connector-strap	FDP	C	771
QMQB fusible panelboard switch (FPE)	KQB46C	connector-strap	FDP	C	771
QMQB fusible panelboard switch (FPE)	KQB4C	connector-strap	FDP	C	772
QMQB fusible panelboard switch (FPE)	KQB66C	connector-strap	FDP	C	772
QMQB fusible panelboard switch (FPE)	KQB86C	connector-strap	FDP	C	772
QMQB fusible panelboard switch (FPE)	KQB-D26C	connector-strap	FDP	C	772
QMQB fusible panelboard switch (FPE)	PK103T	connector-strap	FDP	C	773
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TA1QR300	lug-kit		A	736
QR2 / QRH2 / HQR2 (250A frame) (SIE)	3TC1QR250	lug-kit		A	737
QR2 / QRH2 / HQR2 (250A frame) (SIE)	CCQ250	lug		A	737
QR2 / QRH2 / HQR2 / HQR2H (SIE)	6QR2	branch-connector-kit	P5, SB, CDP6	A	662
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR1	branch-connector-kit	P2	A	631
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR2	branch-connector-kit	P3	A	641
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	639
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	644
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1	main-breaker-kit	P1, S1/S2	A	623
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1A	main-breaker-kit	RP1	A	682
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3	main-breaker-kit	P1, S1/S2	A	624
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3A	main-breaker-kit	RP1	A	683
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQRFK	filler-plate	RP1, P1	—	709
QR2 / QRH2 / HQR2 / HQR2H (SIE)	P2QRFP01	filler-plate	P2	—	638
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQR	branch-connector-kit	P4	A	654
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRC	other	P4, P5	—	659
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRD	branch-connector-kit	SB	A	730
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G01	handle-lock	PRL1A, PRL3A	—	177
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1256C42G02	handle-lock	PRL1A, PRL3A	—	177
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96608	branch-connector-kit	PRL1A, PRL1X	A	160
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	1C96619	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	170
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	4176B67	deadfront	PRL3A, PRL3X	—	208

Breaker family	Part	Component	Equipment family	Cl.	Pg
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	173
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	5156C10	deadfront	PRL1/PRL2	—	100
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	C	97
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06	branch-connector-kit	PRL3A, PRC	A	197
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA06-1	branch-connector-kit	PRL3A, PRC	A	197
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12	branch-connector-kit	PRL3A, PRC	A	198
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA12-1	branch-connector-kit	PRL3A, PRC	A	198
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18	branch-connector-kit	PRL3A, PRC	A	199
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA18-1	branch-connector-kit	PRL3A, PRC	A	199
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24	branch-connector-kit	PRL3A, PRC	A	200
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3ABA24-1	branch-connector-kit	PRL3A, PRC	A	200
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06	branch-connector-kit	PRL3X	A	220
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA06-1	branch-connector-kit	PRL3X	A	220
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12	branch-connector-kit	PRL3X	A	220
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA12-1	branch-connector-kit	PRL3X	A	221
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18	branch-connector-kit	PRL3X	A	221
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA18-1	branch-connector-kit	PRL3X	A	221
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24	branch-connector-kit	PRL3X	A	222
QUICKLAG bolt-on (BAB/QBHW family) (EAT)	KPRL3XBA24-1	branch-connector-kit	PRL3X	A	222
QUICKLAG plug-on (HQP/QPHW family) (EAT)	2C11642	branch-connector-kit	PRL1A, PRL1X	A	161
QUICKLAG plug-on (HQP/QPHW family) (EAT)	5155C62H01	filler-plate	PRL1A, PRL2A, PRL1X, PRL2X, PRL3A, PRL3X	—	173
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	503
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5700P86	mounting-bracket	A-SERIES-PWR	—	500
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	496
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	496
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	497
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP2FBD	filler-plate	SPECTRA-PP	A	561
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP3FBD	filler-plate	SPECTRA-PP	A	563
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AHKBFB1	hardware-kit	SPECTRA-PP	A	571
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMC6FBFP	breaker-mounting-kit	SPECTRA-PP	A	553

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB4FBFP	branch-connector-kit	SPECTRA-PP	A	527
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB6FBFP	branch-connector-kit	SPECTRA-PP	A	531
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB12P	breaker-mounting-kit	A-SERIES	—	484
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB3P	breaker-mounting-kit	A-SERIES	—	484
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPP6FB6D	branch-connector-kit	A-SERIES-PWR	A	492
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	TEDFP1	filler-plate	A-SERIES	—	487
Record Plus FB 100 (GEA)	FCAL12	lug		A	599
Record Plus FB 100 (GEA)	FCAL13	lug		A	599
Record Plus FB 100 (GEA)	FCAL14	lug		A	599
Record Plus FB 100 (GEA)	FCALK12	lug-kit		A	598
Record Plus FB 100 (GEA)	FCALK13	lug-kit		A	598
Record Plus FB 100 (GEA)	FCALK14	lug-kit		A	598
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKBFD1	hardware-kit	SPECTRA-PP	A	571
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKFD1	hardware-kit	SPECTRA-PP	A	572
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDBFP	breaker-mounting-kit	SPECTRA-PP	A	545
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDSFP	breaker-mounting-kit	SPECTRA-PP	A	546
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDBFP	breaker-mounting-kit	SPECTRA-PP	A	553
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDSPF	breaker-mounting-kit	SPECTRA-PP	A	554
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB4FDBFP	branch-connector-kit	SPECTRA-PP	A	527
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB6FDBFP	branch-connector-kit	SPECTRA-PP	A	532
Record Plus FC 100 (GEA)	FCAL12	lug		A	599
Record Plus FC 100 (GEA)	FCAL13	lug		A	599
Record Plus FC 100 (GEA)	FCAL14	lug		A	599
Record Plus FC 100 (GEA)	FCALK12	lug-kit		A	598
Record Plus FC 100 (GEA)	FCALK13	lug-kit		A	598
Record Plus FC 100 (GEA)	FCALK14	lug-kit		A	598
Record Plus FE 250 (GEA)	FCAL15	lug		A	601
Record Plus FE 250 (GEA)	FCAL16	lug		A	601
Record Plus FE 250 (GEA)	FCALK15	lug-kit		A	600
Record Plus FE 250 (GEA)	FCALK15LV	lug-kit		A	600
Record Plus FE 250 (GEA)	FCALK16	lug-kit		A	600
Record Plus FE 250 (GEA)	FCALK16LV	lug-kit		A	601
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGD	filler-plate	SPECTRA-PP	A	564
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGS	filler-plate	SPECTRA-PP	A	565

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKBFG1	hardware-kit	SPECTRA-PP	A	571
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKFG1	hardware-kit	SPECTRA-PP	A	573
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC2FGMFP	breaker-mounting-kit	SPECTRA-PP	A	537
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC3FGMFP	breaker-mounting-kit	SPECTRA-PP	A	541
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC4FGBFP	breaker-mounting-kit	SPECTRA-PP	A	546
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC6FGBFP	breaker-mounting-kit	SPECTRA-PP	A	554
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB2FGMFP	branch-connector-kit	SPECTRA-PP	A	520
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB3FGMFP	branch-connector-kit	SPECTRA-PP	A	523
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB4FGBFP	branch-connector-kit	SPECTRA-PP	A	527
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB6FGBFP	branch-connector-kit	SPECTRA-PP	A	532
Record Plus FG 600 (GEA)	FCALK218H	lug-kit		A	602
Record Plus FG 600 (GEA)	FCALK318H	lug-kit		A	602
Record Plus FG 600 (GEA)	FGH1LCK	breaker-accessory		A	603
Record Plus FG 600 (GEA)	FGJN3	breaker-accessory		A	603
Record Plus FG 600 (GEA)	FGJS3	barrier		A	602
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	CCE125	lug		A	738
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E060	lug		A	738
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LD1E100	lug		A	738
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	LN1E100	lug		A	739
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2641	breaker-accessory		A	740
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2642	breaker-accessory		A	740
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2643	breaker-accessory		A	741
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	RS2644	breaker-accessory		A	741
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	SA1E025	lug		A	739
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA1E6125	lug		A	739
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TA6ED06	lug		A	739
Sentron ED (ED2, ED4, ED6, HED4, HHED6, CED6) (SIE)	TC1ED6150	lug		A	740
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	CCF250	lug		A	742

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4755	breaker-accessory		A	743
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	RS4756	breaker-accessory		A	743
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA1FD350A	lug		A	742
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TA6FD04	lug		A	742
Sentron FD (FD6-A, FXD6-A, HFD6, HHFD6, CFD6) (SIE)	TC1FD350	lug		A	742
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CCL600	lug		A	744
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	CLRSJL3	barrier		A	746
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	JDTERMSHIELD	barrier		A	746
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5773	breaker-accessory		A	747
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	RS5774	breaker-accessory		A	747
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA1L6750	lug		A	744
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J630	lug		A	744
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA2J6500	lug		A	745
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TA6JD20	lug		A	745
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC1J6600	lug		A	745
Sentron JD (JD6, JXD2, JXD6, HJD6, HHJD6, SJD6-B, CJD6) (SIE)	TC2J6500	lug		A	746
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CCL600	lug		A	744
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	CLRSJL3	barrier		A	746
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	JDTERMSHIELD	barrier		A	746
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5783	breaker-accessory		A	748
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	RS5784	breaker-accessory		A	748
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA1L6750	lug		A	744
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA2J6500	lug		A	745

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TA6JD20	lug		A	745
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC1J6600	lug		A	745
Sentron LD (LD6, LXD6, HLD6, HHLD6, SLD6-B, CLD6) (SIE)	TC2J6500	lug		A	746
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5787	breaker-accessory		A	750
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	RS5788	breaker-accessory		A	750
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA2K500	lug		A	749
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TA3K500	lug		A	749
Sentron LMD (LMD6, LMXD6, HLMD6, HLMXD6) (SIE)	TC2K500	lug		A	749
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA2N8750	lug-kit		A	751
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA3N8750	lug-kit		A	751
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4N8500	lug-kit		A	752
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	2TA4P8500	lug-kit		A	752
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA2N8750	lug-kit		A	752
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA3N8750	lug-kit		A	753
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4N8500	lug-kit		A	753
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	3TA4P8500	lug-kit		A	753
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K2	lug-kit		A	754
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	CCM800K3	lug-kit		A	754
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	MDTERMSHIELD	barrier		A	755
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	NDTS	barrier		A	755
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5785	breaker-accessory		A	755
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	RS5786	breaker-accessory		A	756
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2K500	lug		A	749

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA2N750	lug		A	754
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TA3K500	lug		A	749
Sentron MD (MD6, MXD6, HMD6, HMXD6, SMD6-B, CMD6) (SIE)	TC2K500	lug		A	749
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA3N8750	lug-kit		A	751
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4N8500	lug-kit		A	752
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	2TA4P8500	lug-kit		A	752
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA3N8750	lug-kit		A	753
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4N8500	lug-kit		A	753
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	3TA4P8500	lug-kit		A	753
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K2	lug-kit		A	756
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	CCN1200K3	lug-kit		A	756
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	MDTERMSHIELD	barrier		A	755
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	NDTS	barrier		A	755
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5785	breaker-accessory		A	755
Sentron ND (ND6, NXD6, HND6, HNXD6, SND6-B, CND6) (SIE)	RS5786	breaker-accessory		A	756
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	MDTERMSHIELD	barrier		A	755
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA4P750	lug		A	757
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA5P600	lug		A	757
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TA6R600	lug		A	757
Sentron PD (PD6, PXD6, HPD6, HPXD6, SPD6-B, CPD6) (SIE)	TC5R600	lug		A	758
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	MDTERMSHIELD	barrier		A	755
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TA6R600	lug		A	757

Breaker family	Part	Component	Equipment family	Cl.	Pg
Sentron RD (RD6, RXD6, HRD6, HRXD6) (SIE)	TC5R600	lug		A	758
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1	branch-connector-kit	P4	A	646
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	663
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	663
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SDGD	branch-connector-kit	P4, P5, SB, CDP6	A	651
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFG	branch-connector-kit	P4	A	652
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFGD	branch-connector-kit	P5, SB, CDP6	A	670
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG	branch-connector-kit	P4	A	653
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG1D	branch-connector-kit	P5, SB, CDP6	A	672
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG2D	branch-connector-kit	P5, SB, CDP6	A	673
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLG	branch-connector-kit	P4	A	654
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLGD	branch-connector-kit	P5, SB, CDP6	A	674
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4176B68	deadfront	PRL3A	—	208
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4178B08	deadfront	PRL3A	—	210
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B39	deadfront	PRL3A	—	210
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B40	deadfront	PRL3A	—	210
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B41	deadfront	PRL3A	—	210
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4179B42	deadfront	PRL3A	—	211
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	171
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	4180B93	deadfront	PRL3A	—	211
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	212
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	212
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	213
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	214

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	109
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	110
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	110
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	111
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	111
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	112
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	112
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	113
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	60
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	200
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A	A	201
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	194
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED	breaker-mounting-kit	PRL4	A	235
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4ED2	breaker-mounting-kit	PRL4	A	236
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
Series C E-frame 240 V (ED/EDB/EDS/EDH/EDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	251
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G01	connector-strap		A	273
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C72G03	connector-strap		A	274
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G01	connector-strap		A	274
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G03	connector-strap		A	274
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G05	connector-strap		A	274

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	1253C73G06	connector-strap		A	275
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G01	breaker-accessory		A	281
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	374D883G02	breaker-accessory		A	281
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T100FB	lug-kit		A	269
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T150FB	lug-kit		A	270
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T20FB	lug-kit		A	270
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3T225FD	lug-kit		C	270
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA100FD	lug-kit		A	271
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F3K	lug-kit		A	271
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150F6K	lug-kit		A	271
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA150FB	lug-kit		—	272
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FD	lug-kit		A	272
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA225FDK	lug-kit		A	272
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	3TA50FB	lug-kit		A	273
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G01	barrier		A	277
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	4210B95G02	barrier		A	277
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G01	breaker-accessory		A	281
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	451D874G02	breaker-accessory		A	282
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H01	mounting-bracket		A	276
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	624B600H02	mounting-bracket		A	276
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G06	barrier		A	277

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G07	barrier		A	278
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G08	barrier		A	278
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	625B229G09	barrier		A	278
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G02	connector-strap		A	275
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G03	connector-strap		A	275
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G04	connector-strap		A	275
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	673B142G10	connector-strap		A	276
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK	breaker-accessory		A	282
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	FCWTK225	breaker-accessory		A	282
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	IPB1	barrier		A	279
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK1	breaker-accessory		A	282
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK12	breaker-accessory		A	283
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEK14	breaker-accessory		A	283
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM1	breaker-accessory		A	283
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM12	breaker-accessory		A	284
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPEKM14	breaker-accessory		A	284
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1A	fastener		A	280
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	KPR1AM	fastener		A	280
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC1	barrier		A	279
Series C F-Frame (FD/HFD/FDC/EHD/FDB/FDE) (EAT)	TEC2	barrier		A	279
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4176B68	deadfront	PRL3A	—	208

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B06H01	filler-plate	PRL3A	—	215
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4178B08	deadfront	PRL3A	—	210
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B39	deadfront	PRL3A	—	210
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B40	deadfront	PRL3A	—	210
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B41	deadfront	PRL3A	—	210
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4179B42	deadfront	PRL3A	—	211
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B03	deadfront	PRL1A, PRL2A	—	170
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	173
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B61	deadfront	PRL1A, PRL2A	—	171
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	4180B93	deadfront	PRL3A	—	211
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8072	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8073	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8076	deadfront	PRL3A, PRL3X	—	212
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8077	deadfront	PRL3A, PRL3X	—	212
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8078	deadfront	PRL3A, PRL3X	—	212
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8079	deadfront	PRL3A, PRL3X	—	213
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8080	deadfront	PRL3A, PRL3X	—	213
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8081	deadfront	PRL3A, PRL3X	—	213
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8082	deadfront	PRL3A, PRL3X	—	214
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	42C8083H01	filler-plate	PRL3A, PRL3X	—	215
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFB	main-breaker-kit	PRL1A, PRL2A	**A**	105

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11AFT	main-breaker-kit	PRL1A, PRL2A	A	106
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFB	main-breaker-kit	PRL1A, PRL2A	A	106
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB11SFT	main-breaker-kit	PRL1A, PRL2A	A	107
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFB	main-breaker-kit	PRL1A, PRL2A	A	107
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13AFT	main-breaker-kit	PRL1A, PRL2A	A	108
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFB	main-breaker-kit	PRL1A, PRL2A	A	108
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB13SFT	main-breaker-kit	PRL1A, PRL2A	A	109
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFB	main-breaker-kit	PRL1A, PRL2A	A	109
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21AFT	main-breaker-kit	PRL1A, PRL2A	A	110
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFB	main-breaker-kit	PRL1A, PRL2A	A	110
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB21SFT	main-breaker-kit	PRL1A, PRL2A	A	111
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFB	main-breaker-kit	PRL1A, PRL2A	A	111
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23AFT	main-breaker-kit	PRL1A, PRL2A	A	112
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFB	main-breaker-kit	PRL1A, PRL2A	A	112
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KB23SFT	main-breaker-kit	PRL1A, PRL2A	A	113
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	60
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPEHD	conversion-kit	CDP	A	71
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFD	conversion-kit	CDP	A	72
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KCDPFDB	conversion-kit	CDP	A	73
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED2	branch-connector-kit	PRL3A	A	200

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AED3	branch-connector-kit	PRL3A	A	201
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD1	branch-connector-kit	PRL3A	A	201
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD2	branch-connector-kit	PRL3A	A	201
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3AFD3	branch-connector-kit	PRL3A	A	202
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	195
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	237
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD	breaker-mounting-kit	PRL4	A	237
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD1	breaker-mounting-kit	PRL4	A	238
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FD2	breaker-mounting-kit	PRL4	A	239
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4FDCL	breaker-mounting-kit	PRL4, PRL4X	A	239
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X12	breaker-mounting-kit	PRL4, PRL4X	A	249
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X22	breaker-mounting-kit	PRL4, PRL4X	A	250
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	KPRL4X32	breaker-mounting-kit	PRL4, PRL4X	A	251
Series C F-frame (EHD/FDB/FD/HFD/FDC) (EAT)	PRLSEBFD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	168
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G3K	lug-kit		A	284
Series C G-Frame (GD/GHC/GHB) (EAT)	3TA100G6K	lug-kit		A	285
Series C G-Frame (GD/GHC/GHB) (EAT)	5652B38G01	breaker-accessory		A	339
Series C G-Frame (GD/GHC/GHB) (EAT)	GTSK3	barrier		A	285
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	1266C07G01	barrier		A	288
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G01	connector-strap		A	287
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	2600D26G02	connector-strap		A	287
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J3K	lug-kit		A	286
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	3TA250J6K	lug-kit		A	286
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G01	breaker-accessory		A	290

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	5010D23G02	breaker-accessory		A	291
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6631C01G01	barrier		A	288
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G01	barrier		A	288
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	6641C16G02	barrier		A	289
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB2	barrier		C	289
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	IPB3	barrier		A	289
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KCWTK	breaker-accessory		A	291
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK2	breaker-accessory		A	291
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEK24	breaker-accessory		A	291
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM2	breaker-accessory		A	292
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	KPEKM24	breaker-accessory		A	292
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2	fastener		A	290
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	PLN2M	fastener		A	290
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	T250KB	lug-kit		A	286
Series C J-Frame (JD/HJD/JDC/JDB) (EAT)	TA250KB	lug-kit		A	287
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B60	deadfront	PRL3A	—	207
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4176B79	deadfront	PRL3A	—	209
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B04	deadfront	PRL1A, PRL2A	—	171
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	173
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJB	main-breaker-kit	PRL1A, PRL2A	A	113
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41AJT	main-breaker-kit	PRL1A, PRL2A	A	114
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJB	main-breaker-kit	PRL1A, PRL2A	A	115
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB41SJT	main-breaker-kit	PRL1A, PRL2A	A	116
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJB	main-breaker-kit	PRL1A, PRL2A	A	117
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43AJT	main-breaker-kit	PRL1A, PRL2A	A	118
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJB	main-breaker-kit	PRL1A, PRL2A	A	119
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KB43SJT	main-breaker-kit	PRL1A, PRL2A	A	120
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJD	conversion-kit	CDP	A	75
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPJDB	conversion-kit	CDP	A	76
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	62

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDS	breaker-mounting-kit	PRL4, PRL4X	A	240
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	KPRL4JDT	breaker-mounting-kit	PRL4, PRL4X	A	241
Series C J-frame (JD/JDB/HJD/JDC) (EAT)	PRLSEBJD	barrier	PRL1A, PRL2A, PRL3A	A	168
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	208B264H01	mounting-bracket		A	304
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400K	lug-kit		A	293
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T400KCW	lug-kit		A	294
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2T402K	lug-kit		A	294
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400K	lug-kit		A	294
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA400KCW	lug-kit		A	295
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401K	lug-kit		A	295
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA401KCW	lug-kit		A	295
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	2TA402K	lug-kit		A	296
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400K	lug-kit		A	296
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T400KCW	lug-kit		A	296
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3T402K	lug-kit		A	297
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K	lug-kit		A	297
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K3K	lug-kit		A	297
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400K6K	lug-kit		A	298
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA400KCW	lug-kit		A	298
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401K	lug-kit		A	298
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA401KCW	lug-kit		A	299
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	3TA402K	lug-kit		A	299
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B77G01	connector-strap		A	303
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4212B78G02	connector-strap		A	304
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400K	lug-kit		A	299
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T400KCW	lug-kit		A	300
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4T402K	lug-kit		A	300
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400K	lug-kit		A	300
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA400KCW	lug-kit		A	301
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401K	lug-kit		A	301

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA401KCW	lug-kit		A	301
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	4TA402K	lug-kit		A	302
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G02	breaker-accessory		A	307
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G03	breaker-accessory		A	307
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G04	breaker-accessory		A	308
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G05	breaker-accessory		A	308
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G06	breaker-accessory		A	308
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	6642C14G07	breaker-accessory		A	309
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB2	barrier		C	289
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	IPB3	barrier		A	289
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KCWTK	breaker-accessory		A	291
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK3	breaker-accessory		A	309
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEK34	breaker-accessory		A	309
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM3	breaker-accessory		A	310
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPEKM34	breaker-accessory		A	310
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3A	fastener		A	305
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3AM	fastener		A	306
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3B	fastener		A	306
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	KPR3BM	fastener		A	306
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T300K	lug-kit		A	302
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	T350K	lug-kit		A	302
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA250KB	lug-kit		A	287
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA300K	lug-kit		A	303
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TA350K	lug-kit		A	303
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LD	barrier		A	304
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS33LN	barrier		A	305
Series C K-Frame (KD/HKD/KDC/KDB) (EAT)	TS34LN	barrier		A	305
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4176B61	deadfront	PRL3A	—	208

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B05	deadfront	PRL1A, PRL2A	—	171
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	4180B52H01	filler-plate	PRL1A, PRL2A	—	173
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	42C7982	deadfront	PRL1A, PRL2A, PRL1X, PRL2X	—	172
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKB	main-breaker-kit	PRL1A, PRL2A	A	114
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41AKT	main-breaker-kit	PRL1A, PRL2A	A	115
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKB	main-breaker-kit	PRL1A, PRL2A	A	116
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB41SKT	main-breaker-kit	PRL1A, PRL2A	A	117
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKB	main-breaker-kit	PRL1A, PRL2A	A	118
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43AKT	main-breaker-kit	PRL1A, PRL2A	A	119
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKB	main-breaker-kit	PRL1A, PRL2A	A	120
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KB43SKT	main-breaker-kit	PRL1A, PRL2A	A	121
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPDK	conversion-kit	CDP	A	70
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPHKD	conversion-kit	CDP	A	74
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKD	conversion-kit	CDP	A	77
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPKDB	conversion-kit	CDP	A	78
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4CKD	breaker-mounting-kit	PRL4, PRL4X	A	234
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDS	breaker-mounting-kit	PRL4, PRL4X	A	241
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	KPRL4KDT	breaker-mounting-kit	PRL4, PRL4X	A	242
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	169
Series C K-frame (DK/KD/KDB/HKD/KDC, CKD/CHKD 100%) (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	208B297H01	mounting-bracket		A	317
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA401LDK	lug-kit		A	311
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDK	lug-kit		A	311
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	2TA603LDKCW	lug-kit		A	312
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C420G05	barrier		A	318
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G07	breaker-accessory		A	318
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G08	breaker-accessory		A	319
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	314C960G09	breaker-accessory		A	319
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA401LDK	lug-kit		A	312
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDK	lug-kit		A	313
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	3TA603LDKCW	lug-kit		A	313
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA401LDK	lug-kit		A	314
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDK	lug-kit		A	314
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	4TA603LDKCW	lug-kit		A	315
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	506C052G01	connector-strap		A	317
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	624B609G01	connector-strap		A	317
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB3	barrier		A	289
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	IPB4	barrier		A	318
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK4	breaker-accessory		A	319
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEK44	breaker-accessory		A	320
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM4	breaker-accessory		A	320
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	KPEKM44	breaker-accessory		A	320
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LD	lug-kit		A	315
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	T602LDCW	lug-kit		A	315
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA450LD	lug-kit		A	316
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LD	lug-kit		A	316
Series C L-Frame (LD/HLD/LDC/LDB) (EAT)	TA602LDCW	lug-kit		A	316
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	4176B51	deadfront	PRL3A	—	207
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	63

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KCDPLD	conversion-kit	CDP	A	79
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LC	breaker-mounting-kit	PRL4, PRL4X	A	243
Series C L-frame (LD/LDB/HLD/LDC, CLD/CHLD/CLDC 100%, LC/HLC) (EAT)	KPRL4LD	breaker-mounting-kit	PRL4	A	245
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	208B966G01	barrier		A	324
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G01	breaker-accessory		A	325
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G04	breaker-accessory		A	325
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G05	breaker-accessory		A	325
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G06	breaker-accessory		A	326
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G07	breaker-accessory		A	318
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G08	breaker-accessory		A	319
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G09	breaker-accessory		A	319
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G10	breaker-accessory		A	326
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G11	breaker-accessory		A	326
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C960G12	breaker-accessory		A	327
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G01	connector-strap		A	323
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G02	connector-strap		A	323
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	314C996G03	connector-strap		A	324
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	315C270H01	mounting-bracket		A	324
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	IPB4	barrier		A	318
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T600MA1	lug-kit		A	321
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	T800MA1	lug-kit		A	321
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1	lug-kit		A	321
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA700MA1CWT	lug-kit		A	322
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2	lug-kit		A	322
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA800MA2CWT	lug-kit		A	322
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MA	lug-kit		A	322
Series C M-Frame (MDL/HMDL/MDLB) (EAT)	TA801MACWT	lug-kit		A	323

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	65
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KCDPMDL	conversion-kit	CDP	A	80
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MC	breaker-mounting-kit	PRL4, PRL4X	A	246
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4MD	breaker-mounting-kit	PRL4, PRL4X	A	247
Series C M-frame (MDL/HMDL, CMDL/CHMDL; MC/HMC; MDS) (EAT)	KPRL4X34	breaker-mounting-kit	PRL4, PRL4X	A	253
Series C N-Frame (ND/HND/NDC/NB) (EAT)	315C270H01	mounting-bracket		A	324
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G03	breaker-accessory		A	331
Series C N-Frame (ND/HND/NDC/NB) (EAT)	373B375G04	breaker-accessory		A	331
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G04	connector-strap		A	330
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G05	connector-strap		A	330
Series C N-Frame (ND/HND/NDC/NB) (EAT)	505C606G06	connector-strap		A	330
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G01	breaker-accessory		A	332
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G02	breaker-accessory		A	332
Series C N-Frame (ND/HND/NDC/NB) (EAT)	623B222G03	breaker-accessory		A	332
Series C N-Frame (ND/HND/NDC/NB) (EAT)	IPB5	barrier		A	330
Series C N-Frame (ND/HND/NDC/NB) (EAT)	NTS3K	barrier		A	331
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1000NB1	lug-kit		A	327
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T1200NB3	lug-kit		A	328
Series C N-Frame (ND/HND/NDC/NB) (EAT)	T700NB1	lug-kit		A	328
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1000NB1	lug-kit		A	328
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1200NB1	lug-kit		A	329
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA1201NB1	lug-kit		A	329
Series C N-Frame (ND/HND/NDC/NB) (EAT)	TA700NB1	lug-kit		A	329
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	66
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KCDPND	conversion-kit	CDP	A	81

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4CND	breaker-mounting-kit	PRL4, PRL4X	A	235
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4NC	breaker-mounting-kit	PRL4, PRL4X	A	248
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4ND	breaker-mounting-kit	PRL4, PRL4X	A	249
Series C N-frame (ND/HND/NDC, CND/CHND/CNDC; NGS/NGH/NGC; NHH; NC/HNC) (EAT)	KPRL4X35	breaker-mounting-kit	PRL4, PRL4X	A	254
Series C R-Frame (RD/RDC) (EAT)	B2016RD	breaker-accessory		A	334
Series C R-Frame (RD/RDC) (EAT)	B2016RDL	breaker-accessory		A	334
Series C R-Frame (RD/RDC) (EAT)	B2500RD	breaker-accessory		A	334
Series C R-Frame (RD/RDC) (EAT)	T1600RD	lug-kit		A	333
Series C R-Frame (RD/RDC) (EAT)	TA1600RD	lug-kit		A	333
Series C R-Frame (RD/RDC) (EAT)	TA2000RD	lug-kit		A	333
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3T125EF	lug-kit		A	335
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E3K	lug-kit		A	335
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125E6K	lug-kit		A	335
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA125EF	lug-kit		A	336
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA150EF	lug-kit		A	336
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	3TA160EFK	lug-kit		A	336
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	4TA160EFK	lug-kit		A	337
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	5652B38G01	breaker-accessory		A	339
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC3K	barrier		A	337
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EEC4K	barrier		A	337
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTDK	breaker-accessory		A	339

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF2RTWK	breaker-accessory		A	339
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTDK	breaker-accessory		A	339
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF3RTWK	breaker-accessory		A	340
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTDK	breaker-accessory		A	340
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EF4RTWK	breaker-accessory		A	340
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS3K	barrier		A	338
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EFTS4K	barrier		A	338
Series G EG-Frame (EGB/EGE/EGS/EGH/EGC) (EAT)	EIPBK	barrier		A	338
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA225FD	lug-kit		A	272
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ3	lug-kit		A	341
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	3TA250FJ6	lug-kit		A	341
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTDK	breaker-accessory		A	343
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ3RTWK	breaker-accessory		A	343
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTDK	breaker-accessory		A	344
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJ4RTWK	breaker-accessory		A	344
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJCWTK	breaker-accessory		A	344
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK	barrier		A	342
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJIPBK4	barrier		A	342
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS3K	barrier		A	343
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	FJTS4K	barrier		A	343
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	T250FJ	lug-kit		A	341
Series G JG-Frame (JGE/JGS/JGH/JGC) (EAT)	TA250FJ	lug-kit		A	342
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4LG	breaker-mounting-kit	PRL4, PRL4X	A	245
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	KPRL4X336	breaker-mounting-kit	PRL4, PRL4X	A	252
Series G L-frame (LGE/LGS/LGH/LGC/LGU) and LHH (EAT)	PRLSEBLGKD	barrier	PRL1A, PRL2A, PRL3A, PRL1X, PRL2X	A	169
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T631LK	lug-kit		A	345

Breaker family	Part	Component	Equipment family	Cl.	Pg
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LK	lug-kit		A	345
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3T632LKW	lug-kit		A	346
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA631LK	lug-kit		A	346
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LK	lug-kit		A	346
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	3TA632LKW	lug-kit		A	347
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T631LK	lug-kit		A	347
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LK	lug-kit		A	347
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4T632LKW	lug-kit		A	348
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA631LK	lug-kit		A	348
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LK	lug-kit		A	348
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	4TA632LKW	lug-kit		A	349
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	IPB3	barrier		A	289
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L3RTWK	breaker-accessory		A	351
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	L4RTWK	breaker-accessory		A	351
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES3	breaker-accessory		A	351
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTES4	breaker-accessory		A	351
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW3	breaker-accessory		A	352
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LGTEW4	breaker-accessory		A	352
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS3K	barrier		A	350
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	LTS4K	barrier		A	350
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	T350LK	lug-kit		A	349
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA350LK	lug-kit		A	349
Series G LG-Frame (LGE/LGS/LGH/LGC) (EAT)	TA632L	lug-kit		A	350
Series G NG-Frame (EAT)	IPB5	barrier		A	330
Series G NG-Frame (EAT)	T1200NB3M	lug-kit		A	352
Spectra RMS SE150 (GEA)	SE3LCK	breaker-accessory		A	606
Spectra RMS SE150 (GEA)	SE3LCKL	breaker-accessory		A	606
Spectra RMS SE150 (GEA)	TC018	lug		A	604
Spectra RMS SE150 (GEA)	TCAL18	lug		A	605
Spectra RMS SE150 (GEA)	TCAL18LV	lug		A	605
Spectra RMS SE150 (GEA)	TCAL19PD1	lug		A	605
Spectra RMS SE150 (GEA)	TCAL19PD3	lug-kit		A	603
Spectra RMS SE150 (GEA)	TCALK318	lug-kit		A	604
Spectra RMS SE150 (GEA)	TEF1	breaker-accessory		A	577
Spectra RMS SE150 (GEA)	TEF2	breaker-accessory		A	577
Spectra RMS SE150 (GEA)	TEF3	breaker-accessory		A	577

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra RMS SE150 (GEA)	TEF4	breaker-accessory		A	578
Spectra RMS SF250 (GEA)	SF3LCK	breaker-accessory		A	609
Spectra RMS SF250 (GEA)	TCAL28PD1	lug		A	607
Spectra RMS SF250 (GEA)	TCAL28PD3	lug-kit		A	606
Spectra RMS SF250 (GEA)	TCAL29	lug		A	608
Spectra RMS SF250 (GEA)	TCAL29LV	lug		A	608
Spectra RMS SF250 (GEA)	TCALK329	lug-kit		A	607
Spectra RMS SF250 (GEA)	TCO29	lug		A	608
Spectra RMS SF250 (GEA)	TFK1	breaker-accessory		A	580
Spectra RMS SF250 (GEA)	TFK2	breaker-accessory		A	580
Spectra RMS SG600 (GEA)	SG1BCK	breaker-accessory		A	612
Spectra RMS SG600 (GEA)	SG1LCK	breaker-accessory		A	612
Spectra RMS SG600 (GEA)	SGBCS1	breaker-accessory		A	612
Spectra RMS SG600 (GEA)	SGBCS2	breaker-accessory		A	613
Spectra RMS SG600 (GEA)	SGLVK	breaker-accessory		A	613
Spectra RMS SG600 (GEA)	TCAL40PD1	lug		A	611
Spectra RMS SG600 (GEA)	TCAL40PD3	lug-kit		A	609
Spectra RMS SG600 (GEA)	TCLK265	lug-kit		A	610
Spectra RMS SG600 (GEA)	TCLK365	lug-kit		A	610
Spectra RMS SG600 (GEA)	TCOK265	lug-kit		A	611
Spectra RMS SG600 (GEA)	TCOK365	lug-kit		A	611
Spectra RMS SK1200 (GEA)	SK1LCK	breaker-accessory		A	616
Spectra RMS SK1200 (GEA)	SKLVK	breaker-accessory		A	596
Spectra RMS SK1200 (GEA)	SKPSHLD	barrier		A	616
Spectra RMS SK1200 (GEA)	TC0121	lug		A	589
Spectra RMS SK1200 (GEA)	TC081A	lug		A	591
Spectra RMS SK1200 (GEA)	TCAL124	lug		A	615
Spectra RMS SK1200 (GEA)	TCAL125	lug		A	615
Spectra RMS SK1200 (GEA)	TCAL81	lug		A	594
Spectra RMS SK1200 (GEA)	TCALK2124	lug-kit		A	613
Spectra RMS SK1200 (GEA)	TCALK2125	lug-kit		A	614
Spectra RMS SK1200 (GEA)	TCALK281	lug-kit		A	586
Spectra RMS SK1200 (GEA)	TCALK3124	lug-kit		A	614
Spectra RMS SK1200 (GEA)	TCALK3125	lug-kit		A	614
Spectra RMS SK1200 (GEA)	TCALK381	lug-kit		A	588
Spectra RMS SK1200 (GEA)	TCO124	lug		A	615
Spectra RMS SK1200 (GEA)	TCO125	lug		A	616
Spectra RMS SK1200 (GEA)	TKM11	breaker-accessory		A	597
Spectra RMS SK1200 (GEA)	TKM12	breaker-accessory		A	597
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5500P82	mounting-bracket	A-SERIES-PWR	—	500
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	503
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	496
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	496
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	497

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTMKSE	branch-connector-kit	SCP-PLUS	A	512
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP3SED	filler-plate	SPECTRA-PP	A	563
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	570
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	545
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP	A	551
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	552
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	530
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ASPP6SE6D	branch-connector-kit	A-SERIES-PWR	A	494
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	MB133WB	main-breaker-kit	A-SERIES	A	475
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	NHB150PK	branch-connector-kit	NHB	C	509
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TEDFP1	filler-plate	A-SERIES	—	487
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5500P84	mounting-bracket	A-SERIES-PWR	—	500
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	503
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702ASFG1	connector-strap	A-SERIES-PWR	—	496
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702BSFG1	connector-strap	A-SERIES-PWR	—	497
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702CSFG1	connector-strap	A-SERIES-PWR	—	497
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTMKSF	branch-connector-kit	SCP-PLUS	A	513
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFD	filler-plate	SPECTRA-PP	A	563
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFS	filler-plate	SPECTRA-PP	A	564
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	571
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKF1	hardware-kit	SPECTRA-PP	A	572
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP	A	537
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	538
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP	A	541
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	542
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP	A	547

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	548
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP	A	555
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	556
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	521
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	523
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	528
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	533
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASP2PTFJ3P	conversion-kit	A-SERIES	—	489
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASPP6SF3S	branch-connector-kit	A-SERIES-PWR	A	494
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233	main-breaker-kit	A-SERIES	A	475
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332	main-breaker-kit	A-SERIES	A	475
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332WB	main-breaker-kit	A-SERIES	A	476
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233WB	main-breaker-kit	A-SERIES	A	476
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SF2DPK	branch-connector-kit	CCB-QMR	A	504
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5500P83	mounting-bracket	A-SERIES-PWR	—	500
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5503P103	filler-plate	A-SERIES-PWR	—	502
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P7	connector-strap	A-SERIES-PWR	—	498
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P8	connector-strap	A-SERIES-PWR	—	498
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P9	connector-strap	A-SERIES-PWR	—	498
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSMKSG	branch-connector-kit	SCP-PLUS	A	510
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTMKSG	branch-connector-kit	SCP-PLUS	A	513
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGD	filler-plate	SPECTRA-PP	A	565
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGS	filler-plate	SPECTRA-PP	A	565
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKBG1	hardware-kit	SPECTRA-PP	A	571
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKG1	hardware-kit	SPECTRA-PP	A	573

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC2GMFP	breaker-mounting-kit	SPECTRA-PP	A	539
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC3GMFP	breaker-mounting-kit	SPECTRA-PP	A	543
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC4GBFP	breaker-mounting-kit	SPECTRA-PP	A	549
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC6GBFP	breaker-mounting-kit	SPECTRA-PP	A	556
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GMFP	branch-connector-kit	SPECTRA-PP	A	522
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GMFP	branch-connector-kit	SPECTRA-PP	A	524
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GBFP	branch-connector-kit	SPECTRA-PP	A	529
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GBFP	branch-connector-kit	SPECTRA-PP	A	534
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ASPP6SG3S	branch-connector-kit	A-SERIES-PWR	A	495
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332	main-breaker-kit	A-SERIES	A	476
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332WB	main-breaker-kit	A-SERIES	A	477
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333	main-breaker-kit	A-SERIES	A	477
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333WB	main-breaker-kit	A-SERIES	A	477
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSMKSK	branch-connector-kit	SCP-PLUS	A	510
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP5LCS	filler-plate	SPECTRA-PP	A	565
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP6SKS	filler-plate	SPECTRA-PP	A	566
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AHKLB1	hardware-kit	SPECTRA-PP	A	573
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP	A	540
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP	A	544
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	522
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	525
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3LBFP	branch-connector-kit	SPECTRA-PP	A	525
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK12SPK	branch-connector-kit	CCB-QMR	A	504
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK8SPK	branch-connector-kit	CCB-QMR	A	504
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA	lug-kit		A	424

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100FA4	lug-kit		A	425
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL100TF	lug-kit		A	425
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL150FA	lug-kit		A	425
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	AL50FA	lug-kit		A	426
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100FA	lug-kit		A	426
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU100TF	lug-kit		A	426
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CU30FA4	lug-kit		A	427
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	CVC100FA	lug-kit		A	427
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	FAT	breaker-accessory		A	428
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC3FA2	lug-kit		A	427
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	PDC6FA6	lug-kit		A	428
Square D FA/FH/FC/FI (F-frame 100/150 A) (SQD)	VC100FA	lug-kit		A	428
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KA	lug-kit		A	429
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KI	lug-kit		A	429
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	AL250KIT	breaker-accessory		A	431
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CU250KA	lug-kit		A	430
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	CVC250KA3	lug-kit		A	430
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA3	lug-kit		A	430
Square D KA/KH/KC/KI (K-frame 250 A) (SQD)	VC250KA35	lug-kit		A	431
Square D LA/LH (L-frame 400 A) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	417
Square D LA/LH (L-frame 400 A) (SQD)	AL400LAT	breaker-accessory		A	435
Square D LA/LH (L-frame 400 A) (SQD)	AL400LH7	lug-kit		A	432
Square D LA/LH (L-frame 400 A) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	418
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA3	lug-kit		A	432
Square D LA/LH (L-frame 400 A) (SQD)	CVC400LA5	lug-kit		A	432
Square D LA/LH (L-frame 400 A) (SQD)	PDC12LA4	lug-kit		A	433
Square D LA/LH (L-frame 400 A) (SQD)	PDC4LA250	lug-kit		A	433
Square D LA/LH (L-frame 400 A) (SQD)	PDC6LA20	lug-kit		A	433
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA3	lug-kit		A	434
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA35	lug-kit		A	434

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA5	lug-kit		A	434
Square D LA/LH (L-frame 400 A) (SQD)	VC400LA7	lug-kit		A	435
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600IN	breaker-accessory		A	439
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35	lug-kit		A	436
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI35T	breaker-accessory		A	439
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5	lug-kit		A	436
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI5T	breaker-accessory		A	440
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	AL600LI7	lug-kit		A	436
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI35	lug-kit		A	437
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI5	lug-kit		A	437
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CU600LI7	lug-kit		A	437
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	CVC600LI5	lug-kit		A	438
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI3	lug-kit		A	438
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI5	lug-kit		A	438
Square D LC/LI/LE/LX/LXI (L-frame 600 A) (SQD)	VC600LI7	lug-kit		A	439
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL1000MAT	breaker-accessory		A	440
Square D MA/MH/MX/ME (M-frame 1000 A) (SQD)	AL900MAT	breaker-accessory		A	440
Square D NA/NC/NX/NE (N-frame 1200 A) (SQD)	AL1200NE6T	breaker-accessory		A	441
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	29348	breaker-accessory		A	467
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32508	lug-kit		A	441
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	32510	lug-kit		A	442
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	36965	barrier		A	443
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC12DG4	lug-kit		A	442
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	PDC5DG20	lug-kit		A	442
Square D PowerPact D-Frame (DG/DJ/DL) (SQD)	S36967	fastener		A	467
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	AL150HD	lug-kit	QED-2, QMB, I-LINE	A	415
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CU150HD	lug-kit	QED-2, QMB, I-LINE	A	417
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA060HD	lug-kit		A	443
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	CYA150HD	lug-kit		A	444

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC3HD2	lug-kit		A	444
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	PDC6HD6	lug-kit		A	444
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37423	breaker-accessory		A	448
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37425	breaker-accessory		A	448
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37426	breaker-accessory		A	448
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37429	breaker-accessory		A	448
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37432	barrier		A	446
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37433	breaker-accessory		A	449
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37434	breaker-accessory		A	449
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37436	barrier		A	446
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37444	breaker-accessory		A	449
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37446	barrier		A	446
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37447	barrier		A	447
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	S37449	barrier		A	447
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA060HD	lug-kit		A	445
Square D PowerPact H-Frame (HD/HG/HJ/HL/HR) (SQD)	YA150HD	lug-kit		A	445
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL175JD	lug-kit	QED-2, QMB, I-LINE	A	415
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	AL250JD	lug-kit	QED-2, QMB, I-LINE	A	416
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CU250JD	lug-kit	QED-2, QMB, I-LINE	A	418
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA150JD	lug-kit		A	450
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	CYA250J3	lug-kit		A	450

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC3JD20	lug-kit		A	450
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	PDC6JD4	lug-kit		A	451
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37424	breaker-accessory		A	453
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37427	breaker-accessory		A	453
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37428	breaker-accessory		A	453
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37430	breaker-accessory		A	454
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37437	breaker-accessory		A	454
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37438	breaker-accessory		A	454
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37439	breaker-accessory		A	454
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37440	barrier		A	452
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37445	breaker-accessory		A	455
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37448	barrier		A	452
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	S37450	barrier		A	452
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA150JD	lug-kit		A	451
Square D PowerPact J-Frame (JD/JG/JJ/JL/JR) (SQD)	YA250J35	lug-kit		A	451
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	29348	breaker-accessory		A	467
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K3	lug-kit		A	456
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL400L61K4	lug-kit		A	456
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LF52K3	lug-kit		A	457
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K3	lug-kit		A	457
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	AL600LS52K4	lug-kit		A	457

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K3	lug-kit		A	458
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU400L61K4	lug-kit		A	458
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LF52K3	lug-kit		A	458
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K3	lug-kit		A	459
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CU600LS52K4	lug-kit		A	459
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K3	lug-kit		A	459
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L31K4	lug-kit		A	460
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K3	lug-kit		A	460
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L51K4	lug-kit		A	460
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA400L71K3	lug-kit		A	461
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K3	lug-kit		A	461
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L32K4	lug-kit		A	461
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K3	lug-kit		A	462
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	CYA600L52K4	lug-kit		A	462
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC12DG4L3	lug-kit		A	462
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	PDC5DG20L3	lug-kit		A	463
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32477	breaker-accessory		A	467
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32478	breaker-accessory		A	468
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32562	barrier		A	466
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S32563	barrier		A	466
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S36967	fastener		A	467

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432475	breaker-accessory		A	468
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	S432476	breaker-accessory		A	468
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L31K3	lug-kit		A	463
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K3	lug-kit		A	463
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L51K4	lug-kit		A	464
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K3	lug-kit		A	464
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA400L71K4	lug-kit		A	464
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K3	lug-kit		A	465
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L32K4	lug-kit		A	465
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K3	lug-kit		A	465
Square D PowerPact L-Frame (LD/LG/LJ/LL/LR) (SQD)	YA600L52K4	lug-kit		A	466
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23K	lug-kit		C	469
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK	lug-kit		A	469
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800M23TK4	lug-kit		A	469
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK	lug-kit		A	470
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P6TK4	lug-kit		A	470
Square D PowerPact M-Frame (MG/MJ) (SQD)	AL800P7K	lug-kit		C	470
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P24TK	lug-kit		A	471
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK	lug-kit		A	471
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL1200P25TK4	lug-kit		A	471
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23K	lug-kit		C	469
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK	lug-kit		A	469
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800M23TK4	lug-kit		A	469
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK	lug-kit		A	470
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P6TK4	lug-kit		A	470
Square D PowerPact P-Frame (PG/PJ/PL) (SQD)	AL800P7K	lug-kit		C	470

Breaker family	Part	Component	Equipment family	Cl.	Pg
Square D PowerPact R-Frame (RG/RJ/RL) (SQD)	AL1200R53TK	lug-kit		A	472
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LA	lug-kit	QED-2, QMB, I-LINE	A	417
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LAT	breaker-accessory		A	435
Square D Q4 (400 A, LA-type lugs) (SQD)	AL400LH7	lug-kit		A	432
Square D Q4 (400 A, LA-type lugs) (SQD)	CU400LA	lug-kit	QED-2, QMB, I-LINE	A	418
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA3	lug-kit		A	432
Square D Q4 (400 A, LA-type lugs) (SQD)	CVC400LA5	lug-kit		A	432
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC12LA4	lug-kit		A	433
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC4LA250	lug-kit		A	433
Square D Q4 (400 A, LA-type lugs) (SQD)	PDC6LA20	lug-kit		A	433
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA3	lug-kit		A	434
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA35	lug-kit		A	434
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA5	lug-kit		A	434
Square D Q4 (400 A, LA-type lugs) (SQD)	VC400LA7	lug-kit		A	435
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SECT	branch-connector-kit	ZIN-DIST	—	783
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SEHT	branch-connector-kit	ZIN-DIST	—	784
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SJD4T	branch-connector-kit	ZIN-DIST	—	784
Sylvania S-series bolt-on breakers (SE / SEH / SF / SJD / SJK / SKM) (ZIN)	SKM8S	branch-connector-kit	ZIN-DIST	—	784
TEB / TED / THED / TED4 / TED6 (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	503
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	496
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	496
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	497
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB1P	branch-connector-kit	SCP-PLUS	A	510
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB2P	branch-connector-kit	SCP-PLUS	A	511
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB3P	branch-connector-kit	SCP-PLUS	A	511
TEB / TED / THED / TED4 / TED6 (GEA)	AFP2TED	filler-plate	SPECTRA-PP	A	562
TEB / TED / THED / TED4 / TED6 (GEA)	AHKE1	hardware-kit	SPECTRA-PP	A	572
TEB / TED / THED / TED4 / TED6 (GEA)	AHKEL1	hardware-kit	SPECTRA-PP	A	572
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP	A	544

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP	A	551
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	526
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	530
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6TEDL	filler-plate	SPECTRA-PP	—	566
TEB / TED / THED / TED4 / TED6 (GEA)	ASPTED3P	breaker-mounting-kit	A-SERIES	—	484
TEB / TED / THED / TED4 / TED6 (GEA)	MB133	main-breaker-kit	A-SERIES	A	474
TEB / TED / THED / TED4 / TED6 (GEA)	NHB150PK	branch-connector-kit	NHB	C	509
TEB / TED / THED / TED4 / TED6 (GEA)	TED1DPK	branch-connector-kit	CCB-QMR	A	505
TEB / TED / THED / TED4 / TED6 (GEA)	TEDFP1	filler-plate	A-SERIES	—	487
TEB / TED / THED / TED4 / TED6 (GEA)	TEL1DPK	branch-connector-kit	CCB-QMR	A	505
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	139C5503P129	filler-plate	A-SERIES-PWR	—	502
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	499
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	499
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	911E347P3	insulator	A-SERIES-PWR	—	501
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AFP3EYD	filler-plate	SPECTRA-PP	A	562
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP	A	552
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EYFP	branch-connector-kit	SPECTRA-PP	A	526
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EYFP	branch-connector-kit	SPECTRA-PP	A	531
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY12D	branch-connector-kit	A-SERIES-PWR	A	491
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY6D	branch-connector-kit	A-SERIES-PWR	A	491
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB423	main-breaker-kit	A-SERIES	A	478
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB426	main-breaker-kit	A-SERIES	A	478
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	487
TFJ / TFK / THFK / TFL (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	503
TFJ / TFK / THFK / TFL (GEA)	AFP3TFD	filler-plate	SPECTRA-PP	A	564
TFJ / TFK / THFK / TFL (GEA)	AFP3TFS	filler-plate	SPECTRA-PP	A	564
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	538
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	542
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	548
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	555
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	521
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	524
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	528
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	533
TFJ / TFK / THFK / TFL (GEA)	TF2DPK	branch-connector-kit	CCB-QMR	A	505

Breaker family	Part	Component	Equipment family	Cl.	Pg
THQB / THHQB / TXQB (GEA)	139C5362P2	filler-plate	A-SERIES-PWR	—	501
THQB / THHQB / TXQB (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	499
THQB / THHQB / TXQB (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	499
THQB / THHQB / TXQB (GEA)	911E347P3	insulator	A-SERIES-PWR	—	501
THQB / THHQB / TXQB (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP	A	557
THQB / THHQB / TXQB (GEA)	ASPP6QB12D	branch-connector-kit	A-SERIES-PWR	A	492
THQB / THHQB / TXQB (GEA)	ASPP6QB6D	branch-connector-kit	A-SERIES-PWR	A	493
THQB / THHQB / TXQB (GEA)	MB612	main-breaker-kit	A-SERIES	A	479
THQB / THHQB / TXQB (GEA)	MB613	main-breaker-kit	A-SERIES	A	480
THQB / THHQB / TXQB (GEA)	MB614	main-breaker-kit	A-SERIES	A	480
THQB / THHQB / TXQB (GEA)	MB616	main-breaker-kit	A-SERIES	A	480
THQB / THHQB / TXQB (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	487
THQL / THHQL / TXQL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	487
TJD / TJJ / TJK / THJK (GEA)	ACTMKJD	branch-connector-kit	SCP-PLUS	A	511
TJD / TJJ / TJK / THJK (GEA)	AHKJ1	hardware-kit	SPECTRA-PP	A	573
TJD / TJJ / TJK / THJK (GEA)	AMC2JKFP	breaker-mounting-kit	SPECTRA-PP	A	540
TJD / TJJ / TJK / THJK (GEA)	AMC3JKFP	breaker-mounting-kit	SPECTRA-PP	A	543
TJD / TJJ / TJK / THJK (GEA)	AMC4JKFP	breaker-mounting-kit	SPECTRA-PP	A	549
TJD / TJJ / TJK / THJK (GEA)	AMC6JKFP	breaker-mounting-kit	SPECTRA-PP	A	557
TJD / TJJ / TJK / THJK (GEA)	TJ4DPK	branch-connector-kit	CCB-QMR	A	505
TJD / TJJ / TJK / THJK (GEA)	TJ6DPK	branch-connector-kit	CCB-QMR	A	506
TKM / THKM (GEA)	TK12SPK	branch-connector-kit	CCB-QMR	A	506
TKM / THKM (GEA)	TK8SPK	branch-connector-kit	CCB-QMR	A	506
TQD / THQD (GEA)	139C5500P81	mounting-bracket	A-SERIES-PWR	—	499
TQD / THQD (GEA)	139C5503P64	filler-plate	A-SERIES-PWR	—	502
TQD / THQD (GEA)	139C5702AQDG1	connector-strap	A-SERIES-PWR	—	495
TQD / THQD (GEA)	139C5702BQDG1	connector-strap	A-SERIES-PWR	—	496
TQD / THQD (GEA)	139C5702CQDG1	connector-strap	A-SERIES-PWR	—	497
TQD / THQD (GEA)	ACTMKQD2P	branch-connector-kit	SCP-PLUS	A	512
TQD / THQD (GEA)	ACTMKQD3P	branch-connector-kit	SCP-PLUS	A	512
TQD / THQD (GEA)	AFP2QDD	filler-plate	SPECTRA-PP	A	562
TQD / THQD (GEA)	AFP3QDD	filler-plate	SPECTRA-PP	A	563
TQD / THQD (GEA)	AHKBQ1	hardware-kit	SPECTRA-PP	A	571
TQD / THQD (GEA)	AHKQ1	hardware-kit	SPECTRA-PP	A	574
TQD / THQD (GEA)	AMC4QDFP	breaker-mounting-kit	SPECTRA-PP	A	550
TQD / THQD (GEA)	AMC6QDFP	breaker-mounting-kit	SPECTRA-PP	A	558
TQD / THQD (GEA)	AMCB4QDFP	branch-connector-kit	SPECTRA-PP	A	529
TQD / THQD (GEA)	AMCB6QDFP	branch-connector-kit	SPECTRA-PP	A	534
TQD / THQD (GEA)	ASP2PTQD3P	conversion-kit	A-SERIES	—	489
TQD / THQD (GEA)	ASPP6QD6D	branch-connector-kit	A-SERIES-PWR	A	493
TQD / THQD (GEA)	ASPTQD3P	breaker-mounting-kit	A-SERIES	—	484
TQD / THQD (GEA)	MB512	main-breaker-kit	A-SERIES	A	478
TQD / THQD (GEA)	MB513	main-breaker-kit	A-SERIES	A	479
TQD / THQD (GEA)	MB516	main-breaker-kit	A-SERIES	A	479

Breaker family	Part	Component	Equipment family	Cl.	Pg
TQD / THQD (GEA)	TEDFP1	filler-plate	A-SERIES	—	487
TQD / THQD (GEA)	TQ2DPK	branch-connector-kit	CCB-QMR	A	506
TQD / THQD (GEA)	TQDFM1	breaker-accessory	A-SERIES	—	489
TQD / THQD (Q-Line 225A) (GEA)	TCAL25	lug		A	617
TQD / THQD (Q-Line 225A) (GEA)	TCALK325	lug-kit		A	617
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B57	deadfront	PRL3A	—	207
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	4176B70	deadfront	PRL3A	—	209
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	61
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	63
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	66
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	237
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	243
TRI-PAC integrally fused (FB-P, LA-P, NB-P) (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	247
Tri-Pac (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	61
Tri-Pac (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	63
Tri-Pac (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	66
Tri-Pac (EAT)	KPRL4FBP	breaker-mounting-kit	PRL4, PRL4X	A	237
Tri-Pac (EAT)	KPRL4LAP	breaker-mounting-kit	PRL4, PRL4X	A	243
Tri-Pac (EAT)	KPRL4NBP	breaker-mounting-kit	PRL4, PRL4X	A	247
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPCA	breaker-mounting-kit	CDP	A	59
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPDK	conversion-kit	CDP	A	70
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPED225	breaker-mounting-kit	CDP	A	60
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPEHD	conversion-kit	CDP	A	71
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFB100	breaker-mounting-kit	CDP	A	61
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFBP	breaker-mounting-kit	CDP	A	61
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFD	conversion-kit	CDP	A	72
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPFDB	conversion-kit	CDP	A	73
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPHKD	conversion-kit	CDP	A	74
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJD	conversion-kit	CDP	A	75
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPJDB	conversion-kit	CDP	A	76
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKB	breaker-mounting-kit	CDP	A	62
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKD	conversion-kit	CDP	A	77
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPKDB	conversion-kit	CDP	A	78
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA400	breaker-mounting-kit	CDP	A	63

Breaker family	Part	Component	Equipment family	Cl.	Pg
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLA600	breaker-mounting-kit	CDP	A	63
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLB	breaker-mounting-kit	CDP	A	64
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLCL	breaker-mounting-kit	CDP	A	65
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPLD	conversion-kit	CDP	A	79
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMC	breaker-mounting-kit	CDP	A	65
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPMDL	conversion-kit	CDP	A	80
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNBP	breaker-mounting-kit	CDP	A	66
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPNC	breaker-mounting-kit	CDP	A	66
Westinghouse pre-Series C industrial MCCBs (EAT)	KCDPND	conversion-kit	CDP	A	81
Westinghouse pre-Series C industrial MCCBs (EAT)	TAD3	conversion-kit	PRL4, CDP	A	257
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100DS	branch-connector-kit	ZIN-DIST	—	782
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SB	branch-connector-kit	ZIN-DIST	—	782
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF100SS	branch-connector-kit	ZIN-DIST	—	782
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200DS	branch-connector-kit	ZIN-DIST	—	782
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF200SB	branch-connector-kit	ZIN-DIST	—	783
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400DS	branch-connector-kit	ZIN-DIST	—	783
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF400SB	branch-connector-kit	ZIN-DIST	—	783
Zinsco / Sylvania QSF fusible panelboard switch (ZIN)	QSF600DS	branch-connector-kit	ZIN-DIST	—	783
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQB	branch-connector-kit	ZIN-DIST	—	781
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	DSLQFB	branch-connector-kit	ZIN-DIST	—	781
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	QFP2T	main-breaker-kit	ZIN-Q	C	785
Zinsco Q / QC / QB / QFP / QFL / QFB (Magnatrip) (ZIN)	UBIZRBK12	bus-assembly	ZIN-Q	—	786

12.5 Component-type index

Component type	Parts (OEM PN → page)
main-breaker-kit	KB11A2B (EAT), KB11A2T (EAT), KB11AFB (EAT), KB11AFT (EAT), KB11S2B (EAT), KB11S2T (EAT), KB11SFB (EAT), KB11SFT (EAT), KB13A2B (EAT), KB13A2T (EAT), KB13AFB (EAT), KB13AFT (EAT), KB13S2B (EAT), KB13S2T (EAT), KB13SFB (EAT), KB13SFT (EAT), KB21A2B (EAT), KB21A2T (EAT), KB21AFB (EAT), KB21AFT (EAT), KB21S2B (EAT), KB21S2T (EAT), KB21SFB (EAT), KB21SFT (EAT), KB23A2B (EAT), KB23A2T (EAT), KB23AFB (EAT), KB23AFT (EAT), KB23S2B (EAT), KB23S2T (EAT), KB23SFB (EAT), KB23SFT (EAT), KB41A14B (EAT), KB41A14T (EAT), KB41AJB (EAT), KB41AJT (EAT), KB41AKB (EAT), KB41AKT (EAT), KB41S14B (EAT), KB41S14T (EAT), KB41SJB (EAT), KB41SJT (EAT), KB41SKB (EAT), KB41SKT (EAT), KB43A34B (EAT), KB43A34T (EAT), KB43AJB (EAT), KB43AJT (EAT), KB43AKB (EAT), KB43AKT (EAT), KB43S34B (EAT), KB43S34T (EAT), KB43SJB (EAT), KB43SJT (EAT), KB43SKB (EAT), KB43SKT (EAT), KB61S16B (EAT), KB61S16T (EAT), KB63S36B (EAT), KB63S36T (EAT), MB133 (GEA), MB133WB (GEA), MB233 (GEA), MB2332 (GEA), MB2332WB (GEA), MB233WB (GEA), MB332 (GEA), MB332WB (GEA), MB333 (GEA), MB333WB (GEA), MB423 (GEA), MB426 (GEA), MB512 (GEA), MB513 (GEA), MB516 (GEA), MB612 (GEA), MB613 (GEA), MB614 (GEA), MB616 (GEA), MBKBC3 (SIE), MBKBL1 (SIE), MBKBL3 (SIE), MBKED1 (SIE), MBKED1A (SIE), MBKED3 (SIE), MBKED3A (SIE), MBKFD1 (SIE), MBKFD1A (SIE), MBKFD3 (SIE), MBKFD3A (SIE), MBKJD1 (SIE), MBKJD3 (SIE), MBKJD3B (SIE), MBKNB1 (SIE), MBKNB3 (SIE), MBKQR1 (SIE), MBKQR1A (SIE), MBKQR3 (SIE), MBKQR3A (SIE), MBKVA41A (SIE), MBKVA41B (SIE), MBKVA5262A (SIE), MBKVA5262B (SIE), MBKVA5363A (SIE), SMBKED1 (SIE), SMBKED3 (SIE), SMBKFD1 (SIE), SMBKFD3 (SIE), SMBKJD1 (SIE), SMBKJD3 (SIE), QFP2T (ZIN)
main-lug-kit	5PLUG31200TC (EAT), 5PLUG3400SC (EAT), 5PLUG3600SC (EAT), 5PLUG3800SC (EAT), BRL200 (EAT), KL11AMO (EAT), KL11AMS (EAT), KL11AVO (EAT), KL11AVS (EAT), KL11SCO (EAT), KL11SCS (EAT), KL11SMO (EAT), KL11SMS (EAT), KL11SVO (EAT), KL11SVS (EAT), KL13AMO (EAT), KL13AMS (EAT), KL13AVO (EAT), KL13AVS (EAT), KL13SCO (EAT), KL13SCS (EAT), KL13SMO (EAT), KL13SMS (EAT), KL13SVO (EAT), KL13SVS (EAT), KL21AMO (EAT), KL21AMS (EAT), KL21AVO (EAT), KL21AVS (EAT), KL21SCO (EAT), KL21SCS (EAT), KL21SMO (EAT), KL21SMS (EAT), KL21SVO (EAT), KL21SVS (EAT), KL23AMO (EAT), KL23AMS (EAT), KL23AVO (EAT), KL23AVS (EAT), KL23SCO (EAT), KL23SCS (EAT), KL23SMO (EAT), KL23SMS (EAT), KL23SVO (EAT), KL23SVS (EAT), KL41AMO (EAT), KL41AMS (EAT), KL41AVO (EAT), KL41AVS (EAT), KL41SCO (EAT), KL41SMO (EAT), KL41SMS (EAT), KL41SVO (EAT), KL41SVS (EAT), KL43AMO (EAT), KL43AMS (EAT), KL43AVO (EAT), KL43AVS (EAT), KL43SCO (EAT), KL43SMO (EAT), KL43SMS (EAT), KL43SVO (EAT), KL43SVS (EAT), KL61CMO (EAT), KL61CMS (EAT), KL61CVO (EAT), KL61CVS (EAT), KL61SMO (EAT), KL61SMS (EAT), KL61SVO (EAT), KL61SVS (EAT), KL61TMO (EAT), KL61TMS (EAT), KL61TVO (EAT), KL61TVS (EAT), KL63CMO (EAT), KL63CMS (EAT), KL63CVO (EAT), KL63CVS (EAT), KL63SMO (EAT), KL63SMS (EAT), KL63SVO (EAT), KL63SVS (EAT), KL63TMO (EAT), KL63TMS (EAT), KL63TVO (EAT), KL63TVS (EAT), KNA1B1C (FPE), AML3120CFP (GEA), AML3120FP (GEA), AML3250CFP (GEA), AML3250FP (GEA), AML3250SFP (GEA), AML3400CFP (GEA), AML3400FP (GEA), AML3400SFP (GEA), AML3600CFP (GEA), AML3600FP (GEA), AML3600SFP (GEA), AML3800CFP (GEA), AML3800FP (GEA), MLA1 (GEA), MLA2 (GEA), MLA41 (GEA), MLA61 (GEA), MLA62 (GEA), MLR1 (GEA), MLR2 (GEA), MLR41 (GEA), MLR61 (GEA), MLT1 (GEA), MLT2 (GEA), MLT41 (GEA), MLT42 (GEA), 4MLKA1 (SIE), 4MLKA1A (SIE), 4MLKA1B (SIE), 4MLKA3 (SIE), 4MLKA3A (SIE), 4MLKA3B (SIE), 4MLKC1 (SIE), 4MLKC1A (SIE), 4MLKC3 (SIE), 4MLKC3A (SIE), MLKA1 (SIE), MLKA1A (SIE), MLKA3 (SIE), MLKA3A (SIE), MLKC1 (SIE), MLKC1A (SIE), MLKC3 (SIE), MLKC3A (SIE), QMB12CLA (SQD), QMB8CLA (SQD), LK-15 (ZIN), LK-22 (ZIN)
sub-feed-lug-kit	3BRS225 (EAT), 3BRSF150 (EAT), BRS225 (EAT), BRSF125 (EAT), BRSF150 (EAT), KL11AMF (EAT), KL11AVF (EAT), KL11SCF (EAT), KL11SMF (EAT), KL11SVF (EAT), KL13AMF (EAT), KL13AVF (EAT), KL13SCF (EAT), KL13SMF (EAT), KL13SVF (EAT), KL21AMF (EAT), KL21AVF (EAT), KL21SCF (EAT), KL21SMF (EAT), KL21SVF (EAT), KL23AMF (EAT), KL23AVF (EAT), KL23SCF (EAT), KL23SMF (EAT), KL23SVF (EAT), S33930 (SQD), SL100 (SQD), SL1200P5 (SQD), SL1200P6 (SQD), SL1200P7 (SQD), SL250 (SQD), SL400 (SQD), SL800 (SQD), SL800M5 (SQD)
through-feed-lug-kit	AFL120 (GEA), AFL600 (GEA)

Component type	Parts (OEM PN → page)
lug-kit	2T400K (EAT), 2T400KCW (EAT), 2T402K (EAT), 2TA400K (EAT), 2TA400KCW (EAT), 2TA401K (EAT), 2TA401KCW (EAT), 2TA401LDK (EAT), 2TA402K (EAT), 2TA603LDK (EAT), 2TA603LDKCW (EAT), 3T100FB (EAT), 3T125EF (EAT), 3T150FB (EAT), 3T20FB (EAT), 3T225FD (EAT), 3T400K (EAT), 3T400KCW (EAT), 3T402K (EAT), 3T631LK (EAT), 3T632LK (EAT), 3T632LKW (EAT), 3TA100FD (EAT), 3TA100G3K (EAT), 3TA100G6K (EAT), 3TA125E3K (EAT), 3TA125E6K (EAT), 3TA125EF (EAT), 3TA150EF (EAT), 3TA150F3K (EAT), 3TA150F6K (EAT), 3TA150FB (EAT), 3TA160EFK (EAT), 3TA225FD (EAT), 3TA225FDK (EAT), 3TA250FJ3 (EAT), 3TA250FJ6 (EAT), 3TA250J3K (EAT), 3TA250J6K (EAT), 3TA400K (EAT), 3TA400K3K (EAT), 3TA400K6K (EAT), 3TA400KCW (EAT), 3TA401K (EAT), 3TA401KCW (EAT), 3TA401LDK (EAT), 3TA402K (EAT), 3TA50FB (EAT), 3TA603LDK (EAT), 3TA603LDKCW (EAT), 3TA631LK (EAT), 3TA632LK (EAT), 3TA632LKW (EAT), 4T400K (EAT), 4T400KCW (EAT), 4T402K (EAT), 4T631LK (EAT), 4T632LK (EAT), 4T632LKW (EAT), 4TA160EFK (EAT), 4TA400K (EAT), 4TA400KCW (EAT), 4TA401K (EAT), 4TA401KCW (EAT), 4TA401LDK (EAT), 4TA402K (EAT), 4TA603LDK (EAT), 4TA603LDKCW (EAT), 4TA631LK (EAT), 4TA632LK (EAT), 4TA632LKW (EAT), T1000NB1 (EAT), T1200NB3 (EAT), T1200NB3M (EAT), T1600RD (EAT), T250FJ (EAT), T250KB (EAT), T300K (EAT), T350K (EAT), T350LK (EAT), T600MA1 (EAT), T602LD (EAT), T602LDCW (EAT), T700NB1 (EAT), T800MA1 (EAT), TA1000NB1 (EAT), TA1200NB1 (EAT), TA1201NB1 (EAT), TA1600RD (EAT), TA2000RD (EAT), TA250FJ (EAT), TA250KB (EAT), TA300K (EAT), TA350K (EAT), TA350LK (EAT), TA450LD (EAT), TA602LD (EAT), TA602LDCW (EAT), TA632L (EAT), TA700MA1 (EAT), TA700MA1CWT (EAT), TA700NB1 (EAT), TA800MA2 (EAT), TA800MA2CWT (EAT), TA801MA (EAT), TA801MACWT (EAT), N32 (FPE), NM34 (FPE), NM36 (FPE), NM38 (FPE), FCALK12 (GEA), FCALK13 (GEA), FCALK14 (GEA), FCALK15 (GEA), FCALK15LV (GEA), FCALK16 (GEA), FCALK16LV (GEA), FCALK218H (GEA), FCALK318H (GEA), TCAL19PD3 (GEA), TCAL28PD3 (GEA), TCAL40PD3 (GEA), TCALK2121 (GEA), TCALK2122 (GEA), TCALK2124 (GEA), TCALK2125 (GEA), TCALK261 (GEA), TCALK281 (GEA), TCALK291 (GEA), TCALK3121 (GEA), TCALK3122 (GEA), TCALK3124 (GEA), TCALK3125 (GEA), TCALK318 (GEA), TCALK324 (GEA), TCALK325 (GEA), TCALK329 (GEA), TCALK341 (GEA), TCALK343 (GEA), TCALK347 (GEA), TCALK361 (GEA), TCALK363 (GEA), TCALK381 (GEA), TCALK391 (GEA), TCLK265 (GEA), TCLK365 (GEA), TCOK265 (GEA), TCOK365 (GEA), 2TA2N8750 (SIE), 2TA3N8750 (SIE), 2TA4N8500 (SIE), 2TA4P8500 (SIE), 3TA1QR300 (SIE), 3TA2N8750 (SIE), 3TA3N8750 (SIE), 3TA4N8500 (SIE), 3TA4P8500 (SIE), 3TC1GG20 (SIE), 3TC1Q1 (SIE), 3TC1QR250 (SIE), BNK350N (SIE), CCM800K2 (SIE), CCM800K3 (SIE), CCN1200K2 (SIE), CCN1200K3 (SIE), TA1Q300 (SIE), 32508 (SQD), 32510 (SQD), AL100FA (SQD), AL100FA4 (SQD), AL100TF (SQD), AL1200P24TK (SQD), AL1200P25TK (SQD), AL1200P25TK4 (SQD), AL1200R53TK (SQD), AL150FA (SQD), AL150HD (SQD), AL175JD (SQD), AL250JD (SQD), AL250KA (SQD), AL250KI (SQD), AL400L61K3 (SQD), AL400L61K4 (SQD), AL400LA (SQD), AL400LH7 (SQD), AL50FA (SQD), AL600LF52K3 (SQD), AL600LI35 (SQD), AL600LI5 (SQD), AL600LI7 (SQD), AL600LS52K3 (SQD), AL600LS52K4 (SQD), AL800M23K (SQD), AL800M23TK (SQD), AL800M23TK4 (SQD), AL800P6TK (SQD), AL800P6TK4 (SQD), AL800P7K (SQD), CU100FA (SQD), CU100TF (SQD), CU150HD (SQD), CU250JD (SQD), CU250KA (SQD), CU30FA4 (SQD), CU400L61K3 (SQD), CU400L61K4 (SQD), CU400LA (SQD), CU600LF52K3 (SQD), CU600LI35 (SQD), CU600LI5 (SQD), CU600LI7 (SQD), CU600LS52K3 (SQD), CU600LS52K4 (SQD), CVC100FA (SQD), CVC250KA3 (SQD), CVC400LA3 (SQD), CVC400LA5 (SQD), CVC600LI5 (SQD), CYA060HD (SQD), CYA150HD (SQD), CYA150JD (SQD), CYA250J3 (SQD), CYA400L31K3 (SQD), CYA400L31K4 (SQD), CYA400L51K3 (SQD), CYA400L51K4 (SQD), CYA400L71K3 (SQD), CYA600L32K3 (SQD), CYA600L32K4 (SQD), CYA600L52K3 (SQD), CYA600L52K4 (SQD), PDC12DG4 (SQD), PDC12DG4L3 (SQD), PDC12LA4 (SQD), PDC3FA2 (SQD), PDC3HD2 (SQD), PDC3JD20 (SQD), PDC4LA250 (SQD), PDC5DG20 (SQD), PDC5DG20L3 (SQD), PDC6FA6 (SQD), PDC6HD6 (SQD), PDC6JD4 (SQD), PDC6LA20 (SQD), VC100FA (SQD), VC250KA3 (SQD), VC250KA35 (SQD), VC400LA3 (SQD), VC400LA35 (SQD), VC400LA5 (SQD), VC400LA7 (SQD), VC600LI3 (SQD), VC600LI5 (SQD), VC600LI7 (SQD), YA060HD (SQD), YA150HD (SQD), YA150JD (SQD), YA250J35 (SQD), YA400L31K3 (SQD), YA400L51K3 (SQD), YA400L51K4 (SQD), YA400L71K3 (SQD), YA400L71K4 (SQD), YA600L32K3 (SQD), YA600L32K4 (SQD), YA600L52K3 (SQD), YA600L52K4 (SQD)
lug	NL300 (EAT), FCAL12 (GEA), FCAL13 (GEA), FCAL14 (GEA), FCAL15 (GEA), FCAL16 (GEA), TC012 (GEA), TC0121 (GEA), TC0131 (GEA), TC018 (GEA), TC024 (GEA), TC041 (GEA), TC043 (GEA), TC061 (GEA), TC063 (GEA), TC081A (GEA), TC091 (GEA), TCAL12 (GEA), TCAL121 (GEA), TCAL122 (GEA), TCAL124 (GEA), TCAL125 (GEA), TCAL12A (GEA), TCAL131 (GEA), TCAL14 (GEA), TCAL15 (GEA), TCAL18 (GEA), TCAL18LV (GEA), TCAL19PD1 (GEA), TCAL24 (GEA), TCAL25 (GEA), TCAL27 (GEA), TCAL28PD1 (GEA), TCAL29 (GEA), TCAL29LV (GEA), TCAL40PD1 (GEA), TCAL41 (GEA), TCAL43 (GEA), TCAL47 (GEA), TCAL61 (GEA), TCAL63 (GEA), TCAL81 (GEA), TCAL91 (GEA), TCLK43 (GEA), TCO124 (GEA), TCO125 (GEA), TCO29 (GEA), CCE125 (SIE), CCF250 (SIE), CCL600 (SIE), CCQ250 (SIE), LD1E060 (SIE), LD1E100 (SIE), LN1E100 (SIE), SA1E025 (SIE), TA1E6125 (SIE), TA1FD350A (SIE), TA1L6750 (SIE), TA1Q1 (SIE), TA2J630 (SIE), TA2J6500 (SIE), TA2K500 (SIE), TA2N750 (SIE), TA3K500 (SIE), TA4P750 (SIE), TA5P600 (SIE), TA6ED06 (SIE), TA6FD04 (SIE), TA6GG04 (SIE), TA6JD20 (SIE), TA6R600 (SIE), TC1ED6150 (SIE), TC1FD350 (SIE), TC1J6600 (SIE), TC1Q1 (SIE), TC2J6500 (SIE), TC2K500 (SIE), TC5R600 (SIE), 40251-016-51 (SQD), 40251-018-50 (SQD), 4025101851 (SQD), 40251-162-50 (SQD), 40251-287-50 (SQD), 40256-014-50 (SQD), 40256-034-50 (SQD), 40256-039-50 (SQD), 40560-270-50 (SQD), VCEL02114S1 (SQD), VCEL030516H1 (SQD), VCEL05012H1 (SQD), VCEL06012H1 (SQD), VCEL07512H1 (SQD), VCELC02114S1 (SQD), VCELC03038H1 (SQD), VCELC05012H1 (SQD), VCELC07512H1 (SQD)

Component type	Parts (OEM PN → page)
branch-connector-kit	1C96608 (EAT), 1C96609 (EAT), 2C11642 (EAT), CCA4K (EAT), CED3K (EAT), CED4BK (EAT), CED4K (EAT), CFD3K (EAT), CFD4BK (EAT), CFD4K (EAT), CJD4K (EAT), CJDS4BK (EAT), CJDS4K (EAT), CKD4K (EAT), CKDS4BK (EAT), CKDS4K (EAT), CLD4K (EAT), CLDS4BK (EAT), CMD4K (EAT), CND4K (EAT), KFDP4XT (EAT), KFDP5XT (EAT), KFDPB6X-2 (EAT), KFDPW11X-6 (EAT), KFDPW11X-8 (EAT), KFDPW15X-12 (EAT), KFDPW9X-4 (EAT), KPRL1BAB (EAT), KPRL2GHB (EAT), KPRL3ABA06 (EAT), KPRL3ABA06-1 (EAT), KPRL3ABA12 (EAT), KPRL3ABA12-1 (EAT), KPRL3ABA18 (EAT), KPRL3ABA18-1 (EAT), KPRL3ABA24 (EAT), KPRL3ABA24-1 (EAT), KPRL3AED2 (EAT), KPRL3AED3 (EAT), KPRL3AFD1 (EAT), KPRL3AFD2 (EAT), KPRL3AFD3 (EAT), KPRL3AGB06 (EAT), KPRL3AGB06-1 (EAT), KPRL3AGB12 (EAT), KPRL3AGB12-1 (EAT), KPRL3AGB18 (EAT), KPRL3AGB18-1 (EAT), KPRL3AGB24 (EAT), KPRL3AGB24-1 (EAT), KPRL3CA (EAT), KPRL3CF3 (EAT), KPRL3ED (EAT), KPRL3FD (EAT), KPRL3X21T (EAT), KPRL3X22 (EAT), KPRL3X22T (EAT), KPRL3X23 (EAT), KPRL3X23T (EAT), KPRL3XBA06 (EAT), KPRL3XBA06-1 (EAT), KPRL3XBA12 (EAT), KPRL3XBA12-1 (EAT), KPRL3XBA18 (EAT), KPRL3XBA18-1 (EAT), KPRL3XBA24 (EAT), KPRL3XBA24-1 (EAT), KPRL3XGB06 (EAT), KPRL3XGB06-1 (EAT), KPRL3XGB12 (EAT), KPRL3XGB12-1 (EAT), KPRL3XGB18 (EAT), KPRL3XGB18-1 (EAT), KPRL3XGB24 (EAT), KPRL3XGB24-1 (EAT), KPRL44X (EAT), KPRL45X (EAT), KPRL45X1 (EAT), KPRL45XS (EAT), KPRL4B6XS (EAT), KPRL4B6XT (EAT), KPRL4CD (EAT), KPRL4CED (EAT), KPRL4CSL (EAT), KPRL4CSM (EAT), KPRL4CSN (EAT), KPRL4W11X (EAT), KPRL4W15X (EAT), KPRL4W9X (EAT), KBDP1C (FPE), KBDP2C (FPE), KBDP3C (FPE), KBDP4C (FPE), KBDP5C (FPE), KCDP-1A (FPE), KCDP1C (FPE), KCDP2C (FPE), KCDP3C (FPE), KCDP4C (FPE), KCDP5C (FPE), NAIB-NEF (FPE), NDPNE (FPE), NDPNEJ (FPE), ACSMKSG (GEA), ACSMKSK (GEA), ACTMKEB1P (GEA), ACTMKEB2P (GEA), ACTMKEB3P (GEA), ACTMKJD (GEA), ACTMKQD2P (GEA), ACTMKQD3P (GEA), ACTMKSE (GEA), ACTMKSF (GEA), ACTMKSG (GEA), AMCB2FGMFP (GEA), AMCB2FJFP (GEA), AMCB2FJFPTF (GEA), AMCB2GMFP (GEA), AMCB2KMFP (GEA), AMCB3FGMFP (GEA), AMCB3FJFP (GEA), AMCB3FJFPTF (GEA), AMCB3GMFP (GEA), AMCB3KMFP (GEA), AMCB3LBFP (GEA), AMCB4EBFP (GEA), AMCB4EYFP (GEA), AMCB4FBFP (GEA), AMCB4FDBFP (GEA), AMCB4FGBFP (GEA), AMCB4FJFP (GEA), AMCB4FJFPTF (GEA), AMCB4GBFP (GEA), AMCB4QDFP (GEA), AMCB4SEFP (GEA), AMCB6EBFP (GEA), AMCB6EYFP (GEA), AMCB6FBFP (GEA), AMCB6FDBFP (GEA), AMCB6FGBFP (GEA), AMCB6FJFP (GEA), AMCB6FJFPTF (GEA), AMCB6GBFP (GEA), AMCB6QDFP (GEA), ASPP6EY12D (GEA), ASPP6EY6D (GEA), ASPP6FB6D (GEA), ASPP6QB12D (GEA), ASPP6QB6D (GEA), ASPP6QD6D (GEA), ASPP6SE6D (GEA), ASPP6SF3S (GEA), ASPP6SG3S (GEA), NHB150PK (GEA), SF2DPK (GEA), SK12SPK (GEA), SK8SPK (GEA), TED1DPK (GEA), TEL1DPK (GEA), TF2DPK (GEA), TJ4DPK (GEA), TJ6DPK (GEA), TK12SPK (GEA), TK8SPK (GEA), TQ2DPK (GEA), 6BL2C (SIE), 6CLE2 (SIE), 6CLF1 (SIE), 6CLJ1 (SIE), 6CLL1 (SIE), 6E62 (SIE), 6F62 (SIE), 6JJ61 (SIE), 6JJ62 (SIE), 6LL61 (SIE), 6M61C (SIE), 6N61C (SIE), 6QJ2 (SIE), 6QR2 (SIE), 6SCJ1 (SIE), 6SCL1 (SIE), 6SCL61C (SIE), 6SJL1 (SIE), 6SLL1 (SIE), BBKB32 (SIE), BBKEB32 (SIE), BBKED32 (SIE), BBKGB32 (SIE), BBKNB32 (SIE), BBKQ1 (SIE), BBKQ2 (SIE), BBKQR1 (SIE), BBKQR2 (SIE), BBKVA4P2P3 (SIE), BBKVA5262P2S (SIE), BBKVA52P3T (SIE), MG1 (SIE), MG1D (SIE), NG1D (SIE), S3VA41T (SIE), S3VA41TD (SIE), S3VA41TDHD (SIE), S3VA52T (SIE), S3VA52TD (SIE), S3VA53T (SIE), S3VA53T2D (SIE), S3VA53TD (SIE), S3VA54T (SIE), S3VA54T2D (SIE), S3VA54TD (SIE), S3VA55TD (SIE), S3VA57TD (SIE), S3VA63T (SIE), S3VA63TD (SIE), S3VA64T (SIE), S3VA64TD (SIE), SBL (SIE), SBLBD (SIE), SCE (SIE), SCED (SIE), SCF (SIE), SCFD (SIE), SCJ (SIE), SCJD (SIE), SCL (SIE), SCLD (SIE), SDGD (SIE), SE6 (SIE), SE6D (SIE), SF6 (SIE), SF6D (SIE), SFG (SIE), SFGD (SIE), SGB2 (SIE), SGB2D (SIE), SJ1 (SIE), SJ1D (SIE), SJ2D (SIE), SJG (SIE), SJG1D (SIE), SJG2D (SIE), SL6 (SIE), SL6D (SIE), SLG (SIE), SLGD (SIE), SLM1D (SIE), SMND (SIE), SQR (SIE), SQRD (SIE), SSCJ (SIE), SSCJD (SIE), SSCL (SIE), SSCLD (SIE), SSJ1 (SIE), SSJ1D (SIE), SSL6 (SIE), SSL6D (SIE), SSMND (SIE), DSLNEJT (ZIN), DSLNET (ZIN), DSLNFT (ZIN), DSLNJT (ZIN), DSLNM (ZIN), DSLNMS (ZIN), DSLQB (ZIN), DSLQFB (ZIN), FPENEFT (ZIN), QSF100DS (ZIN), QSF100SB (ZIN), QSF100SS (ZIN), QSF200DS (ZIN), QSF200SB (ZIN), QSF400DS (ZIN), QSF400SB (ZIN), QSF600DS (ZIN), SECT (ZIN), SEHT (ZIN), SJD4T (ZIN), SKM8S (ZIN)
breaker-mounting-kit	KCDPCA (EAT), KCDPED225 (EAT), KCDPFB100 (EAT), KCDPFBP (EAT), KCDPKB (EAT), KCDPLA400 (EAT), KCDPLA600 (EAT), KCDPLB (EAT), KCDPLCL (EAT), KCDPMC (EAT), KCDPNBP (EAT), KCDPNC (EAT), KPRL4CA (EAT), KPRL4CKD (EAT), KPRL4CND (EAT), KPRL4ED (EAT), KPRL4ED2 (EAT), KPRL4FBP (EAT), KPRL4FD (EAT), KPRL4FD1 (EAT), KPRL4FD2 (EAT), KPRL4FDCL (EAT), KPRL4JDS (EAT), KPRL4JDT (EAT), KPRL4KDS (EAT), KPRL4KDT (EAT), KPRL4LAP (EAT), KPRL4LC (EAT), KPRL4LCL (EAT), KPRL4LD (EAT), KPRL4LG (EAT), KPRL4MC (EAT), KPRL4MD (EAT), KPRL4NBP (EAT), KPRL4NC (EAT), KPRL4ND (EAT), KPRL4X12 (EAT), KPRL4X22 (EAT), KPRL4X32 (EAT), KPRL4X334S (EAT), KPRL4X334T (EAT), KPRL4X336 (EAT), KPRL4X34 (EAT), KPRL4X35 (EAT), NFHARDWARE (FPE), AMC2FGMFP (GEA), AMC2FJFP (GEA), AMC2FJFPTF (GEA), AMC2FLSFP (GEA), AMC2GMFP (GEA), AMC2JKFP (GEA), AMC2KMFP (GEA), AMC3FGMFP (GEA), AMC3FJFP (GEA), AMC3FJFPTF (GEA), AMC3FLSFP (GEA), AMC3GMFP (GEA), AMC3JKFP (GEA), AMC3KMFP (GEA), AMC4EBFP (GEA), AMC4EBSFP (GEA), AMC4FDBFP (GEA), AMC4FDSFP (GEA), AMC4FGBFP (GEA), AMC4FJFP (GEA), AMC4FJFPTF (GEA), AMC4FLSFP (GEA), AMC4GBFP (GEA), AMC4JKFP (GEA), AMC4QDFP (GEA), AMC4SEFP (GEA), AMC6EBFP (GEA), AMC6EBSFP (GEA), AMC6EYFP (GEA), AMC6FBFP (GEA), AMC6FDBFP (GEA), AMC6FDSPF (GEA), AMC6FGBFP (GEA), AMC6FJFP (GEA), AMC6FJFPTF (GEA), AMC6FLSFP (GEA), AMC6GBFP (GEA), AMC6JKFP (GEA), AMC6QBFP (GEA), AMC6QDFP (GEA), ASPFB12P (GEA), ASPFB3P (GEA), ASPTED3P (GEA), ASPTQD3P (GEA), CU-NFJ (OTH), QMB3300LA (SQD), QMB3400LA (SQD)

Component type	Parts (OEM PN → page)
connector-strap	1253C72G01 (EAT), 1253C72G03 (EAT), 1253C73G01 (EAT), 1253C73G03 (EAT), 1253C73G05 (EAT), 1253C73G06 (EAT), 2600D26G01 (EAT), 2600D26G02 (EAT), 314C996G01 (EAT), 314C996G02 (EAT), 314C996G03 (EAT), 4212B77G01 (EAT), 4212B78G02 (EAT), 505C606G04 (EAT), 505C606G05 (EAT), 505C606G06 (EAT), 506C052G01 (EAT), 624B609G01 (EAT), 673B142G02 (EAT), 673B142G03 (EAT), 673B142G04 (EAT), 673B142G10 (EAT), KFDP2C (FPE), KFDP3C (FPE), KFDP46C (FPE), KFDP4C (FPE), KFDP-5C (FPE), KFDP66C (FPE), KFDP7C (FPE), KFDPD16C (FPE), KFDPD26C (FPE), KFDPS16C (FPE), KFDPS26C (FPE), KFDPV7C (FPE), KQB3C (FPE), KQB46C (FPE), KQB4C (FPE), KQB66C (FPE), KQB86C (FPE), KQB-D26C (FPE), PK103T (FPE), 139C5702AQDG1 (GEA), 139C5702ASEG1 (GEA), 139C5702ASFG1 (GEA), 139C5702BQDG1 (GEA), 139C5702BSEG1 (GEA), 139C5702BSFG1 (GEA), 139C5702CQDG1 (GEA), 139C5702CSEG1 (GEA), 139C5702CSFG1 (GEA), 315A7046P7 (GEA), 315A7046P8 (GEA), 315A7046P9 (GEA), 315A7048P20 (GEA), 315A7049P10 (GEA), TKMC1 (GEA), P1CONACPHAL (SIE), P1CONACPHCU (SIE), P1CONBPHAL (SIE), P1CONBPHCU (SIE)
bus-assembly	UBIZRBK12 (ZIN)
neutral-assembly	1C96645 (EAT), 1C96646 (EAT), 1C96647 (EAT), 1C96648 (EAT), 1C96649 (EAT), 1C96650 (EAT), 1C96651 (EAT), 1C96652 (EAT), 1C96653 (EAT), 1C96654 (EAT), 1C97022 (EAT), 42C4050 (EAT), 42C4051 (EAT), 42C4052 (EAT), 5158C03 (EAT), 5158C03G01 (EAT), 5158C03G02 (EAT), 5158C03G03 (EAT), 5158C03G04 (EAT), 5158C04G01 (EAT), 5PN1200A (EAT), 5PN1200C (EAT), 5PN800A (EAT), 5PN800C (EAT), BINA (EAT), ANK120D (GEA), ANK800D (GEA), ANKN120 (GEA), ANKN400 (GEA), NKA (GEA), NKA42 (GEA), NKA4FT (GEA), NKR (GEA), NKR4 (GEA), NKT (GEA), NKT4 (GEA), 2NLK42B (SIE), 2NLK54B (SIE), 42NLK54B (SIE), BNK2 (SIE), BNKP2EX1 (SIE), CNLK42B (SIE), CNLK54B (SIE), LNLK4X11B (SIE), LNLK5X12A (SIE), LNLK6X17B (SIE), LNLK7X18A (SIE), LNLK7X20B (SIE), LPP2NB01 (SIE)
ground-bar	2C11296 (EAT), 5158C05 (EAT), 5158C05G01 (EAT), 5158C05G02 (EAT), 5158C05G05 (EAT), 5158C05G06 (EAT), 5PG1200A (EAT), 5PG1200C (EAT), 6572C746G01 (EAT), AEG10 (GEA), AEG21 (GEA), AEG21S (GEA), AEG31S (GEA), AEG47 (GEA), AEG47S (GEA), EGS12 (GEA), TGL2 (GEA), TGL20 (GEA), ECGK (SIE), EGK (SIE), ICGK (SIE), IGK (SIE), PK32DGTA (SQD)
interior	CF16RJ63C36 (SQD), CF20R63C (SQD), CF20RJ63C (SQD), CF25R63C (SQD), CF30RJ63C (SQD)
mounting-bracket	208B264H01 (EAT), 208B297H01 (EAT), 315C270H01 (EAT), 624B600H01 (EAT), 624B600H02 (EAT), 139C5500P81 (GEA), 139C5500P82 (GEA), 139C5500P83 (GEA), 139C5500P84 (GEA), 139C5700P86 (GEA), ASPAQLEBKT (GEA), P1DFS250AFT (SIE), P1DFS250ANFT (SIE), P1DFS400A (SIE), 4051749901 (SQD)
insulator	911E347P3 (GEA), 4052098601 (SQD)
barrier	1266C07G01 (EAT), 208B966G01 (EAT), 314C420G05 (EAT), 4210B95G01 (EAT), 4210B95G02 (EAT), 625B229G06 (EAT), 625B229G07 (EAT), 625B229G08 (EAT), 625B229G09 (EAT), 6631C01G01 (EAT), 6641C16G01 (EAT), 6641C16G02 (EAT), EEC3K (EAT), EEC4K (EAT), EFTS3K (EAT), EFTS4K (EAT), EIPBK (EAT), FJIPBK (EAT), FJIPBK4 (EAT), FJTS3K (EAT), FJTS4K (EAT), GTSK3 (EAT), IPB1 (EAT), IPB2 (EAT), IPB3 (EAT), IPB4 (EAT), IPB5 (EAT), LTS3K (EAT), LTS4K (EAT), NTS3K (EAT), PRLSEBFD (EAT), PRLSEBGHB (EAT), PRLSEBJD (EAT), PRLSEBLGKD (EAT), PRLSEBPD2 (EAT), PRLSEBPD3 (EAT), TEC1 (EAT), TEC2 (EAT), TS33LD (EAT), TS33LN (EAT), TS34LN (EAT), ASP25AD65KA (GEA), FGJS3 (GEA), SKPSHLD (GEA), TEDLS (GEA), TFKLS (GEA), TJKLS (GEA), BQFS2 (SIE), CLRSJL3 (SIE), JDTERMSHIELD (SIE), MDTERMSHIELD (SIE), NDTS (SIE), SEBKP1P2P3V1 (SIE), SEBKP2V1 (SIE), SEBKP2V2 (SIE), SEBKP2V3 (SIE), SEBKP2V4 (SIE), SEBKP2V5 (SIE), SEBKP2V6 (SIE), SEBKP2V7 (SIE), SEBKP3V1 (SIE), SEBKRP1V1 (SIE), SEBKRP1V2 (SIE), SEBKRP1V3 (SIE), SEBKRP1V4 (SIE), SEBKRP1V5 (SIE), SEBKRP1V6 (SIE), SEBKRP1V7 (SIE), SEBP4V1 (SIE), SEBP4V2 (SIE), SEBP4V3 (SIE), SEBP5V1 (SIE), SEBP5V2 (SIE), SEBP5V3 (SIE), SEBP5V4 (SIE), TSSG3A (SIE), 36965 (SQD), GYT (SQD), S32562 (SQD), S32563 (SQD), S37432 (SQD), S37436 (SQD), S37440 (SQD), S37446 (SQD), S37447 (SQD), S37448 (SQD), S37449 (SQD), S37450 (SQD)
deadfront	1C96619 (EAT), 1C96620 (EAT), 1C96638 (EAT), 4176B51 (EAT), 4176B56 (EAT), 4176B57 (EAT), 4176B60 (EAT), 4176B61 (EAT), 4176B66 (EAT), 4176B67 (EAT), 4176B68 (EAT), 4176B69 (EAT), 4176B70 (EAT), 4176B79 (EAT), 4176B80 (EAT), 4178B08 (EAT), 4179B39 (EAT), 4179B40 (EAT), 4179B41 (EAT), 4179B42 (EAT), 4180B03 (EAT), 4180B04 (EAT), 4180B05 (EAT), 4180B61 (EAT), 4180B79 (EAT), 4180B91 (EAT), 4180B93 (EAT), 42C7980 (EAT), 42C7982 (EAT), 42C8055 (EAT), 42C8072 (EAT), 42C8073 (EAT), 42C8076 (EAT), 42C8077 (EAT), 42C8078 (EAT), 42C8079 (EAT), 42C8080 (EAT), 42C8081 (EAT), 42C8082 (EAT), 5156C09 (EAT), 5156C10 (EAT), 6559C59 (EAT), 6574C74 (EAT), DFK07 (SIE), DFK08 (SIE), DFK1 (SIE)

Component type	Parts (OEM PN → page)
filler-plate	3456B35H01 (EAT), 3456B99H01 (EAT), 3456B99H05 (EAT), 4176B72 (EAT), 4178B06H01 (EAT), 4180B08 (EAT), 4180B52H01 (EAT), 42C8083H01 (EAT), 5155C62H01 (EAT), 5PFP1S (EAT), 5PFP1T (EAT), 5PFP2S (EAT), 5PFP2T (EAT), 5PFP3S (EAT), 5PFP3T (EAT), 5PFP4S (EAT), 5PFP4T (EAT), 5PFP5S (EAT), 5PFP5T (EAT), 5PFP6S (EAT), 5PFP6T (EAT), 6554C01 (EAT), 6554C02 (EAT), 6555C40H01 (EAT), 6555C41H01 (EAT), BRFP (EAT), BWFP (EAT), KCDP_X (EAT), KFDP_X (EAT), P41X25 (EAT), PRXP4PD2FILL1 (EAT), NCFS (FPE), 139C5362P2 (GEA), 139C5503P103 (GEA), 139C5503P129 (GEA), 139C5503P64 (GEA), 139C5503P77 (GEA), 139C5503P90 (GEA), 75C145005G703 (GEA), 75C145005G711 (GEA), 75C145005G715 (GEA), AFP2FBD (GEA), AFP2QDD (GEA), AFP2TED (GEA), AFP3EYD (GEA), AFP3FBD (GEA), AFP3QDD (GEA), AFP3SED (GEA), AFP3SFD (GEA), AFP3SFS (GEA), AFP3TFD (GEA), AFP3TFS (GEA), AFP4FGD (GEA), AFP4FGS (GEA), AFP4SGD (GEA), AFP4SGS (GEA), AFP5LCS (GEA), AFP6SKS (GEA), AMCB6TEDL (GEA), APP1 (GEA), APP1S (GEA), APP1W (GEA), APP2 (GEA), APP2S (GEA), APP2W (GEA), APP3 (GEA), APP3S (GEA), APP3W (GEA), APP4 (GEA), APP4S (GEA), APP4W (GEA), APP5 (GEA), APP5S (GEA), APP5W (GEA), APP6 (GEA), APP6S (GEA), APP6W (GEA), CCBFP1 (GEA), CCBFP3 (GEA), CCBFP5 (GEA), QMRFP1 (GEA), QMRFP2 (GEA), QMRFP5 (GEA), SCPFP1 (GEA), SCPFP2 (GEA), SCPFP3 (GEA), SCPFP5 (GEA), TEDFP1 (GEA), TQLFP1 (GEA), 6FPB01 (SIE), 6FPB02 (SIE), 6FPB03 (SIE), 6FPB05 (SIE), 6FPB10 (SIE), 6FPB15 (SIE), DFFP01B (SIE), DFFP01C (SIE), DFFP1A (SIE), DFFP3 (SIE), DFFP6 (SIE), DFFPED01 (SIE), DFFPFD01 (SIE), DFFPJD01 (SIE), DFFPJD02 (SIE), DFFPQJ01 (SIE), DFFPQJ02 (SIE), DFFPVA41A (SIE), DFFPVA5262A (SIE), DFFPVA5262P2A (SIE), DFFPVA5262P2B (SIE), DFFPVA5363A (SIE), DFP3AP01 (SIE), EBF1 (SIE), MBKQRFK (SIE), P2QRFP01 (SIE), QF3 (SIE), HLN1BL (SQD), HLN4BL (SQD), HLN4EBL (SQD), HLW1BL (SQD), HLW4BL (SQD), HLW4EBL (SQD), HNM1BL (SQD), HNM4BL (SQD), QMB15BLW (SQD), QMB1BLW (SQD), QMB3BLW (SQD), QMB6BLW (SQD), QW1BL (SQD), QW3BL (SQD)
trim	0080429 (EAT), 114C247G01 (EAT), 1A32258H03 (EAT), 1A85194G01 (EAT), 3457B16G01 (EAT), 5155C81G01 (EAT), 5155C81G03 (EAT), 8450C62H39 (EAT), K80133 (EAT), K80429 (EAT), K80522 (EAT)
box/enclosure	EWK1 (SIE), EWK1B (SIE), EWK2 (SIE), EWK2B (SIE), EWK3 (SIE)
hardware-kit	2C11641G02 (EAT), 414A380G02 (EAT), 4180B62 (EAT), 5078A98 (EAT), 7494A11G02 (EAT), KCDPFB100-H (EAT), 139C5720G3 (GEA), 139C5720G6 (GEA), 139C5720G9 (GEA), AHKBE1 (GEA), AHKBF1 (GEA), AHKBFB1 (GEA), AHKBFD1 (GEA), AHKBFG1 (GEA), AHKBG1 (GEA), AHKBQ1 (GEA), AHKE1 (GEA), AHKEL1 (GEA), AHKF1 (GEA), AHKFD1 (GEA), AHKFG1 (GEA), AHKG1 (GEA), AHKJ1 (GEA), AHKLB1 (GEA), AHKQ1 (GEA), BNDKT (GEA), BNDKT6 (GEA), BBKVA5262P2HW (SIE), BBKVA52P3HW (SIE), BK1A (SIE), IMK1 (SIE), MBKBFA (SIE), P2BK1 (SIE), P2BK2 (SIE), P2BK3 (SIE), P3BK1 (SIE), S3VA52PR (SIE), S3VA53PR (SIE), TNKG3 (SIE), 4028343250 (SQD), 4028343550 (SQD), 4028343750 (SQD), 8000602003 (SQD), 8023317701 (SQD)
fastener	414A380G01 (EAT), 42C1129H02 (EAT), 5081A08G02 (EAT), 5081A09G02 (EAT), 5157C83G06 (EAT), 7499A48G04 (EAT), 8712C73H01 (EAT), KPR1A (EAT), KPR1AM (EAT), KPR3A (EAT), KPR3AM (EAT), KPR3B (EAT), KPR3BM (EAT), PLN2 (EAT), PLN2M (EAT), 3VA9233-0QA00 (SIE), 3VA9243-0QA00 (SIE), 3VA9473-0QA00 (SIE), P1SCRWS (SIE), 2142720241 (SQD), 21427-20401 (SQD), 2150720200 (SQD), 2152620361 (SQD), 21590-20241 (SQD), 21593-20100 (SQD), 2271020200 (SQD), 2300100200 (SQD), 2330241601 (SQD), 2342702001 (SQD), 2342702400 (SQD), 2370100200 (SQD), 4020506501 (SQD), 8000602001 (SQD), 8011417101 (SQD), PKDFSCREW (SQD), S36967 (SQD)
conversion-kit	5PCGBLD600S (EAT), 5PCGBLUG1200T (EAT), 5PCGBLUG400S (EAT), 5PCGBLUG600S (EAT), 5PCGBLUG800S (EAT), 5PCGBMD800T (EAT), 5PCGBND1200T (EAT), KCDPDK (EAT), KCDPEHD (EAT), KCDPFD (EAT), KCDPFDB (EAT), KCDPHKD (EAT), KCDPJD (EAT), KCDPJDB (EAT), KCDPKD (EAT), KCDPKDB (EAT), KCDPLD (EAT), KCDPMDL (EAT), KCDPND (EAT), KFDPBS324R (EAT), KFDPBS364R (EAT), KFDPW325R (EAT), KFDPW326R (EAT), KFDPW365R (EAT), KFDPW366R (EAT), KFDPW367 (EAT), KFDPW368 (EAT), KFDPWT3211R (EAT), KFDPWT3222R (EAT), KFDPWT3233R (EAT), KFDPWT3611R (EAT), KFDPWT3622R (EAT), KFDPWT3633R (EAT), RAABR10BXXX (EAT), RAABR10BXXXA (EAT), RAABR12L125 (EAT), RAABR12L125A (EAT), RABR12B3XXX (EAT), RABR12H3XXX (EAT), RABR12L3125 (EAT), RABR20BXXX (EAT), RABR20HXXX (EAT), RABR20L125 (EAT), RACH18B3XXX (EAT), RACH22BXXX (EAT), RACH24L125 (EAT), RACH24L3125 (EAT), RACH30L3125 (EAT), RACH30L3225 (EAT), RBBR20BXXX (EAT), RBBR24L3150 (EAT), RBBR30BCXXX (EAT), RBBR30BXXX (EAT), RBBR30H3XXX (EAT), RBBR30HCXXX (EAT), RBBR30L200 (EAT), RBBR30L3100 (EAT), RBCH24BXXX (EAT), RBCH24D225 (EAT), RBCH24D3225 (EAT), RBCH30BXXX (EAT), RBCH30D3225 (EAT), RBCH30L3225 (EAT), RBCH32D225 (EAT), RBCH32L225 (EAT), RBCH42L125 (EAT), RBCH42L225 (EAT), RBCH42L3125 (EAT), RBCH42L3225 (EAT), RCBR30BXXX (EAT), RCBR30L3200 (EAT), RCBR40L200 (EAT), RCCH30D3225 (EAT), RCCH32BXXX (EAT), RCCH32D225 (EAT), RCCH42L225 (EAT), RCCH42L3225 (EAT), RDBR30B3XXX (EAT), RDBR30H3XXX (EAT), RDBR40BXXX (EAT), RDBR42L225 (EAT), RDBR42L3225 (EAT), RDCH42B3XXX (EAT), RDCH42BXXX (EAT), RDCH42D225 (EAT), RDCH42D3225 (EAT), RDCH42H3XXX (EAT), RDCH42HXXX (EAT), RDCH42L225 (EAT), RDCH42L3225 (EAT), REBR42B3XXX (EAT), REBR42H3XXX (EAT), REBR42L3225 (EAT), TAD3 (EAT), APHBL (GEA), APHBQ (GEA), ASP2PTFJ3P (GEA), ASP2PTQD3P (GEA), BBKQRP1FK (SIE), BBKQRP2FK (SIE), MBKVA5363JD (SIE), QMB306EX (SQD), QMB306LEX (SQD), QMB310EX (SQD), QMB310LEX (SQD), QMB320EX (SQD), QMB600T6 (SQD), QMB800T6 (SQD)
spd-kit	QMB1IMA_ (SQD), QMB2IMA_ (SQD), QMB3IMA_ (SQD), QMB4IMA_ (SQD), QMB8IMA_ (SQD), TVS12RMU (SQD)
switch-unit	QMB221HW (SQD), QMB221TW (SQD), QMB222HW (SQD), QMB222TW (SQD), QMB223HW (SQD), QMB223TW (SQD), QMB224W (SQD), QMB225W (SQD), QMB225WT3 (SQD), QMB261HW (SQD), QMB261TW (SQD), QMB262HW (SQD), QMB262TW (SQD), QMB263HW (SQD), QMB263TW (SQD), QMB264W (SQD), QMB321HW (SQD), QMB321TW (SQD), QMB322HW (SQD), QMB322TW (SQD), QMB323HW (SQD), QMB323TW (SQD), QMB324W (SQD), QMB325W (SQD), QMB325WT3 (SQD), QMB326W (SQD), QMB326WT3 (SQD), QMB327WT3 (SQD), QMB361HW (SQD), QMB361TW (SQD), QMB362HW (SQD), QMB362T21W (SQD), QMB362TW (SQD), QMB363HW (SQD), QMB363T31W (SQD), QMB363T32W (SQD), QMB363TW (SQD), QMB364W (SQD), QMB365W (SQD), QMB365WT6 (SQD), QMB366W (SQD), QMB367W (SQD), QMB368W (SQD), QMJ361T (SQD), QMJ362T (SQD), QMJ363H (SQD), QMJ363T (SQD), QMJ364H (SQD), QMJ364T (SQD), QMJ365 (SQD), QMJ366 (SQD)

Component type	Parts (OEM PN → page)
breaker-accessory	314C960G01 (EAT), 314C960G04 (EAT), 314C960G05 (EAT), 314C960G06 (EAT), 314C960G07 (EAT), 314C960G08 (EAT), 314C960G09 (EAT), 314C960G10 (EAT), 314C960G11 (EAT), 314C960G12 (EAT), 373B375G03 (EAT), 373B375G04 (EAT), 374D883G01 (EAT), 374D883G02 (EAT), 451D874G01 (EAT), 451D874G02 (EAT), 5010D23G01 (EAT), 5010D23G02 (EAT), 5652B38G01 (EAT), 623B222G01 (EAT), 623B222G02 (EAT), 623B222G03 (EAT), 6642C14G02 (EAT), 6642C14G03 (EAT), 6642C14G04 (EAT), 6642C14G05 (EAT), 6642C14G06 (EAT), 6642C14G07 (EAT), B2016RD (EAT), B2016RDL (EAT), B2500RD (EAT), EF2RTDK (EAT), EF2RTWK (EAT), EF3RTDK (EAT), EF3RTWK (EAT), EF4RTDK (EAT), EF4RTWK (EAT), FCWTK (EAT), FCWTK225 (EAT), FJ3RTDK (EAT), FJ3RTWK (EAT), FJ4RTDK (EAT), FJ4RTWK (EAT), FJCWTK (EAT), KCWTK (EAT), KPEK1 (EAT), KPEK12 (EAT), KPEK14 (EAT), KPEK2 (EAT), KPEK24 (EAT), KPEK3 (EAT), KPEK34 (EAT), KPEK4 (EAT), KPEK44 (EAT), KPEKM1 (EAT), KPEKM12 (EAT), KPEKM14 (EAT), KPEKM2 (EAT), KPEKM24 (EAT), KPEKM3 (EAT), KPEKM34 (EAT), KPEKM4 (EAT), KPEKM44 (EAT), L3RTWK (EAT), L4RTWK (EAT), LGTES3 (EAT), LGTES4 (EAT), LGTEW3 (EAT), LGTEW4 (EAT), RP211002 (FPE), RP212001 (FPE), 286A8066G1 (GEA), 789A448G1 (GEA), 789A448G2 (GEA), 789A448G3 (GEA), FGH1LCK (GEA), FGJN3 (GEA), SE3LCK (GEA), SE3LCKL (GEA), SF3LCK (GEA), SG1BCK (GEA), SG1LCK (GEA), SGBCS1 (GEA), SGBCS2 (GEA), SGLVK (GEA), SK1LCK (GEA), SKLVK (GEA), TEF1 (GEA), TEF2 (GEA), TEF3 (GEA), TEF4 (GEA), TFK1 (GEA), TFK2 (GEA), TJLVK (GEA), TKM11 (GEA), TKM12 (GEA), TQDFM1 (GEA), RS2641 (SIE), RS2642 (SIE), RS2643 (SIE), RS2644 (SIE), RS4755 (SIE), RS4756 (SIE), RS5773 (SIE), RS5774 (SIE), RS5783 (SIE), RS5784 (SIE), RS5785 (SIE), RS5786 (SIE), RS5787 (SIE), RS5788 (SIE), 29348 (SQD), AL1000MAT (SQD), AL1200NE6T (SQD), AL250KIT (SQD), AL400LAT (SQD), AL600IN (SQD), AL600LI35T (SQD), AL600LI5T (SQD), AL900MAT (SQD), FAT (SQD), HRK1020 (SQD), HRK30 (SQD), QMB100R (SQD), QMB200EK (SQD), QMB300EK (SQD), QMB36R (SQD), QMB4060R (SQD), QMB60R (SQD), QMB610EK (SQD), S32477 (SQD), S32478 (SQD), S37423 (SQD), S37424 (SQD), S37425 (SQD), S37426 (SQD), S37427 (SQD), S37428 (SQD), S37429 (SQD), S37430 (SQD), S37433 (SQD), S37434 (SQD), S37437 (SQD), S37438 (SQD), S37439 (SQD), S37444 (SQD), S37445 (SQD), S432475 (SQD), S432476 (SQD)
handle-lock	1256C42G01 (EAT), 1256C42G02 (EAT), BHT (EAT), 1LOK (FPE)
padlock-attachment	BRLW (EAT), BRLW1 (EAT)
other	APN48 (GEA), APN84 (GEA), SQRC (SIE), 4052017302 (SQD), 4052021450 (SQD), 4052021650 (SQD), 4052031850 (SQD), 4052036750 (SQD), 4052085601 (SQD), 50552-108-01 (SQD), 80031-024-02 (SQD), HQO306 (SQD), QMB210T (SQD), QMB2240 (SQD), QMB303T (SQD), QMB306T (SQD), QMB310T (SQD), QMB323TD (SQD), QMB3240 (SQD), QMB3260 (SQD), QMB3606T (SQD), QMB3620 (SQD), QMB362T (SQD), QMB364 (SQD), QMB3640 (SQD)

12.6 Rating and pole index

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00635	1266C07G01	—	2,3	—	288
EDH-EAT-00703	208B264H01	—	2,3	—	304
EDH-EAT-00704	208B297H01	—	2,3	—	317
EDH-EAT-00164	2C11642	Sum of horizontally twin-mounted breakers shall not exceed 140 A	—	—	161
EDH-EAT-00479	2T400K	400 A max breaker	2	—	293
EDH-EAT-00494	2T400KCW	400 A max breaker	2	—	294
EDH-EAT-00488	2T402K	400 A max breaker	2	—	294
EDH-EAT-00474	2TA400K	400 A max breaker	2	—	294
EDH-EAT-00491	2TA400KCW	400 A max breaker	2	—	295
EDH-EAT-00482	2TA401K	400 A max breaker	2	—	295
EDH-EAT-00497	2TA401KCW	400 A max breaker	2	—	295
EDH-EAT-00500	2TA401LDK	400 A max breaker	2	—	311
EDH-EAT-00485	2TA402K	400 A max breaker	2	—	296
EDH-EAT-00505	2TA603LDK	600 A max breaker	2	—	311
EDH-EAT-00510	2TA603LDKCW	—	2	—	312
EDH-EAT-00462	3T100FB	100 A max breaker	—	—	269
EDH-EAT-00536	3T125EF	125 A max breaker	—	—	335
EDH-EAT-00466	3T150FB	200 A max breaker	—	—	270
EDH-EAT-00461	3T20FB	20 (EHD) A max breaker	—	—	270
EDH-EAT-00468	3T225FD	225 A	—	—	270
EDH-EAT-00480	3T400K	400 A max breaker	3	—	296
EDH-EAT-00495	3T400KCW	400 A max breaker	3	—	296
EDH-EAT-00489	3T402K	400 A max breaker	3	—	297
EDH-EAT-00545	3T631LK	400 A max breaker	3	—	345
EDH-EAT-00549	3T632LK	630 A max breaker	3	—	345

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00556	3T632LKW	—	3	—	346
EDH-EAT-00465	3TA100FD	100 A max breaker	—	—	271
EDH-EAT-00620	3TA100G3K	100 A	—	—	284
EDH-EAT-00621	3TA100G6K	100 A	—	—	285
EDH-EAT-00537	3TA125EF	125 A max breaker	—	—	336
EDH-EAT-00538	3TA150EF	125/160 A max breaker	—	—	336
EDH-EAT-00622	3TA150F3K	225 A	—	—	271
EDH-EAT-00623	3TA150F6K	225 A	—	—	271
EDH-EAT-00469	3TA150FB	150 A	—	—	272
EDH-EAT-00539	3TA160EFK	160 A max breaker	—	—	336
EDH-EAT-00463	3TA225FD	225 A max breaker	—	—	272
EDH-EAT-00467	3TA225FDK	225 A max breaker	—	—	272
EDH-EAT-00624	3TA250J3K	250 A	—	—	286
EDH-EAT-00625	3TA250J6K	250 A	—	—	286
EDH-EAT-00475	3TA400K	400 A max breaker	3	—	297
EDH-EAT-00626	3TA400K3K	400 A	—	—	297
EDH-EAT-00627	3TA400K6K	400 A	—	—	298
EDH-EAT-00492	3TA400KCW	400 A max breaker	3	—	298
EDH-EAT-00483	3TA401K	400 A max breaker	3	—	298
EDH-EAT-00498	3TA401KCW	400 A max breaker	3	—	299
EDH-EAT-00501	3TA401LDK	400 A max breaker	3	—	312
EDH-EAT-00486	3TA402K	400 A max breaker	3	—	299
EDH-EAT-00464	3TA50FB	50 A max breaker	—	—	273
EDH-EAT-00506	3TA603LDK	600 A max breaker	3	—	313
EDH-EAT-00511	3TA603LDKCW	—	3	—	313
EDH-EAT-00543	3TA631LK	400 A max breaker	3	—	346
EDH-EAT-00547	3TA632LK	630 A max breaker	3	—	346
EDH-EAT-00554	3TA632LKW	—	3	—	347
EDH-EAT-00633	4210B95G01	—	3	—	277
EDH-EAT-00634	4210B95G02	—	4	—	277
EDH-EAT-00481	4T400K	400 A max breaker	4	—	299
EDH-EAT-00496	4T400KCW	400 A max breaker	4	—	300
EDH-EAT-00490	4T402K	400 A max breaker	4	—	300
EDH-EAT-00546	4T631LK	400 A max breaker	4	—	347
EDH-EAT-00550	4T632LK	630 A max breaker	4	—	347
EDH-EAT-00557	4T632LKW	—	4	—	348
EDH-EAT-00540	4TA160EFK	160 A max breaker	—	—	337
EDH-EAT-00476	4TA400K	400 A max breaker	4	—	300
EDH-EAT-00493	4TA400KCW	400 A max breaker	4	—	301
EDH-EAT-00484	4TA401K	400 A max breaker	4	—	301
EDH-EAT-00499	4TA401KCW	400 A max breaker	4	—	301
EDH-EAT-00502	4TA401LDK	400 A max breaker	4	—	314
EDH-EAT-00487	4TA402K	400 A max breaker	4	—	302
EDH-EAT-00507	4TA603LDK	600 A max breaker	4	—	314
EDH-EAT-00512	4TA603LDKCW	—	4	—	315
EDH-EAT-00544	4TA631LK	400 A max breaker	4	—	348
EDH-EAT-00548	4TA632LK	630 A max breaker	4	—	348
EDH-EAT-00555	4TA632LKW	—	4	—	349
EDH-EAT-00702	624B600H01	—	3	—	276
EDH-EAT-00701	624B600H02	—	2	—	276
EDH-EAT-00629	625B229G06	—	1	—	277
EDH-EAT-00630	625B229G07	—	2	—	278

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00631	625B229G08	—	3	—	278
EDH-EAT-00632	625B229G09	—	4	—	278
EDH-EAT-00636	6631C01G01	—	4	—	288
EDH-EAT-00637	6641C16G01	—	2,3	—	288
EDH-EAT-00638	6641C16G02	—	4	—	289
EDH-EAT-00766	CCA4K	225 A max, 240 V	—	—	82
EDH-EAT-00767	CED3K	225 A max, 600 V	—	—	83
EDH-EAT-00769	CED4BK	225 A max, 600 V	—	—	83
EDH-EAT-00768	CED4K	225 A max, 240 V	—	—	83
EDH-EAT-00770	CFD3K	150 A max, 600 V	—	—	83
EDH-EAT-00772	CFD4BK	150 A max, 600 V	—	—	84
EDH-EAT-00771	CFD4K	150 A max, 600 V	—	—	84
EDH-EAT-00773	CJD4K	250 A max, 600 V	—	—	84
EDH-EAT-00775	CJDS4BK	250 A max, 600 V	—	—	84
EDH-EAT-00774	CJDS4K	250 A max, 600 V	—	—	85
EDH-EAT-00778	CKDS4BK	400 A max, 600 V	—	—	85
EDH-EAT-00777	CKDS4K	400 A max, 600 V	—	—	85
EDH-EAT-00779	CLD4K	600 A max, 600 V	—	—	86
EDH-EAT-00780	CLDS4BK	600 A max, 600 V	—	—	86
EDH-EAT-00781	CMD4K	800 A max, 600 V	—	—	86
EDH-EAT-00782	CND4K	1200 A max, 600 V	—	—	86
EDH-EAT-00584	EF2RTDK	—	2	—	339
EDH-EAT-00581	EF2RTWK	—	2	—	339
EDH-EAT-00585	EF3RTDK	—	3	—	339
EDH-EAT-00582	EF3RTWK	—	3	—	340
EDH-EAT-00586	EF4RTDK	—	4	—	340
EDH-EAT-00583	EF4RTWK	—	4	—	340
EDH-EAT-00589	FJ3RTDK	—	3	—	343
EDH-EAT-00587	FJ3RTWK	—	3	—	343
EDH-EAT-00590	FJ4RTDK	—	4	—	344
EDH-EAT-00588	FJ4RTWK	—	4	—	344
EDH-EAT-00006	KB11AFB	100 A max	2-pole (single-phase A/C)	—	105
EDH-EAT-00005	KB11AFT	100 A max	2-pole (single-phase A/C)	—	106
EDH-EAT-00008	KB11SFB	100 A max	2-pole (single-phase A/C)	—	106
EDH-EAT-00007	KB11SFT	100 A max	2-pole (single-phase A/C)	—	107
EDH-EAT-00002	KB13AFB	100 A max	3-pole (A/B/C)	—	107
EDH-EAT-00001	KB13AFT	100 A max	3-pole (A/B/C)	—	108
EDH-EAT-00004	KB13SFB	100 A max	3-pole (A/B/C)	—	108
EDH-EAT-00003	KB13SFT	100 A max	3-pole (A/B/C)	—	109
EDH-EAT-00014	KB21AFB	225 A max	2-pole (single-phase A/C)	—	109
EDH-EAT-00013	KB21AFT	225 A max	2-pole (single-phase A/C)	—	110
EDH-EAT-00016	KB21SFB	225 A max	2-pole (single-phase A/C)	—	110

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00015	KB21SFT	225 A max	2-pole (single-phase A/C)	—	111
EDH-EAT-00010	KB23AFB	225 A max	3-pole (A/B/C)	—	111
EDH-EAT-00009	KB23AFT	225 A max	3-pole (A/B/C)	—	112
EDH-EAT-00012	KB23SFB	225 A max	3-pole (A/B/C)	—	112
EDH-EAT-00011	KB23SFT	225 A max	3-pole (A/B/C)	—	113
EDH-EAT-00022	KB41AJB	400 A class (frame)	2-pole (single-phase A/C)	—	113
EDH-EAT-00021	KB41AJT	400 A class (frame)	2-pole (single-phase A/C)	—	114
EDH-EAT-00030	KB41AKB	400 A class (frame)	2-pole (single-phase A/C)	—	114
EDH-EAT-00029	KB41AKT	400 A class (frame)	2-pole (single-phase A/C)	—	115
EDH-EAT-00024	KB41SJB	400 A class (frame)	2-pole (single-phase A/C)	—	115
EDH-EAT-00023	KB41SJT	400 A class (frame)	2-pole (single-phase A/C)	—	116
EDH-EAT-00032	KB41SKB	400 A class (frame)	2-pole (single-phase A/C)	—	116
EDH-EAT-00031	KB41SKT	400 A class (frame)	2-pole (single-phase A/C)	—	117
EDH-EAT-00018	KB43AJB	400 A class (frame)	3-pole (A/B/C)	—	117
EDH-EAT-00017	KB43AJT	400 A class (frame)	3-pole (A/B/C)	—	118
EDH-EAT-00026	KB43AKB	400 A class (frame)	3-pole (A/B/C)	—	118
EDH-EAT-00025	KB43AKT	400 A class (frame)	3-pole (A/B/C)	—	119
EDH-EAT-00020	KB43SJB	400 A class (frame)	3-pole (A/B/C)	—	119
EDH-EAT-00019	KB43SJT	400 A class (frame)	3-pole (A/B/C)	—	120
EDH-EAT-00028	KB43SKB	400 A class (frame)	3-pole (A/B/C)	—	120
EDH-EAT-00027	KB43SKT	400 A class (frame)	3-pole (A/B/C)	—	121
EDH-EAT-00343	KCDPCA	225 A frame	3	—	59
EDH-EAT-00341	KCDPED225	225 A frame	3	—	60
EDH-EAT-00340	KCDPFB100	100 A maximum	3	—	61
EDH-EAT-00342	KCDPFBP	100 A (FB-P 15-100 A)	3	—	61
EDH-EAT-00344	KCDPKB	250 A frame	3	—	62
EDH-EAT-00346	KCDPLA400	400 A (LA-P 70-400 A)	3	—	63
EDH-EAT-00347	KCDPLA600	600 A frame	3	—	63
EDH-EAT-00345	KCDPLB	400 A frame	3	—	64
EDH-EAT-00348	KCDPLCL	LCL 125-400 A	3	—	65
EDH-EAT-00349	KCDPMC	800 A frame	3	—	65
EDH-EAT-00351	KCDPNBP	800 A (NB-P 300-800 A)	3	—	66
EDH-EAT-00350	KCDPNC	1200 A frame; not rated for 100 percent breakers	3	—	66
EDH-EAT-00366	KFDP4XT	—	3	—	55
EDH-EAT-00367	KFDP5XT	—	3	—	56
EDH-EAT-00368	KFDPB6X-2	—	3	—	56
EDH-EAT-00430	KFDPBS324R	200 A	3	240 V	90
EDH-EAT-00431	KFDPBS364R	200 A	3	600 V	90
EDH-EAT-00370	KFDPW11X-6	—	3	—	57

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00371	KFDPW11X-8	—	3	—	57
EDH-EAT-00372	KFDPW15X-12	—	3	—	58
EDH-EAT-00432	KFDPW325R	400 A	3	240 V	90
EDH-EAT-00434	KFDPW326R	600 A	3	240 V	91
EDH-EAT-00433	KFDPW365R	400 A	3	600 V	91
EDH-EAT-00435	KFDPW366R	600 A	3	600 V	91
EDH-EAT-00436	KFDPW367	800 A	3	240/600 V	92
EDH-EAT-00437	KFDPW368	1200 A	3	240/600 V	92
EDH-EAT-00369	KFDPW9X-4	—	3	—	58
EDH-EAT-00424	KFDPWT3211R	30 A	3	240 V	92
EDH-EAT-00426	KFDPWT3222R	60 A	3	240 V	93
EDH-EAT-00428	KFDPWT3233R	100 A	3	240 V	93
EDH-EAT-00425	KFDPWT3611R	30 A	3	600 V	93
EDH-EAT-00427	KFDPWT3622R	60 A	3	600 V	94
EDH-EAT-00429	KFDPWT3633R	100 A	3	600 V	94
EDH-EAT-00067	KL11AMF	100 A	—	—	153
EDH-EAT-00071	KL11AMO	100 A	—	—	125
EDH-EAT-00063	KL11AMS	100 A	—	—	125
EDH-EAT-00079	KL11AVF	100 A	—	—	154
EDH-EAT-00083	KL11AVO	100 A	—	—	126
EDH-EAT-00075	KL11AVS	100 A	—	—	126
EDH-EAT-00088	KL11SCF	100 A	—	—	154
EDH-EAT-00090	KL11SCO	100 A	—	—	126
EDH-EAT-00086	KL11SCS	100 A	—	—	127
EDH-EAT-00068	KL11SMF	100 A	—	—	154
EDH-EAT-00072	KL11SMO	100 A	—	—	127
EDH-EAT-00064	KL11SMS	100 A	—	—	127
EDH-EAT-00080	KL11SVF	100 A	—	—	155
EDH-EAT-00084	KL11SVO	100 A	—	—	128
EDH-EAT-00076	KL11SVS	100 A	—	—	128
EDH-EAT-00065	KL13AMF	100 A	—	—	155
EDH-EAT-00069	KL13AMO	100 A	—	—	128
EDH-EAT-00061	KL13AMS	100 A	—	—	129
EDH-EAT-00077	KL13AVF	100 A	—	—	155
EDH-EAT-00081	KL13AVO	100 A	—	—	129
EDH-EAT-00073	KL13AVS	100 A	—	—	129
EDH-EAT-00087	KL13SCF	100 A	—	—	156
EDH-EAT-00089	KL13SCO	100 A	—	—	130
EDH-EAT-00085	KL13SCS	100 A	—	—	130
EDH-EAT-00066	KL13SMF	100 A	—	—	156
EDH-EAT-00070	KL13SMO	100 A	—	—	130
EDH-EAT-00062	KL13SMS	100 A	—	—	131
EDH-EAT-00078	KL13SVF	100 A	—	—	156
EDH-EAT-00082	KL13SVO	100 A	—	—	131
EDH-EAT-00074	KL13SVS	100 A	—	—	131
EDH-EAT-00097	KL21AMF	225 A	—	—	157
EDH-EAT-00101	KL21AMO	225 A	—	—	132
EDH-EAT-00093	KL21AMS	225 A	—	—	132
EDH-EAT-00109	KL21AVF	225 A	—	—	157
EDH-EAT-00113	KL21AVO	225 A	—	—	132
EDH-EAT-00105	KL21AVS	225 A	—	—	133
EDH-EAT-00118	KL21SCF	225 A	—	—	157

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00120	KL21SCO	225 A	—	—	133
EDH-EAT-00116	KL21SCS	225 A	—	—	133
EDH-EAT-00098	KL21SMF	225 A	—	—	158
EDH-EAT-00102	KL21SMO	225 A	—	—	134
EDH-EAT-00094	KL21SMS	225 A	—	—	134
EDH-EAT-00110	KL21SVF	225 A	—	—	158
EDH-EAT-00114	KL21SVO	225 A	—	—	134
EDH-EAT-00106	KL21SVS	225 A	—	—	135
EDH-EAT-00095	KL23AMF	225 A	—	—	158
EDH-EAT-00099	KL23AMO	225 A	—	—	135
EDH-EAT-00091	KL23AMS	225 A	—	—	135
EDH-EAT-00107	KL23AVF	225 A	—	—	159
EDH-EAT-00111	KL23AVO	225 A	—	—	136
EDH-EAT-00103	KL23AVS	225 A	—	—	136
EDH-EAT-00117	KL23SCF	225 A	—	—	159
EDH-EAT-00119	KL23SCO	225 A	—	—	136
EDH-EAT-00115	KL23SCS	225 A	—	—	137
EDH-EAT-00096	KL23SMF	225 A	—	—	159
EDH-EAT-00100	KL23SMO	225 A	—	—	137
EDH-EAT-00092	KL23SMS	225 A	—	—	137
EDH-EAT-00108	KL23SVF	225 A	—	—	160
EDH-EAT-00112	KL23SVO	225 A	—	—	138
EDH-EAT-00104	KL23SVS	225 A	—	—	138
EDH-EAT-00127	KL41AMO	400 A	—	—	138
EDH-EAT-00123	KL41AMS	400 A	—	—	139
EDH-EAT-00135	KL41AVO	400 A	—	—	139
EDH-EAT-00131	KL41AVS	400 A	—	—	139
EDH-EAT-00138	KL41SCO	400 A	—	—	140
EDH-EAT-00128	KL41SMO	400 A	—	—	140
EDH-EAT-00124	KL41SMS	400 A	—	—	140
EDH-EAT-00136	KL41SVO	400 A	—	—	141
EDH-EAT-00132	KL41SVS	400 A	—	—	141
EDH-EAT-00125	KL43AMO	400 A	—	—	141
EDH-EAT-00121	KL43AMS	400 A	—	—	142
EDH-EAT-00133	KL43AVO	400 A	—	—	142
EDH-EAT-00129	KL43AVS	400 A	—	—	142
EDH-EAT-00137	KL43SCO	400 A	—	—	143
EDH-EAT-00126	KL43SMO	400 A	—	—	143
EDH-EAT-00122	KL43SMS	400 A	—	—	143
EDH-EAT-00134	KL43SVO	400 A	—	—	144
EDH-EAT-00130	KL43SVS	400 A	—	—	144
EDH-EAT-00148	KL61CMO	600 A	—	—	144
EDH-EAT-00142	KL61CMS	600 A	—	—	145
EDH-EAT-00160	KL61CVO	600 A	—	—	145
EDH-EAT-00154	KL61CVS	600 A	—	—	145
EDH-EAT-00149	KL61SMO	600 A	—	—	146
EDH-EAT-00143	KL61SMS	600 A	—	—	146
EDH-EAT-00161	KL61SVO	600 A	—	—	146
EDH-EAT-00155	KL61SVS	600 A	—	—	147
EDH-EAT-00150	KL61TMO	600 A	—	—	147
EDH-EAT-00144	KL61TMS	600 A	—	—	147
EDH-EAT-00162	KL61TVO	600 A	—	—	148

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00156	KL61TVS	600 A	—	—	148
EDH-EAT-00145	KL63CMO	600 A	—	—	148
EDH-EAT-00139	KL63CMS	600 A	—	—	149
EDH-EAT-00157	KL63CVO	600 A	—	—	149
EDH-EAT-00151	KL63CVS	600 A	—	—	149
EDH-EAT-00146	KL63SMO	600 A	—	—	150
EDH-EAT-00140	KL63SMS	600 A	—	—	150
EDH-EAT-00158	KL63SVO	600 A	—	—	150
EDH-EAT-00152	KL63SVS	600 A	—	—	151
EDH-EAT-00147	KL63TMO	600 A	—	—	151
EDH-EAT-00141	KL63TMS	600 A	—	—	151
EDH-EAT-00159	KL63TVO	600 A	—	—	152
EDH-EAT-00153	KL63TVS	600 A	—	—	152
EDH-EAT-00593	KPEK1	—	3	—	282
EDH-EAT-00591	KPEK12	—	2	—	283
EDH-EAT-00595	KPEK14	—	4	—	283
EDH-EAT-00597	KPEK2	—	3	—	291
EDH-EAT-00599	KPEK24	—	4	—	291
EDH-EAT-00601	KPEK3	—	3	—	309
EDH-EAT-00603	KPEK34	—	4	—	309
EDH-EAT-00605	KPEK4	—	3	—	319
EDH-EAT-00607	KPEK44	—	4	—	320
EDH-EAT-00594	KPEKM1	—	3	—	283
EDH-EAT-00592	KPEKM12	—	2	—	284
EDH-EAT-00596	KPEKM14	—	4	—	284
EDH-EAT-00598	KPEKM2	—	3	—	292
EDH-EAT-00600	KPEKM24	—	4	—	292
EDH-EAT-00602	KPEKM3	—	3	—	310
EDH-EAT-00604	KPEKM34	—	4	—	310
EDH-EAT-00606	KPEKM4	—	3	—	320
EDH-EAT-00608	KPEKM44	—	4	—	320
EDH-EAT-00166	KPRL1BAB	Max 140 A connected to any one connector	—	—	97
EDH-EAT-00167	KPRL2GHB	Max 140 A connected to any one connector	—	—	97
EDH-EAT-00184	KPRL3ABA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	197
EDH-EAT-00185	KPRL3ABA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	197
EDH-EAT-00186	KPRL3ABA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	198
EDH-EAT-00187	KPRL3ABA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	198
EDH-EAT-00188	KPRL3ABA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	199
EDH-EAT-00189	KPRL3ABA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	199
EDH-EAT-00190	KPRL3ABA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	200

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00191	KPRL3ABA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	200
EDH-EAT-00192	KPRL3AGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	202
EDH-EAT-00193	KPRL3AGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	202
EDH-EAT-00194	KPRL3AGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	203
EDH-EAT-00195	KPRL3AGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	203
EDH-EAT-00196	KPRL3AGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	204
EDH-EAT-00197	KPRL3AGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	204
EDH-EAT-00198	KPRL3AGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	205
EDH-EAT-00199	KPRL3AGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	205
EDH-EAT-00788	KPRL3CF3	150 A max	—	—	87
EDH-EAT-00168	KPRL3XBA06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	220
EDH-EAT-00169	KPRL3XBA06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	220
EDH-EAT-00170	KPRL3XBA12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	220
EDH-EAT-00171	KPRL3XBA12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	221
EDH-EAT-00172	KPRL3XBA18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	221
EDH-EAT-00173	KPRL3XBA18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	221
EDH-EAT-00174	KPRL3XBA24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	222
EDH-EAT-00175	KPRL3XBA24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	222
EDH-EAT-00176	KPRL3XGB06	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	222
EDH-EAT-00177	KPRL3XGB06-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	223
EDH-EAT-00178	KPRL3XGB12	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	223
EDH-EAT-00179	KPRL3XGB12-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	223

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00180	KPRL3XGB18	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	224
EDH-EAT-00181	KPRL3XGB18-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	224
EDH-EAT-00182	KPRL3XGB24	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	224
EDH-EAT-00183	KPRL3XGB24-1	100 A max per device (kit label 'Max Amps 100'); max 200 A connected to any one connector	—	—	225
EDH-EAT-00308	KPRL4CA	—	2, 3	—	233
EDH-EAT-00784	KPRL4CD	225 A max	—	—	87
EDH-EAT-00783	KPRL4CED	225 A max	—	—	87
EDH-EAT-00322	KPRL4CKD	—	2, 3	—	234
EDH-EAT-00324	KPRL4CND	—	3	—	235
EDH-EAT-00785	KPRL4CSL	600 A max	—	—	87
EDH-EAT-00786	KPRL4CSM	800 A max	—	—	88
EDH-EAT-00787	KPRL4CSN	1200 A max	—	—	88
EDH-EAT-00329	KPRL4ED	—	3	—	235
EDH-EAT-00327	KPRL4ED2	—	2	—	236
EDH-EAT-00311	KPRL4FBP	—	3	—	237
EDH-EAT-00328	KPRL4FD	225 A	3	—	237
EDH-EAT-00325	KPRL4FD1	—	1 (two sets of twin-mounted single-pole)	—	238
EDH-EAT-00326	KPRL4FD2	—	2	—	239
EDH-EAT-00307	KPRL4FDCL	—	3	—	239
EDH-EAT-00309	KPRL4JDS	—	2, 3	—	240
EDH-EAT-00310	KPRL4JDT	—	2, 3	—	241
EDH-EAT-00312	KPRL4KDS	—	2, 3	—	241
EDH-EAT-00313	KPRL4KDT	—	2, 3	—	242
EDH-EAT-00317	KPRL4LAP	—	2, 3	—	243
EDH-EAT-00314	KPRL4LC	—	3	—	243
EDH-EAT-00318	KPRL4LCL	—	2, 3	—	244
EDH-EAT-00330	KPRL4LD	—	2, 3	—	245
EDH-EAT-00315	KPRL4LG	—	3	—	245
EDH-EAT-00316	KPRL4MC	—	2, 3	—	246
EDH-EAT-00323	KPRL4MD	—	3	—	247
EDH-EAT-00319	KPRL4NBP	—	2, 3	—	247
EDH-EAT-00320	KPRL4NC	—	3	—	248
EDH-EAT-00321	KPRL4ND	—	2, 3	—	249
EDH-EAT-00299	KPRL4X12	—	1 (two sets of twin-mounted single-pole)	—	249
EDH-EAT-00300	KPRL4X22	—	2	—	250
EDH-EAT-00301	KPRL4X32	—	3	—	251
EDH-EAT-00302	KPRL4X334S	—	3	—	251
EDH-EAT-00303	KPRL4X334T	—	3	—	252
EDH-EAT-00304	KPRL4X336	—	3	—	252
EDH-EAT-00305	KPRL4X34	—	3	—	253
EDH-EAT-00306	KPRL4X35	—	3	—	254
EDH-EAT-00560	L3RTWK	—	3	—	351
EDH-EAT-00561	L4RTWK	—	4	—	351
EDH-EAT-00564	LGTES3	—	3	—	351

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00565	LGTES4	—	4	—	351
EDH-EAT-00562	LGTEW3	—	3	—	352
EDH-EAT-00563	LGTEW4	—	4	—	352
EDH-EAT-00558	LTS3K	—	3	—	350
EDH-EAT-00559	LTS4K	—	4	—	350
EDH-EAT-00297	PRXP4PD2FILL1	—	1	—	258
EDH-EAT-00764	RAABR10BXXX	60-125 A	—	—	25
EDH-EAT-00765	RAABR10BXXXA	60-125 A	—	—	25
EDH-EAT-00762	RAABR12L125	125 A	—	—	25
EDH-EAT-00763	RAABR12L125A	125 A	—	—	26
EDH-EAT-00748	RABR12B3XXX	60-100 A, 10K AIC	—	3-ph 240	26
EDH-EAT-00749	RABR12H3XXX	60-100 A, 22K AIC	—	3-ph 240	27
EDH-EAT-00756	RABR12L3125	125 A	—	3-ph 240	27
EDH-EAT-00737	RABR20BXXX	60-125 A, 10K AIC	—	1-ph 120/240	28
EDH-EAT-00738	RABR20HXXX	60-125 A, 22K AIC	—	1-ph 120/240	28
EDH-EAT-00744	RABR20L125	125 A	—	1-ph 120/240	29
EDH-EAT-00722	RACH18B3XXX	60-125 A, 10K AIC	—	3-ph 240	29
EDH-EAT-00706	RACH22BXXX	60-125 A, 10K AIC	—	1-ph 120/240	30
EDH-EAT-00712	RACH24L125	125 A	—	1-ph 120/240	30
EDH-EAT-00725	RACH24L3125	125 A	—	3-ph 240	31
EDH-EAT-00726	RACH30L3125	125 A	—	3-ph 240	31
EDH-EAT-00727	RACH30L3225	150-225 (chart rows 150 A 22.5-30 in #4-1/0 and 225 A 24.5-30 in #4-4/0 share this number) A	—	3-ph 240	32
EDH-EAT-00741	RBBR20BXXX	100-200 A, 25K AIC	—	1-ph 120/240	32
EDH-EAT-00758	RBBR24L3150	150 A	—	3-ph 240	33
EDH-EAT-00739	RBBR30BCXXX	60-125 A, 10K AIC	—	1-ph 120/240	33
EDH-EAT-00750	RBBR30BXXX	60-100 A, 10K AIC	—	3-ph 240	33
EDH-EAT-00751	RBBR30H3XXX	60-100 A, 22K AIC	—	3-ph 240	34
EDH-EAT-00740	RBBR30HCXXX	60-125 A, 22K AIC	—	1-ph 120/240	35
EDH-EAT-00745	RBBR30L200	200 A	—	1-ph 120/240	35
EDH-EAT-00757	RBBR30L3100	100 A	—	3-ph 240	36
EDH-EAT-00708	RBCH24BXXX	100-200 A, 35K AIC	—	1-ph 120/240	36
EDH-EAT-00718	RBCH24D225	225 A	—	1-ph 120/240	37
EDH-EAT-00733	RBCH24D3225	225 A	—	3-ph 240	37
EDH-EAT-00707	RBCH30BXXX	60-125 A, 10K AIC	—	1-ph 120/240	38
EDH-EAT-00734	RBCH30D3225	225 A	—	3-ph 240	38
EDH-EAT-00728	RBCH30L3225	225 A	—	3-ph 240	39
EDH-EAT-00719	RBCH32D225	225 A	—	1-ph 120/240	39
EDH-EAT-00714	RBCH32L225	225 A	—	1-ph 120/240	40
EDH-EAT-00713	RBCH42L125	125 A	—	1-ph 120/240	40
EDH-EAT-00715	RBCH42L225	225 A	—	1-ph 120/240	41
EDH-EAT-00729	RBCH42L3125	125 A	—	3-ph 240	41
EDH-EAT-00730	RBCH42L3225	225 A	—	3-ph 240	42
EDH-EAT-00742	RCBR30BXXX	100-200 A, 25K AIC	—	1-ph 120/240	42
EDH-EAT-00759	RCBR30L3200	200 A	—	3-ph 240	43
EDH-EAT-00746	RCBR40L200	200 A	—	1-ph 120/240	43
EDH-EAT-00735	RCCH30D3225	225 A	—	3-ph 240	44
EDH-EAT-00709	RCCH32BXXX	100-225 A, 35K AIC	—	1-ph 120/240	44
EDH-EAT-00720	RCCH32D225	225 A	—	1-ph 120/240	45
EDH-EAT-00716	RCCH42L225	225 A	—	1-ph 120/240	45
EDH-EAT-00731	RCCH42L3225	225 A	—	3-ph 240	46
EDH-EAT-00752	RDBR30B3XXX	100-200 A, 10K AIC	—	3-ph 240	46

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00753	RDBR30H3XXX	100-200 A, 100K AIC	—	3-ph 240	47
EDH-EAT-00743	RDBR40BXXX	100-200 A, 25K AIC	—	1-ph 120/240	47
EDH-EAT-00747	RDBR42L225	225 A	—	1-ph 120/240	48
EDH-EAT-00760	RDBR42L3225	225 A	—	3-ph 240	48
EDH-EAT-00723	RDCH42B3XXX	100-225 A, 10K AIC	—	3-ph 240	49
EDH-EAT-00710	RDCH42BXXX	100-225 A, 35K AIC	—	1-ph 120/240	49
EDH-EAT-00721	RDCH42D225	225 A	—	1-ph 120/240	50
EDH-EAT-00736	RDCH42D3225	225 A	—	3-ph 240	50
EDH-EAT-00724	RDCH42H3XXX	100-225 A, 100K AIC	—	3-ph 240	51
EDH-EAT-00711	RDCH42HXXX	100-225 A, 100K AIC	—	1-ph 120/240	51
EDH-EAT-00717	RDCH42L225	225 A	—	1-ph 120/240	52
EDH-EAT-00732	RDCH42L3225	225 A	—	3-ph 240	52
EDH-EAT-00754	REBR42B3XXX	100-225 A, 10K AIC	—	3-ph 240	53
EDH-EAT-00755	REBR42H3XXX	100-225 A, 100K AIC	—	3-ph 240	53
EDH-EAT-00761	REBR42L3225	225 A	—	3-ph 240	54
EDH-EAT-00527	T1000NB1	1000 A max breaker	—	—	327
EDH-EAT-00528	T1200NB3	1200 A max breaker	—	—	328
EDH-EAT-00529	T1200NB3M	1250 A	—	—	352
EDH-EAT-00531	T1600RD	1600 A max breaker	—	—	333
EDH-EAT-00541	T250FJ	250 A	—	—	341
EDH-EAT-00471	T250KB	250 A	—	—	286
EDH-EAT-00477	T300K	225 A max breaker	—	—	302
EDH-EAT-00478	T350K	350 A max breaker	—	—	302
EDH-EAT-00552	T350LK	400 A max breaker	—	—	349
EDH-EAT-00517	T600MA1	600 A max breaker	—	—	321
EDH-EAT-00508	T602LD	600 A max breaker	—	—	315
EDH-EAT-00526	T700NB1	700 A max breaker	—	—	328
EDH-EAT-00518	T800MA1	800 A max breaker	—	—	321
EDH-EAT-00523	TA1000NB1	1000 A max breaker	—	—	328
EDH-EAT-00524	TA1200NB1	1200 A max breaker	—	—	329
EDH-EAT-00525	TA1201NB1	1200 A max breaker	—	—	329
EDH-EAT-00530	TA1600RD	1600 A max breaker	—	—	333
EDH-EAT-00532	TA2000RD	2000 A max breaker	—	—	333
EDH-EAT-00542	TA250FJ	250 A	—	—	342
EDH-EAT-00470	TA250KB	250 A	—	—	287
EDH-EAT-00472	TA300K	225 A max breaker	—	—	303
EDH-EAT-00473	TA350K	350 A max breaker	—	—	303
EDH-EAT-00551	TA350LK	400 A max breaker	—	—	349
EDH-EAT-00503	TA450LD	450 A max breaker	—	—	316
EDH-EAT-00504	TA602LD	500 A max breaker	—	—	316
EDH-EAT-00553	TA632L	630 A	—	—	350
EDH-EAT-00514	TA700MA1	600 (700 per KM/DC table) A max breaker	—	—	321
EDH-EAT-00522	TA700NB1	700 A max breaker	—	—	329
EDH-EAT-00515	TA800MA2	800 (std.) A max breaker	—	—	322
EDH-EAT-00516	TA801MA	800 A max breaker	—	—	322
EDH-EAT-00641	TS33LD	—	3	—	304
EDH-EAT-00639	TS33LN	—	2,3	—	305
EDH-EAT-00640	TS34LN	—	4	—	305
EDH-FPE-00007	KBDP1C	100 A	—	240 V (Superbreakers)	760
EDH-FPE-00008	KBDP2C	225 A	—	600 V	761
EDH-FPE-00010	KBDP4C	400 A max (per NJL3K)	—	—	762
EDH-FPE-00001	KCDP1C	100 A max (per NEF1K listing)	—	600 V	763

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-FPE-00002	KCDP2C	225 A max (per NEJ1K listing)	—	600 V	764
EDH-FPE-00003	KCDP3C	225 A max (per NFJ1K listing)	—	—	764
EDH-FPE-00004	KCDP4C	400 A max (per NJL1K listing)	—	—	765
EDH-FPE-00005	KCDP5C	225 A (Superbreakers tag - doubtful for NM/NN frames)	—	600 V	765
EDH-FPE-00018	KFDP46C	400 A, 600 V	—	—	768
EDH-FPE-00017	KFDP4C	200 A, 600 V; single branch mounting; for QMQB R-style panelboard switches	—	—	768
EDH-FPE-00019	KFDP66C	600 A, 600 V	—	—	769
EDH-FPE-00020	KFDP7C	1200 A, 600 V	—	—	769
EDH-FPE-00021	KFDPD16C	100 A, 600 V	—	—	769
EDH-FPE-00022	KFDPS16C	100 A, 600 V	—	—	770
EDH-FPE-00025	KFDPV7C	1200 A, 600 V	—	—	771
EDH-FPE-00013	NDPNE	100 A / 240 V per search snippet of relectric NDPNE page	—	—	776
EDH-FPE-00012	NDPNEJ	225 A max	—	600 V max	776
EDH-GEA-00027	315A7049P10	200 A (per description)	—	—	499
EDH-GEA-00254	ACSMKSG	400/800 A max	—	—	510
EDH-GEA-00255	ACSMKSK	800/1200 A max	—	—	510
EDH-GEA-00246	ACTMKEB1P	150 A max	—	—	510
EDH-GEA-00247	ACTMKEB2P	150 A max	—	—	511
EDH-GEA-00248	ACTMKEB3P	150 A max	—	—	511
EDH-GEA-00252	ACTMKJD	400 A max	—	—	511
EDH-GEA-00250	ACTMKQD2P	225 A max	—	—	512
EDH-GEA-00251	ACTMKQD3P	225 A max	—	—	512
EDH-GEA-00245	ACTMKSE	150 A max	—	—	512
EDH-GEA-00249	ACTMKSF	250 A max	—	—	513
EDH-GEA-00253	ACTMKSG	400/600 A max	—	—	513
EDH-GEA-00243	AFL120	800/1200 A	—	—	519
EDH-GEA-00242	AFL600	250/400/600 A	—	—	519
EDH-GEA-00181	AMC2FGMFP	600 A max breaker	—	—	537
EDH-GEA-00179	AMC2FJFP	250 A max breaker	—	—	537
EDH-GEA-00178	AMC2FJFPTF	225 A max breaker	—	—	538
EDH-GEA-00184	AMC2FLSFP	250 A max breaker	—	—	538
EDH-GEA-00182	AMC2GMFP	600 A max breaker	—	—	539
EDH-GEA-00180	AMC2JKFP	400/600 A max breaker	—	—	540
EDH-GEA-00183	AMC2KMFP	1200 A max breaker	—	—	540
EDH-GEA-00162	AMC3FGMFP	600 A max breaker	—	—	541
EDH-GEA-00160	AMC3FJFP	250 A max breaker	—	—	541
EDH-GEA-00159	AMC3FJFPTF	225 A max breaker	—	—	542
EDH-GEA-00165	AMC3FLSFP	250 A max breaker	—	—	542
EDH-GEA-00163	AMC3GMFP	600 A max breaker	—	—	543
EDH-GEA-00161	AMC3JKFP	400/600 A max breaker	—	—	543
EDH-GEA-00164	AMC3KMFP	1200 A max breaker	—	—	544
EDH-GEA-00167	AMC4EBFP	150 A max breaker	—	—	544
EDH-GEA-00176	AMC4EBSFP	150 A max breaker	—	—	545
EDH-GEA-00166	AMC4FDBFP	100 A max breaker	—	—	545
EDH-GEA-00175	AMC4FDSFP	100 A max breaker	—	—	546
EDH-GEA-00173	AMC4FGBFP	600 A max breaker	—	—	546
EDH-GEA-00171	AMC4FJFP	250 A max breaker	—	—	547
EDH-GEA-00170	AMC4FJFPTF	225 A max breaker	—	—	548
EDH-GEA-00177	AMC4FLSFP	250 A max breaker	—	—	548
EDH-GEA-00174	AMC4GBFP	600 A max breaker	—	—	549

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00172	AMC4JKFP	400/600 A max breaker	—	—	549
EDH-GEA-00169	AMC4QDFP	225 A max breaker	—	—	550
EDH-GEA-00168	AMC4SEFP	150 A max breaker	—	—	551
EDH-GEA-00149	AMC6EBFP	150 A max breaker	—	—	551
EDH-GEA-00157	AMC6EBSFP	150 A max breaker	—	—	552
EDH-GEA-00146	AMC6EYFP	100 A max breaker	—	—	552
EDH-GEA-00147	AMC6FBFP	100 A max breaker	—	—	553
EDH-GEA-00148	AMC6FDBFP	100 A max breaker	—	—	553
EDH-GEA-00156	AMC6FDSPF	100 A max breaker	—	—	554
EDH-GEA-00154	AMC6FGBFP	600 A max breaker	—	—	554
EDH-GEA-00152	AMC6FJFP	250 A max breaker	—	—	555
EDH-GEA-00151	AMC6FJFPTF	225 A max breaker	—	—	555
EDH-GEA-00158	AMC6FLSFP	250 A max breaker	—	—	556
EDH-GEA-00155	AMC6GBFP	600 A max breaker	—	—	556
EDH-GEA-00153	AMC6JKFP	400/600 A max breaker	—	—	557
EDH-GEA-00145	AMC6QBFP	100 A max breaker	—	—	557
EDH-GEA-00150	AMC6QDFP	225 A max breaker	—	—	558
EDH-GEA-00119	AMCB2FGMFP	—	2	—	520
EDH-GEA-00117	AMCB2FJFP	—	2	—	521
EDH-GEA-00118	AMCB2FJFPTF	—	2	—	521
EDH-GEA-00120	AMCB2GMFP	—	2	—	522
EDH-GEA-00126	AMCB2KMFP	—	2	—	522
EDH-GEA-00123	AMCB3FGMFP	—	3	—	523
EDH-GEA-00121	AMCB3FJFP	—	3	—	523
EDH-GEA-00122	AMCB3FJFPTF	—	3	—	524
EDH-GEA-00124	AMCB3GMFP	—	3	—	524
EDH-GEA-00127	AMCB3KMFP	—	3	—	525
EDH-GEA-00125	AMCB3LBFP	—	2	—	525
EDH-GEA-00098	AMCB4EBFP	—	2	—	526
EDH-GEA-00099	AMCB4EYFP	—	2	—	526
EDH-GEA-00100	AMCB4FBFP	—	2	—	527
EDH-GEA-00101	AMCB4FDBFP	—	2	—	527
EDH-GEA-00113	AMCB4FGBFP	—	2	—	527
EDH-GEA-00109	AMCB4FJFP	—	2	—	528
EDH-GEA-00111	AMCB4FJFPTF	—	2	—	528
EDH-GEA-00114	AMCB4GBFP	—	2	—	529
EDH-GEA-00102	AMCB4QDFP	—	2	—	529
EDH-GEA-00103	AMCB4SEFP	—	2	—	530
EDH-GEA-00104	AMCB6EBFP	—	3	—	530
EDH-GEA-00105	AMCB6EYFP	—	3	—	531
EDH-GEA-00106	AMCB6FBFP	—	3	—	531
EDH-GEA-00107	AMCB6FDBFP	—	3	—	532
EDH-GEA-00115	AMCB6FGBFP	—	3	—	532
EDH-GEA-00110	AMCB6FJFP	—	3	—	533
EDH-GEA-00112	AMCB6FJFPTF	—	3	—	533
EDH-GEA-00116	AMCB6GBFP	—	3	—	534
EDH-GEA-00108	AMCB6QDFP	—	3	—	534
EDH-GEA-00231	AML3120CFP	1200 A	—	—	515
EDH-GEA-00226	AML3120FP	1200 A	—	—	515
EDH-GEA-00227	AML3250CFP	250 A	—	—	516
EDH-GEA-00220	AML3250FP	250 A	—	—	516
EDH-GEA-00219	AML3250SFP	250 A	—	—	516

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00228	AML3400CFP	400 A	—	—	516
EDH-GEA-00222	AML3400FP	400 A	—	—	517
EDH-GEA-00221	AML3400SFP	400 A	—	—	517
EDH-GEA-00229	AML3600CFP	600 A	—	—	517
EDH-GEA-00224	AML3600FP	600 A	—	—	517
EDH-GEA-00223	AML3600SFP	600 A	—	—	518
EDH-GEA-00230	AML3800CFP	800 A	—	—	518
EDH-GEA-00225	AML3800FP	800 A	—	—	518
EDH-GEA-00235	ANK120D	1200 A	—	—	558
EDH-GEA-00234	ANK800D	800 A	—	—	558
EDH-GEA-00233	ANKN120	600-1200 A	—	—	559
EDH-GEA-00232	ANKN400	250/400 A	—	—	559
EDH-GEA-00369	FCAL12	15-20 A	—	—	599
EDH-GEA-00371	FCAL13	25-60 A	—	—	599
EDH-GEA-00373	FCAL14	70-100 A	—	—	599
EDH-GEA-00375	FCAL15	150 A	—	—	601
EDH-GEA-00378	FCAL16	250 A	—	—	601
EDH-GEA-00370	FCALK12	15-20 A	—	—	598
EDH-GEA-00372	FCALK13	25-60 A	—	—	598
EDH-GEA-00374	FCALK14	70-100 A	—	—	598
EDH-GEA-00376	FCALK15	150 A	—	—	600
EDH-GEA-00377	FCALK15LV	150 A	—	—	600
EDH-GEA-00379	FCALK16	250 A	—	—	600
EDH-GEA-00380	FCALK16LV	250 A	—	—	601
EDH-GEA-00381	FCALK218H	—	2	—	602
EDH-GEA-00382	FCALK318H	—	3	—	602
EDH-GEA-00059	MB133	150 A	3	—	474
EDH-GEA-00060	MB133WB	150 A	3	—	475
EDH-GEA-00051	MB233	225 A	3	—	475
EDH-GEA-00053	MB2332	400 A	6	—	475
EDH-GEA-00054	MB2332WB	400 A	6	—	476
EDH-GEA-00052	MB233WB	225 A	3	—	476
EDH-GEA-00045	MB332	400/600 A	2	—	476
EDH-GEA-00046	MB332WB	600 A	2	—	477
EDH-GEA-00055	MB333	400/600 A	3	—	477
EDH-GEA-00056	MB333WB	600 A	3	—	477
EDH-GEA-00057	MB423	100 A	3	—	478
EDH-GEA-00058	MB426	100 A	6	—	478
EDH-GEA-00044	MB512	225 A	2	—	478
EDH-GEA-00049	MB513	225 A	3	—	479
EDH-GEA-00050	MB516	400 A	6	—	479
EDH-GEA-00042	MB612	100 A	2	—	479
EDH-GEA-00047	MB613	100 A	3	—	480
EDH-GEA-00043	MB614	100 A	4	—	480
EDH-GEA-00048	MB616	100 A	6	—	480
EDH-GEA-00061	MLA1	225 A	—	—	481
EDH-GEA-00062	MLA2	225 A	—	—	481
EDH-GEA-00063	MLA41	400 A	—	—	481
EDH-GEA-00064	MLA61	600 A	—	—	482
EDH-GEA-00065	MLA62	400/600 A	—	—	482
EDH-GEA-00066	MLR1	225 A	—	—	482
EDH-GEA-00067	MLR2	225 A	—	—	482

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00068	MLR41	400 A	—	—	482
EDH-GEA-00069	MLR61	400/600 A	—	—	483
EDH-GEA-00070	MLT1	225 A	—	—	483
EDH-GEA-00071	MLT2	225 A	—	—	483
EDH-GEA-00073	MLT41	400 A	—	—	483
EDH-GEA-00072	MLT42	400 A	—	—	483
EDH-GEA-00074	NKA	225 A	—	—	485
EDH-GEA-00075	NKA42	400 A	—	—	485
EDH-GEA-00080	NKA4FT	400 A	—	—	485
EDH-GEA-00076	NKR	225 A	—	—	485
EDH-GEA-00077	NKR4	400 A	—	—	485
EDH-GEA-00078	NKT	225 A	—	—	486
EDH-GEA-00079	NKT4	400 A	—	—	486
EDH-GEA-00262	SF2DPK	225 A	—	—	504
EDH-GEA-00266	SK12SPK	1200 A	—	—	504
EDH-GEA-00265	SK8SPK	800 A	—	—	504
EDH-GEA-00354	TC018	15-150 A	—	—	604
EDH-GEA-00284	TCAL12	15-60 A	—	—	575
EDH-GEA-00341	TCAL124	Cu 275-1200 A / Al 225-1100 A	—	—	615
EDH-GEA-00344	TCAL125	600-1200 A	—	—	615
EDH-GEA-00285	TCAL12A	70-90 A	—	—	575
EDH-GEA-00283	TCAL14	15-30 A	—	—	576
EDH-GEA-00286	TCAL15	100-150 A	—	—	576
EDH-GEA-00335	TCAL18	15-150 A	—	—	605
EDH-GEA-00360	TCAL18LV	15-150 A	—	—	605
EDH-GEA-00363	TCAL19PD1	125 A max	—	—	605
EDH-GEA-00364	TCAL19PD3	125 A max	—	—	603
EDH-GEA-00365	TCAL28PD1	250 A max	—	—	607
EDH-GEA-00366	TCAL28PD3	250 A max	—	—	606
EDH-GEA-00337	TCAL29	70-250 A	—	—	608
EDH-GEA-00361	TCAL29LV	70-250 A	—	—	608
EDH-GEA-00367	TCAL40PD1	400 A max	—	—	611
EDH-GEA-00368	TCAL40PD3	400 A max	—	—	609
EDH-GEA-00308	TCAL81	300-800 A (SK1200 table)	—	—	594
EDH-GEA-00342	TCALK2124	Cu 275-1200 A / Al 225-1100 A	—	—	613
EDH-GEA-00345	TCALK2125	600-1200 A	—	—	614
EDH-GEA-00343	TCALK3124	Cu 275-1200 A / Al 225-1100 A	—	—	614
EDH-GEA-00346	TCALK3125	600-1200 A	—	—	614
EDH-GEA-00336	TCALK318	15-150 A	—	—	604
EDH-GEA-00338	TCALK329	70-250 A	—	—	607
EDH-GEA-00339	TCLK265	125-600 A	—	—	610
EDH-GEA-00340	TCLK365	125-600 A	—	—	610
EDH-GEA-00358	TCO124	600-1200 A	—	—	615
EDH-GEA-00359	TCO125	600-1200 A	—	—	616
EDH-GEA-00355	TCO29	70-250 A	—	—	608
EDH-GEA-00356	TCOK265	125-600 A	—	—	611
EDH-GEA-00357	TCOK365	125-600 A	—	—	611
EDH-GEA-00256	TED1DPK	150 A	—	—	505
EDH-GEA-00261	TEL1DPK	150 A	—	—	505
EDH-GEA-00257	TF2DPK	225 A	—	—	505
EDH-GEA-00259	TJ4DPK	400 A	—	—	505
EDH-GEA-00260	TJ6DPK	600 A	—	—	506

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00264	TK12SPK	1200 A	—	—	506
EDH-GEA-00263	TK8SPK	800 A	—	—	506
EDH-GEA-00258	TQ2DPK	225 A	—	—	506
EDH-SIE-00040	2NLK42B	250A (18, 30, 42 ckt)	—	—	695
EDH-SIE-00041	2NLK54B	250A (54, 66 ckt)	—	—	696
EDH-SIE-00042	42NLK54B	all 400A (30, 54, 66 ckt)	—	—	696
EDH-SIE-00029	4MLKA1	400A	—	—	624
EDH-SIE-00019	4MLKA1A	400A	—	—	688
EDH-SIE-00023	4MLKA1B	400A	—	—	688
EDH-SIE-00030	4MLKA3	400A	—	—	625
EDH-SIE-00020	4MLKA3A	400A	—	—	689
EDH-SIE-00024	4MLKA3B	400A	—	—	689
EDH-SIE-00031	4MLKC1	400A	—	—	625
EDH-SIE-00021	4MLKC1A	400A	—	—	690
EDH-SIE-00032	4MLKC3	400A	—	—	625
EDH-SIE-00022	4MLKC3A	400A	—	—	690
EDH-SIE-00155	6CLE2	125A max (table max-amp rating)	—	—	661
EDH-SIE-00157	6QR2	225A max (table max-amp rating)	—	—	662
EDH-SIE-00102	BBKB32	100A max	—	—	629
EDH-SIE-00108	BBKQR1	225A max	—	—	631
EDH-SIE-00109	BBKQR2	225A max	—	—	641
EDH-SIE-00103	BBKVA4P2P3	125A max	—	—	631
EDH-SIE-00112	BBKVA5262P2S	250A max	—	—	632
EDH-SIE-00114	BBKVA52P3T	250A max	—	—	642
EDH-SIE-00038	CNLK42B	250A (18, 30, 42 ckt)	—	—	697
EDH-SIE-00039	CNLK54B	all 400A (30, 54, 66) and 250A 54/66 ckt	—	—	697
EDH-SIE-00035	LNLK4X11B	250A & 400A	—	—	698
EDH-SIE-00033	LNLK5X12A	250A & 400A	—	—	698
EDH-SIE-00036	LNLK6X17B	250A & 400A	—	—	699
EDH-SIE-00034	LNLK7X18A	250A & 400A	—	—	699
EDH-SIE-00037	LNLK7X20B	250A & 400A	—	—	700
EDH-SIE-00045	MBKBC3	100A max	—	—	620
EDH-SIE-00043	MBKBL1	100A max	—	—	620
EDH-SIE-00044	MBKBL3	100A max	—	—	620
EDH-SIE-00048	MBKED1	125A max	—	—	621
EDH-SIE-00003	MBKED1A	125A max	2-pole (1-phase)	—	679
EDH-SIE-00049	MBKED3	125A max	—	—	621
EDH-SIE-00004	MBKED3A	125A max	3-pole (3-phase)	—	680
EDH-SIE-00052	MBKFD1	250A max	—	—	621
EDH-SIE-00007	MBKFD1A	250A max	2-pole (1-phase)	—	680
EDH-SIE-00053	MBKFD3	250A max	—	—	622
EDH-SIE-00008	MBKFD3A	250A max	3-pole (3-phase)	—	681
EDH-SIE-00054	MBKJD1	400A max	—	—	622
EDH-SIE-00055	MBKJD3	400A max	—	—	622
EDH-SIE-00012	MBKJD3B	400A max	—	—	681
EDH-SIE-00046	MBKNB1	125A max	—	—	623
EDH-SIE-00047	MBKNB3	125A max	—	—	623
EDH-SIE-00050	MBKQR1	225A max	—	—	623
EDH-SIE-00005	MBKQR1A	225A max	2-pole (1-phase)	—	682

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00051	MBKQR3	225A max	—	—	624
EDH-SIE-00006	MBKQR3A	225A max	3-pole (3-phase)	—	683
EDH-SIE-00001	MBKVA41A	125A max	2-pole (1-phase)	—	684
EDH-SIE-00002	MBKVA41B	125A max	3-pole (3-phase)	—	685
EDH-SIE-00009	MBKVA5262A	250A max	2-pole (1-phase)	—	686
EDH-SIE-00010	MBKVA5262B	250A max	3-pole (3-phase)	—	687
EDH-SIE-00011	MBKVA5363A	400A max	—	—	687
EDH-SIE-00149	MG1	800A max (table max-amp rating)	—	—	646
EDH-SIE-00175	MG1D	800A max (table max-amp rating)	—	—	663
EDH-SIE-00025	MLKA1	250A	—	—	626
EDH-SIE-00015	MLKA1A	250A	—	—	691
EDH-SIE-00026	MLKA3	250A	—	—	626
EDH-SIE-00016	MLKA3A	250A	—	—	691
EDH-SIE-00027	MLKC1	250A	—	—	626
EDH-SIE-00017	MLKC1A	250A	—	—	692
EDH-SIE-00028	MLKC3	250A	—	—	627
EDH-SIE-00018	MLKC3A	250A	—	—	692
EDH-SIE-00179	NG1D	1200A max (table max-amp rating)	—	—	663
EDH-SIE-00125	S3VA41T	125A max (table max-amp rating)	—	—	646
EDH-SIE-00151	S3VA41TD	125A max (table max-amp rating)	—	—	664
EDH-SIE-00152	S3VA41TDHD	125A max (table max-amp rating)	—	—	664
EDH-SIE-00129	S3VA52T	150/250A max (table max-amp rating)	—	—	647
EDH-SIE-00156	S3VA52TD	150/250A max (table max-amp rating)	—	—	665
EDH-SIE-00135	S3VA53T	400A max (table max-amp rating)	—	—	647
EDH-SIE-00182	S3VA53T2D	400A max (table max-amp rating)	—	—	728
EDH-SIE-00161	S3VA53TD	400A max (table max-amp rating)	—	—	665
EDH-SIE-00142	S3VA54T	600A max (table max-amp rating)	—	—	648
EDH-SIE-00185	S3VA54T2D	600A max (table max-amp rating)	—	—	728
EDH-SIE-00168	S3VA54TD	600A max (table max-amp rating)	—	—	666
EDH-SIE-00186	S3VA55TD	800/1000A max (table max-amp rating)	—	—	729
EDH-SIE-00187	S3VA57TD	1200A max (table max-amp rating)	—	—	729
EDH-SIE-00136	S3VA63T	400A max (table max-amp rating)	—	—	648
EDH-SIE-00162	S3VA63TD	400A max (table max-amp rating)	—	—	666
EDH-SIE-00143	S3VA64T	600A max (table max-amp rating)	—	—	649
EDH-SIE-00169	S3VA64TD	600A max (table max-amp rating)	—	—	667
EDH-SIE-00124	SBL	100A max (table max-amp rating)	—	—	649
EDH-SIE-00150	SBLBD	100A max (table max-amp rating)	—	—	667
EDH-SIE-00128	SCE	125A max (table max-amp rating)	—	—	650
EDH-SIE-00180	SCED	125A max (table max-amp rating)	—	—	730
EDH-SIE-00134	SCF	250A max (table max-amp rating)	—	—	650
EDH-SIE-00160	SCFD	250A max (table max-amp rating)	—	—	668
EDH-SIE-00139	SCJ	400A max (table max-amp rating)	—	—	650
EDH-SIE-00167	SCJD	400A max (table max-amp rating)	—	—	668
EDH-SIE-00146	SCL	600A max (table max-amp rating)	—	—	651
EDH-SIE-00172	SCLD	600A max (table max-amp rating)	—	—	669
EDH-SIE-00130	SDGD	150A max (table max-amp rating)	—	—	651
EDH-SIE-00127	SE6	125A max (table max-amp rating)	—	—	652
EDH-SIE-00154	SE6D	125A max (table max-amp rating)	—	—	669
EDH-SIE-00133	SF6	250A max (table max-amp rating)	—	—	652

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00159	SF6D	250A max (table max-amp rating)	—	—	670
EDH-SIE-00132	SFG	250A max (table max-amp rating)	—	—	652
EDH-SIE-00158	SFGD	250A max (table max-amp rating)	—	—	670
EDH-SIE-00126	SGB2	125A max (table max-amp rating)	—	—	653
EDH-SIE-00153	SGB2D	125A max (table max-amp rating)	—	—	671
EDH-SIE-00138	SJ1	400A max (table max-amp rating)	—	—	653
EDH-SIE-00165	SJ1D	400A max (table max-amp rating)	—	—	671
EDH-SIE-00166	SJ2D	400A max (table max-amp rating)	—	—	672
EDH-SIE-00137	SJG	400A max (table max-amp rating)	—	—	653
EDH-SIE-00164	SJG1D	400A max (table max-amp rating)	—	—	672
EDH-SIE-00163	SJG2D	400A max (table max-amp rating)	—	—	673
EDH-SIE-00145	SL6	600A max (table max-amp rating)	—	—	654
EDH-SIE-00171	SL6D	600A max (table max-amp rating)	—	—	673
EDH-SIE-00144	SLG	600A max (table max-amp rating)	—	—	654
EDH-SIE-00170	SLGD	600A max (table max-amp rating)	—	—	674
EDH-SIE-00176	SLM1D	800A max (table max-amp rating)	—	—	674
EDH-SIE-00056	SMBKED1	125A max	—	—	712
EDH-SIE-00057	SMBKED3	125A max	—	—	713
EDH-SIE-00058	SMBKFD1	250A max	—	—	713
EDH-SIE-00059	SMBKFD3	250A max	—	—	713
EDH-SIE-00060	SMBKJD1	400A max	—	—	714
EDH-SIE-00061	SMBKJD3	400A max	—	—	714
EDH-SIE-00177	SMND	800/1200A max (table max-amp rating)	—	—	675
EDH-SIE-00131	SQR	225A max (table max-amp rating)	—	—	654
EDH-SIE-00181	SQRD	225A max (table max-amp rating)	—	—	730
EDH-SIE-00141	SSCJ	400A max (table max-amp rating)	—	—	655
EDH-SIE-00184	SSCJD	400A max (table max-amp rating)	—	—	731
EDH-SIE-00148	SSCL	600A max (table max-amp rating)	—	—	655
EDH-SIE-00174	SSCLD	600A max (table max-amp rating)	—	—	675
EDH-SIE-00140	SSJ1	400A max (table max-amp rating)	—	—	656
EDH-SIE-00183	SSJ1D	400A max (table max-amp rating)	—	—	731
EDH-SIE-00147	SSL6	600A max (table max-amp rating)	—	—	656
EDH-SIE-00173	SSL6D	600A max (table max-amp rating)	—	—	676
EDH-SIE-00178	SSMND	800/1200A max (table max-amp rating)	—	—	676
EDH-SQD-00268	32508	—	3	—	441
EDH-SQD-00269	32510	—	3	—	442
EDH-SQD-00306	AL1200P24TK	1200 A	—	—	471
EDH-SQD-00307	AL1200P25TK	1200 A	—	—	471
EDH-SQD-00308	AL1200P25TK4	1200 A	—	—	471
EDH-SQD-00309	AL1200R53TK	1200 A	—	—	472
EDH-SQD-00082	AL150HD	15-150 A	—	—	415
EDH-SQD-00083	AL175JD	150-175 A	—	—	415
EDH-SQD-00084	AL250JD	150-250 A	—	—	416
EDH-SQD-00221	AL400L61K3	250 A	3	—	456
EDH-SQD-00222	AL400L61K4	250 A	4	—	456
EDH-SQD-00225	AL600LF52K3	400/600 A	3	—	457
EDH-SQD-00223	AL600LS52K3	400/600 A	3	—	457
EDH-SQD-00224	AL600LS52K4	400/600 A	4	—	457
EDH-SQD-00302	AL800M23TK	800 A	—	—	469
EDH-SQD-00304	AL800M23TK4	800 A	—	—	469
EDH-SQD-00303	AL800P6TK	800 A	—	—	470
EDH-SQD-00305	AL800P6TK4	800 A	—	—	470

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00086	CU150HD	15-150 A	—	—	417
EDH-SQD-00087	CU250JD	150-250 A	—	—	418
EDH-SQD-00226	CU400L61K3	250/400 A	3	—	458
EDH-SQD-00227	CU400L61K4	250/400 A	4	—	458
EDH-SQD-00230	CU600LF52K3	400/600 A	3	—	458
EDH-SQD-00228	CU600LS52K3	400/600 A	3	—	459
EDH-SQD-00229	CU600LS52K4	400/600 A	4	—	459
EDH-SQD-00208	CYA060HD	<=60 A Cu (rating at 75 C)	3	—	443
EDH-SQD-00209	CYA150HD	<=150 A Cu (rating at 75 C)	3	—	444
EDH-SQD-00210	CYA150JD	<=150 A Cu (rating at 75 C)	3	—	450
EDH-SQD-00211	CYA250J3	<=250 A Cu (rating at 75 C)	3	—	450
EDH-SQD-00212	CYA400L31K3	285 A Cu (rating at 75 C)	3	—	459
EDH-SQD-00217	CYA400L31K4	285 A Cu (rating at 75 C)	4	—	460
EDH-SQD-00214	CYA400L51K3	380 A Cu (rating at 75 C)	3	—	460
EDH-SQD-00219	CYA400L51K4	380 A Cu (rating at 75 C)	4	—	460
EDH-SQD-00216	CYA400L71K3	475 A Cu (rating at 75 C)	3	—	461
EDH-SQD-00213	CYA600L32K3	570 A Cu (rating at 75 C)	3	—	461
EDH-SQD-00218	CYA600L32K4	570 A Cu (rating at 75 C)	4	—	461
EDH-SQD-00215	CYA600L52K3	760 A Cu (rating at 75 C)	3	—	462
EDH-SQD-00220	CYA600L52K4	760 A Cu (rating at 75 C)	4	—	462
EDH-SQD-00081	QMB12CLA	1200 A	—	—	363
EDH-SQD-00002	QMB221HW	30-blank (single switch in twin frame) A	2	240 Vac / 250 Vdc	378
EDH-SQD-00001	QMB221TW	30-30 (twin) A	2	240 Vac / 250 Vdc	378
EDH-SQD-00004	QMB222HW	60-blank A	2	240 Vac / 250 Vdc	379
EDH-SQD-00003	QMB222TW	60-60 (twin) A	2	240 Vac / 250 Vdc	379
EDH-SQD-00006	QMB223HW	100-blank A	2	240 Vac / 250 Vdc	380
EDH-SQD-00005	QMB223TW	100-100 (twin) A	2	240 Vac / 250 Vdc	380
EDH-SQD-00007	QMB224W	200 (single) A	2	240 Vac / 250 Vdc	381
EDH-SQD-00008	QMB225W	400 (single) A	2	240 Vac / 250 Vdc	381
EDH-SQD-00009	QMB225WT3	400 (single, 300 Vac Class T fuses only) A	2	240 Vac	382
EDH-SQD-00023	QMB261HW	30-blank A	2	600 Vac / 250 Vdc	382
EDH-SQD-00022	QMB261TW	30-30 (twin) A	2	600 Vac / 250 Vdc	383
EDH-SQD-00025	QMB262HW	60-blank A	2	600 Vac / 250 Vdc	383
EDH-SQD-00024	QMB262TW	60-60 (twin) A	2	600 Vac / 250 Vdc	384
EDH-SQD-00027	QMB263HW	100-blank A	2	600 Vac / 250 Vdc	384
EDH-SQD-00026	QMB263TW	100-100 (twin) A	2	600 Vac / 250 Vdc	385
EDH-SQD-00028	QMB264W	200 (single) A	2	600 Vac / 250 Vdc	385
EDH-SQD-00011	QMB321HW	30-blank A	3	240 Vac	386
EDH-SQD-00010	QMB321TW	30-30 (twin) A	3	240 Vac	386
EDH-SQD-00013	QMB322HW	60-blank A	3	240 Vac	387
EDH-SQD-00012	QMB322TW	60-60 (twin) A	3	240 Vac	387
EDH-SQD-00015	QMB323HW	100-blank A	3	240 Vac	388
EDH-SQD-00014	QMB323TW	100-100 (twin) A	3	240 Vac	388
EDH-SQD-00016	QMB324W	200 (single) A	3	240 Vac	389
EDH-SQD-00017	QMB325W	400 (single) A	3	240 Vac	389
EDH-SQD-00018	QMB325WT3	400 (single, 300 Vac Class T fuses only) A	3	240 Vac	390
EDH-SQD-00019	QMB326W	600 (single) A	3	240 Vac	390
EDH-SQD-00020	QMB326WT3	600 (single, 300 Vac Class T fuses only) A	3	240 Vac	391
EDH-SQD-00021	QMB327WT3	800 (single, 300 Vac Class T fuses only) A	3	240 Vac	391

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00030	QMB361HW	30-blank A	3	600 Vac	392
EDH-SQD-00029	QMB361TW	30-30 (twin) A	3	600 Vac	392
EDH-SQD-00032	QMB362HW	60-blank A	3	600 Vac	393
EDH-SQD-00033	QMB362T21W	60-30 (twin, unequal) A	3	600 Vac	393
EDH-SQD-00031	QMB362TW	60-60 (twin) A	3	600 Vac	394
EDH-SQD-00035	QMB363HW	100-blank A	3	600 Vac	394
EDH-SQD-00036	QMB363T31W	100-30 (twin, unequal) A	3	600 Vac	395
EDH-SQD-00037	QMB363T32W	100-60 (twin, unequal) A	3	600 Vac	395
EDH-SQD-00034	QMB363TW	100-100 (twin) A	3	600 Vac	396
EDH-SQD-00038	QMB364W	200 (single) A	3	600 Vac	396
EDH-SQD-00039	QMB365W	400 (single) A	3	600 Vac / 250 Vdc	397
EDH-SQD-00040	QMB365WT6	400 (single, 600 Vac Class T fuses only) A	3	600 Vac	397
EDH-SQD-00041	QMB366W	600 (single) A	3	600 Vac / 250 Vdc	398
EDH-SQD-00042	QMB367W	800 (single) A	3	600 Vac	398
EDH-SQD-00080	QMB8CLA	800 A	—	—	364
EDH-SQD-00044	QMJ361T	30-30 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	399
EDH-SQD-00045	QMJ362T	60-60 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	399
EDH-SQD-00047	QMJ363H	100-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	400
EDH-SQD-00046	QMJ363T	100-100 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	400
EDH-SQD-00049	QMJ364H	200-blank A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	401
EDH-SQD-00048	QMJ364T	200-200 (twin) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	401
EDH-SQD-00050	QMJ365	400 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	402
EDH-SQD-00051	QMJ366	600 (single) A	3	600 Vac / 250 Vdc (dc: use top and bottom poles)	402
EDH-SQD-00239	S32477	—	3	—	467
EDH-SQD-00240	S32478	—	4	—	468
EDH-SQD-00243	S32562	—	3	—	466
EDH-SQD-00244	S32563	—	4	—	466
EDH-SQD-00152	S33930	1200 A (100% rated, for R-frame applications)	—	—	354
EDH-SQD-00231	S37432	—	3	—	446
EDH-SQD-00232	S37433	—	2/3	—	449
EDH-SQD-00233	S37434	—	2/3	—	449
EDH-SQD-00234	S37436	—	3	—	446
EDH-SQD-00235	S37437	—	3	—	454
EDH-SQD-00236	S37438	—	2/3	—	454
EDH-SQD-00237	S37439	—	3	—	454
EDH-SQD-00238	S37440	—	3	—	452
EDH-SQD-00241	S432475	—	3	—	468
EDH-SQD-00242	S432476	—	3	—	468
EDH-SQD-00153	SL100	100 A	—	—	354
EDH-SQD-00149	SL1200P5	1200 A	—	—	354
EDH-SQD-00150	SL1200P6	1200 A	—	—	355
EDH-SQD-00151	SL1200P7	1200 A	—	—	355
EDH-SQD-00146	SL250	250 A	—	—	355
EDH-SQD-00147	SL400	400 A	—	—	356
EDH-SQD-00154	SL800	800 A	—	—	356

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SQD-00148	SL800M5	800 A	—	—	356
EDH-SQD-00195	YA060HD	<=60 A Al/Cu (rating at 75 C)	3	—	445
EDH-SQD-00196	YA150HD	<=150 A (rating at 75 C)	3	—	445
EDH-SQD-00197	YA150JD	<=200 A (rating at 75 C)	3	—	451
EDH-SQD-00198	YA250J35	<=250 A (rating at 75 C)	3	—	451
EDH-SQD-00199	YA400L31K3	230 A Al / 285 A Cu @75C (rating at 75 C)	3	—	463
EDH-SQD-00201	YA400L51K3	310 A Al / 380 A Cu (rating at 75 C)	3	—	463
EDH-SQD-00205	YA400L51K4	310 A Al / 380 A Cu (rating at 75 C)	4	—	464
EDH-SQD-00203	YA400L71K3	385 A Al / 475 A Cu (rating at 75 C)	3	—	464
EDH-SQD-00207	YA400L71K4	385 A Al / 475 A Cu (rating at 75 C)	4	—	464
EDH-SQD-00200	YA600L32K3	460 A Al / 570 A Cu (rating at 75 C)	3	—	465
EDH-SQD-00204	YA600L32K4	460 A Al / 570 A Cu (rating at 75 C)	4	—	465
EDH-SQD-00202	YA600L52K3	620 A Al / 760 A Cu (rating at 75 C)	3	—	465
EDH-SQD-00206	YA600L52K4	620 A Al / 760 A Cu (rating at 75 C)	4	—	466
EDH-ZIN-00023	LK-15	150 A	—	—	785
EDH-ZIN-00024	LK-22	225 A	—	—	785
EDH-ZIN-00001	QSF100DS	100 A	—	—	782
EDH-ZIN-00014	QSF100SB	100 A	—	—	782
EDH-ZIN-00013	QSF100SS	100 A	—	—	782
EDH-ZIN-00002	QSF200DS	200 A	—	—	782
EDH-ZIN-00015	QSF200SB	200 A	—	—	783
EDH-ZIN-00003	QSF400DS	400 A	—	—	783
EDH-ZIN-00016	QSF400SB	listed '200A' - probably 400 A	—	—	783
EDH-ZIN-00004	QSF600DS	600 A	—	—	783
EDH-ZIN-00018	SECT	225 A	—	—	783
EDH-ZIN-00017	SEHT	100 A	—	—	784
EDH-ZIN-00019	SJD4T	400 A	—	—	784
EDH-ZIN-00020	SKM8S	800 A	—	—	784
EDH-ZIN-00025	UBIZRBK12	125 A	—	—	786

12.7 Physical dimension and hole-pattern index

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00249	4180B08	Height 1.00-16.00 in by H number; width not stated **A**	—	173
EDH-EAT-00269	4176B72	Fills 1 3/8 in (1X) to 16 1/2 in (12X) height; 13 in wide (for 20 in and 28 in wide boxes) **A**	—	215
EDH-EAT-00285	42C8083H01	Length 4.220 in **C**	—	215
EDH-EAT-00291	3456B99H01	Height 3.00 in (76.2 mm) **A**	—	101
EDH-EAT-00292	3456B35H01	Height 6.00 in (152.4 mm) **A**	—	100
EDH-EAT-00293	3456B99H05	Height 15.00 in (381.0 mm) **A**	—	101
EDH-EAT-00294	6554C01	Width 17 in; height 1X = 1 3/8 in ... 20X = 27 1/2 in **A**	—	255
EDH-EAT-00295	6554C02	Width 25 in; height in X units (1X = 1.38 in) **A**	—	256
EDH-EAT-00296	P41X25	1.375 in H x 25 in W **C**	—	256
EDH-EAT-00299	KPRL4X12	Space required 2X (2.75 in) (1X = 1.38 in) **A**	—	249
EDH-EAT-00300	KPRL4X22	Space required 2X (2.75 in) (1X = 1.38 in) **A**	—	250
EDH-EAT-00301	KPRL4X32	Space required 3X (4.13 in) (1X = 1.38 in) **A**	—	251
EDH-EAT-00302	KPRL4X334S	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	251
EDH-EAT-00303	KPRL4X334T	Space required 4X (5.50 in) (1X = 1.38 in) **A**	—	252
EDH-EAT-00304	KPRL4X336	Space required 4X (PDG3) / 6X (LG) per table (1X = 1.38 in) **A**	—	252
EDH-EAT-00305	KPRL4X34	Space required 6X (8.25 in) (1X = 1.38 in) **A**	—	253

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00306	KPRL4X35	Space required 6X (8.25 in) (1X = 1.38 in) A	—	254
EDH-EAT-00307	KPRL4FDCL	Space required 3X (4.13 in) (1X = 1.38 in) A	—	239
EDH-EAT-00308	KPRL4CA	Space required 2X/3X (1X = 1.38 in) A	—	233
EDH-EAT-00309	KPRL4JDS	Space required 3X (4.13 in) (1X = 1.38 in) A	—	240
EDH-EAT-00310	KPRL4JDT	Space required 3X (4.13 in) (1X = 1.38 in) A	—	241
EDH-EAT-00311	KPRL4FBP	Space required 3X (4.13 in) (1X = 1.38 in) A	—	237
EDH-EAT-00312	KPRL4KDS	Space required 4X (5.50 in) (1X = 1.38 in) A	—	241
EDH-EAT-00313	KPRL4KDT	Space required 4X (5.50 in) (1X = 1.38 in) A	—	242
EDH-EAT-00314	KPRL4LC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	243
EDH-EAT-00315	KPRL4LG	Space required 4X (5.50 in) (1X = 1.38 in) A	—	245
EDH-EAT-00316	KPRL4MC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	246
EDH-EAT-00317	KPRL4LAP	Space required 6X (8.25 in) (1X = 1.38 in) A	—	243
EDH-EAT-00318	KPRL4LCL	Space required 6X (8.25 in) (1X = 1.38 in) A	—	244
EDH-EAT-00319	KPRL4NBP	Space required 6X (8.25 in) (1X = 1.38 in) A	—	247
EDH-EAT-00320	KPRL4NC	Space required 6X (8.25 in) (1X = 1.38 in) A	—	248
EDH-EAT-00321	KPRL4ND	Space required 6X (8.25 in) (1X = 1.38 in) A	—	249
EDH-EAT-00322	KPRL4CKD	Space required 4X (5.50 in) (1X = 1.38 in) A	—	234
EDH-EAT-00323	KPRL4MD	Space required 6X (8.25 in) (1X = 1.38 in) A	—	247
EDH-EAT-00324	KPRL4CND	Space required 6X (8.25 in) (1X = 1.38 in) A	—	235
EDH-EAT-00325	KPRL4FD1	2X space (1X = 1.38 in) A	—	238
EDH-EAT-00326	KPRL4FD2	2X space (1X = 1.38 in) A	—	239
EDH-EAT-00327	KPRL4ED2	2X space (1X = 1.38 in) A	—	236
EDH-EAT-00328	KPRL4FD	3X space (1X = 1.38 in) A	—	237
EDH-EAT-00329	KPRL4ED	3X space (1X = 1.38 in) A	—	235
EDH-EAT-00330	KPRL4LD	6X space (1X = 1.38 in) A	—	245
EDH-EAT-00331	KPRL44X	Switch space 4X (5.50 in) A	—	228
EDH-EAT-00332	KPRL45X1	Switch space 5X (6.88 in) A	—	229
EDH-EAT-00333	KPRL45X	Switch space 5X (6.88 in) A	—	228
EDH-EAT-00334	KPRL45XS	Switch space unknown D	—	229
EDH-EAT-00335	KPRL4B6XS	Switch space 6X (8.25 in) A	—	230
EDH-EAT-00336	KPRL4B6XT	Switch space 6X (8.25 in) A	—	230
EDH-EAT-00337	KPRL4W9X	Switch space 9X (12.38 in) A	—	232
EDH-EAT-00338	KPRL4W11X	Switch space 11X (15.13 in) A	—	231
EDH-EAT-00339	KPRL4W15X	Switch space 15X (20.63 in) A	—	231
EDH-EAT-00340	KCDPFB100	3X space (1X = 1.38 in) A	—	61
EDH-EAT-00341	KCDPED225	3X space (1X = 1.38 in) A	—	60
EDH-EAT-00342	KCDPFBP	3X space (1X = 1.38 in) A	—	61
EDH-EAT-00343	KCDPCA	3X space (1X = 1.38 in) A	—	59
EDH-EAT-00344	KCDPKB	3X space (1X = 1.38 in) A	—	62
EDH-EAT-00345	KCDPLB	4X space (1X = 1.38 in) A	—	64
EDH-EAT-00346	KCDPLA400	6X space (1X = 1.38 in) A	—	63
EDH-EAT-00347	KCDPLA600	6X space (1X = 1.38 in) A	—	63
EDH-EAT-00348	KCDPLCL	6X space (1X = 1.38 in) A	—	65
EDH-EAT-00349	KCDPMC	6X space (1X = 1.38 in) A	—	65
EDH-EAT-00350	KCDPNC	6X space (1X = 1.38 in) A	—	66
EDH-EAT-00351	KCDPNBP	6X space (1X = 1.38 in) A	—	66
EDH-EAT-00352	KCDP_X	Height = n x 1.38 in (35.1 mm) A	—	68
EDH-EAT-00366	KFDP4XT	4X space A	—	55
EDH-EAT-00367	KFDP5XT	5X space A	—	56
EDH-EAT-00368	KFDPB6X-2	6X space A	—	56
EDH-EAT-00369	KFDPW9X-4	9X space A	—	58
EDH-EAT-00370	KFDPW11X-6	11X space A	—	57

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00371	KFDPW11X-8	11X space A	—	57
EDH-EAT-00372	KFDPW15X-12	15X space A	—	58
EDH-EAT-00374	5PLUG3400SC	8X space A	—	259
EDH-EAT-00375	5PLUG3600SC	8X space A	—	259
EDH-EAT-00376	5PLUG3800SC	8X space A	—	260
EDH-EAT-00377	5PLUG31200TC	7X space A	—	259
EDH-EAT-00384	5PFP1S	1X height (1X = 1.38 in) A	—	262
EDH-EAT-00385	5PFP1T	1X height (1X = 1.38 in) A	—	262
EDH-EAT-00386	5PFP2S	2X height (1X = 1.38 in) A	—	262
EDH-EAT-00387	5PFP2T	2X height (1X = 1.38 in) A	—	262
EDH-EAT-00388	5PFP3S	3X height (1X = 1.38 in) A	—	263
EDH-EAT-00389	5PFP3T	3X height (1X = 1.38 in) A	—	263
EDH-EAT-00390	5PFP4S	4X height (1X = 1.38 in) A	—	263
EDH-EAT-00391	5PFP4T	4X height (1X = 1.38 in) A	—	263
EDH-EAT-00392	5PFP5S	5X height (1X = 1.38 in) A	—	264
EDH-EAT-00393	5PFP5T	5X height (1X = 1.38 in) A	—	264
EDH-EAT-00394	5PFP6S	6X height (1X = 1.38 in) A	—	264
EDH-EAT-00395	5PFP6T	6X height (1X = 1.38 in) A	—	264
EDH-EAT-00403	5155C81G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	174
EDH-EAT-00405	K80522	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	176
EDH-EAT-00407	8450C62H39	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	175
EDH-EAT-00408	K80429	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	175
EDH-EAT-00411	114C247G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	101
EDH-EAT-00412	3457B16G01	Outline dimensions shown in drawing on RP01400002E p.19 (e.g. K80522 3.00 x 1.38 in face) B	—	102
EDH-EAT-00420	414A380G02	Overall length 2.50 in (63.5 mm) A	—	69
EDH-EAT-00424	KFDPWT3211R	4X of chassis height A	—	92
EDH-EAT-00425	KFDPWT3611R	4X of chassis height A	—	93
EDH-EAT-00426	KFDPWT3222R	4X of chassis height A	—	93
EDH-EAT-00427	KFDPWT3622R	4X of chassis height A	—	94
EDH-EAT-00428	KFDPWT3233R	4X of chassis height A	—	93
EDH-EAT-00429	KFDPWT3633R	5X of chassis height A	—	94
EDH-EAT-00430	KFDPBS324R	6X of chassis height A	—	90
EDH-EAT-00431	KFDPBS364R	6X of chassis height A	—	90
EDH-EAT-00432	KFDPW325R	9X of chassis height A	—	90
EDH-EAT-00433	KFDPW365R	9X of chassis height A	—	91
EDH-EAT-00434	KFDPW326R	11X of chassis height A	—	91
EDH-EAT-00435	KFDPW366R	11X of chassis height A	—	91
EDH-EAT-00436	KFDPW367	11X of chassis height A	—	92
EDH-EAT-00437	KFDPW368	15X of chassis height A	—	92
EDH-EAT-00445	0080429	approx. 2.50 in (63.5 mm) per drawing C	—	68
EDH-EAT-00446	414A380G01	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 C	—	102
EDH-EAT-00645	TEC1	conductor opening diameter 0.25 in (6.35 mm) A	—	279
EDH-EAT-00646	TEC2	conductor opening diameter 0.41 in (10.41 mm) A	—	279

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00664	314C960G07	length / back-of-breaker dimension 5.47 in (L) / 5.91 in back of breaker (M) **A**	—	318
EDH-EAT-00665	314C960G08	length / back-of-breaker dimension 7.97 in (L) / 8.41 in (M) **A**	—	319
EDH-EAT-00666	314C960G09	length / back-of-breaker dimension 10.47 in (L) / 10.91 in (M) **A**	—	319
EDH-EAT-00667	314C960G01	length / back-of-breaker dimension 3.66 in **A**	—	325
EDH-EAT-00668	314C960G04	length / back-of-breaker dimension 5.91 in **A**	—	325
EDH-EAT-00669	314C960G05	length / back-of-breaker dimension 8.41 in **A**	—	325
EDH-EAT-00670	314C960G06	length / back-of-breaker dimension 10.91 in **A**	—	326
EDH-EAT-00671	314C960G10	length / back-of-breaker dimension 5.91 in **A**	—	326
EDH-EAT-00672	314C960G11	length / back-of-breaker dimension 8.41 in **A**	—	326
EDH-EAT-00673	314C960G12	length / back-of-breaker dimension 10.91 in **A**	—	327
EDH-EAT-00674	623B222G01	length / back-of-breaker dimension 5.5 in **A**	—	332
EDH-EAT-00675	623B222G02	length / back-of-breaker dimension 8.0 in **A**	—	332
EDH-EAT-00676	623B222G03	length / back-of-breaker dimension 10.5 in **A**	—	332
EDH-EAT-00677	373B375G04	length / back-of-breaker dimension 5.5 in **A**	—	331
EDH-EAT-00678	373B375G03	length / back-of-breaker dimension 10.5 in **A**	—	331
EDH-EAT-00706	RACH22BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	30
EDH-EAT-00707	RBCH30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	38
EDH-EAT-00708	RBCH24BXXX	Fits existing box height 29-30 in (#2-250 kcmil) / 30.5-36 in (#2-300 kcmil); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	36
EDH-EAT-00709	RCCH32BXXX	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	44
EDH-EAT-00710	RDCH42BXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	49
EDH-EAT-00711	RDCH42HXXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51
EDH-EAT-00712	RACH24L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	30
EDH-EAT-00713	RBCH42L125	Fits existing box height 25-26 in (#4-#1) / 26.5-30 in (#4-1/0); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	40
EDH-EAT-00714	RBCH32L225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	40
EDH-EAT-00715	RBCH42L225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	41
EDH-EAT-00716	RCCH42L225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	45
EDH-EAT-00717	RDCH42L225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	52
EDH-EAT-00718	RBCH24D225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	37
EDH-EAT-00719	RBCH32D225	Fits existing box height 31-33.5 in (#6-250) / 34-36 in (#6-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	39
EDH-EAT-00720	RCCH32D225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	45
EDH-EAT-00721	RDCH42D225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00722	RACH18B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	29
EDH-EAT-00723	RDCH42B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	49
EDH-EAT-00724	RDCH42H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	51

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00725	RACH24L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	31
EDH-EAT-00726	RACH30L3125	Fits existing box height 22-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	31
EDH-EAT-00727	RACH30L3225	Fits existing box height 22.5-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	32
EDH-EAT-00728	RBCH30L3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	39
EDH-EAT-00729	RBCH42L3125	Fits existing box height 25-28 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	41
EDH-EAT-00730	RBCH42L3225	Fits existing box height 28.5-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00731	RCCH42L3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	46
EDH-EAT-00732	RDCH42L3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	52
EDH-EAT-00733	RBCH24D3225	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	37
EDH-EAT-00734	RBCH30D3225	Fits existing box height 31-33.5 in / 34-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	38
EDH-EAT-00735	RCCH30D3225	Fits existing box height 34-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	44
EDH-EAT-00736	RDCH42D3225	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	50
EDH-EAT-00737	RABR20BXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	28
EDH-EAT-00738	RABR20HXXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	28
EDH-EAT-00739	RBBR30BCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	33
EDH-EAT-00740	RBBR30HCXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	35
EDH-EAT-00741	RBBR20BXXX	Fits existing box height 29-30.5 in (#2-250) / 31-36 in (#2-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	32
EDH-EAT-00742	RCBR30BXXX	Fits existing box height 34-35.5 in (#2-250) / 36-41 in (#2-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	42
EDH-EAT-00743	RDBR40BXXX	Fits existing box height 37-38.5 in (#2-4/0) / 39-40.5 in (#2-250) / 41-45 in (#2-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	47
EDH-EAT-00744	RABR20L125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	29
EDH-EAT-00745	RBBR30L200	Fits existing box height 29-31.5 in (#1-250) / 32-36 in (#1-300); retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	35
EDH-EAT-00746	RCBR40L200	Fits existing box height 34-36.5 in / 37-41 in; retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00747	RDBR42L225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00748	RABR12B3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	26
EDH-EAT-00749	RABR12H3XXX	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	27
EDH-EAT-00750	RBBR30BXXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	33
EDH-EAT-00751	RBBR30H3XXX	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	34
EDH-EAT-00752	RDBR30B3XXX	Fits existing box height 37-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	46

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00753	RDBR30H3XXX	Fits existing box height 37-38.5 in (2/0-250) / 39-45 in (2/0-300); retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	47
EDH-EAT-00754	REBR42B3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	53
EDH-EAT-00755	REBR42H3XXX	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	53
EDH-EAT-00756	RABR12L3125	Fits existing box height 21-30 in; retro cover 33 x 24 in (HxW); depth adjustable 4-6 in **A**	—	27
EDH-EAT-00757	RBBR30L3100	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	36
EDH-EAT-00758	RBBR24L3150	Fits existing box height 29-36 in; retro cover 40 x 24 in (HxW); depth adjustable 4-6 in **A**	—	33
EDH-EAT-00759	RCBR30L3200	Fits existing box height 34-35.5 in (#4-250) / 36-41 in (#4-300); retro cover 43 x 24 in (HxW); depth adjustable 4-6 in **A**	—	43
EDH-EAT-00760	RDBR42L3225	Fits existing box height 37-38.5 in / 39-45 in; retro cover 47 x 24 in (HxW); depth adjustable 4-6 in **A**	—	48
EDH-EAT-00761	REBR42L3225	Fits existing box height 45-54 in; retro cover 56 x 24 in (HxW); depth adjustable 4-6 in **A**	—	54
EDH-EAT-00762	RAABR12L125	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall **A**	—	25
EDH-EAT-00763	RAABR12L125A	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall **A**	—	26
EDH-EAT-00764	RAABR10BXXX	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 19 x 13 in; trim protrudes 1/2 in from drywall **A**	—	25
EDH-EAT-00765	RAABR10BXXXA	For existing boxes 10.5-15.5 in W, 3.5-5.25 in D, 14.5-20.5 in H; cover 21 x 16 in; trim protrudes 1/2 in from drywall **A**	—	25
EDH-FPE-00004	KCDP4C	Shipping weight 7 lb (aftermarket NJL1K equivalent) **C**	—	765
EDH-FPE-00006	KCDP-1A	Shipping package 4 x 3 x 3 in, 1 lb (listing; not part dimensions) **C**	—	774
EDH-GEA-00029	911E347P3	3X vertical (1X = 1-3/8 in per GE convention) **B**	—	501
EDH-GEA-00098	AMCB4EBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	526
EDH-GEA-00099	AMCB4EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	526
EDH-GEA-00100	AMCB4FBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	527
EDH-GEA-00101	AMCB4FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	527
EDH-GEA-00102	AMCB4QDFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	529
EDH-GEA-00103	AMCB4SEFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	530
EDH-GEA-00104	AMCB6EBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	530
EDH-GEA-00105	AMCB6EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	531
EDH-GEA-00106	AMCB6FBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	531
EDH-GEA-00107	AMCB6FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	532
EDH-GEA-00108	AMCB6QDFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	534
EDH-GEA-00109	AMCB4FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in **A**	—	528

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00110	AMCB6FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	533
EDH-GEA-00111	AMCB4FJFPTF	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in A	—	528
EDH-GEA-00112	AMCB6FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in A	—	533
EDH-GEA-00113	AMCB4FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	527
EDH-GEA-00114	AMCB4GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	529
EDH-GEA-00115	AMCB6FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	532
EDH-GEA-00116	AMCB6GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	534
EDH-GEA-00117	AMCB2FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	521
EDH-GEA-00118	AMCB2FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	521
EDH-GEA-00119	AMCB2FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	520
EDH-GEA-00120	AMCB2GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	522
EDH-GEA-00121	AMCB3FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	523
EDH-GEA-00122	AMCB3FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	524
EDH-GEA-00123	AMCB3FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	523
EDH-GEA-00124	AMCB3GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	524
EDH-GEA-00125	AMCB3LBFP	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in A	—	525
EDH-GEA-00126	AMCB2KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	522
EDH-GEA-00127	AMCB3KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	525
EDH-GEA-00128	AFP2QDD	2X vertical; box width 27-44 in A	—	562
EDH-GEA-00129	AFP2TED	2X vertical; box width 27-44 in A	—	562
EDH-GEA-00130	AFP3EYD	3X vertical; box width 27-44 in A	—	562
EDH-GEA-00131	AFP2FBD	2X vertical; box width 27-44 in A	—	561
EDH-GEA-00132	AFP3FBD	3X vertical; box width 27-44 in A	—	563
EDH-GEA-00133	AFP3QDD	3X vertical; box width 27-44 in A	—	563
EDH-GEA-00134	AFP3SED	3X vertical; box width 27-44 in A	—	563
EDH-GEA-00135	AFP3SFD	3X vertical; box width 31-44 in A	—	563
EDH-GEA-00136	AFP3TFD	2X, 3X vertical; box width 36-44 in A	—	564
EDH-GEA-00137	AFP4FGD	4X vertical; box width 40, 44 in A	—	564
EDH-GEA-00138	AFP4SGD	4X vertical; box width 40-44 in A	—	565
EDH-GEA-00139	AFP3SFS	3X vertical; box width 27-44 in A	—	564
EDH-GEA-00140	AFP3TFS	3X vertical; box width 27-44 in A	—	564
EDH-GEA-00141	AFP4FGS	4X vertical; box width 27-44 in A	—	565
EDH-GEA-00142	AFP4SGS	4X vertical; box width 27-44 in A	—	565
EDH-GEA-00143	AFP5LCS	6X vertical; box width 27-44 in A	—	565
EDH-GEA-00144	AFP6SKS	6X vertical; box width 44 in A	—	566
EDH-GEA-00145	AMC6QBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	557
EDH-GEA-00146	AMC6EYFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	552

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00147	AMC6FBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	553
EDH-GEA-00148	AMC6FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	553
EDH-GEA-00149	AMC6EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	551
EDH-GEA-00150	AMC6QDFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	558
EDH-GEA-00151	AMC6FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	555
EDH-GEA-00152	AMC6FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	555
EDH-GEA-00153	AMC6JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in **A**	—	557
EDH-GEA-00154	AMC6FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	554
EDH-GEA-00155	AMC6GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	556
EDH-GEA-00156	AMC6FDSPF	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	554
EDH-GEA-00157	AMC6EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	552
EDH-GEA-00158	AMC6FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	556
EDH-GEA-00159	AMC3FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	542
EDH-GEA-00160	AMC3FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	541
EDH-GEA-00161	AMC3JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	543
EDH-GEA-00162	AMC3FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	541
EDH-GEA-00163	AMC3GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	543
EDH-GEA-00164	AMC3KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	544
EDH-GEA-00165	AMC3FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	542
EDH-GEA-00166	AMC4FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	545
EDH-GEA-00167	AMC4EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	544
EDH-GEA-00168	AMC4SEFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	551
EDH-GEA-00169	AMC4QDFP	2X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	550
EDH-GEA-00170	AMC4FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	548
EDH-GEA-00171	AMC4FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	547
EDH-GEA-00172	AMC4JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in **A**	—	549
EDH-GEA-00173	AMC4FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	546
EDH-GEA-00174	AMC4GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	549
EDH-GEA-00175	AMC4FDSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	546
EDH-GEA-00176	AMC4EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	545
EDH-GEA-00177	AMC4FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	548

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00178	AMC2FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	538
EDH-GEA-00179	AMC2FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	537
EDH-GEA-00180	AMC2JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	540
EDH-GEA-00181	AMC2FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	537
EDH-GEA-00182	AMC2GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	539
EDH-GEA-00183	AMC2KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	540
EDH-GEA-00184	AMC2FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	538
EDH-GEA-00201	APP1S	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	566
EDH-GEA-00202	APP1	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	566
EDH-GEA-00203	APP1W	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	567
EDH-GEA-00204	APP2S	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	567
EDH-GEA-00205	APP2	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	567
EDH-GEA-00206	APP2W	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	567
EDH-GEA-00207	APP3S	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	568
EDH-GEA-00208	APP3	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	567
EDH-GEA-00209	APP3W	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	568
EDH-GEA-00210	APP4S	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	568
EDH-GEA-00211	APP4	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	568
EDH-GEA-00212	APP4W	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	568
EDH-GEA-00213	APP5S	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	569
EDH-GEA-00214	APP5	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	569
EDH-GEA-00215	APP5W	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	569
EDH-GEA-00216	APP6S	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	569
EDH-GEA-00217	APP6	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	569
EDH-GEA-00218	APP6W	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	570
EDH-GEA-00219	AML3250SFP	4X module height; box width 27, 36 in **A**	—	516
EDH-GEA-00220	AML3250FP	6X module height; box width 36 in **A**	—	516
EDH-GEA-00221	AML3400SFP	4X module height; box width 27, 36, 44 in **A**	—	517
EDH-GEA-00222	AML3400FP	6X module height; box width 36, 44 in **A**	—	517
EDH-GEA-00223	AML3600SFP	4X module height; box width 27, 36, 44 in **A**	—	518
EDH-GEA-00224	AML3600FP	6X module height; box width 36, 44 in **A**	—	517
EDH-GEA-00225	AML3800FP	6X module height; box width 36, 44 in **A**	—	518
EDH-GEA-00226	AML3120FP	6X module height; box width 36, 44 in **A**	—	515
EDH-GEA-00227	AML3250CFP	6X module height; box width 36 in **A**	—	516

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00228	AML3400CFP	6X module height; box width 36, 44 in A	—	516
EDH-GEA-00229	AML3600CFP	6X module height; box width 36, 44 in A	—	517
EDH-GEA-00230	AML3800CFP	6X module height; box width 36, 44 in A	—	518
EDH-GEA-00231	AML3120CFP	6X module height; box width 36, 44 in A	—	515
EDH-GEA-00242	AFL600	9X; box width 27, 36, 44 in A	—	519
EDH-GEA-00243	AFL120	12X; box width 36, 44 in A	—	519
EDH-GEA-00244	AMCB6TEDL	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards A	—	566
EDH-GEA-00386	TEF1	Length behind back of breaker: 2 25/32 in (short) A	—	577
EDH-GEA-00387	TEF2	Length behind back of breaker: 4 13/32 in (long) A	—	577
EDH-GEA-00388	TEF3	Length behind back of breaker: 3 13/32 in (short) A	—	577
EDH-GEA-00389	TEF4	Length behind back of breaker: 5 25/32 in (long) A	—	578
EDH-GEA-00390	TFK1	Length behind back of breaker: 2 23/32 in (short) A	—	580
EDH-GEA-00391	TFK2	Length behind back of breaker: 5 31/32 in (long) A	—	580
EDH-GEA-00392	SGBCS1	Length behind back of breaker: 2 13/16 in (short) A	—	612
EDH-GEA-00393	SGBCS2	Length behind back of breaker: 6 1/16 in (long) A	—	613
EDH-GEA-00394	TKM11	Length behind back of breaker: 5 1/2 in A	—	597
EDH-GEA-00395	TKM12	Length behind back of breaker: 8 in A	—	597
EDH-SIE-00033	LNLK5X12A	strip length 5.80 in A	—	698
EDH-SIE-00034	LNLK7X18A	strip length 8.14 in A	—	699
EDH-SIE-00035	LNLK4X11B	strip length 6.17 in A	—	698
EDH-SIE-00036	LNLK6X17B	strip length 8.67 in A	—	699
EDH-SIE-00037	LNLK7X20B	strip length 9.92 in A	—	700
EDH-SIE-00076	DFFP3	3in high (P3 plate 2.97in) A	—	637
EDH-SIE-00077	DFFP6	6in high (P3 plate 5.97in) A	—	637
EDH-SIE-00102	BBKB32	Unit space: 3in / 6 circuits A	—	629
EDH-SIE-00103	BBKVA4P2P3	Unit space: 3in / 6 circuits A	—	631
EDH-SIE-00104	BBKED32	Unit space: 3in / 6 circuits A	—	629
EDH-SIE-00105	BBKNB32	Unit space: 3in / 6 circuits A	—	630
EDH-SIE-00106	BBKGB32	Unit space: 3in / 6 circuits A	—	630
EDH-SIE-00107	BBKEB32	Unit space: 3in / 6 circuits A	—	640
EDH-SIE-00108	BBKQR1	Unit space: 6in / 1 breaker A	—	631
EDH-SIE-00109	BBKQR2	Unit space: 6in / 2 breakers A	—	641
EDH-SIE-00110	BBKQ1	Unit space: 6in / 1 breaker A	—	631
EDH-SIE-00112	BBKVA5262P2S	Unit space: 6in / 1 breaker A	—	632
EDH-SIE-00114	BBKVA52P3T	Unit space: 6in / 2 breakers A	—	642
EDH-SIE-00124	SBL	Unit height 3.75 in A	—	649
EDH-SIE-00125	S3VA41T	Unit height 3.75 in A	—	646
EDH-SIE-00126	SGB2	Unit height 3.75 in A	—	653
EDH-SIE-00127	SE6	Unit height 3.75 in A	—	652
EDH-SIE-00128	SCE	Unit height 3.75 in A	—	650
EDH-SIE-00129	S3VA52T	Unit height 5.00 in A	—	647
EDH-SIE-00130	SDGD	Unit height 5.00 in A	—	651
EDH-SIE-00131	SQR	Unit height 5.00 in A	—	654
EDH-SIE-00132	SFG	Unit height 5.00 in A	—	652
EDH-SIE-00133	SF6	Unit height 5.00 in A	—	652
EDH-SIE-00134	SCF	Unit height 5.00 in A	—	650
EDH-SIE-00135	S3VA53T	Unit height 6.25 in A	—	647
EDH-SIE-00136	S3VA63T	Unit height 6.25 in A	—	648
EDH-SIE-00137	SJG	Unit height 6.25 in A	—	653
EDH-SIE-00138	SJ1	Unit height 8.75 in A	—	653
EDH-SIE-00139	SCJ	Unit height 8.75 in A	—	650

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00140	SSJ1	Unit height 8.75 in A	—	656
EDH-SIE-00141	SSCJ	Unit height 8.75 in A	—	655
EDH-SIE-00142	S3VA54T	Unit height 6.25 in A	—	648
EDH-SIE-00143	S3VA64T	Unit height 6.25 in A	—	649
EDH-SIE-00144	SLG	Unit height 6.25 in A	—	654
EDH-SIE-00145	SL6	Unit height 8.75 in A	—	654
EDH-SIE-00146	SCL	Unit height 8.75 in A	—	651
EDH-SIE-00147	SSL6	Unit height 8.75 in A	—	656
EDH-SIE-00148	SSCL	Unit height 8.75 in A	—	655
EDH-SIE-00149	MG1	Unit height 8.75 in A	—	646
EDH-SIE-00150	SBLBD	Unit height 3.75 in A	—	667
EDH-SIE-00151	S3VA41TD	Unit height 3.75 in A	—	664
EDH-SIE-00152	S3VA41TDHD	Unit height 7.50 in A	—	664
EDH-SIE-00153	SGB2D	Unit height 3.75 in A	—	671
EDH-SIE-00154	SE6D	Unit height 3.75 in A	—	669
EDH-SIE-00155	6CLE2	Unit height 3.75 in A	—	661
EDH-SIE-00156	S3VA52TD	Unit height 5.00 in A	—	665
EDH-SIE-00157	6QR2	Unit height 5 / 5.00 in A	—	662
EDH-SIE-00158	SFGD	Unit height 5.00 in A	—	670
EDH-SIE-00159	SF6D	Unit height 5.00 in A	—	670
EDH-SIE-00160	SCFD	Unit height 5.00 in A	—	668
EDH-SIE-00161	S3VA53TD	Unit height 6.25 in A	—	665
EDH-SIE-00162	S3VA63TD	Unit height 6.25 in A	—	666
EDH-SIE-00163	SJG2D	Unit height 6.25 in A	—	673
EDH-SIE-00164	SJG1D	Unit height 6.25 in A	—	672
EDH-SIE-00165	SJ1D	Unit height 8.75 in A	—	671
EDH-SIE-00166	SJ2D	Unit height 8.75 in A	—	672
EDH-SIE-00167	SCJD	Unit height 8.75 in A	—	668
EDH-SIE-00168	S3VA54TD	Unit height 6.25 in A	—	666
EDH-SIE-00169	S3VA64TD	Unit height 6.25 in A	—	667
EDH-SIE-00170	SLGD	Unit height 6.25 in A	—	674
EDH-SIE-00171	SL6D	Unit height 8.75 in A	—	673
EDH-SIE-00172	SCLD	Unit height 8.75 in A	—	669
EDH-SIE-00173	SSL6D	Unit height 8.75 in A	—	676
EDH-SIE-00174	SSCLD	Unit height 8.75 in A	—	675
EDH-SIE-00175	MG1D	Unit height 8.75 in A	—	663
EDH-SIE-00176	SLM1D	Unit height 8.75 in A	—	674
EDH-SIE-00177	SMND	Unit height 10 / 10.00 in A	—	675
EDH-SIE-00178	SSMND	Unit height 10 / 10.00 in A	—	676
EDH-SIE-00179	NG1D	Unit height 10 / 10.00 in A	—	663
EDH-SIE-00180	SCED	Unit height 3.75 in A	—	730
EDH-SIE-00181	SQRD	Unit height 5.00 in A	—	730
EDH-SIE-00182	S3VA53T2D	Unit height 6.25 in A	—	728
EDH-SIE-00183	SSJ1D	Unit height 8.75 in A	—	731
EDH-SIE-00184	SSCJD	Unit height 8.75 in A	—	731
EDH-SIE-00185	S3VA54T2D	Unit height 6.25 in A	—	728
EDH-SIE-00186	S3VA55TD	Unit height 8.75 in A	—	729
EDH-SIE-00187	S3VA57TD	Unit height 10.00 in A	—	729
EDH-SIE-00188	6E62	Unit height 3.75 in A	—	720
EDH-SIE-00189	6QJ2	Unit height 5 in A	—	724
EDH-SIE-00190	6F62	Unit height 5 in A	—	720
EDH-SIE-00191	6CLF1	Unit height 5 in A	—	717

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00192	6JJ61	Unit height 8.75 in **A**	—	721
EDH-SIE-00193	6JJ62	Unit height 8.75 in **A**	—	721
EDH-SIE-00194	6CLJ1	Unit height 8.75 in **A**	—	718
EDH-SIE-00195	6SJL1	Unit height 8.75 in **A**	—	726
EDH-SIE-00196	6SCJ1	Unit height 8.75 in **A**	—	724
EDH-SIE-00197	6LL61	Unit height 8.75 in **A**	—	722
EDH-SIE-00198	6CLL1	Unit height 8.75 in **A**	—	719
EDH-SIE-00199	6SLL1	Unit height 8.75 in **A**	—	726
EDH-SIE-00200	6SCL1	Unit height 8.75 in **A**	—	725
EDH-SIE-00201	6BL2C	Unit height 3.75 in **A**	—	716
EDH-SIE-00202	6SCL61C	Unit height 8.75 in **A**	—	725
EDH-SIE-00203	6M61C	Unit height 10 in **A**	—	723
EDH-SIE-00204	6N61C	Unit height 10 in **A**	—	723
EDH-SIE-00211	6FPB01	1.25in unit height **A**	—	657
EDH-SIE-00212	6FPB02	2.5in unit height **A**	—	658
EDH-SIE-00213	6FPB03	3.75in unit height **A**	—	658
EDH-SIE-00214	6FPB05	5in unit height **A**	—	658
EDH-SIE-00215	6FPB10	10in unit height **A**	—	659
EDH-SIE-00216	6FPB15	15.00in (381mm) **A**	—	731
EDH-SIE-00240	EWK1	20in W x 5.75in D **A**	—	709
EDH-SIE-00241	EWK2	24in W x 7.75in D **A**	—	643
EDH-SIE-00242	EWK3	20in W x 5.75in D **A**	—	710
EDH-SIE-00243	EWK1B	20in W x 5.75in D **A**	—	710
EDH-SIE-00244	EWK2B	24in W x 7.75in D **A**	—	643
EDH-SIE-00289	NDTS	Breaker overall length 24 in with lug shields vs 16 in without (W 9, D 6, D1 8.25) **A**	—	755
EDH-SIE-00299	RS2643	Extension behind breaker 2.38 in **A**	—	741
EDH-SIE-00300	RS2644	Extension behind breaker 2.38 in **A**	—	741
EDH-SIE-00301	RS2641	Extension behind breaker 4.88 in **A**	—	740
EDH-SIE-00302	RS2642	Extension behind breaker 4.88 in **A**	—	740
EDH-SIE-00303	RS4756	Extension behind breaker 3.12 in **A**	—	743
EDH-SIE-00304	RS4755	Extension behind breaker 7.06 in **A**	—	743
EDH-SIE-00305	RS5774	Extension behind breaker 5.85 in **A**	—	747
EDH-SIE-00306	RS5773	Extension behind breaker 11.20 in **A**	—	747
EDH-SIE-00307	RS5784	Extension behind breaker 5.85 in **A**	—	748
EDH-SIE-00308	RS5783	Extension behind breaker 11.20 in **A**	—	748
EDH-SIE-00309	RS5788	Extension behind breaker 5.85 in **A**	—	750
EDH-SIE-00310	RS5787	Extension behind breaker 11.20 in **A**	—	750
EDH-SIE-00311	RS5786	Extension behind breaker 5.50 in **A**	—	756
EDH-SIE-00312	RS5785	Extension behind breaker 8.00 in **A**	—	755
EDH-SQD-00001	QMB221TW	Unit mounting height 4.5 in. (114 mm) **A**	—	378
EDH-SQD-00002	QMB221HW	Unit mounting height 4.5 in. (114 mm) **A**	—	378
EDH-SQD-00003	QMB222TW	Unit mounting height 4.5 in. (114 mm) **A**	—	379
EDH-SQD-00004	QMB222HW	Unit mounting height 4.5 in. (114 mm) **A**	—	379
EDH-SQD-00005	QMB223TW	Unit mounting height 6 in. (152 mm) **A**	—	380
EDH-SQD-00006	QMB223HW	Unit mounting height 6 in. (152 mm) **A**	—	380
EDH-SQD-00007	QMB224W	Unit mounting height 9 in. (229 mm) **A**	—	381
EDH-SQD-00008	QMB225W	Unit mounting height 15 in. (381 mm) **A**	—	381
EDH-SQD-00009	QMB225WT3	Unit mounting height 9 in. (229 mm) **A**	—	382
EDH-SQD-00010	QMB321TW	Unit mounting height 4.5 in. (114 mm) **A**	—	386
EDH-SQD-00011	QMB321HW	Unit mounting height 4.5 in. (114 mm) **A**	—	386
EDH-SQD-00012	QMB322TW	Unit mounting height 4.5 in. (114 mm) **A**	—	387

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00013	QMB322HW	Unit mounting height 4.5 in. (114 mm) A	—	387
EDH-SQD-00014	QMB323TW	Unit mounting height 6 in. (152 mm) A	—	388
EDH-SQD-00015	QMB323HW	Unit mounting height 6 in. (152 mm) A	—	388
EDH-SQD-00016	QMB324W	Unit mounting height 9 in. (229 mm) A	—	389
EDH-SQD-00017	QMB325W	Unit mounting height 15 in. (381 mm) A	—	389
EDH-SQD-00018	QMB325WT3	Unit mounting height 9 in. (229 mm) A	—	390
EDH-SQD-00019	QMB326W	Unit mounting height 15 in. (381 mm) A	—	390
EDH-SQD-00020	QMB326WT3	Unit mounting height 15 in. (381 mm) A	—	391
EDH-SQD-00021	QMB327WT3	Unit mounting height 15 in. (381 mm) A	—	391
EDH-SQD-00022	QMB261TW	Unit mounting height 4.5 in. (114 mm) A	—	383
EDH-SQD-00023	QMB261HW	Unit mounting height 4.5 in. (114 mm) A	—	382
EDH-SQD-00024	QMB262TW	Unit mounting height 6 in. (152 mm) A	—	384
EDH-SQD-00025	QMB262HW	Unit mounting height 6 in. (152 mm) A	—	383
EDH-SQD-00026	QMB263TW	Unit mounting height 7.5 in. (191 mm) A	—	385
EDH-SQD-00027	QMB263HW	Unit mounting height 7.5 in. (191 mm) A	—	384
EDH-SQD-00028	QMB264W	Unit mounting height 9 in. (229 mm) A	—	385
EDH-SQD-00029	QMB361TW	Unit mounting height 4.5 in. (114 mm) A	—	392
EDH-SQD-00030	QMB361HW	Unit mounting height 4.5 in. (114 mm) A	—	392
EDH-SQD-00031	QMB362TW	Unit mounting height 6 in. (152 mm) A	—	394
EDH-SQD-00032	QMB362HW	Unit mounting height 6 in. (152 mm) A	—	393
EDH-SQD-00033	QMB362T21W	Unit mounting height 6 in. (152 mm) A	—	393
EDH-SQD-00034	QMB363TW	Unit mounting height 7.5 in. (191 mm) A	—	396
EDH-SQD-00035	QMB363HW	Unit mounting height 7.5 in. (191 mm) A	—	394
EDH-SQD-00036	QMB363T31W	Unit mounting height 7.5 in. (191 mm) A	—	395
EDH-SQD-00037	QMB363T32W	Unit mounting height 7.5 in. (191 mm) A	—	395
EDH-SQD-00038	QMB364W	Unit mounting height 9 in. (229 mm) A	—	396
EDH-SQD-00039	QMB365W	Unit mounting height 15 in. (381 mm) A	—	397
EDH-SQD-00040	QMB365WT6	Unit mounting height 9 in. (229 mm) A	—	397
EDH-SQD-00041	QMB366W	Unit mounting height 15 in. (381 mm) A	—	398
EDH-SQD-00042	QMB367W	Unit mounting height 15 in. (381 mm) A	—	398
EDH-SQD-00043	QMB368W	Mounting height 24 in. (610 mm) for 1200 A single switch in QED-2 A	—	423
EDH-SQD-00044	QMJ361T	Unit mounting height 4.5 in. (114 mm) A	—	399
EDH-SQD-00045	QMJ362T	Unit mounting height 6 in. (152 mm) A	—	399
EDH-SQD-00046	QMJ363T	Unit mounting height 6 in. (152 mm) A	—	400
EDH-SQD-00047	QMJ363H	Unit mounting height 6 in. (152 mm) A	—	400
EDH-SQD-00048	QMJ364T	Unit mounting height 7.5 in. (191 mm) A	—	401
EDH-SQD-00049	QMJ364H	Unit mounting height 7.5 in. (191 mm) A	—	401
EDH-SQD-00050	QMJ365	Unit mounting height 9 in. (229 mm) A	—	402
EDH-SQD-00051	QMJ366	Unit mounting height 15 in. (381 mm) A	—	402
EDH-SQD-00089	QMB1BLW	Covers 1.5 in. of QMB mounting space A	—	370
EDH-SQD-00090	QMB3BLW	Covers 3 in. of QMB mounting space A	—	370
EDH-SQD-00091	QMB6BLW	Covers 6 in. of QMB mounting space A	—	371
EDH-SQD-00092	QMB15BLW	Package 2.30 x 16.00 x 26.00 in., 9.04 lb (packaged) A	—	370
EDH-SQD-00137	HNM1BL	1.5 in. wide A	—	361
EDH-SQD-00138	HNM4BL	4.5 in. wide A	—	361
EDH-SQD-00139	HLN1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height A	—	358
EDH-SQD-00140	HLN4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	358
EDH-SQD-00141	HLN4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	359

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SQD-00142	HLW1BL	Covers 1.5 in. (38.1 mm) of breaker mounting height A	—	359
EDH-SQD-00143	HLW4BL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	360
EDH-SQD-00144	HLW4EBL	Covers 4.5 in. (114.3 mm) of breaker mounting height A	—	360
EDH-SQD-00147	SL400	Occupies 6 in. of mounting space C	—	356
EDH-SQD-00245	S37446	dimension B (extension past breaker end) = 0.50 in A	—	446
EDH-SQD-00246	S37447	dimension B (extension past breaker end) = 0.50 in A	—	447
EDH-SQD-00247	S37448	dimension B (extension past breaker end) = 0.24 in A	—	452
EDH-SQD-00248	S37449	dimension B (extension past breaker end) = 2.24 in A	—	447
EDH-SQD-00249	S37450	dimension B (extension past breaker end) = 1.68 in A	—	452
EDH-SQD-00272	VC100FA	Dimension A (max extension past end of breaker) 1.3 in A	—	428
EDH-SQD-00273	VC250KA3	Dimension A (max extension past end of breaker) 1.5 in A	—	430
EDH-SQD-00274	VC250KA35	Dimension A (max extension past end of breaker) 1.5 in A	—	431
EDH-SQD-00275	VC400LA35	Dimension A (max extension past end of breaker) 1.25 in A	—	434
EDH-SQD-00276	VC400LA3	Dimension A (max extension past end of breaker) 1.0 in A	—	434
EDH-SQD-00277	VC400LA5	Dimension A (max extension past end of breaker) 2.2 in A	—	434
EDH-SQD-00278	VC400LA7	Dimension A (max extension past end of breaker) 2.5 in A	—	435
EDH-SQD-00279	VC600LI3	Dimension A (max extension past end of breaker) 1.05 in A	—	438
EDH-SQD-00280	VC600LI5	Dimension A (max extension past end of breaker) 3.20 in A	—	438
EDH-SQD-00281	VC600LI7	Dimension A (max extension past end of breaker) 3.45 in A	—	439
EDH-SQD-00282	CVC100FA	Dimension A (max extension past end of breaker) 1.4 in A	—	427
EDH-SQD-00283	CVC250KA3	Dimension A (max extension past end of breaker) 1.5 in A	—	430
EDH-SQD-00284	CVC400LA3	Dimension A (max extension past end of breaker) 1.3 in A	—	432
EDH-SQD-00285	CVC400LA5	Dimension A (max extension past end of breaker) 2.3 in A	—	432
EDH-SQD-00286	CVC600LI5	Dimension A (max extension past end of breaker) 3.20 in A	—	438
EDH-SQD-00287	PDC6FA6	Dimension A 1.0 in A	—	428
EDH-SQD-00288	PDC3FA2	Dimension A 1.2 in A	—	427
EDH-SQD-00289	PDC6LA20	Dimension A 2.25 in A	—	433
EDH-SQD-00290	PDC12LA4	Dimension A 1.25 in A	—	433
EDH-SQD-00291	PDC4LA250	Dimension A 2.0 in A	—	433
EDH-SQD-00292	PDC5DG20	Dimension A 1.28-1.31 in A	—	442
EDH-SQD-00293	PDC12DG4	Dimension A 1.28-1.31 in A	—	442
EDH-ZIN-00022	QFP2T	Listing package dims 4.25 x 4.5 x 1.125 in, 0.1 lb (may be item size) C	—	785

Appendix A Documentation Library

OEM and supporting documents, grouped by manufacturer lineage and document type. 'Local' identifies documents preserved in docs/library/ (see docs/DOCUMENT_INDEX.csv for checksums). Documents not preserved are cited by URL; inaccessible documents are listed as research leads.

Eaton lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S6	CA08100003E	Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control 2020-06	catalog	Local	0
S118	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015 2015-10	catalog	Local	37
S119	CA08100005E	Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014 2014-04	catalog	Local	19
S127	CA08100005E	Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current) 2026-04	catalog	blocked	0
S116	CA08101001E	Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008 2008-11	catalog	Local	242
S117	CA08101001E	Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008 2008-05	catalog	Local	2
S120	CA08101001E (excerpt)	Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic 2008-05	catalog	Local	3
S7	CA08104001E (Tab 22)	Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R) 2018-01	catalog	Local	10
S17	CA08104001E Tab 21 (TB01500003E)	Switchboards—Low Voltage (Consulting Application Guide Tab 21) 2018-04	catalog	Local	18
S162		Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide	catalog	Local	60
S21	IB015002EN	Eaton Pow-R-Line CS switchboards instruction manual 2021-11	instruction	ok	0
S22	IM01500001E	Pow-R-Line switchboards instruction manual 2021-05	instruction	blocked	0
S13	CA08100014E	Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions 2018-06	renewal_parts	Local	14
S20	CA08100014E Tab 5	Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt 2016-10	renewal_parts	Local	13
S2	RP01400001E	Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command) 2009-02	renewal_parts	Local	282
S3	RP01400001E	Renewal Parts RP01400001E - Current Eaton panelboards 2017-10	renewal_parts	Local	141
S16	RP01400001E (2017)	Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P) 2017-10	renewal_parts	Local	39
S1	RP01400001E (Z25020)	Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4) 2021-04	renewal_parts	Local	361
S14	RP01400002E	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	75
S15	RP01400002E (2009)	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition) 2009-04	renewal_parts	Local	32
S5	RP01400002E (Z13209)	Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	57

Ref	Doc no.	Title / date	Type	Avail.	Entries
S4	RP01414001E	Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E 2011-01	renewal_parts	Local	80
S121	3TA150FB spec sheet	Eaton product specifications 3TA150FB unknown	web	Local	1
S122	ID-SPE-v2-3TA632LK	Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec) unknown	web	Local	1
S18	KPRL4KDS spec sheet	Eaton product specifications — KPRL4KDS	web	Local	1
S19	KPRL4KDT spec sheet	Eaton product specifications — KPRL4KDT	web	Local	1

Square D / Schneider Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S59	0600DB1004	Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin 2010-12-01	bulletin	blocked	0
S112	0611CT1001 R01/13	PowerPact H-, J-, and L-Frame Circuit Breakers Catalog 2013-01	catalog	Local	78
S27	2110CT9701R07/19	I-Line Circuit Breaker Panelboards Catalog, Class 2110 2019-07	catalog	Local	12
S26	2700CT1101	Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742) 2012-02	catalog	Local	43
S57	2700CT1601	OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog 2023-01-11 (v1.3)	catalog	blocked	5
S28	4620CT9601R07/15	QMB Fusible Panelboards Catalog, Class 4620 2015-07	catalog	Local	93
S114	Digest 176 Section 3 (Class 612)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012) 2012	catalog	Local	65
S115	Digest Section 3 (Class 612, ref. catalog 0612CT0101)	Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016) 2016-09-24	catalog	Local	39
S126	48940-221-02 (v05, 2019-12)	Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD) 2019-12	instruction	blocked	5
S29	80030-695-02	I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110 2011-09	instruction	Local	8
S58	80043-055-16	Power-Style QED-2 Switchboards Instruction Bulletin 2024-06	instruction	blocked	0
S63	FA92286	FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)	renewal_parts	ok	10
S62	FA92305	FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)	renewal_parts	ok	9
S113	AL175JD data sheet	Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3 unknown	web	Local	1
S32	FA100365	FAQ FA100365: blank filler catalog numbers for current design QMB panelboards	web	ok	4
S67	FA100372	FAQ FA100372: replacement for a QMB3260 600 A QMB switch	web	ok	5
S39	FA103561	FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker	web	ok	1
S36	FA108059	FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?	web	ok	8
S44	FA108122	FAQ FA108122: QED cover screw part number	web	blocked	1
S34	FA112712	FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?	web	ok	3
S72	FA113960	FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4	web	ok	3
S43	FA116225	FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)	web	ok	1

Ref	Doc no.	Title / date	Type	Avail.	Entries
S37	FA117096	FAQ FA117096: difference between plug-on and bolt-on I-Line connections	web	ok	0
S73	FA118445	FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard	web	ok	2
S42	FA118475	FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard	web	ok	2
S64	FA119872	FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch	web	ok	4
S48	FA121592	FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?	web	ok	0
S71	FA122202	FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution	web	ok	4
S69	FA122651	FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch	web	ok	5
S61	FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified)	QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)	web	blocked	5
S46	FA124494	FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard	web	ok	7
S45	FA125924	FAQ FA125924: replacement handle for an outdoor QED switchboard	web	ok	1
S41	FA125949	FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?	web	ok	0
S65	FA127541	FAQ FA127541: replacement for a QMB3620	web	ok	3
S68	FA128647	FAQ FA128647: replacement parts for a QMB3240	web	ok	5
S38	FA129562	FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket	web	ok	1
S125	FA221892	Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892) unknown	web	blocked	1
S31	FA225625	FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?	web	ok	4
S70	FA242815	FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?	web	ok	1
S33	FA243887	FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?	web	ok	9
S49	FA308905	FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?	web	ok	0
S66	FA88047	FAQ FA88047: replacement for a QMB3606T	web	ok	4
S35	FA93287	FAQ FA93287: blank extensions for the wide side of an HCW panelboard	web	ok	2
S47	FA96877	FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)	web	ok	1
S50	FAQ000269509	FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)	web	blocked	9
S40	FAQ000274446	FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard	web	ok	0
S51	FAQ000279508 / FAQ000257217	Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)	web	blocked	1
S30	QMB15BLW data sheet	Product data sheet QMB15BLW - Panelboard blank filler plate 2023-04-12	web	Local	1
S149		Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers	web	blocked	0
S150		Federal Pioneer / Schneider Canada FAQ FA234570	web	blocked	0

GE / ABB lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S90	1SXU900191B0201	ReliaGear neXT Power Panelboards (brochure) 2022-01	catalog	ok	0
S75	BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014)	BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts) 2014-07	catalog	Local	242

Ref	Doc no.	Title / date	Type	Avail.	Entries
S133	BuyLog Section 3, Rev. 1/08	GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.) 2008-01	catalog	Local	2
S132	BuyLog Section 3, Rev. 9/12	GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices) 2012-09	catalog	Local	86
S130	BuyLog Section 6, Rev. 1/19	GE Products BuyLog, Section 6: Molded Case Circuit Breakers 2019-01	catalog	Local	115
S131	BuyLog Section 6, Rev. 11/13	GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers 2013-11	catalog	Local	0
S134	BuyLog p. 6-103 Rev. 7/13	GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13 2013-07	catalog	Local	4
S76	BuyLog p.11-10 Rev. 11/13	GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts 2013-11	catalog	Local	6
S93		BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)	catalog	blocked	0
S86	DEH065 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD) 2001-09	instruction	ok	32
S89	DEH212 R02	Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S 2001-04	instruction	ok	2
S77	DEH40150 Rev.No.03	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S78	DEH40151 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S79	DEH40152 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S80	DEH40153 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S81	DEH40154 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S82	DEH40155 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S83	DEH40156 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S84	DEH40157 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S85	DEH40158 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S88	DEH40392 R01	Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL 2001-04	instruction	ok	1
S87	GEH5674 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM) 2001-07	instruction	ok	41

Siemens lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S104	SI-LP-1633	NextGen P1 panelboard brochure (Siemens Canada) unknown (c.2020)	bulletin	Local	3
S101	SIE_CS_P1 / Siemens SIOS 109799956	Type P1 Panelboard data sheet (SIE_CS_P1) 2021-10	bulletin	Local	10

Ref	Doc no.	Title / date	Type	Avail.	Entries
S102		Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf) 2021	bulletin	Local	14
S103		New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf) c.2015-2019	bulletin	Local	22
S99	Discount Schedule A, page 8-13	2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits 2005	catalog	Local	26
S98	Power Product Catalogue Section 11	Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS) 2025-05	catalog	Local	53
S135	SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020)	Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers 2020-09	catalog	Local	68
S106	SIE Selection And Application Guide Panelboards (SIOS 109792056)	Panelboards Selection and Application Guide 2016	catalog	Local	48
S100	SPEEDFAX 2007-2008 pp.10-17..10-22	SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22 2007	catalog	Local	0
S97	SPEEDFAX Section 11 (last modified 06/24/21)	SPEEDFAX Product Catalog - Section 11 Panelboards 2021-06	catalog	Local	214
S136	SPEEDFAX Section 7 (2021 revision)	Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21) 2021-08	catalog	Local	68
S105	US2:MBKBFA	Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER 2021-01-06	web	Local	1

Federal Pacific Electric

Ref	Doc no.	Title / date	Type	Avail.	Entries
S144		Federal Pacific Electric panelboard connector kits	web	ok	0
S145		About Federal Pacific Electric Equipment (history)	web	ok	0

Other manufacturers

Ref	Doc no.	Title / date	Type	Avail.	Entries
S12		Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"	distributor	Local	1

Appendix B Bibliography and Source Register

S1 [SRC-00001] Eaton. *Renewal Parts RP01400001E - Pow-R-Line Xpert and legacy (PRL1X, PRL2X, PRL3X, PRL4X, PRL1a, PRL2a, PRL3a, PRL4)*. RP01400001E (Z25020). 2021-04. Type: oem_renewal_parts. URL: https://eatonarabia.com/wp-content/uploads/2022/03/pow-r-line-1.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/pow-r-line-1.pdf Note: Effective April 2021, supersedes December 2020. 40 pp. Mirror hosted on eatonarabia.com (Eaton distributor site). Primary source for kit tables.

S2 [SRC-00002] Eaton / Cutler-Hammer. *Current Cutler-Hammer Panelboards Renewal Parts RP01400001E (PRL1a, PRL2a, PRL3a, PRL4B/F, PRL5P, PRL1a/2a-LX, Pow-R-Command)*. RP01400001E. 2009-02. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_426974_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_426974_catalog.pdf Note: Effective February 2009; supersedes RP.38F.01.T.E pages 1-48 dated February 2000. 44 pp. Distributor-hosted (US Electrical Services) copy of OEM PDF. Contains older PRL4 kit numbers (KPRL4FD etc.) and PRL5P section.

S3 [SRC-00003] Eaton. *Renewal Parts RP01400001E - Current Eaton panelboards*. RP01400001E. 2017-10. Type: oem_renewal_parts. URL: https://elliottelectric.com/Media/5155C62H01-CHS (accessed 2026-10-21) Local copy: docs/library/EAT/rp01400001e_2022_cl.pdf Note: Effective October 2017, supersedes February 2009. Served by Elliott Electric as the spec sheet for 5155C62H01. Used to bracket when part numbers changed (still lists KPRL4FD, 4180B03, 4176B68, 4178B06H01).

S4 [SRC-00004] Eaton. *Panelboard Renewal Parts Supplement, Renewal Parts Data RP01414001E*. RP01414001E. 2011-01. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/catalogs/USESI_196328_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_196328_catalog.pdf Note: Effective January 2011. 16 pp. Identical content also at https://assets.usesi.com/product-media/brochures/USESI_426974_brochure.pdf (saved as USESI_426974_brochure.pdf). Includes PRL3a blank cover widths, PRL4 blank cover widths, PRL4 connector kits (KPRL4LD/MD/ND/45XS) and Pow-R-Kit order form.

S5 [SRC-00005] Eaton. *Renewal Parts RP01400002E - Vintage Westinghouse panelboards (PRL1, PRL2, PRL3, PRL1-LX, PRL3-LX, CDP/HCDP, FDP)*. RP01400002E (Z13209). 2013-02. Type: oem_renewal_parts. URL: https://novapart.co/media/2/6/6/F38703722D40D662.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_novapart_mirror.pdf Note: Effective February 2013, supersedes April 2009. 20 pp. Mirror on novapart.co (landing page https://novapart.co/datasheet/farnell:2192454/ contains promotional text aimed at AI assistants - ignored).

S6 [SRC-00006] Eaton. *Volume 2 - Commercial Distribution, Tab 3 Panelboards and Lighting Control*. CA08100003E. 2020-06. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/panelboard-and-lighting-control.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/panelboard-and-lighting-control.pdf Note: 135 pp. Pow-R-Line Xpert (PRL1X/2X/3X/3E/4X/4DX/4F) selection guide p. V2-T3-2, panelboard selection guide p. V2-T3-11, terminal tables V2-T3-12/13.

S7 [SRC-00007] Eaton. *Panelboards - Consulting Application Guide Tab 22 (Pow-R-Line 1a/2a/3a/3E/4/1aF/2aF/1a-LX/2a-LX/1R/2R)*. CA08104001E (Tab 22). 2018-01. Type: oem_catalog. URL: https://eatonarabia.com/wp-content/uploads/2022/03/eaton-panelboard-cag-tb01400003e-tab-22.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-panelboard-cag-tb01400003e-tab-22.pdf Note: 84 pp, January 2018 sheets. Table 22.0-2 selection guide p. 22.0-5; PRL1a p. 22.1-1; PRL2a p. 22.2-1; PRL3a p. 22.3-1/22.3-2; PRL3E p. 22.3-5; PRL4 p. 22.4-1/22.4-2.

S8 [SRC-00008] Rexel USA. *Rexel USA listing: Filler Plate, Panelboard, PRL3A, for Panelboards Built After April 2019 (42C8083H01)*. Type: distributor. URL: https://www.rexelusa.com/p/2273430/eaton/filler-plate-panelboard-prl3a-for-panelboards-built-after-april-2019/42c8083h01 (accessed 2026-10-21) Note: Spec: Type Filler Plate; Length 4.220 in.

S9 [SRC-00009] Rexel USA. *Rexel USA listing: Panel Board, PRL3A, Cover Filler Plate, 1P for F-Frame Breakers (4178B06H01)*. Type: distributor. URL: https://rexelusa.com/p/120408/eaton/panel-board-prl3a-cover-filler-plate-1p-for-f-frame-breakers/786685467672/4178b06h01 (accessed 2026-10-21) Note: UPC 786685467672; description says 'for panels built PRIOR to April 2019'; color black; 1 pole.

S10 [SRC-00010] Elliott Electric Supply. *Elliott Electric listing: KPRL4FD - PRL4 Connector Kit For Twin MTD 3P EHD, FD, FDB, HFD*. Type: distributor. URL: https://elliottelectric.com/P/Item/CHD/KPRL4FD/Alternate (accessed 2026-10-21) Note: UPC 782114795941; 225 A; 3-phase; product type 'PRL4 Conn Kit Twin MTD 3P E/F-FRM BKR'; package dims 9.0 x 1.5 x 3.0 in; listed weight 17 lb (as given); UL 67; shown in stock.

S11 [SRC-00011] Rexel USA. *Rexel USA listing: PRL4X PD2 1 POLE FILLER (PRXP4PD2FILL1)*. Type: distributor. URL: https://www.rexelusa.com/p/2925374/eaton/prl4x-pd2-1-pole-filler/786689814915/prxp4pd2fill1 (accessed 2026-10-21) Note: UPC 786689814915; Pow-R-Xpress (unassembled PRL4X) context.

S12 [SRC-00012] Elliott Electric Supply. *Elliott Electric spec sheet: P41X25 SWBD/PRL4 1X Filler 1.375"H 25"W Fits 36" 44" 45"*. Type: distributor. URL: https://www.elliottelectric.com/Media/P41X25-ETN (accessed 2026-10-21) Local copy: docs/library/OTH/P41X25-ETN_elliott_spec.pdf Note: Description 'Eaton, PRL4- 1X Blank Cover'; UPC 621037246102; 2.0 lb.

S13 [SRC-00013] Eaton. *Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions*. CA08100014E. 2018-06. Type: oem_renewal_parts. URL: https://www.revereelectric.com/ASSETS/DOCUMENTS/ITEMS/EN/EATON_1MMMSB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_CA08100014E_revereelectric_EATON_1MMMSB_Catalog.pdf Note: Full 734-page Volume 12 hosted by distributor Revere Electric (mirror of OEM PDF). Tabs carry mixed dates: Tab 4 Panelboards dated June 2018; Tab 3 MCCB, Tab 5 Loadcenters and Tab 15 Distribution Switchboards dated October 2016. Key pages: V12-T4-1..T4-23 (panelboards: replacement charts, CDP/FDP/PRL layouts, renewal-parts doc index), V12-T15-1..T15-6 (switchboards incl. WF/WRP, ES, Pow-R-Line C history), V12-T3-10..T3-12 (Westinghouse breaker dimensions, last-manufactured dates), V12-T3-80..87 (panelboard-only replacement breakers RE/REH/RHF...). Eaton-hosted tab copy: https://www.eaton.com/content/dam/eaton/support/poweredge/aftermarket/vol12-tab04.pdf (eaton.com fetch failed from container).

S14 [SRC-00014] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP)*. RP01400002E. 2013-02. Type: oem_renewal_parts. URL: https://www.farnell.com/datasheets/2307937.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2013_farnell.pdf Note: 20 pages, Publication No. RP01400002E / Z13209, effective February 2013, supersedes April 2009. Distributor (Farnell) mirror of OEM PDF. Contains CDP connector kits (Table 19 p.14), CDP retrofit kits (Tables 16-18 pp.12-13), FDP connector/retrofit kits (Tables 20-21 pp.17-18), PRL1/2/3 replacement connectors, neutral/ground bars, trim locks and clamps. Pricing in PL01400002E (not found).

S15 [SRC-00015] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)*. RP01400002E (2009). 2009-04. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/brochures/USESI_501159_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2009_usesi.pdf Note: Earlier edition hosted by distributor US Electrical Services. Kit catalog numbers identical to 2013 edition except the hardware-only example: 2009 shows 'KCDPFD100H', 2013 shows 'KCDPFB100-H'.

S16 [SRC-00016] Eaton. *Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P)*. RP01400001E (2017). 2017-10. Type: oem_renewal_parts. URL: https://www.elliottelectric.com/Media/5155C62H01-CHS-2-1-SpecificationSheet.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017_elliott.pdf Note: 36 pages, effective October 2017, supersedes February 2009. Distributor (Elliott Electric) mirror. PRL4 breaker connector kits Table 37 p.24, fusible connector kits Table 38 p.25, retrofit kits Tables 39-40 p.26, PRL4 blank covers Table 36 p.24.

S17 [SRC-00017] Eaton. *Switchboards—Low Voltage (Consulting Application Guide Tab 21)*. CA08104001E Tab 21 (TB01500003E). 2018-04. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_515260_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_515260_catalog_CA08104001E_Tab21.pdf Note: Distributor-hosted copy of Eaton Consulting Application Guide Section 21 (April 2018). Pow-R-Line C description p.21.0-8/21.0-9, Pow-R-Line i p.21.0-11, PRLC distribution layout guide with device X-space Figure 21.1-9 p.21.1-12, main lug space Table 21.1-11 p.21.1-11, Integrated Facility System p.21.6-1.

S18 [SRC-00018] Eaton. *Eaton product specifications — KPRL4KDS*. KPRL4KDS spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDS-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDS-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114795996; 25.5 x 9.3 x 3.2 in; 9.25 lb; UL Listed.

S19 [SRC-00019] Eaton. *Eaton product specifications — KPRL4KDT*. KPRL4KDT spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDT-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDT-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114796412; 9.85 lb; 'UL 67'; '44-inch box width required'. Listed dimensions 9 x 2 x 3.2 in look like packaging/data error.

S20 [SRC-00020] Eaton. *Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt*. CA08100014E Tab 5. 2016-10. Type: oem_renewal_parts. URL: https://media.suthlbr.com/images/downloads/vendor/18446/EATON_102581945_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_Tab5_2016_suthlbr_EATON_102581945_Catalog.pdf Note: 30-page excerpt; BR history (Bryant, Bridgeport CT; Challenger 1988; Jackson MS; Lincoln IL) p.V12-T5-2; BR replacement parts pp.V12-T5-14..16.

S21 [SRC-00021] Eaton. *Eaton Pow-R-Line CS switchboards instruction manual*. IB015002EN. 2021-11. Type: oem_instruction. URL: https://www.manualslib.com/manual/2585212/Eaton-Pow-R-Line-Cs.html (accessed 2026-10-21) Note: Read via ManualsLib web view (pages 3, 8, 17). Eaton-hosted PDF https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/canada/eaton-pow-r-line-cs-switchboards-instruction-manual-ib015002en-ca.pdf could not be downloaded (timeout). Appendix A Table 2 busbar torque p.17.

S22 [SRC-00022] Eaton. *Pow-R-Line switchboards instruction manual*. IM01500001E. 2021-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-switchboard-manual-im01500001e.pdf (accessed 2026-10-21) Status: blocked. Note: Download from eaton.com and eaton.com.cn failed (timeout). Known only from search snippet (effective May 2021, supersedes Feb 2020).

S23 [SRC-00023] eBay seller (surplus). *eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P*. Type: surplus. URL: https://www.ebay.de/itm/187106607578 (accessed 2026-10-21) Note: Seen only as search-result title/snippet; page not opened. Listing title associates KPRL4KDS with 'Pow-R-Line C'.

S24 [SRC-00024] various distributors. *Distributor listings for Eaton PRL4 connector kits (Crescent Electric, Rexel, Platt, Elliott, Gexpro, Dixon)*. Type: distributor. URL: https://crescentelectric.com/product/57375/eaton-panelboard-connector-kit-copper-connectors-mounting-brackets-covers-hardware-and-instructions-for-ehd-fd-fdb-hfd-fdc-breakers-three-phase-three-pole-225a (accessed 2026-10-21) Note: Seen as search snippets: KPRL4FD described 'for EHD, FD, FDB, HFD, FDC breakers three-phase three-pole 225A'; Elliott marks KPRL4FD inactive; Dixon lists KPRL4LFD3 'CON KIT FD+LFD PRL4'; Gexpro lists KPRL4MC as single-mount kit for MDL/HMDL; Crescent lists KPRL4ND 'PRL4 connector kit for ND/HND breakers'.

S25 [SRC-00025] Surplus Record. *Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard*. Type: surplus. URL: https://surplusrecord.com/listing/westinghouse-pow-r-line-c-4000-amp-240v-3ph3w-2-section-switchboard-367548/ (accessed 2026-10-21) Note: Search snippet only: 'PROVISIONS FOR (2) KD, (4) LD, (2) ND, 3 POLE CIRCUIT BREAKERS' — shows Westinghouse-branded PRLC with Series C group-mounted provisions.

S26 [SRC-00026] Schneider Electric (Square D). *Power-Style Low Voltage Switchboards: QED-2 and Speed-D Merchandised Service Section Switchboards Catalog (Class 2710, 2741, 2742)*. 2700CT1101. 2012-02. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider_synd/2023q1/documents/3ec11ffaa483c317fee9fe851a4472117ace727c.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_3ec11.pdf Note: Distributor-hosted (DistributorDataSolutions) copy of OEM PDF, 60 pp. A newer 2700CT1101 (v02, 2025-12, ~140 MB) exists on se.com but was not retrieved.

S27 [SRC-00027] Schneider Electric (Square D). *I-Line Circuit Breaker Panelboards Catalog, Class 2110*. 2110CT9701R07/19. 2019-07. Type: oem_catalog. URL: https://media.distributordatasolutions.com/schneider2/2020q1/20ebda625aea586bc898b8e30954a51d38425d30.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_20ebda.pdf Note: Distributor-hosted copy of OEM PDF, 24 pp. Current revision is v2.1 2025-02-18 (se.com, blocked).

S28 [SRC-00028] Schneider Electric (Square D). *QMB Fusible Panelboards Catalog, Class 4620*. 4620CT9601R07/15. 2015-07. Type: oem_catalog. URL: https://download.se.com/files?p_Doc_Ref=4620CT9601&p_enDocType=Catalog&p_File_Name=4620CT9601.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/4620CT9601.pdf Note: Retrieved via WebFetch (curl 403). se.com page says document is current but may reference obsolete products.

S29 [SRC-00029] Schneider Electric (Square D). *I-Line (HCP, HCP-SU, and HCRU) Panelboards and Switchboards - Blank Extension Installation, Instruction Bulletin, Class 2110*. 80030-695-02. 2011-09. Type: oem_instruction. URL: https://media.distributordatasolutions.com/schneider/2018q1/f4c97d51a6c117544e2493c3367e6bba5774eb47 (accessed 2026-10-21) Local copy: docs/library/SQD/dds_f4c97d.pdf Note: Trilingual EN/ES/FR, 10 pp. States it applies to I-Line panelboards and QED2 switchboards manufactured after 2011.

S30 [SRC-00030] Schneider Electric. *Product data sheet QMB15BLW - Panelboard blank filler plate*. QMB15BLW data sheet. 2023-04-12. Type: oem_web. URL: https://media.distributordatasolutions.com/schneider_synd/2023q2/documents/55f1316a17cc332c2db81fbd11361b088e686058.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/dds_55f131.pdf

S31 [SRC-00031] Schneider Electric. *FAQ FA225625: Do the merchandised Speed-D switchboards with QMB branch devices come with blank fillers for the unused space?*. FA225625. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA225625 (accessed 2026-10-21)

S32 [SRC-00032] Schneider Electric Canada. *FAQ FA100365: blank filler catalog numbers for current design QMB panelboards*. FA100365. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA100365 (accessed 2026-10-21)

S33 [SRC-00033] Schneider Electric. *FAQ FA243887: What is the difference between an I-Line Blank Filler and a Blank Extension?*. FA243887. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA243887 (accessed 2026-10-21) Note: Gives internal part numbers for HNM/HLN/HLW fillers and extensions; WebFetch summary (not verbatim).

S34 [SRC-00034] Schneider Electric. *FAQ FA112712: What blank fillers are required in an I-Line panel when an LI breaker is replaced with a KI?*. FA112712. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA112712 (accessed 2026-10-21)

S35 [SRC-00035] Schneider Electric. *FAQ FA93287: blank extensions for the wide side of an HCW panelboard*. FA93287. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA93287 (accessed 2026-10-21)

S36 [SRC-00036] Schneider Electric Canada. *FAQ FA108059: Do the blank filler plates and extensions for I-Line panelboards fit the QED switchboards?*. FA108059. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA108059 (accessed 2026-10-21)

S37 [SRC-00037] Schneider Electric. *FAQ FA117096: difference between plug-on and bolt-on I-Line connections*. FA117096. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA117096 (accessed 2026-10-21) Note: References Data Bulletin 0600DB1004.

S38 [SRC-00038] Schneider Electric. *FAQ FA129562: mounting screw for a PowerPact H or J frame breaker I-Line mounting bracket*. FA129562. Type: oem_web. URL: https://www.se.com/au/en/faqs/FA129562/ (accessed 2026-10-21)

S39 [SRC-00039] Schneider Electric. *FAQ FA103561: mounting bracket screw for an FA or FH I-Line breaker*. FA103561. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA103561 (accessed 2026-10-21)

S40 [SRC-00040] Schneider Electric. *FAQ FAQ000274446: replacement mounting screw for L-frame breaker inside I-Line panelboard*. FAQ000274446. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000274446 (accessed 2026-10-21)

S41 [SRC-00041] Schneider Electric. *FAQ FA125949: Can you replace the mounting bracket on the load end of I-Line breakers?*. FA125949. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125949 (accessed 2026-10-21)

S42 [SRC-00042] Schneider Electric. *FAQ FA118475: deadfront brackets on an I-Line HCN3254-2 panelboard*. FA118475. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118475 (accessed 2026-10-21)

S43 [SRC-00043] Schneider Electric. *FAQ FA116225: plug-button for unused holes in NEMA 1 and 3R QED-1 and QED-2 switchboards (incl. Speed-D)*. FA116225. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA116225 (accessed 2026-10-21)

S44 [SRC-00044] Schneider Electric. *FAQ FA108122: QED cover screw part number*. FA108122. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA108122 (accessed 2026-10-21) Status: blocked. Note: 403 on direct fetch; content (21427-20401, 1/4-20 x 1-1/4 self-tapping screw) seen only in search-engine snippet.

S45 [SRC-00045] Schneider Electric. *FAQ FA125924: replacement handle for an outdoor QED switchboard*. FA125924. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA125924 (accessed 2026-10-21)

S46 [SRC-00046] Schneider Electric Canada. *FAQ FA124494: door and frame hinges for a QED2, CMM, or Speed-D NEMA 3R switchboard*. FA124494. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA124494 (accessed 2026-10-21)

S47 [SRC-00047] Schneider Electric. *FAQ FA96877: deadfront screws used on Square D panelboards (NF, I-Line, NQ, QMB)*. FA96877. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA96877 (accessed 2026-10-21)

S48 [SRC-00048] Schneider Electric. *FAQ FA121592: Are Square D QED switchboards able to have additional (splice-to) sections installed?*. FA121592. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA121592 (accessed 2026-10-21)

S49 [SRC-00049] Schneider Electric. *FAQ FA308905: Do QED 2 switchboards NEMA 1 or 3R come with a solid bottom?*. FA308905. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA308905/ (accessed 2026-10-21)

S50 [SRC-00050] Schneider Electric. *FAQ FAQ000269509: I-Line subfeed lug kits to tap I-Line bus (SL100...SL1200P7)*. FAQ000269509. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FAQ000269509/ (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summary only (direct fetch 403).

S51 [SRC-00051] Schneider Electric. *Square D QMB / QED-2 FAQ group (QED-2 Series 2 QMB mounting height 63 in.; QED-2 I-Line section limits 3000 A single row / 2000 A double row)*. FAQ000279508 / FAQ000257217. Type: oem_web. URL: https://www.se.com/us/en/faqs/FAQ000279508 (accessed 2026-10-21) Status: blocked. Note: Content seen via search-engine summaries only (direct fetch 403).

S52 [SRC-00052] Standard Electric Supply / Steiner Electric / Crescent Electric. *Distributor listings for QMB blank fillers (QMB1BLW, QMB3BLW, QMB6BLW) - kit contents*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-QMB3BLW-Filler-Plate-Kit (accessed 2026-10-21) Note: Seen via search summaries; Crescent lists QMB1BLW as discontinued.

S53 [SRC-00053] Standard Electric Supply / Crescent Electric / Steiner Electric / Rexel. *Distributor listings for I-Line blank extensions (HLW4BL qty 5, 6.35 in W x 4.5 in H; HLW1BL qty 3; HLN4BL)*. Type: distributor. URL: https://www.standardelectricsupply.com/Square-D-HLW4BL-I-Line-Blank-Plate (accessed 2026-10-21) Note: Seen via search summaries. Note conflicting qty for HLW1BL (se.com product title says qty 5; distributors and FAQ FA112712 say kit of 3).

S54 [SRC-00054] Rexel USA / Royal Wholesale Electric / others. *Distributor listings for QED-2 OEM I-Line switchboard interiors (CF20R63C, CF25R63C, CF20RJ63C, CF30RJ63C, CF16RJ63C36)*. Type: distributor. URL: https://www.rexelusa.com/p/1207792/square-d/panelboard-interior-qed-2-i-line-63-height-3000a-copper-bus-center-feed/cf30rj63c (accessed 2026-10-21) Note: Seen via search summaries only.

S55 [SRC-00055] Crescent Electric / Steiner Electric / Forberg Smith. *Distributor listings for QMB switch units (QMB368W 1200 A 24 in.; QMB322TD; QMB362T1; QMB323TD)*. Type: distributor. URL: https://www.crescentelectric.com/product/90087/switch-unit-qmb-fusible-panelboards-1200a-24-inch-3-pole-600vac-max (accessed 2026-10-21) Note: Seen via search summaries.

S56 [SRC-00056] Crescent Electric / Steiner Electric / MB Glick. *Distributor listings for SL400 I-Line sub-feed lug kit*. Type: distributor. URL: https://www.crescentelectric.com/product/227088/panelboard-accessory-i-line-lug-kit-subfeed-400a-6-in (accessed 2026-10-21) Note: Crescent title: 'I-Line, lug kit, subfeed, 400A, 6 in'.

S57 [SRC-00057] Schneider Electric (Square D). *OEM QED-2 Switchboard I-Line Interiors, Single-Row and Double-Row OEM Interior Products Catalog*. 2700CT1601. 2023-01-11 (v1.3). Type: oem_catalog. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/2700ct1601-oem-qed-2-switchboard-i-linetm-interiors-catalog/English/2700CT1601.pdf (accessed 2026-10-21) Status: blocked. Note: Akamai 403 via curl and WebFetch; download.se.com also 403. HIGH-VALUE: contains OEM interior selection tables.

S58 [SRC-00058] Schneider Electric (Square D). *Power-Style QED-2 Switchboards Instruction Bulletin*. 80043-055-16. 2024-06. Type: oem_instruction. URL: https://www.productinfo.schneider-electric.com/power_style_qed_2/80043-055-power-style-qed-2-switchboards-instruction-bulletin/English/80043-055-016_en.pdf (accessed 2026-10-21) Status: blocked.

S59 [SRC-00059] Schneider Electric (Square D). *Square D I-Line Plug-on Connection Design and Advantages, Data Bulletin*. 0600DB1004. 2010-12-01. Type: oem_bulletin. URL: https://www.se.com/us/en/download/document/0600DB1004 (accessed 2026-10-21) Status: blocked.

S60 [SRC-00060] forums.mikeholt.com. *Mike Holt forum thread: SQ-D replacement parts (I-Line bussing not sold as DIY parts)*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1409627 (accessed 2026-10-21) Note: Anecdotal; seen via search summary.

S61 [SRC-00061] Schneider Electric. *QMB legacy-replacement FAQs seen only via search summary (QMB3640 -> QMB3400LA; QMB303T -> QMB321T + QMB306LEX; QMB306T Series 1 -> QMB322TD + QMB306LEX)*. FA123288 / FA87289 / FA113960 / FA99653 / FA118445 (mapping unverified). Type: oem_web. URL: https://www.se.com/us/en/faqs/FA123288 (accessed 2026-10-21) Status: blocked. Note: Direct fetch 403 (rate-limited); content seen only through search-engine summary - treat as C until verified.

S62 [SRC-00062] Schneider Electric Canada. *FAQ FA92305: repair parts for a QMB363TW, Series E1 (E01)*. FA92305. Type: oem_renewal_parts. URL: https://www.se.com/ca/en/faqs/FA92305 (accessed 2026-10-21)

S63 [SRC-00063] Schneider Electric. *FAQ FA92286: repair parts for a QMB367W, Series E1 (E01)*. FA92286. Type: oem_renewal_parts. URL: https://www.se.com/us/en/faqs/FA92286 (accessed 2026-10-21)

S64 [SRC-00064] Schneider Electric. *FAQ FA119872: replacement for a QMB310T, series 1 through 4 switch*. FA119872. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA119872 (accessed 2026-10-21)

S65 [SRC-00065] Schneider Electric. *FAQ FA127541: replacement for a QMB3620*. FA127541. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA127541 (accessed 2026-10-21)

S66 [SRC-00066] Schneider Electric. *FAQ FA88047: replacement for a QMB3606T*. FA88047. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA88047 (accessed 2026-10-21)

S67 [SRC-00067] Schneider Electric. *FAQ FA100372: replacement for a QMB3260 600 A QMB switch*. FA100372. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA100372 (accessed 2026-10-21)

S68 [SRC-00068] Schneider Electric. *FAQ FA128647: replacement parts for a QMB3240*. FA128647. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA128647 (accessed 2026-10-21)

S69 [SRC-00069] Schneider Electric. *FAQ FA122651: replacement switch for the old QMB2240, 2P 400 A QMB switch*. FA122651. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122651 (accessed 2026-10-21)

S70 [SRC-00070] Schneider Electric. *FAQ FA242815: Does Schneider offer a 1200 A QMB switch? Where is it used?*. FA242815. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA242815 (accessed 2026-10-21)

S71 [SRC-00071] Schneider Electric. *FAQ FA122202: QMB blanks for current style QMB panelboards and switchboards with QMB distribution*. FA122202. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA122202 (accessed 2026-10-21)

S72 [SRC-00072] Schneider Electric. *FAQ FA113960: replacement branch switch for the old QMB210T Series 1 through 4*. FA113960. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA113960 (accessed 2026-10-21)

S73 [SRC-00073] Schneider Electric. *FAQ FA118445: part number for a 300 A / 3P circuit breaker unit for an old QMB Saflex panelboard*. FA118445. Type: oem_web. URL: https://www.se.com/us/en/faqs/FA118445 (accessed 2026-10-21)

S74 [SRC-00074] MB Glick / others. *MB Glick surplus listing: Square D QMB3606T QMB Saflex panelboard switch unit 60 A Series 4 (and used QMB 3606T Series 2 Saflex twin unit listing)*. Type: surplus. URL: https://mbglick.com/shop/panelboard-switch/square-d-qmb3606t-qmb-saflex-panelboard-switch-unit-60a-max-600hp-series-4 (accessed 2026-10-21) Note: Seen via search summary only.

S75 [SRC-00075] GE Industrial Solutions. *BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts)*. BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014). 2014-07. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_18438_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_18438_catalog.pdf Note: 52-page OEM PDF (PDF title 'GE BuyLog - Section 11: Panelboards') mirrored by distributor US Electrical Services (USESI). OEM original URL https://electrification.us.abb.com/catalog/buylog/GE%20Products%20BuyLog%202019/11_GE%20Products%20BuyLog_Panelboards.pdf returned HTTP/2 INTERNAL_ERROR / 503 from this container. Text extracted to buylog11.txt.

S76 [SRC-00076] GE Industrial Solutions. *GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts*. BuyLog p.11-10 Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/specification-sheets/USESI_49199_specification_sheets.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_49199_specification_sheets.pdf Note: Single-page extract of BuyLog p.11-10 mirrored by USESI; heading reads 'A-Series II Panelboards'.

S77 [SRC-00077] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits*. DEH40150 Rev.No.03. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/rYlgoZ/DEH40150rev03.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40150rev03.pdf Note: Distributor mirror (Carbon Controls). Original yodify mirror links now 404.

S78 [SRC-00078] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits*. DEH40151 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/vYA1QZ/DEH40151.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40151.pdf

S79 [SRC-00079] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits*. DEH40152 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/BnbG3Z/DEH40152.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40152.pdf Note: Same file also mirrored at https://cdn.lsicloud.net/kendall/Resources/AD/GE_ASPP6QD6D_Manual.pdf

S80 [SRC-00080] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits*. DEH40153 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/lYWwVZ/DEH40153.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40153.pdf

S81 [SRC-00081] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole)*. DEH40154 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/LeQrBZ/DEH40154.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40154.pdf

S82 [SRC-00082] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole)*. DEH40155 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/YjVDgZ/DEH40155.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40155.pdf

S83 [SRC-00083] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits*. DEH40156 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/KOrvrZ/DEH40156.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40156.pdf Note: Also rendered as text at https://www.manualsdir.com/manuals/295079/ge-industrial-solutions-a-series-ii-panelboards-fb.html

S84 [SRC-00084] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole)*. DEH40157 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/AelGOZ/DEH40157.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40157.pdf

S85 [SRC-00085] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole)*. DEH40158 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/mDAggZ/DEH40158.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40158.pdf

S86 [SRC-00086] GE Industrial Systems. *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD)*. DEH065 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295540/ge-industrial-solutions-spectra-series-power-panelboards-amcb4qd-and-amcb6qd.html (accessed 2026-10-21) Note: Text rendering on manualsdir.com (4 pages); footer 'DEH065 R02 0901 (c) 2001 General Electric Company'. Table 1 quantities not captured in the text rendering.

S87 [SRC-00087] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM)*. GEH5674 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294735/ge-industrial-solutions-spectra-series-power-panelboards-amc2gm-and-amc3gm.html (accessed 2026-10-21) Note: Footer 'GEH5674 R03 0701'.

S88 [SRC-00088] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL*. DEH40392 R01. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295049/ge-industrial-solutions-spectra-series-power-panelboards.html (accessed 2026-10-21)

S89 [SRC-00089] GE Industrial Systems. *Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S*. DEH212 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294723/ge-industrial-solutions-spectra-series-power-panelboards-aeg47-and-aeg47s.html (accessed 2026-10-21)

S90 [SRC-00090] ABB. *ReliaGear neXT Power Panelboards (brochure)*. 1SXU900191B0201. 2022-01. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnextpanelboards?textonly=1 (accessed 2026-10-21) Note: Read via simplebooklet text-only rendering; no kit catalog numbers present.

S91 [SRC-00091] Relectric. *NHB150PK General Electric / GE Mounting Hardware (product page)*. Type: surplus. URL: https://www.relectric.com/nhb150pk (accessed 2026-10-21)

S92 [SRC-00092] SuperBreakers. *General Electric NHB150PK Twin Mount Mounting Hardware (product page)*. Type: surplus. URL: https://www.superbreakers.com/collections/mounting-kits-panels-accessories/products/general-electric-nhb150pk-mounting-hardware (accessed 2026-10-21) Note: Content seen only via search-engine summary; page not fetched directly.

S93 [SRC-00093] ABB. *BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)*. Type: oem_catalog. URL: https://electrification.us.abb.com/catalog/buylog/11_BuyLog_Panelboards.pdf (accessed 2026-10-21) Status: blocked. Note: curl: empty reply; WebFetch: HTTP 503. Contents known only from search-engine summary (TOC mentions ReliaGear neXT nomenclature and 'Spectra (obsoleted) bolt-on panelboard mounting hardware'; 'Retrofit kit for Spectra panelboards').

S94 [SRC-00094] manualmachine.com (mirror of GE documents). *GE Industrial Solutions manuals on manualmachine.com (DEH061 AMCB3KM/AMCB2KM; DEH042 cover supports SE/SF/TE/TF/TQ/TEL; GEH5589 APN/APNB interiors; AMCB4GB/AMCB6GB; AMCB2GM/AMCB3GM; A-Series II TQD)*. Type: archive. URL: https://manualmachine.com/ge/amcb3km/12960805-user-manual/ (accessed 2026-10-21) Status: blocked. Note: HTTP 403 to both curl and WebFetch. Existence/titles known only from search results.

S95 [SRC-00095] Stanion Wholesale Electric. *TQ2DPK GE product page*. Type: distributor. URL: https://www.stanion.com/Product/tq2dpkge (accessed 2026-10-21) Status: 404. Note: Description known only from search-engine summary; direct fetch returned 404.

S96 [SRC-00096] Surplus Record. *Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)*. Type: surplus. URL: https://surplusrecord.com/listing/1600-amp-general-electric-av-line-switchboard-480-volts-3ph-4w-10-breaker-power-break-dist-main-1086962/ (accessed 2026-10-21) Note: Seen via search-engine summary only.

S97 [SRC-00097] Siemens Industry, Inc.. *SPEEDFAX Product Catalog - Section 11 Panelboards*. SPEEDFAX Section 11 (last modified 06/24/21). 2021-06. Type: oem_catalog. URL: https://media.distributordatasolutions.com/siemenscomplete/2021q3/documents/4c3c521171b400657d1e4257e047beee1a99295b.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/speedfax_sec11_2021q3.pdf Note: 132 pages. Distributor-hosted (DDS syndication) copy of OEM PDF. Key pages: 11-7 (UPB coding), 11-13/11-14 (Revised P1 kits), 11-15 (Original P1 / S1-S2-SE kits), 11-20..11-23 (spare parts, filler chart), 11-53/11-54 (P2/P3 spare parts), 11-66/11-67 (P3 kits), 11-96 (P4 strap kits), 11-110 (P5 strap kits). Individual pages carry their own 'Revised on' dates (2019-2021).

S98 [SRC-00098] Siemens Canada Limited. *Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS)*. Power Product Catalogue Section 11. 2025-05. Type: oem_catalog. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:ac958a69-a1ee-45e7-95f6-152fe9153d31/s11-switchboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/s11-switchboards.pdf Note: PDF metadata creation 2025-05-30. p.11-5: SB1/SB2/SB3 connection strap kit table; p.11-14: S3VA52PR/S3VA53PR provision kits, nut keeper kits, 6FPB blank plates; p.11-15: CSA SMP/Series 6 strap kits (6BL2C, 6E62, 6F62, 6JJ62, 6M61C, 6N61C etc.).

S99 [SRC-00099] Siemens Energy & Automation. *2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits*. Discount Schedule A, page 8-13. 2005. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_93250_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93250_brochure.pdf Note: Single catalog page hosted by distributor (USESI). Strap kits 'for Series 5 or 6 CDP Circuit Breaker Panelboards or FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, and SB3 Switchboards ... for switchboards manufactured since 1974'. Includes list prices (2005).

S100 [SRC-00100] Siemens Power Distribution & Control. *SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22*. SPEEDFAX 2007-2008 pp.10-17..10-22. 2007. Type: oem_catalog. URL: https://www.nooutage.com/pdf/Siemens-PanelboardsP1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens-PanelboardsP1.pdf Note: Original (pre-revision) P1 pages; lists P1 branch breakers BL/BLH/HBL/BQD/NGB, subfeed QJ2/ED4/FXD6. No kit tables on these pages.

S101 [SRC-00101] Siemens Industry, Inc.. *Type P1 Panelboard data sheet (SIE_CS_P1)*. SIE_CS_P1 / Siemens SIOS 109799956. 2021-10. Type: oem_bulletin. URL: https://cache.industry.siemens.com/dl/files/956/109799956/att_1147894/v1/SIE_CS_P1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_CS_P1.pdf Note: (c) 10.2021. Revised P1 specification + main strap kit list; states 'Revised P1 kits cannot be used with original P1'.

S102 [SRC-00102] Siemens Industry, Inc.. *Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)*. 2021. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/30WD80V.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/30WD80V.pdf Note: Lists P2/P3 branch unit-space strap kits BBKB32, BBKVA4P2P3, BBKQR2, BBKVA5262S (sic; SpeedFax spells BBKVA5262P2S), BBKVA52P3T; strap kit for 1in frame breakers uses 3in unit space.

S103 [SRC-00103] Siemens Industry, Inc.. *New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf)*. c.2015-2019. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/MBKQR3150HA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/MBKQR3150HA.pdf Note: Earlier (pre-April-2020 neutral update) Revised P1 kit list: MBK..A breaker kits, CNLK30A/42A/54A, LNLK30A/42A/54A, 2NLK..A, 42NLK..A, MBKDFA back-fed label kit, DFFP1.

S104 [SRC-00104] Siemens Canada Limited. *NextGen P1 panelboard brochure (Siemens Canada)*. SI-LP-1633. unknown (c.2020). Type: oem_bulletin. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:f264c377-e970-40b2-b60d-155bc2e52f40/ca-si-lv-en-NextGen-P1-brochure-SI-LP-1633.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/NextGen-P1-brochure-SI-LP-1633.pdf Note: Canadian Revised P1 kit table; references MBKBFA back-fed main label kit and Canadian kit numbers (e.g. MBKQR12225A, MBKFD33250A, MBKJD33400A).

S105 [SRC-00105] Siemens. *Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER*. US2:MBKBFA. 2021-01-06. Type: oem_web. URL: https://res.cloudinary.com/wholesale-plumbing/image/upload/Documents2/Siemens_MBKBFA_Specification_Sheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens_MBKBFA_Specification_Sheet.pdf Note: Minimal data sheet (title + 'Field installable kit').

S106 [SRC-00106] Siemens Industry, Inc.. *Panelboards Selection and Application Guide*. SIE Selection And Application Guide Panelboards (SIOS 109792056). 2016. Type: oem_catalog. URL: https://cache.industry.siemens.com/dl/files/056/109792056/att_1049678/v1/SIE_Selection_And_Application_Guide_Panelboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_Selection_And_Application_Guide_Panelboards.pdf Note: (c) 2016. Only cross-checked by part-number grep in this batch (BBKB32, BBKED32, BBKNB32, BBKQR1, BBKQR2, BBKQRP1FK, BBKQRP2FK, DFFP3, DFFP6, LNLK30A/42A/54A, SEB kits, SF6/SF6D, SJ1/SJ1D, SE6/SE6D, SQR/SQRC/SQRD, 6FPB01..10). Not fully mined.

S107 [SRC-00107] Lumen. *Lumen (Canada) product listing - Siemens 6BL2C switchboards breaker mounting kit copper 3 ph 240 V 100 A*. Type: distributor. URL: https://lumen.ca/en/products/20-power-distribution/08-panelboards/01-main-breaker-kits/p-U0lFNkJMMkM=-sie6bl2c-siemens-6bl2c-switchboards-breaker-mounting-kit-copper-3-ph-240-v-100-a (accessed 2026-10-21) Note: Seen via search summary only; breaker list varies between distributors (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB).

S108 [SRC-00108] various. *Distributor listings for Siemens SBL (sydist.com SIEM-SBL-50631; superbreakers.com/products/sbl; steinerelectric 'BL BKR MTG KIT FOR P4/S4/SPP PNLBD')*. Type: distributor. URL: https://www.sydist.com/Product/SIEM-SBL-50631 (accessed 2026-10-21) Note: Search-summary only. Distributor descriptions are inconsistent (one wrongly calls it a padlock kit / QR frame); SpeedFax p.11-96 is authoritative.

S109 [SRC-00109] Crescent Electric Supply. *Crescent Electric listing - QF3 Load Center Filler Plate (sub no. 12-1800-01), for QP/BQ/ED2/EQL/SEQ/EQG*. Type: distributor. URL: https://crescentelectric.com/product/47056/qpbqed2-filler-plate-sub-no-12-1800-01 (accessed 2026-10-21) Note: Search-summary only.

S110 [SRC-00110] Mike Holt Enterprises forum. *Mike Holt forum thread - Gould panels and switchboards*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1425085 (accessed 2026-10-21) Note: Anecdotal: ITE/Gould lineage, Bulldog Pushmatic not supported by Siemens.

S111 [SRC-00111] Franklin Empire. *Franklin Empire listing - Siemens 6F62 Connecting Strap Kit, For Use With SPP/FPP/S5/F2 Panelboards, 600 VAC, 70 to 250 A, Copper, 5 in H*. Type: distributor. URL: https://franklinempire.com/en/6f62-4114-6f62.html (accessed 2026-10-21) Note: Search-summary only.

S112 [SRC-00112] Schneider Electric / Square D. *PowerPact H-, J-, and L-Frame Circuit Breakers Catalog*. 0611CT1001 R01/13. 2013-01. Type: oem_catalog. URL: https://docs.rs-online.com/c13a/0900766b813b5fa7.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/0611CT1001_R01-13_rs-mirror.pdf Note: Distributor-hosted (RS Components) copy of OEM catalog. Section 9 'Circuit Breaker Mounting and Connections' pp.117-129: Tables 118-130 (rear connections, mechanical lug kits, control wire terminals, terminal nuts, PDCs, compression lugs, terminal shields). Superseded by 0611CT1001 v5.0 (2024-09-30) which could not be downloaded (se.com 403).

S113 [SRC-00113] Schneider Electric. *Product data sheet AL175JD - Circuit breaker accessory, PowerPacT J, lug kit, mechanical, 150A to 175A, aluminum, qty 3*. AL175JD data sheet. unknown. Type: oem_web. URL: https://docs.rs-online.com/4ce1/A700000013719674.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/rs_A700000013719674.pdf Note: Distributor-hosted copy of Schneider product data sheet.

S114 [SRC-00114] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2012)*. Digest 176 Section 3 (Class 612). 2012. Type: oem_catalog. URL: https://www.farnell.com/datasheets/1883762.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/farnell_1883762_SquareD_Digest_Sec3_2012.pdf Note: Farnell-hosted copy. Table 3.61/3.62 (control wire terminations, tapped PowerPact lugs) p.3-17; Table 3.71 termination clip p.3-20; Table 3.88 mechanical lug kits, 3.89 D-frame lugs, 3.90 terminal shields p.3-28; Table 3.91 compression lugs, 3.92/3.93 PDC p.3-29. Digest edition number inferred from 2012 copyright (not printed in extracted text).

S115 [SRC-00115] Schneider Electric / Square D. *Square D Digest Section 3 - Molded Case Circuit Breakers and Enclosures (2016)*. Digest Section 3 (Class 612, ref. catalog 0612CT0101). 2016-09-24. Type: oem_catalog. URL: https://cdn.lsicloud.net/kendall/Resources/AD/Square_D_FA24020AB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/SQD/Square_D_FA24020AB_Catalog.pdf Note: Kendall Electric-hosted copy. Table 3.44/3.45 p.3-14; Table 3.69 p.3-25; Table 3.70 mechanical lug kits p.3-26; Table 3.71 compression lugs and 3.72 PDC p.3-27.

S116 [SRC-00116] Eaton (Cutler-Hammer). *Molded Case Circuit Breakers (Tab 12) - Consulting Application Guide / catalog, November 2008*. CA08101001E. 2008-11. Type: oem_catalog. URL: https://files.kempstoncontrols.com/files/13de8777fba90a2d4f0dd1d8944292ca/JT3225FA.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/JT3225FA.pdf Note: Kempston Controls-hosted copy of full Eaton Tab 12 (pp.12-1..). Terminal tables: EG 12-19, JG 12-28, LG 12-37, NG 12-48, F 12-91, J 12-97, K 12-113, L 12-132, M 12-140, N 12-162, R 12-181; External accessories 12-243..12-261 (end caps, keeper nuts, plug nut, control wire kits, multiwire, terminal shields, end covers, interphase barriers, rear connecting studs, panelboard straps).

S117 [SRC-00117] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-250 Amperes J-Frame (pp.12-87..12-92), May 2008*. CA08101001E. 2008-05. Type: oem_catalog. URL: https://rexel-cdn.com/products/eaton-distribution-breakers-moldedcase-j-frame.pdf?i=46AAC28F-3990-44C5-A4CE-75139B8D2493 (accessed 2026-10-21) Local copy: docs/library/EAT/eaton-distribution-breakers-moldedcase-j-frame.pdf Note: Rexel-hosted excerpt. Table 12-163 J-frame line/load terminals p.12-91.

S118 [SRC-00118] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (excerpt pages V4-T2-188, 190, 203, 334, 345, 354, 356), October 2015*. CA08100005E. 2015-10. Type: oem_catalog. URL: https://cdn.lsicloud.net/warshauers/Resources/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/EATCORE00136_V4T2_188_V4T2_190_V4T2_203_V4T2_334_V4T2_345_V4T2_354_V4T2_356.pdf Note: Warshauer Electric-hosted excerpt. V4-T2-203 L-frame terminal table; V4-T2-334 definite purpose terminals; V4-T2-345 Series G enclosed terminals; V4-T2-356 DC breaker terminal wire ranges table.

S119 [SRC-00119] Eaton. *Volume 4 - Circuit Protection, Series G EG-Frame pages V4-T2-16..V4-T2-27, April 2014*. CA08100005E. 2014-04. Type: oem_catalog. URL: https://www.cmafh.com/images/Master%20PDFs/Eaton/Eaton%20MCCB/Eaton%20MCCB%20EG-Frame.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Eaton_MCCB_EG-Frame.pdf Note: CMA/Flodyne-hosted excerpt. EG terminals V4-T2-23/24; control wire kit, interphase barriers, end covers, multiwire, terminal shields V4-T2-25.

S120 [SRC-00120] Eaton (Cutler-Hammer). *Series C Molded Case Circuit Breakers 70-400 Amperes K-Frame p.12-98 (May 2008) - Types KD, HKD, KDC electronic*. CA08101001E (excerpt). 2008-05. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_563623_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_563623_brochure.pdf Note: USESI-hosted single page; shows standard terminals per K-frame electronic rating plug (TA300K, TA350K, 3TA400K).

S121 [SRC-00121] Eaton. *Eaton product specifications 3TA150FB*. 3TA150FB spec sheet. unknown. Type: oem_web. URL: https://www.elliottelectric.com/Media/3TA150FB-ETN-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/3TA150FB-ETN-1021-3-Attachment.pdf Note: Elliott Electric-hosted auto-generated Eaton spec sheet. Taxonomy field 'Frame J-K' appears to be a generic web-taxonomy value (contradicts catalog); treat frame field with caution.

S122 [SRC-00122] Eaton. *Eaton Series G molded case circuit breaker accessories and terminals - 3TA632LK (pe.eaton.com spec)*. ID-SPE-v2-3TA632LK. unknown. Type: oem_web. URL: https://www.ideadigitalcontent.com/files/10964/ID-SPE-v2-3TA632LK.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/ID-SPE-v2-3TA632LK.pdf

S123 [SRC-00123] KM Parts (klocknermoeller.com). *Eaton Series-C Molded Case Circuit Breakers External Accessories (KM Parts web page)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-externalaccessories-2/ (accessed 2026-10-21) Note: Reseller page reproducing a newer Eaton catalog's external-accessory tables; some values differ from 2008 OEM catalog (interphase barrier numbering, J-frame shield location).

S124 [SRC-00124] KM Parts (klocknermoeller.com). *Eaton Series-C F/K/L/M/N/R-frame pages (KM Parts web pages sc-f, sc-k, sc-m, sc-n, sc-r)*. unknown. Type: distributor. URL: https://klocknermoeller.com/sc-k/ (accessed 2026-10-21) Note: Reproduces Eaton terminal tables (newer edition than 2008). Also https://klocknermoeller.com/sc-f/, /sc-m/, /sc-n/, /sc-r/.

S125 [SRC-00125] Schneider Electric. *Can the AL400L61K3 lug be installed on the 400 amp or 600 amp Powerpact L frame breaker? (FAQ FA221892)*. FA221892. unknown. Type: oem_web. URL: https://www.se.com/ca/en/faqs/FA221892/ (accessed 2026-10-21) Status: blocked. Note: Direct fetch blocked (se.com 403); content known only from web-search snippet: lug accepts (1) #2 AWG-500 kcmil Al or (1) #2 AWG-600 kcmil Cu, 3 lugs per kit, may be used as optional lug on 400/600 A L-frame subject to wire size/rating limits.

S126 [SRC-00126] Schneider Electric. *Mechanical Lug Kits Installation Instructions (AL150HD, AL150HDS, CU150HD, AL175JD, AL250JD, CU250JD)*. 48940-221-02 (v05, 2019-12). 2019-12. Type: oem_instruction. URL: https://www.schneider-electric.us/en/download/document/48940-221-02/ (accessed 2026-10-21) Status: blocked. Note: Download returned 403; existence and part list known from search snippet only.

S127 [SRC-00127] Eaton. *Volume 4 - Circuit Protection, Tab 2 Molded Case Circuit Breakers (current)*. CA08100005E. 2026-04. Type: oem_catalog. URL: https://www.eaton.com/content/dam/eaton/products/electrical-circuit-protection/molded-case-circuit-breakers/mccb-catalog-v4-t2-ca08100005e.pdf (accessed 2026-10-21) Status: blocked. Note: eaton.com returns empty reply/503 from this container (curl and WebFetch).

S128 [SRC-00128] various distributors. *Distributor listings AL800M23K / AL800P7K (Steiner Electric, Stoneway, Lakeland)*. unknown. Type: distributor. URL: https://steinerelectric.com/Product/Square-D-AL800M23K-Mechanical-Lug-KitFor-Use-With-PowerPact-M-and-P-Frame-800-A-Circuit-Breaker-390767 (accessed 2026-10-21) Note: Seen via web-search result summaries only; also https://www.stoneway.com/product/206142/Shared.ContactForPricing.ContactLink (AL800P7K).

S129 [SRC-00129] various distributors. *Distributor listings AL250KA (Stanion, Steiner, Stoneway)*. unknown. Type: distributor. URL: https://www.stanion.com/Product/al250kasqd (accessed 2026-10-21) Note: Seen via web-search result summaries; listings state use with KA, KH, KI, KC frames, 4 AWG-350 kcmil.

S130 [SRC-00130] ABB (GE Industrial Solutions). *GE Products BuyLog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 1/19. 2019-01. Type: oem_catalog. URL: https://assets.unilogcorp.com/2/ITEM/DOC/GE_SEFFMI_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/GE_SEFFMI_Catalog.pdf Note: Distributor-hosted mirror of the OEM PDF, 106 pp. Key pages: 6-36/6-37 (TJJ/TJK lugs), 6-48 (SG600 lugs), 6-73/6-78/6-81/6-88 (Record Plus lugs), 6-101 (mounting hardware and studs), 6-102 (lugs, line shields, lug covers), 6-103 (Spectra lugs and covers), 6-104 (power distribution lugs). CAUTION: footnote superscripts are run into the part numbers in the extracted text (e.g. 'TCAL1212' = TCAL121 + footnote 2), so numbers were reconciled against the 2012 edition.

S131 [SRC-00131] GE Industrial Solutions. *GE BuyLog Catalog, Section 6: Molded Case Circuit Breakers*. BuyLog Section 6, Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_107433_catalog_1.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_107433_catalog_1.pdf Note: Distributor mirror. Its lug tables carry the same part numbers as the Rev. 1/19 edition.

S132 [SRC-00132] GE Industrial Solutions. *GE BuyLog Catalog, Section 3: Molded Case Circuit Breakers (with GO-135 list prices)*. BuyLog Section 3, Rev. 9/12. 2012-09. Type: oem_catalog. URL: https://www.usesi.com/media/product-media/catalogs/USESI_14306_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_14306_catalog.pdf Note: Key pages: 3-120 (lugs and associated hardware, with footnotes 1-10), 3-121 (Spectra lugs), the TKMA tables (TCAL81/TCAL121) and the TJJ/TJK tables. Footnote numbers here differ from the 2019 edition, which made it possible to separate base part numbers from footnote digits. Lists the TCAL27, TCALK341, TCALK343, TCALK347 and TJLVK items that the 2013/2019 tables drop.

S133 [SRC-00133] GE Consumer & Industrial. *GE 2008 BuyLog, Section 3: Molded Case Circuit Breakers (excerpt, 3 pp.)*. BuyLog Section 3, Rev. 1/08. 2008-01. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003579.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/W1003579.pdf Note: Excerpt hosted by IPS. Mentions only TCAL81 and TCAL125. Used for corroboration.

S134 [SRC-00134] GE Industrial Solutions. *GE BuyLog Section 6 single page 6-103 (lugs), Rev. 7/13*. BuyLog p. 6-103 Rev. 7/13. 2013-07. Type: oem_catalog. URL: https://cdn.shopify.com/s/files/1/0074/7149/7286/files/TCAL12_Catalogue.pdf?v=1680355092 (accessed 2026-10-21) Local copy: docs/library/GEA/TCAL12_Catalogue.pdf Note: Single-page extract (2013 pagination) of the general lug table hosted by a reseller. Its content matches 2019 p. 6-102.

S135 [SRC-00135] Siemens Industry, Inc.. *Siemens SPEEDFAX Product Catalog, Section 7: Molded Case Circuit Breakers*. SF-17-Sect-07 (SPEEDFAX 2017, pages revised 2017-2020). 2020-09. Type: oem_catalog. URL: http://library.coburns.com/specs/SF-17-Sect-07-ALL-web.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SF-17-Sect-07-ALL-web.pdf Note: 240 pp. Mirror (Coburn's). The OEM URL https://support.industry.siemens.com/cs/attachments/109983309/SF-17-Sect-07-ALL-web.pdf returned a 470-byte HTML stub to curl. Key pages: 7-39 (BQXD lugs, finger-safe shields), 7-40 (QR2 lugs), ED/FD/JD/LD/MD/ND/PD pages (lug notes), 7-153 (mechanical lugs, rev 06/30/19), 7-154 (aluminum body lugs, rev 05/31/18), 7-155 (optional Cu lugs, compression and distribution lugs, rev 11/30/19), 7-160 (terminal shields, rev 02/28/19), 7-165 (plug-in and rear-connecting studs, rev 09/30/20).

S136 [SRC-00136] Siemens Industry, Inc.. *Siemens SPEEDFAX, Section 7: Molded Case Circuit Breakers (section last modified 08/17/21)*. SPEEDFAX Section 7 (2021 revision). 2021-08. Type: oem_catalog. URL: https://docs.ips.us/docs/W1003585.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/W1003585.pdf Note: 242 pp. Later revision. Its set of TA/TC lug catalog numbers is identical to s6, so it was used only for corroboration and to show the parts were still listed in 2021.

S137 [SRC-00137] BSP Automation (distributor). *Siemens TA1Q300 product page*. Type: distributor. URL: https://bspautomation.com/brand/siemens/ta1q300 (accessed 2026-10-21) Note: Describes TA1Q300 as a 3-lug kit for QJ breakers, Al/Cu, single wire up to 300 kcmil. A search snippet from superbreakers.com (HTTP 429 when fetched) lists QJ2, QJH2, QJ2H and HQJ2H, 60-225 A.

S138 [SRC-00138] Breaker King (distributor). *Breaker Mounting Kits :: Federal Pacific Electric (category listing)*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=index&cPath=4_187_189 (accessed 2026-10-21) Note: Aftermarket FPE bus-connection kits with explicit 'replaces OEM K?DP?C' cross references (NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K).

S139 [SRC-00139] Breaker King (distributor). *Federal Pacific CDP [BCDPNJLFPE] product page*. Type: distributor. URL: https://www.breakerking.com/catalog/index.php?main_page=product_info&products_id=1938 (accessed 2026-10-21) Note: Kit contents statement: screws, brackets, deadfront cover plate, instructions; ship wt 7 lb.

S140 [SRC-00140] R&D Electric / relectric.com (surplus/recertifier). *Federal Pacific Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/federal-pacific-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 49 FPE accessory part numbers incl. KCDP-1C..5C, KBDP-1C..4C, KFDP-*, KQB-*, NDPNE/NDPNEJ, NAIB-NEF, NM lugs NM34/NM36/NM38, N32.

S141 [SRC-00141] Superbreakers (distributor/recertifier). *Superbreakers Federal Pacific collection (Shopify products.json, 639 items)*. Type: distributor. URL: https://superbreakers.com/collections/federal-pacific (accessed 2026-10-21) Note: Machine-read via /collections/federal-pacific/products.json?limit=250&page=1..3. Descriptions are partly marketing copy; ratings treated as max conf C.

S142 [SRC-00142] Electrical Power and Control (surplus). *Federal Pacific KCDP-1A Kit (for NH/NA-Type Panel, NE/NEF Frame)*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/federal-pacific-kcdp-1a-kit-for-nh-na-type-panel-ne-nef-frame (accessed 2026-10-21) Note: Used kit; label text 'For NH1B/NA1B Type Panels', '(2) 3 Pole Breakers', 'J25 (HM1)', 'LA25037'.

S143 [SRC-00143] R&D Electric / relectric.com. *NDPNEJ mounting hardware strap kit detail*. Type: surplus. URL: https://www.relectric.com/ndpnej (accessed 2026-10-21)

S144 [SRC-00144] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *Federal Pacific Electric panelboard connector kits*. Type: oem_web. URL: https://fpeparts.com/pages/fpe-panelboard.html (accessed 2026-10-21) Note: Successor-to-tooling site; lists kit families FDP, QMQB, NDP, NHDP, NAIB, NHIB, LDP, CDP, BDP (names only, no part numbers). States no residential Stab-Lok parts.

S145 [SRC-00145] Federal Pacific Equipment / Circuit Breaker Sales (fpeparts.com). *About Federal Pacific Electric Equipment (history)*. Type: oem_web. URL: https://fpeparts.com/pages/history.html (accessed 2026-10-21)

S146 [SRC-00146] Wikipedia. *Federal Pacific Electric Corporation*. Type: other. URL: https://en.wikipedia.org/wiki/Federal_Pacific_Electric_Corporation (accessed 2026-10-21) Note: Cites 406 F.3d 577 and InspectApedia for 1986 split (ACBC breakers / Electro-Mechanical Corp non-breaker), 1993 ACBC->Schneider contract manufacture.

S147 [SRC-00147] Superbreakers. *Federal Pacific panelboard/kits: KBDP1C, KCDP1C, KFDP4C product pages*. Type: distributor. URL: https://superbreakers.com/products/federal-pacific-kbdp1c-mounting-hardware (accessed 2026-10-21) Note: Individual product JSON read for KCDP1C, KBDP1C, KFDP4C.

S148 [SRC-00148] Mike Holt Forums. *Retrofit kit for Federal Pacific (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/retrofit-kit-for-federal-pacific.53588/post-867625 (accessed 2026-10-21) Note: Read via search summary only (site returns 403 to fetch). Eaton/Square D custom retrofit interiors for existing FPE enclosures.

S149 [SRC-00149] Schneider Electric. *Schneider Electric FAQ: replacement breakers for Federal Pacific switchboards/panelboards; NBLP panelboards take NB type breakers*. Type: oem_web. URL: https://www.se.com/nl/en/faqs/FAQ000278110/ (accessed 2026-10-21) Status: blocked. Note: 403 to fetch; content known only from search-result snippet: 'Schneider Electric does no longer offer replacement breakers for Federal pacific switchboard, panelboards' and 'The NBLP panelboards take NB type breakers'.

S150 [SRC-00150] Schneider Electric Canada. *Federal Pioneer / Schneider Canada FAQ FA234570*. Type: oem_web. URL: https://se.com/ca/en/faqs/FA234570/ (accessed 2026-10-21) Status: blocked.

S151 [SRC-00151] Wikipedia. *Zinsco*. Type: other. URL: https://en.wikipedia.org/wiki/Zinsco (accessed 2026-10-21) Note: History Frank Adam->Zinsmeyer->Zinsco (1943)->GTE-Sylvania (1973)->Challenger (1978/1981)->Westinghouse (1994 per article)->T&B molds; Connecticut Electric bus kits. Cites InterNACHI forum 2007.

S152 [SRC-00152] InspectAPedia. *GTE Sylvania Zinsco breaker & panel identification*. Type: other. URL: https://inspectapedia.com/electric/GTE_Sylvania_Zinsco.htm (accessed 2026-10-21) Note: Reader-submitted panel labels: ML12(12-24)C, MLB20(..)C, MOB20(20-40)C, MT12MBB, MTMB20(20-40)F/S, 390-205-09; breaker types Q, QC, QCN, Q24, R38, RC38, HRGF, QFP; main lug blocks LK-15 (150A), LK-22 (225A).

S153 [SRC-00153] Superbreakers. *Superbreakers Zinsco + Sylvania collections (Shopify products.json)*. Type: distributor. URL: https://superbreakers.com/collections/zinsco (accessed 2026-10-21) Note: 95 Zinsco + 48 Sylvania items; QSF fusible panelboard switches, QFP/QFL/QFB/QFBL mains, QB/QCB bolt-on, UBIZ cross refs.

S154 [SRC-00154] The Home Depot (retailer). *Zinsco 125-Amp Type RBK UBI Replacement Buss Bar Kit for Zinsco Load Centers UBIZRBK12*. Type: distributor. URL: https://www.homedepot.com/p/Zinsco-125-Amp-Type-RBK-UBI-Replacement-Buss-Bar-Kit-for-Zinsco-Load-Centers-UBIZRBK12/100669974 (accessed 2026-10-21) Note: Read via search summary: '2 copper-plated buss bars, lugs, screws, insulators included'.

S155 [SRC-00155] Dale Electric / Sonic Electric / Ace Hardware (retailers). *Connecticut Electric UBIZ / UBIF / UBIP replacement breaker listings*. Type: distributor. URL: https://dale-electric.com/products/UBIZ30 (accessed 2026-10-21) Note: UBIZ (Zinsco Q-type), UBIF (FPE Stab-Lok NA/NC), UBIP (Pushmatic/Bulldog) 10kAIC ETL-listed replacement breakers; read via search summaries.

S156 [SRC-00156] Mike Holt Forums / InterNACHI forum. *Challenger / GTE / Zinsco ownership discussion*. Type: forum. URL: https://forums.mikeholt.com/threads/challenger-brand-history.55618/post-924498 (accessed 2026-10-21) Note: Via search summary: Westinghouse acquired Challenger late 1980s (NACHI timeline says 1988); T&B took Zinsco/Challenger breaker lines.

S157 [SRC-00157] InspectAPedia. *Frank Adam Electrical Panels*. Type: other. URL: https://inspectapedia.com/electric/Frank-Adam-Electrical-Panels.php (accessed 2026-10-21) Note: Model labels PULFUZSW, KLAMPSWFUZ; Zinsco-type QSF breakers/switches in some Frank Adam panelboards; Fuselok switch; era c.1900-1950 (to 1970).

S158 [SRC-00158] Mike Holt Forums / InterNACHI / ECN forums. *Trumbull Electric panel / GE-Trumbull discussions*. Type: forum. URL: https://forum.nachi.org/t/trumbull-electric-panel/39581 (accessed 2026-10-21) Note: Label 'Trumbull Electric Mfg. Co. Plainville Conn. USA. A General Electric Organization'; GE/Trumbull breaker numbers same.

S159 [SRC-00159] Mike Holt Forums. *Bulldog Pushmatic forum threads (3-phase Pushmatic, ITE/Siemens lineage)*. Type: forum. URL: https://forums.mikeholt.com/threads/bulldog-pushmatic.2562559/post-2688682 (accessed 2026-10-21)

S160 [SRC-00160] JRL Electric Supply (dealer blog). *What is a Federal Pacific NE and NEF Circuit Breaker?*. Type: distributor. URL: https://jrlelectricsupplyinc.com/?p=12855 (accessed 2026-10-21) Note: Fetch returned 429; content from search summary: NE and NEF obsolete, same dimensions, fit same panels; NEF 2-3P rated 480 VAC / 250 VDC; voltage and AIC differ.

S161 [SRC-00161] Superbreakers. *Superbreakers Murray + Wadsworth collections (products.json)*. Type: distributor. URL: https://superbreakers.com/collections/murray (accessed 2026-10-21)

S162 [SRC-00162] Eaton Electrical / Cutler-Hammer (mirror hosted by InspectAPedia on its FPE pages). *Eaton Electrical Launches New Options for Upgrading Existing Panelboards - Retrofit Kits (Type CH and BR) selection guide*. Type: oem_catalog. URL: https://inspectapedia.com/fpe/CHRetrofitGuide.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/CHRetrofitGuide.pdf Note: 10 pp. Undated (Eaton Electrical/Cutler-Hammer branding suggests c.2004-2008). Selection charts 1-11 give ~60 retrofit kit catalog numbers by box height, wire size, circuits, main type. Lincoln Flex Center 800-330-6479. Interiors 'UL recognized under UL67'. Mirror URL; original Eaton URL not known.

S163 [SRC-00163] Mike Holt Forums. *Eaton's retrofit panel assemblies are not UL listed (forum thread) and related threads*. Type: forum. URL: https://forums.mikeholt.com/threads/eaton%E2%80%99s-retrofit-panel-assemblies-are-not-ul-listed.122367/ (accessed 2026-10-21) Note: Via search summary: components listed but installed assembly in existing enclosure not; UL paths = interior listed for enclosure or field evaluation; claim that interiors not marked for the existing enclosure revert to 10 kA SCCR (unverified).

S164 [SRC-00164] R&D Electric / relectric.com. *Zinsco Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/zinsco-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 12 items: DSLNEJT, DSLNET, DSLNFT, DSLNJT, DSLNM, DSLNMS, DSLQB, DSLQFB, QSF100DS, QSF200DS, QSF400DS, QSF600DS.

S165 [SRC-00165] R&D Electric / relectric.com. *Sylvania Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/sylvania-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 10 items: SEHT, SECT, SJD4T, SKM8S, FPENEFT, QSF100SS, QSF100SB, QSF200SB, QSF400SB, QSF400DS.

S166 [SRC-00166] R&D Electric / relectric.com. *Challenger Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/challenger-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: 41 items: C?D?K twin/single mounting kits (CCA4K, CED3K, CED4K, CED4BK, CFD3K, CFD4K, CFD4BK, CJD4K, CJDS4K, CJDS4BK, CKD4K, CKDS4K, CKDS4BK, CLD4K, CLDS4BK, CMD4K, CND4K), KPRL4C*/KPRL4AC*/KPRL4BC*/KPRL3CF3 kits, CKT trip units, rating plugs. 'PM4a'/'PM4b' annotations.

S167 [SRC-00167] Electrical Power and Control (surplus). *Zinsco QFP2T Main Breaker Panelboard Mounting Hardware / Feet*. Type: surplus. URL: https://electricalpowerandcontrol.com/product/zinsco-qfp2t-main-breaker-panelboard-mounting-hardware-feet (accessed 2026-10-21)

S168 [SRC-00168] R&D Electric / relectric.com. *Frank Adams Breaker Parts & Accessories Catalog*. Type: surplus. URL: https://www.relectric.com/part-catalog/frank-adams-circuit-breaker-parts-and-accessories (accessed 2026-10-21) Note: Single item CU-NFJ 'FAM; CU-NFJ; Hardware Kit'.

S169 [SRC-00169] IAEI Magazine / UL. *Circuit breakers and old panelboard; will anything work? (UL Question Corner)*. 2010-03. Type: other. URL: https://iaeimagazine.org/2010/march2010/circuit-breakers-and-old-panelboard-will-anything-work/ (accessed 2026-10-21) Note: UL guidance: only classified breakers (DIXF, 15-60 A, 120/240 V, panels <=225 A, <=10 kA) may substitute; otherwise use breakers named on panel marking.

S170 [SRC-00170] InspectAPedia. *Pushmatic / Bulldog design history*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic_Design_History.php (accessed 2026-10-21) Note: Bulldog Electric Products Co. (Detroit); ITE (Gould) purchase stated 1976; Siemens c.1984; US 2,428,320 (1947) Platz panelboard with detachably mounted devices = Pushmatic panel; installed mainly 1950-1970.

S171 [SRC-00171] Mike Holt Forums. *Murray / Crouse-Hinds / Siemens lineage (forum threads)*. Type: forum. URL: https://forums.mikeholt.com/threads/siemens-and-murray-interchangable.46702/post-737356 (accessed 2026-10-21) Note: Via search summary: Murray -> Crouse-Hinds (Cooper) late 1970s -> Siemens (c.1992, restored Murray name) -> Murray brand phase-out c.2019 (unverified).

S172 [SRC-00172] Bay Power / Mike Holt Forums. *Wadsworth breaker listings and forum discussion*. Type: distributor. URL: https://www.baypower.com/wadsworth/circuit-breakers/wadsworth-a360-3-pole-60-amp-molded-case-circuit-breaker (accessed 2026-10-21) Note: Via search summary; Wadsworth A-series (e.g., A360 3P 60A, A320) and B-series (B1515) breakers; Superbreakers Wadsworth collection SKUs A15NI..A260NI, B1530NI, B3020NI.

S173 [SRC-00173] Mike Holt Forums. *Kinney Panel (forum thread)*. Type: forum. URL: https://forums.mikeholt.com/threads/kinney-panel.104222/post-1650904 (accessed 2026-10-21) Note: Via search summary: Kinney 'still in Elgin, IL'; Eaton vintage products group may support breakers.

S174 [SRC-00174] Midwest Switchgear Group (surplus). *Midwest Switchgear: Zinsco/Sylvania QSF fusible panelboard switch listings (QSFT1033B, QSF-4033)*. Type: surplus. URL: https://www.swgr.com/store/Fusible-Panelboard-Switch/product/QSFT1033B,27-6809.aspx (accessed 2026-10-21) Note: Via search summary.

S175 [SRC-00175] R&D Electric / relectric.com. *Breaker parts & accessories: Mounting Hardware (listing page 12)*. Type: surplus. URL: https://www.relectric.com/circuit-breaker-parts-and-accessories/mounting-hardware?page=12 (accessed 2026-10-21) Note: Shows CMD4K (Challenger single 800 A 600 V, $568.70), SKM8S (Sylvania 800 A single kit), QSF100DS, QSF200SB, KQB-4C.

S176 [SRC-00176] InspectAPedia. *Pushmatic - Bulldog panels & breakers*. Type: other. URL: https://inspectapedia.com/electric/Pushmatic.php (accessed 2026-10-21) Note: P1515 condensed-space dual 15 A will not fit older Gould ITE Pushmatic panels; 3-phase Pushmatic version reported (Rossi); Electri-Center name; Bulldog Electric Products Co., Detroit; US 1,982,289 (1934).

Appendix C Research Status and Open Questions

Evidence class	Part claims
A OEM Verified	11881
B Strongly Corroborated	645
C Tentative	818
D Unverified	151

Most frequent documentation gaps

Field	Parts lacking it
Torque values	1413
Dimensions	1257
Material	1040
Mounting-hole pattern	1001
OEM instruction document	966
Fasteners	705
Status	659
Identification features	582
Finish / plating	475
Aftermarket / reproduction	204
Kit contents	66
weight	47
bus clip/connector part numbers	40
hole pattern	30
strap dimensions	30
separate orderability	26
field-installation into factory-assembled (non Pro-Stock) panels	19
width	18
wire range	17
exact plate dimensions per box width	17
applicability to other QMB unit sizes	17
renewal parts	16
Current rating	13
lug count	13
bus connection hole pattern	13
date of instruction	9
crimp tool/die	9
stud size	9
quantity per package	8
use on I-Line versions of same frames not stated in this source	7
mounting height (except SL400)	7
key_code	6
mounting height	6
ratings	6
exact per-wire torque mapping (see Table 127)	6
lug_count	5
capacity code digits	5
bus material confirm	5
feed configuration	5
full ratings	5
wire range (verify against PDF p.124)	5
which A-Series types (AQ/AE/AD) each fits	4
part dimensions	4

Field	Parts lacking it
length	4
contact ratings	3
number of terminals	2
current status	2
lug kit	2
thread size	2
thread	2
conductors per lug	2
breaker compatibility	1
not found in 2008/2015 catalog tables	1
OEM confirmation	1
lug cover part number (footnote says a user-supplied lug cover is required)	1
horsepower ratings	1
relation to SL800M5	1
material of this specific number	1
terminals	1
other HCN sizes	1
hole diameter	1
head style	1
lockable	1
breaker family record not created for Square D G-frame	1
OEM table reference	1
kit quantity	1
listing basis	1

Open research leads (priority 1–2)

Lead	Pri.	Topic / detail
LEAD-0001	1	**Eaton instruction leaflets for KB/KL/KPRL3/KPRL4 kits** — Renewal-parts guides give catalog numbers and compatibility but no kit drawings, torque values, strap dimensions or hole patterns. Each kit ships with instructions (IL/IB numbers not cited in the guides). Search Eaton document library for IL numbers packed with KPRL4X32, KPRL3AFD3, KB13AFT, KL23AMS, PRLSEBFD.
LEAD-0002	1	**Supersession mapping 2017 -> 2021 (PRL4 KPRL4FD/FD1/FD2/ED/ED2/LD; PRL1a/2a deadfronts 4180B03/4180B61/4180B05; PRL3a covers 4176B68/4180B93/4178B08/4179B39-42; filler 4178B06H01)** — April 2021 edition replaced these numbers with KPRL4X12/X22/X32/LC and 42C80xx covers (same table rows). Distributor text says 4178B06H01 is for panels built before April 2019 and 42C8083H01 after - implies a chassis change, so old and new are probably NOT interchangeable. Confirm with Eaton Sumter aftermarket (803-481-6677) or a December 2020 edition of RP01400001E. Docs: RP01400001E
LEAD-0014	1	**Pow-R-Line C switchboard branch provision / connector kit catalog numbers** — Vol 12 p. V12-T15-5 says provisions/connectors are available for all PRLC ratings, but no catalog numbers are public. Obtain the PRLC distribution chassis renewal-parts/price list (Sumter) or a PRLC field-installation IL for adding group-mounted FD/JD/KD/LD/MDL/ND devices; confirm whether KPRL4/KPRL4X kits are the same parts. Docs: IM01500001E, CA08100003E Tab 4
LEAD-0015	1	**WF/WRP switchboard distribution-section connector and retrofit kits** — RP01400002E p.20 lists 'Retrofit kits for WF and WRP distribution sections' and 'Connector kits for WF and WRP distribution sections' from Sumter but gives no numbers. Check whether KCDP/KFDP kits are used, since WF/WRP feeders were CDP-type breakers and FDP switches. Docs: RP01400002E, PL01400002E
LEAD-0025	1	**2700CT1601 OEM QED-2 I-Line interiors catalog** — Contains single/double-row OEM interior selection tables (CF... numbers), likely end closures, splice/main lug kits. Blocked by Akamai (productinfo.se.com, download.se.com 403). Try a distributor mirror (media.distributordatasolutions.com), Rexel/Graybar spec-sheet links, or a browser session. Docs: 2700CT1601
LEAD-0026	1	**QED-2 instruction bulletin 80043-055-16 (2024) and -13 (2018)** — Handling, assembly, splice (through-bus) and torque data for QED-2; likely gives splice plate hardware and torque values. Blocked. Docs: 80043-055-16, 80043-055-13
LEAD-0027	1	**OEM interiors IB 80235-597-09** — Schneider FAQ cites IB 80235-597-09 for single/double-row OEM I-Line interiors. Docs: 80235-597-09
LEAD-0038	1	**Current ABB BuyLog Section 11 (2021/2022) - ReliaGear neXT kit numbers and Spectra retrofit kits** — Contains ReliaGear neXT catalog nomenclature, single breaker-installation-kit catalog number, 'Retrofit kit for Spectra panelboards' and 'Spectra (obsoleted) bolt-on mounting hardware'. Host electrification.us.abb.com returns 503/empty reply from this container; try another network or distributor mirror. Docs: BuyLog Section 11 (ABB)

Lead	Pri.	Topic / detail
LEAD-0039	1	**Spectra bolt-on strap instruction leaflets DEH-047, DEH-059, DEH-060, DEH-061, DEH-062 and DEH042 cover supports** — Would give strap part numbers, kit contents and torques for AMCB EB/SE, SF, SG, SK/KM and EY kits, plus cover-support catalog numbers by panel width. Copies exist on manualmachine.com (HTTP 403 here) - e.g. DEH061 AMCB3KM/AMCB2KM, DEH042 SE/SF/TE/TF/TQ/TEL cover supports, AMCB4GB/AMCB6GB, AMCB2GM/AMCB3GM. Docs: DEH-047, DEH-059, DEH-060, DEH-061, DEH-062, DEH042
LEAD-0047	1	**Legacy ITE / Gould-ITE lighting panelboard renewal parts (pre-Siemens S1/S2)** — No OEM ITE, ITE Imperial or Gould-ITE panelboard renewal-parts catalogue was found online. Type designations in the scope (ITE NQB/NLAB/NHB, EQ panelboards, 'CDP' early series) were NOT confirmed in any document reached. Need scanned ITE 'Distribution Products' catalogues (1960s-1980s) or Siemens-Allis price lists; try archive.org, worldradiohistory, eBay catalogue scans, and Siemens legacy support (1-800-333-7421).
LEAD-0048	1	**SpeedFax Section 12 (Switchboards) page 12-32 branch device mounting kits** — SpeedFax Sec.11 p.11-15 says: 'For Series 5, Series 6, CDP6 and VB6 panels as well as FC20, FCI, FCII, SB1, SB2 and SB3 distribution switchboards, see page 12-32 for branch device mounting kits.' US Section 12 PDF not retrieved; try media.distributordatasolutions.com siemenscomplete documents or usa.siemens.com/speedfax. Docs: SPEEDFAX Section 12 p.12-32
LEAD-0056	1	**Current Eaton Volume 4 Tab 2 (CA08100005E) terminal and accessory tables** — eaton.com blocked from container. Needed to confirm newer interphase barrier numbering (IPB2 vs IPB3), J-frame shield line/load, TA350K 350 vs 400 A, 3T225FD and 3TA150FB, K-frame keeper nut pack size, and status/supersessions. Docs: CA08100005E
LEAD-0057	1	**Square D PowerPact M/P/R catalog lug tables** — Need OEM tables for AL800M23K, AL800P6K, AL800P7K, AL1200P25K, CU800M..., R-frame lugs; only tapped versions (…TK) found in Digest. Docs: 0612CT0101
LEAD-0070	1	**FPE OEM panelboard catalog / renewal parts list** — Find original Federal Pacific (or American Circuit Breaker / Federal Pacific Equipment) panelboard catalog giving CDP/BDP/NDP/FDP/NA1B/NH1B/NBLP definitions and the KCDP/KBDP/KFDP/KQB kit tables with breaker compatibility, dimensions and bus details. Circuit Breaker Sales (Matthews NC, 704-882-1875) holds FPE technical documents per fpeparts.com.
LEAD-0071	1	**Confirm KBDP3C frame and KCDP5C/KBDP5C ratings** — Numbering pattern (1=NE/NEF, 2=NEJ, 3=NFJ, 4=NJL, 5=NM) is inferred; Superbreakers gives 225 A for KCDP5C (NM/NN) which looks wrong.
LEAD-0074	1	**Eaton CH/BR retrofit kits current status** — Verify whether RACH*/RBCH*/RCCH*/RDCH*/RABR*/RBBR*/RCBR*/RDBR*/REBR*/RAABR* kit numbers are still orderable (Lincoln Flex Center 800-330-6479) and find the original Eaton publication number/date; look for 480Y/277 V retrofit (PRL-based) offerings and Square D/Siemens equivalents.
LEAD-0003	2	**RP.38F.01.T.E (February 2000) Cutler-Hammer panelboard renewal parts** — Predecessor of RP01400001E; would cover earlier PRL1a/2a/3a/4B part numbers and possibly vintage PRL1/2/3 connector straps. Not found online. Docs: RP.38F.01.T.E
LEAD-0004	2	**RP01400002E April 2009 edition and PL01400002E price list** — Earlier vintage-Westinghouse renewal parts edition and price list referenced by Feb 2013 edition. Docs: RP01400002E, PL01400002E, PL01400001E
LEAD-0005	2	**Drawings 42c8083.pdf etc. on Rexel** — Rexel product page for 42C8083H01 links a drawing file '42c8083.pdf' (not opened). Similar drawing links may exist for other 42C80xx/4176Bxx covers - source of dimensions/hole patterns.
LEAD-0006	2	**KPRL4LFD3 (distributor: 'CON KIT FD+LFD PRL4')** — Dixon Electric (Canada) lists Eaton KPRL4LFD3; not in any OEM table found (2021 table lists FD/LFD under KPRL4FBP). Redirect to dixon.ca not followed.
LEAD-0007	2	**Pow-R-Xpress PRL4X branch fillers PRXP4PD34FILL, PRXP4PD2FILL1 and P44X25** — Distributor-only numbers for PRL4X fillers and PRL4 4X blank cover (P44X25). Relationship to OEM 6554C0x not established.
LEAD-0016	2	**Price list PL01400002E (CDP/HCDP, FDP, PRL1-LX, PRL1, PRL2, PRL3) and PL01400001E** — Price lists would confirm full catalog-number sets (e.g. all KCDP retrofit permutations, KCDPnX fillers) and current availability. Docs: PL01400002E, PL01400001E
LEAD-0017	2	**RP01400003E renewal parts for Cutler-Hammer MP40, MP-200, PB, PH, PH-L, EP, EE panelboards** — Referenced in Vol 12 Tab 4 for branch-device retrofit kits for Cutler-Hammer legacy panelboards (also plug-in power panels/switchboards EE/EP). Not retrieved. Docs: RP01400003E, PL01400003E
LEAD-0018	2	**RP01414001E Panelboard Renewal Parts Supplement** — Referenced with RP01400001E in Vol 12 Tab 4 pp. V12-T4-15..19. Not found. Docs: RP01414001E
LEAD-0019	2	**PRL4 kit renumbering 2017 -> 2022 (KPRL4FD/ED/LD/MC/ND -> KPRL4X32/X22/LC/X34/X35)** — Comparison of RP01400001E Oct 2017 Table 37 and May 2022 Tables 46-47 suggests renumbering with Pow-R-Line Xpert (PD2-PD5 frames). Need explicit OEM supersession statement (April 2021 / Dec 2020 editions, Eaton product pages). Docs: RP01400001E
LEAD-0028	2	**Data Bulletin 0600DB1004 I-Line plug-on connection design** — Jaw design, bolt-on clamp details, I-Line busway/switchgear connections. Docs: 0600DB1004
LEAD-0029	2	**Current 2700CT1101 (v02, 2025-12, 140 MB) and 2110CT9701 v2.1 (2025-02)** — Newer revisions may add QED-2 Series 2 changes (QMB 63 in. only) and accessory tables. Only 2012 and 2019 editions retrieved. Docs: 2700CT1101, 2110CT9701
LEAD-0030	2	**Legacy QMB replacement attachment 'QMB Replacements.pdf' and Supplemental Digest** — Several se.com FAQs reference an attached QMB Replacements.pdf and the Supplemental Digest for QMB3400LA/QMB3300LA and EX/LEX extension kits. Would give full legacy cross-reference table.
LEAD-0031	2	**Unverified FAQs FA123288, FA87289, FA99653** — QMB3640, QMB303T and QMB306T replacement answers seen only in search summaries (rate-limited 403). Re-fetch to upgrade s36 claims to A. Docs: FA123288, FA87289, FA99653

Lead	Pri.	Topic / detail
LEAD-0040	2	**Spectra plug-in module instructions GEH-5623/5624/5625/5626/5643/5673/5675/5677 and hardware kits GEH-5913** — Module-level torques and bus-clip part numbers; GEH-5913 should confirm AHK/AHKB kit contents and the module-to-AHK mapping (PDF text column alignment on BuyLog p.11-44 is ambiguous). Docs: GEH-5623, GEH-5624, GEH-5625, GEH-5626, GEH-5643, GEH-5673, GEH-5675, GEH-5677, GEH-5913
LEAD-0041	2	**GEH5589 APN/APNB interiors installation** — Install of Spectra interiors into APB boxes; listed on manualmachine (blocked). Docs: GEH5589
LEAD-0042	2	**Main lug kit instructions GEH-5588 / GEH-5630 and AMB-numbered main lug kits (p.11-28)** — BuyLog p.11-28 lists a second main-lug numbering (AMB3600MAF, AMB3120MAF, AMB3120DMAF, AMB3250CAF, AMB3600CAF, AMB3800CAF, AMB3120CAF, AMB3120NF, cover plates AFPML4X/6X/6XW) apparently for factory-installed/merchandise panels; relationship to AML modules (p.11-45) unresolved. Not yet catalogued as parts. Docs: GEH-5588, GEH-5630
LEAD-0043	2	**Spectra ANK neutral kit full table (p.11-27) and ADS switch load bases 331A1519Gxx / 331A1545Gx / 331A1543G1** — About 70 ANK/ANKT neutral kit numbers by box width/main config and ~30 ADS load base renewal numbers are in the BuyLog but were not individually catalogued in this batch. Docs: BuyLog p.11-27, BuyLog p.11-44
LEAD-0049	2	**Installation instructions for P1/P2/P3/P4/P5 strap kits** — SpeedFax references Installation Instructions for S3VA41T(D) accommodating xGB/xGB2, and drawing refs (11-D-2267-01 BBKB32, 11-D-2894-01 BBKVA5262P2S, 11-A-2010-01 P1SCRWS, etc.). Siemens SIOS (support.industry.siemens.com) likely hosts these as PDFs; search by kit number. Needed for torque, fastener and dimension data (currently unknown for nearly all parts). Docs: 11-D-2267-01, 11-D-2894-01, 11-D-2895-61, 13-D-2011-13, 11-D-2572-02, 11-D-2573-01, 11-D-2573-02
LEAD-0050	2	**Original P1 / S1 / S2 branch connector replacement parts** — 2021 SpeedFax lists only Revised P1 branch connectors (P1CONACPHCU, P1CONBPHAL, P1CONBPHCU). Whether these fit original P1 or S1/S2 interiors is not stated (table column marks Revised P1 only). Older SpeedFax editions (2010-2014) should be checked for original P1 connector kits.
LEAD-0051	2	**Revised P1 main breaker kits with breaker (MBK...A with amp rating)** — SpeedFax p.11-14 lists ~47 factory kits with breaker included (MBKED3100A, MBKQR1125A..MBKQR3225HA, MBKVAM3150A..MBKVAH3400A, MBKFD3150A..MBKFD3250A, MBKJD1300A..MBKJD32400A). These are referenced in 'replacement' notes on strap-kit records but not catalogued individually in this batch. Canadian equivalents (MBKQR12225A, MBKFD33250A, MBKJD33400A, MBKHF33250A, MBKED33100A) in SI-LP-1633. Docs: SPEEDFAX p.11-14, SI-LP-1633
LEAD-0058	2	**Square D KA/KH lug kit supersession and FY/E-frame/QB-QD-QG-QJ lugs** — 2012 Digest lists AL250KA only against KI; KA/KH lists need older Digest (e.g., Digest 172/173) or instruction bulletins. No E-frame (EDB/EGB/EJB) or Q2/QB lug kits located; 2012 Digest notes threaded insert kit for EDB/EGB/EJB/FJA (table text partly garbled). Docs: Digest 172, Digest 173
LEAD-0059	2	**Square D lug-kit instruction bulletins** — 48940-221-02 (H/J lug kits) and AL100FA4 instructions exist; download blocked (se.com 403). Would give torque values and kit contents. Docs: 48940-221-02
LEAD-0060	2	**Current 0611CT1001 v5.0 (2024) PowerPact H/J/L catalog** — Verify whether 2013 lug tables (esp. column-scrambled CU L-frame rows in Table 121) changed; check PDC3JD20 vs PDC3JD2. Docs: 0611CT1001
LEAD-0063	2	**GE TCAL28 / TCAL38 / TCAL39 / TCAL51 / TCAL62 not found** — These numbers appear in the batch scope but are not in the GE BuyLog 2008 excerpt or the 2012, 2013 or 2019 lug tables. TCAL28 may be confused with TCAL28PD1/PD3 (SF power distribution lugs). Older GE lug numbers (TCAL2x/3x for the 1980s-90s TF/TJ lines) may appear in GEP-1100 / GET-xxxx renewal catalogs or older BuyLog editions (pre-2008). Docs: GEP-1100
LEAD-0064	2	**GE footnote digits fused into part numbers** — The pdftotext extraction of GE BuyLog runs footnote superscripts into part numbers (TCAL1212 = TCAL121 + fn2, TCAL811 = TCAL81 + fn1, TCLK3652 = TCLK365 + fn2, SKLVK6 = SKLVK + fn6, etc.). Base numbers were reconciled across the 2012 and 2019 editions (different footnote numbering). TCAL122, TCALK2122/3122, TCAL91, TCALK291/391, TCAL131 and 789A448G3 are inferred bases (conf B/C). Check them against distributor or ABB product pages. Docs: BuyLog Section 6 Rev 1/19, BuyLog Section 3 Rev 9/12
LEAD-0065	2	**Siemens QJ2 / pre-Sentron ITE lug kits** — SPEEDFAX 2017/2021 no longer lists QJ2, so the only QJ2 lug found is TA1Q300 (distributor). Old ITE numbers such as TA1D/3TA1D/TA1E/TA1F/TA1G/TA2DS/TA3J6500/TA2P400 were not found in the 2017 tables. Search older SPEEDFAX editions (e.g. SPEEDFAX 2004-2011, Section 7) and ITE 'Breaker Lug Selection' leaflets. Docs: SPEEDFAX 2011 Section 7
LEAD-0072	2	**Breaker King / PCS aftermarket FPE kits** — PCS (manufacturer of NEF1K/NEJ1K/NFJ1K/NJL1K/NEF3K/NEJ3K/NJL3K/NFJ3K) - identify company (Power Circuit Specialists?), obtain installation instructions and confirm listing status.
LEAD-0073	2	**Breaker King Obsolete Breaker Guide PDF** — Linked PDF https://www.breakerking.com/catalog/breaker_king_obsolete_book.pdf returned an HTML page to curl; try browser/WebFetch.
LEAD-0075	2	**Square D / Siemens retrofit interiors for FPE and Zinsco** — Forum posts say Square D (NQ/NF) and Eaton build custom interiors to fit existing enclosures; find Schneider 'retrofit panelboard' or 'replacement interior' literature and any listed-for-enclosure marking practice.
LEAD-0076	2	**Schneider/Federal Pioneer FAQs on FPE replacement breakers** — se.com FAQ000278110 and FA234570 blocked (403). Retrieve via browser to capture exact wording on NBLP/NB and CDP.
LEAD-0077	2	**Zinsco/Sylvania commercial panelboard catalogue** — Need GTE-Sylvania/Zinsco catalogue for QSF and double-slot/single-slot split-bus distribution panelboards, DSL* kit numbering (are DSL*/QSF*DS/SB OEM numbers or relectric dealer numbers?), and Sylvania SE/SEH/SC/SJD/SKM kit compatibility.
LEAD-0078	2	**Challenger PM4a/PM4b panelboard documentation** — Identify Challenger panelboard types (PM4a, PM4b) and the breaker frames for C?D?K kits; check whether Eaton KPRL4C*/KPRL4AC*/KPRL4BC* kits are Eaton OEM conversion kits for Challenger breakers in PRL4. Possibly overlaps Eaton batches (B0001/B0002).

The complete backlog is maintained in research/BACKLOG.md.