TECHNICAL REFERENCE LIBRARY

Master Electrical Distribution Hardware Catalogue

Panelboards · Switchboards · Circuit Breakers · Mounting & Connection Hardware

Identification · Compatibility · Supersession · OEM Documentation

Edition 0.1

Generated 2026-10-21 from database build 5c98662

651 hardware entries · 34 equipment families · 62 breaker families · 51 sources

Manufacturer lineages covered

EAT — Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant
GEA — General Electric Industrial Solutions; ABB from 2018; ReliaGear
SIE — Siemens, ITE, ITE Imperial, Gould, Murray

Independent research reference. Not affiliated with or endorsed by any manufacturer named. Trademarks belong to their owners.
Compatibility statements carry evidence classes A–D; only class A is manufacturer-documented. Verify before installation.

Document Control

Item	Value
Edition	0.1
Generated	2026-10-21
Database build (git)	5c98662
Hardware entries	651
Equipment families	34
Breaker families	62
Sources registered	51
Documents preserved in library	30
Open research leads	29

Revision history (research batches merged)

Batch	Research date	Merged	New parts	Updated	New sources
B0006-siemens-ite	2026-10-21	2026-10-21	244	0	15
B0005-ge-abb	2026-10-21	2026-10-21	280	0	22
B0002-eaton-switchboards-legacy	2026-10-21	2026-10-21	127	0	14

This catalogue is generated automatically from the structured parts database (*data/ → build/edh_catalogue.sqlite*). Corrections must be made in the database, never in this PDF. Catalogue identifiers (EDH-…, FAM-…, BRK-…, SRC-…) are permanent and are never reused.

Table of Contents

Document Control 2

1 How to Use This Catalogue 5

2 Hardware Identification Guide 6

2.1 Anatomy of a panelboard interior . . . 6

2.2 Breaker mounting styles . . . 6

2.3 Branch connector straps — what to measure . . . 7

2.4 Terminal lug types . . . 7

3 Eaton lineage 11

3.1 BR — Type BR loadcenter . . . 12

3.2 CDP — Westinghouse CDP / HCDP panelboard . . . 15

3.3 FDP — Westinghouse FDP fusible panelboard . . . 32

3.4 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards . . . 42

3.5 NLAB — Westinghouse NLAB lighting panelboard . . . 42

3.6 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage) . . . 43

3.7 PRL3 — Westinghouse Pow-R-Line 3 panelboard (vintage) . . . 47

3.8 PRL4 — Pow-R-Line 4 panelboard (PRL4B / PRL4F) . . . 48

3.9 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards . . . 68

3.10 ES — Cutler-Hammer Type ES switchboard . . . 68

3.11 IFS — Integrated Facility System switchboard . . . 69

3.12 PRLC — Pow-R-Line C switchboard . . . 69

3.13 PRLCS — Pow-R-Line CS switchboard . . . 70

3.14 PRLi — Pow-R-Line i switchboard . . . 70

3.15 WF/WRP — Westinghouse WF/WRP switchboard . . . 70

4 GE / ABB lineage 71

4.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU) 71

4.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC) . . . 88

4.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N') . . . 88

4.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts) . . . 101

4.5 NHB — NAB / NHB bolt-on panelboards (legacy) . . . 106

4.6 RG-NEXT — ReliaGear neXT Power Panelboards . . . 107

4.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards . . . 107

4.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB) . . . 112

4.9 AV-LINE — AV-Line switchboards (legacy) . . . 172

5 Siemens lineage 173

5.1 P1 — Type P1 (original) . . . 173

5.2 P2 — Type P2 panelboard . . . 182

5.3 P3 — Type P3 panelboard . . . 194

5.4 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard . . . 199

5.5 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard . . . 214
5.6 RP1 — Type P1 (Revised P1) . . . 232
5.7 S1/S2 — Type S1 / S2 lighting panelboards . . . 265
5.8 SE — Type SE panelboard . . . 267
5.9 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage) . . . 267
5.10 SB — Type SB1 / SB2 / SB3 distribution switchboards . . . 280

6 Breaker Family Register 286

7 Cross-Reference Tables 295

7.1 Supersession and alternate numbers . . . 295
7.2 Replacement and successor statements . . . 298
7.3 Companion parts required for installation . . . 299

8 Indexes 301

8.1 Manufacturer index . . . 301
8.2 Equipment family index (including aliases) . . . 301
8.3 Part-number index (primary and alternate numbers) . . . 307
8.4 Breaker compatibility index . . . 328
8.5 Component-type index . . . 347
8.6 Rating and pole index . . . 349
8.7 Physical dimension and hole-pattern index . . . 356

Appendix A Documentation Library 365

Appendix B Bibliography and Source Register 367

Appendix C Research Status and Open Questions 370

1 How to Use This Catalogue

The catalogue is organised by **manufacturer lineage**, then **equipment family** (panelboard, switchboard or loadcenter series), then **component type**. Every hardware item has a permanent catalogue identifier of the form **EDH-<MFR>-nnnnn**.

To identify an unknown part: (1) establish the manufacturer and equipment family from the enclosure nameplate, interior label or breaker type; (2) use Section 2 to decide the component type from its function and mounting style; (3) look up any stamped number in the Part-Number Index (partial numbers are listed in normalised alphanumeric order); (4) if no number is legible, use the Breaker Compatibility Index and the identification-feature table to narrow candidates, then compare dimensions and hole patterns against the part entry.

Claims, not records, carry confidence. Each line in a part entry shows the evidence class of that specific statement and the sources supporting it (S-numbers link to the Source Register in Appendix B). A part may have an OEM-verified part number (A) and only a tentative breaker compatibility (C).

Class	Meaning	Typical evidence
A	**OEM Verified**	Explicitly documented in a manufacturer catalogue, instruction leaflet, drawing or bulletin (page cited).
B	**Strongly Corroborated**	Multiple independent credible sources agree (e.g. two distributors plus a photo of the label).
C	**Tentative**	Single non-OEM source, or plausible but incomplete evidence. Distributor compatibility claims are never above C on their own.
D	**Unverified**	Lead, hearsay or inference requiring investigation.

Evidence basis codes

Code	Meaning
oem_spec	Manufacturer specification text or table
oem_drawing	Manufacturer drawing
distributor	Distributor catalogue / listing
surplus_listing	Surplus / used-equipment listing
photo	Photograph of an actual part or label
field_measurement	Measured from a physical sample (record instrument and date)
inference	Engineering inference — never sufficient for compatibility


Safety and interchangeability notice

Matching dimensions do not establish electrical interchangeability. Panelboard and switchboard assemblies are listed as systems; substituting non-OEM or cross-manufacturer components may void the listing and short-circuit rating. Nothing in this catalogue states that a reproduced or aftermarket part is approved, listed or electrically equivalent unless an explicit, cited source says so. Distinguish OEM specifications from field measurements and manufacturing assumptions at all times.

2 Hardware Identification Guide

The drawings in this section are generic schematics prepared for this catalogue to illustrate terminology and measurement practice. They are not reproductions of manufacturer drawings and do not depict any specific OEM part.


2.1 Anatomy of a panelboard interior

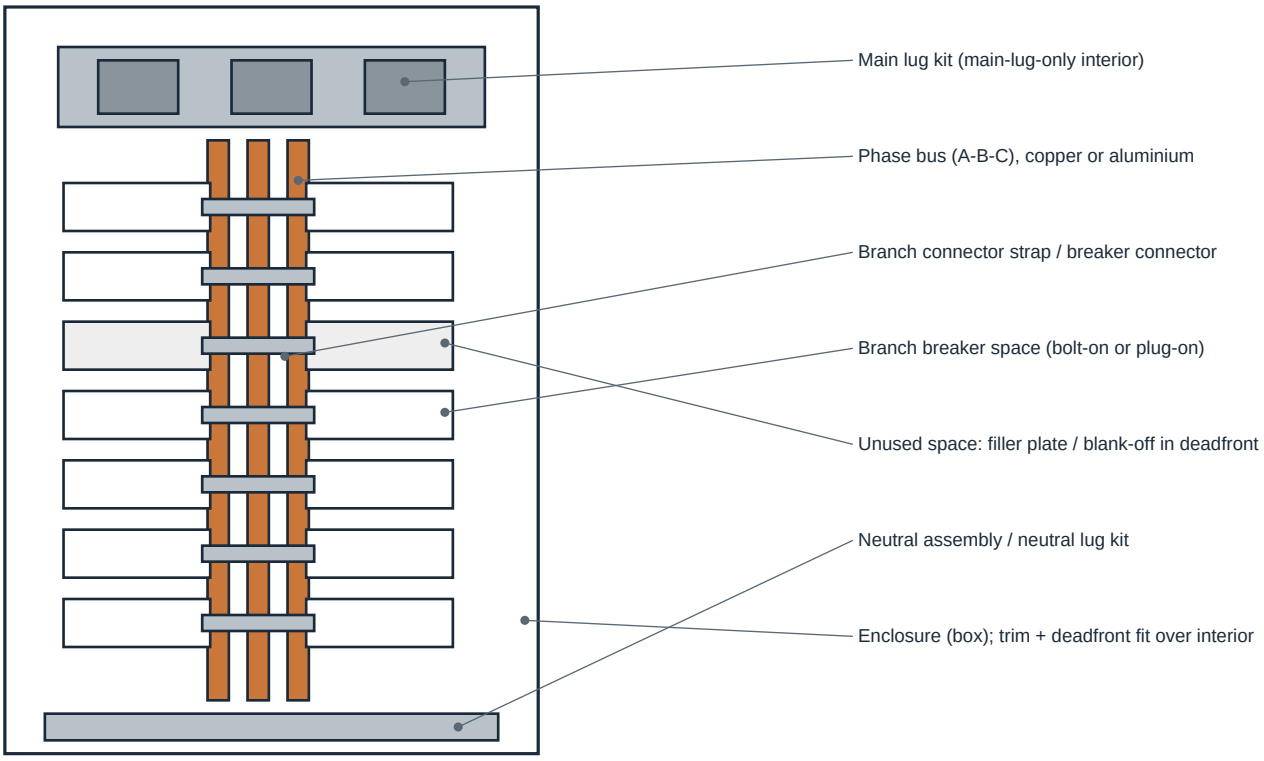

Generic schematic for orientation only — not an OEM drawing, not to scale

Figure 2-1. Generic panelboard interior showing where each component type installs.

2.2 Breaker mounting styles

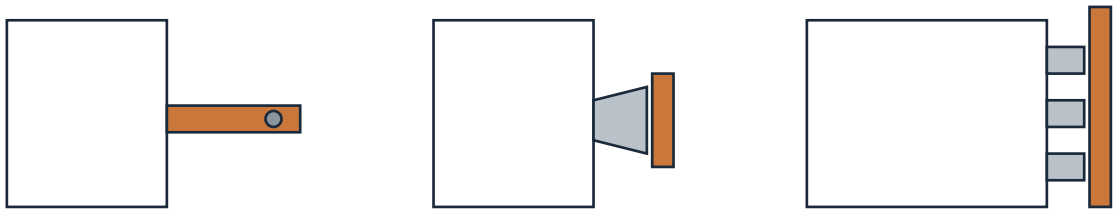

Bolt-on: line terminal screws to bus / connector strap

Plug-on: jaw/clip engages bus stab

Plug-on panel/switchboard unit: jaws onto vertical bus stack

Generic schematics — mounting style is a first-level identification key

Figure 2-2. Bolt-on, plug-on and panel/switchboard plug-on unit mounting.

2.3 Branch connector straps — what to measure

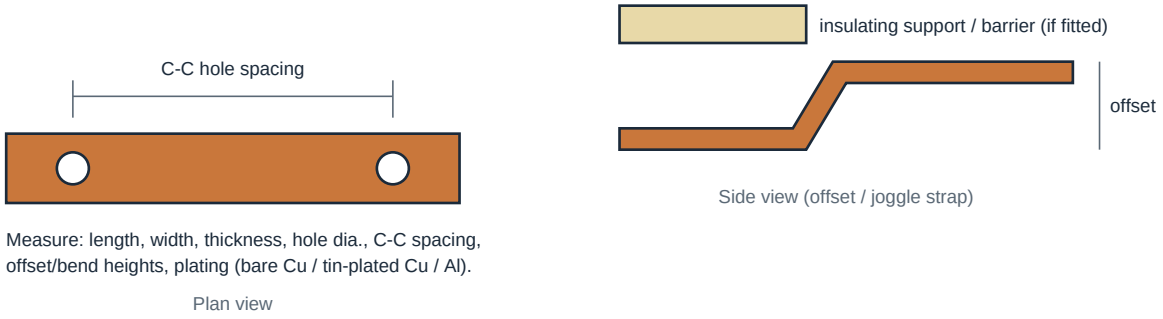


Figure 2-3. Measurement practice for connector straps and bus links.

2.4 Terminal lug types

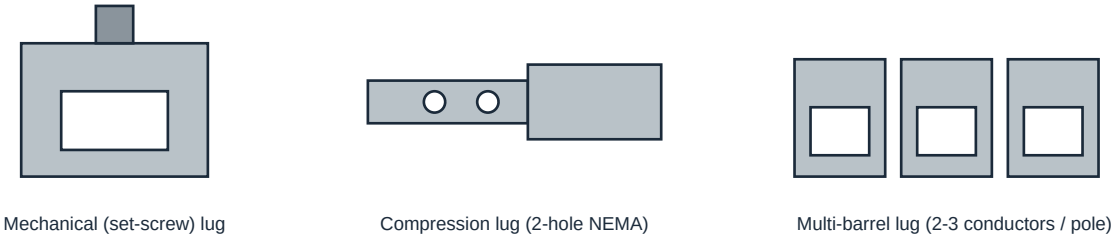


Figure 2-4. Common lug constructions found in main, sub-feed and feed-through lug kits.

2.5 Component-type key

Component type	Function / recognition	Entries
main-breaker-kit	Converts a main-lug interior to main-breaker; includes breaker mounting, connectors to bus.	50
main-lug-kit	Incoming-cable lugs bolted to bus top/bottom; ampere rating set by lug and bus.	45
sub-feed-lug-kit	Second set of lugs to feed a downstream panel from the same bus.	5
through-feed-lug-kit	Lugs at opposite bus end for feeding through to another panel.	2
lug-kit	Lug sets for breakers or assemblies.	1
lug		1
branch-connector-kit	Straps/connectors joining branch breakers to phase bus; series-specific.	218
breaker-mounting-kit	Hardware to mount a breaker frame in a panel/switchboard space.	44
connector-strap	Individual copper/aluminium link between bus and device terminal.	18
neutral-assembly	Neutral bar/lug assembly, incl. 200% neutral options.	30
ground-bar	Equipment grounding bar kit.	17
mounting-bracket		9
insulator	Insulating support or standoff for bus or connectors.	1
barrier	Insulating barrier between phases or sections.	24
deadfront	Inner cover exposing only breaker handles.	3
filler-plate	Closes unused breaker space in the deadfront.	91
trim	Front cover/door assembly (surface or flush).	6
box/enclosure		5

Component type	Function / recognition	Entries
hardware-kit		33
fastener		7
conversion-kit	Adapts later breakers or interiors into legacy equipment.	34
spd-kit	Surge-protective-device mounting/connection kit.	0
breaker-accessory		1
handle-lock		1
padlock-attachment		2
other		3

2.6 Identification by physical feature

Parts for which distinguishing physical features are recorded. Use with the dimensions and hole-pattern fields of the entry.

Catalogue ID	OEM PN	Features	Pg
EDH-EAT-00001	KCDPFB100	Kit name retains Westinghouse FB-frame designation; 100 A max (note a) **C**	17
EDH-EAT-00005	KCDPKB	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference) **C**	18
EDH-EAT-00008	KCDPLA600	Kit name retains Westinghouse LA-frame designation **C**	19
EDH-EAT-00006	KCDPLB	Kit name retains Westinghouse LB-frame designation **C**	20
EDH-EAT-00010	KCDPMC	Kit name retains Westinghouse MC-frame designation **C**	21
EDH-EAT-00011	KCDPNC	Note b: connector kits are not rated for 100 percent breakers **A**	22
EDH-GEA-00102	AMCB4QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	127
EDH-GEA-00108	AMCB6QDFP	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole **A**	132
EDH-GEA-00009	ASPP6EY12D	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc). **A**	89
EDH-GEA-00008	ASPP6EY6D	Crossbar gap 0.06 in **A**	89
EDH-GEA-00005	ASPP6FB6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in **A**	90
EDH-GEA-00007	ASPP6QB12D	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in. **A**	90
EDH-GEA-00006	ASPP6QB6D	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in **A**	91
EDH-GEA-00001	ASPP6QD6D	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in **A**	91
EDH-GEA-00002	ASPP6SE6D	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in **A**	92
EDH-GEA-00003	ASPP6SF3S	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting. **A**	92
EDH-GEA-00004	ASPP6SG3S	Crossbar gap 0.002 in **A**	93
EDH-GEA-00182	AMC2GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	137
EDH-GEA-00163	AMC3GMFP	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices) **A**	141
EDH-GEA-00244	AMCB6TEDL	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler **A**	164
EDH-SIE-00231	SEBKP1P2P3V1	Drawing ref 11-A-1157-01 / 11-D-2740-01 **A**	255
EDH-SIE-00232	SEBKP2V1	Drawing ref 11-D-2733-01 **A**	188
EDH-SIE-00233	SEBKP2V2	Drawing ref 11-D-2734-01 **A**	188
EDH-SIE-00234	SEBKP2V3	Drawing ref 11-D-2735-01 **A**	188
EDH-SIE-00235	SEBKP2V4	Drawing ref 11-D-2736-01 **A**	189
EDH-SIE-00236	SEBKP2V5	Drawing ref 11-D-2738-01 **A**	189
EDH-SIE-00237	SEBKP2V6	Drawing ref 11-D-2739-01 **A**	189
EDH-SIE-00238	SEBKP2V7	Drawing ref 11-D-2898-01 **A**	190
EDH-SIE-00239	SEBKP3V1	Drawing ref (p.11-67) **A**	197
EDH-SIE-00224	SEBKRP1V1	Drawing ref 11-A-1148-01 **A**	255
EDH-SIE-00225	SEBKRP1V2	Drawing ref 11-A-1148-01 **A**	256
EDH-SIE-00226	SEBKRP1V3	Drawing ref 11-A-1149-01 **A**	256
EDH-SIE-00227	SEBKRP1V4	Drawing ref 11-A-1149-01 **A**	256
EDH-SIE-00228	SEBKRP1V5	Drawing ref 11-A-1165-01 **A**	257
EDH-SIE-00229	SEBKRP1V6	Drawing ref 11-A-1194-01 **A**	257

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00230	SEBKRP1V7	Drawing ref 11-B-1060-01 **A**	257
EDH-SIE-00155	6CLE2	2005 list price $845.00 **A**	215
EDH-SIE-00191	6CLF1	2005 list price $1553.00 **A**	270
EDH-SIE-00194	6CLJ1	2005 list price $2122.00 **A**	271
EDH-SIE-00198	6CLL1	2005 list price $2525.00 **A**	272
EDH-SIE-00188	6E62	2005 list price $845.00 **A**	273
EDH-SIE-00190	6F62	2005 list price $1529.00 **A**	273
EDH-SIE-00192	6JJ61	2005 list price $2122.00 **A**	274
EDH-SIE-00193	6JJ62	2005 list price $2349.00 **A**	274
EDH-SIE-00197	6LL61	2005 list price $2525.00 **A**	275
EDH-SIE-00189	6QJ2	2005 list price $1529.00 **A**	277
EDH-SIE-00196	6SCJ1	2005 list price $2122.00 **A**	277
EDH-SIE-00200	6SCL1	2005 list price $2525.00 **A**	278
EDH-SIE-00195	6SJL1	2005 list price $2122.00 **A**	279
EDH-SIE-00199	6SLL1	2005 list price $2525.00 **A**	279
EDH-SIE-00102	BBKB32	Drawing ref 11-D-2267-01 **A**	183
EDH-SIE-00108	BBKQR1	Drawing ref 11-D-2636-01 **A**	185
EDH-SIE-00103	BBKVA4P2P3	Drawing ref 13-D-2011-13 **A**	186
EDH-SIE-00112	BBKVA5262P2S	Drawing ref 11-D-2894-01 **A**	186
EDH-SIE-00175	MG1D	2005 list price $2938.00 **A**	217
EDH-SIE-00179	NG1D	2005 list price $3489.00 **A**	217
EDH-SIE-00150	SBLBD	2005 list price $768.00 **A**	221
EDH-SIE-00176	SLM1D	2005 list price $2938.00 **A**	228
EDH-SIE-00177	SMND	2005 list price $3489.00 **A**	229
EDH-SIE-00178	SSMND	2005 list price $3489.00 **A**	230
EDH-SIE-00088	P1CONACPHCU	Drawing ref 11-D-2572-02 **A**	246
EDH-SIE-00089	P1CONBPHAL	Drawing ref 11-D-2573-01 **A**	247
EDH-SIE-00090	P1CONBPHCU	Drawing ref 11-D-2573-02 **A**	247
EDH-SIE-00080	BBKQRP1FK	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01) **A**	194
EDH-SIE-00081	BBKQRP2FK	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34 **A**	199
EDH-SIE-00086	DFK07	Eng./drawing ref 11-D-3018-67 **A**	190
EDH-SIE-00087	DFK08	Eng./drawing ref 11-D-3018-68 **A**	190
EDH-SIE-00085	DFK1	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07) **A**	191
EDH-SIE-00091	P1SCRWS	Drawing ref 11-A-2010-01 **A**	264
EDH-SIE-00211	6FPB01	Series 6 blank plate; 2005 list price $154.00 **A**	211
EDH-SIE-00212	6FPB02	Series 6 blank plate; 2005 list price $175.00 **A**	212
EDH-SIE-00213	6FPB03	Series 6 blank plate; 2005 list price $175.00 **A**	212
EDH-SIE-00214	6FPB05	Series 6 blank plate; 2005 list price $175.00 **A**	212
EDH-SIE-00215	6FPB10	Series 6 blank plate; 2005 list price $239.00 **A**	213
EDH-SIE-00064	DFFP01B	Eng./drawing ref 11-D-4612-01 **A**	258
EDH-SIE-00065	DFFP01C	Eng./drawing ref 11-D-4600-01 **A**	258
EDH-SIE-00062	DFFP1A	Eng. ref 11-D-4613-01; snap-in with small spring side tabs **A**	259
EDH-SIE-00076	DFFP3	Eng./drawing ref 11-D-2269-01 **A**	191
EDH-SIE-00077	DFFP6	Eng./drawing ref 11-D-2270-01 **A**	191
EDH-SIE-00069	DFFPED01	Eng./drawing ref 12-A-1802-61 **A**	182
EDH-SIE-00070	DFFPFD01	Eng./drawing ref 12-A-1803-61 **A**	259
EDH-SIE-00071	DFFPJD01	Eng./drawing ref 11-D-4522-61 **A**	260
EDH-SIE-00072	DFFPJD02	Eng./drawing ref 11-D-4598-01 **A**	260
EDH-SIE-00073	DFFPQJ01	Eng./drawing ref 12-A-1804-61 **A**	260
EDH-SIE-00074	DFFPQJ02	Eng./drawing ref 12-A-1804-62 **A**	261
EDH-SIE-00066	DFFPVA41A	Eng./drawing ref 11-D-4604-01 **A**	261
EDH-SIE-00067	DFFPVA5262A	Eng./drawing ref 11-D-4617-01 **A**	261

Catalogue ID	OEM PN	Features	Pg
EDH-SIE-00078	DFFPVA5262P2A	Eng./drawing ref 11-D-4610-01 **A**	192
EDH-SIE-00079	DFFPVA5262P2B	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01 **A**	192
EDH-SIE-00068	DFFPVA5363A	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20) **A**	262
EDH-SIE-00084	DFP3AP01	Eng./drawing ref 11-D-3033-61 (11-D-3033-01) **A**	192
EDH-SIE-00083	EBF1	Eng./drawing ref 11-D-4529-01 **A**	197
EDH-SIE-00075	MBKQRFK	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23) **A**	262
EDH-SIE-00082	P2QRFP01	Eng./drawing ref 11-D-4564-01 **A**	192
EDH-SIE-00113	BBKVA5262P2HW	Drawing ref 11-D-2895-61 **A**	193
EDH-SIE-00096	BK1A	Drawing ref 11-A-2024-01 **A**	263
EDH-SIE-00095	IMK1	Drawing ref 11-A-2024-01 **A**	263
EDH-SIE-00120	P2BK1	Drawing ref 11-D-2068-01 **A**	193
EDH-SIE-00121	P2BK2	Drawing ref 11-D-2068-02 **A**	193
EDH-SIE-00122	P2BK3	Drawing ref 11-D-2068-03 **A**	194
EDH-SIE-00123	P3BK1	Drawing ref (p.11-67) **A**	198
EDH-SIE-00117	BNK350N	Drawing ref 11-A-1869-61 **A**	182
EDH-SIE-00029	4MLKA1	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	179
EDH-SIE-00019	4MLKA1A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	241
EDH-SIE-00023	4MLKA1B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] **A**	241
EDH-SIE-00030	4MLKA3	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	179
EDH-SIE-00020	4MLKA3A	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil **A**	242
EDH-SIE-00024	4MLKA3B	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU] **A**	242
EDH-SIE-00031	4MLKC1	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil **A**	179
EDH-SIE-00021	4MLKC1A	Wire range (1) 1/0-600 kcmil, CU cable only **A**	243
EDH-SIE-00032	4MLKC3	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil **A**	180
EDH-SIE-00022	4MLKC3A	Wire range (1) 1/0-600 kcmil, CU cable only **A**	243
EDH-SIE-00025	MLKA1	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	180
EDH-SIE-00015	MLKA1A	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	244
EDH-SIE-00026	MLKA3	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	180
EDH-SIE-00016	MLKA3A	Wire range (1) #6 AWG-350 kcmil (CU or AL) **A**	244
EDH-SIE-00027	MLKC1	Wire range (1) #6 AWG-350 kcmil (CU) **A**	181
EDH-SIE-00017	MLKC1A	Wire range (1) #6 AWG-350 kcmil (CU) **A**	245
EDH-SIE-00028	MLKC3	Wire range (1) #6 AWG-350 kcmil (CU) **A**	181
EDH-SIE-00018	MLKC3A	Wire range (1) #6 AWG-350 kcmil (CU) **A**	245
EDH-SIE-00092	P1DFS250AFT	Drawing ref 11-D-3323 **A**	254
EDH-SIE-00093	P1DFS250ANFT	Drawing ref 11-D-3323 **A**	254
EDH-SIE-00094	P1DFS400A	Drawing ref 11-D-3315 **A**	255
EDH-SIE-00116	BNK2	Drawing ref 11-A-1862 **A**	187
EDH-SIE-00119	BNKP2EX1	Drawing ref 11-1850-01 / 11-C-2011-01 **A**	187
EDH-SIE-00118	LPP2NB01	Drawing ref 15-A-1800-61 **A**	187

3 Eaton lineage

Lineage / brand markings: Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant

Family	Type	Status	Era	Entries	Pg
BR Type BR loadcenter	loadcenter	current (Eaton Type BR)	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	13	12
CDP Westinghouse CDP / HCDP panelboard	panelboard	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	34	15
FDP Westinghouse FDP fusible panelboard	panelboard	discontinued; replacement panelboard type PRL4F	—	29	32
NAB Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	panelboard	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	—	0	42
NLAB Westinghouse NLAB lighting panelboard	panelboard	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	Westinghouse panelboards manufactured between 1937 and 1988	1	42
PRL1/PRL2 Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	panelboard	discontinued; replaced by PRL1a / PRL2a	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	22	43
PRL3 Westinghouse Pow-R-Line 3 panelboard (vintage)	panelboard	discontinued; replaced by PRL3a	—	13	47
PRL4 Pow-R-Line 4 panelboard (PRL4B / PRL4F)	panelboard	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	PRL4B/F introduced October 1987 (originally a Westinghouse product)	40	48
WEB Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	panelboard	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	—	3	68
ES Cutler-Hammer Type ES switchboard	switchboard	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	0	68
IFS Integrated Facility System switchboard	switchboard	current (2018 consulting guide)	—	0	69
PRLC Pow-R-Line C switchboard	switchboard	current (listed in April 2018 consulting guide)	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	0	69
PRLCS Pow-R-Line CS switchboard	switchboard	current (Canadian market; manual IB015002EN effective Nov 2021)	—	0	70

Family	Type	Status	Era	Entries	Pg
PRLi Pow-R-Line i switchboard	switchboard	current (2018 consulting guide)	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	0	70
WF/WRP Westinghouse WF/WRP switchboard	switchboard	discontinued (superseded by Pow-R-Line C)	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	7	70

3.1 BR — Type BR loadcenter

FAM-EAT-015 · loadcenter · aka BR, Type BR, Bryant BR, Challenger BR · markings: Westinghouse, Bryant, Challenger, Cutler-Hammer, Eaton

1-in-per-pole plug-on residential/light-commercial loadcenter family with Westinghouse/Bryant/Challenger lineage. Vol 12 Tab 5 lists replacement main/subfeed lug blocks, filler plates, interlocks and handle accessories.

Attribute	Value	Cl.	Sources
Status	current (Eaton Type BR)	A	S46 p. V12-T5-2; oem_spec
Era of manufacture	Made by Westinghouse's Bryant subsidiary, Bridgeport CT, until 1989 (Westinghouse and Bryant nameplates); Westinghouse bought Challenger Electric 1988, redesigned the product and moved production to Jackson MS; from 1995 Eaton moved all loadcenter production to Lincoln IL	A	same as above

Breaker families associated: BR
Key documents: S46 CA08100014E Tab 5 Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00120	**BRL200**	Type BR loadcenter main lugs (BRL200)	—	listed October 2016

EDH-EAT-00120 **BRL200** Eaton main-lug-kit **LISTED OCTOBER 2016**

Type BR loadcenter main lugs (BRL200)

OEM part number	BRL200	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main lugs, two-pole 200 A stud mounted (includes deadfront filler plate), #1-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Sub Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00119	**3BRS225**	Type BR loadcenter main and subfeed lug block (3BRS225)	—	listed October 2016
EDH-EAT-00118	**3BRSF150**	Type BR loadcenter main and subfeed lug block (3BRSF150)	—	listed October 2016
EDH-EAT-00117	**BRS225**	Type BR loadcenter main and subfeed lug block (BRS225)	—	listed October 2016
EDH-EAT-00115	**BRSF125**	Type BR loadcenter main and subfeed lug block (BRSF125)	—	listed October 2016
EDH-EAT-00116	**BRSF150**	Type BR loadcenter main and subfeed lug block (BRSF150)	—	listed October 2016

EDH-EAT-00119	3BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRS225)

OEM part number	3BRS225	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 225 A, 6 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00118	3BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (3BRSF150)

OEM part number	3BRSF150	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 3-pole 150 A, 3 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00117	BRS225	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRS225)

OEM part number	BRS225	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 225 A, 4 spaces, #2-300 kcmil	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00115	BRSF125	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF125)

OEM part number	BRSF125	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 125 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00116	BRSF150	Eaton	sub-feed-lug-kit	LISTED OCTOBER 2016

Type BR loadcenter main and subfeed lug block (BRSF150)

OEM part number	BRSF150	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Main and subfeed lug block, 2-pole 150 A, 2 spaces, #8-2/0 (75 C only)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Lug

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00124	**NL300**	Type BR loadcenter add-on neutral/ground lug (NL300)	—	listed October 2016

EDH-EAT-00124	NL300	Eaton	lug	LISTED OCTOBER 2016

Type BR loadcenter add-on neutral/ground lug (NL300)

OEM part number	NL300	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Add-on neutral/ground lug, 300 kcmil maximum	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00123	**BINA**	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	—	listed October 2016

EDH-EAT-00123	BINA	Eaton	neutral-assembly	LISTED OCTOBER 2016

Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)

OEM part number	BINA	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Isolated neutral assembly (computer circuits)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00121	**BRFP**	Type BR loadcenter filler plate (BRFP)	—	listed October 2016
EDH-EAT-00122	**BWFP**	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)	—	listed October 2016

EDH-EAT-00121	BRFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate (BRFP)

OEM part number	BRFP	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate, 1.00 in circuit breaker space; ordering quantity 25	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00122	BWFP	Eaton	filler-plate	LISTED OCTOBER 2016

Type BR loadcenter filler plate for bw main circuit breaker space (with hardware) (BWFP)

OEM part number	BWFP	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Filler plate for BW main circuit breaker space (with hardware)	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Handle Lock

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00125	**BHT**	Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)	—	listed October 2016

EDH-EAT-00125	BHT	Eaton	handle-lock	LISTED OCTOBER 2016

Type BR loadcenter handle tie bar joining two adjacent single-pole type br breakers (metal cylinder pin type); qty 10 (BHT)

OEM part number	BHT	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Handle tie bar joining two adjacent single-pole Type BR breakers (metal cylinder pin type); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

Padlock Attachment

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00126	**BRLW**	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	—	listed October 2016
EDH-EAT-00127	**BRLW1**	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)	—	listed October 2016

EDH-EAT-00126	BRLW	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for 1- (BRLW)

OEM part number	BRLW	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for 1-, 2- or 3-pole Type BR (escutcheon mounted); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

EDH-EAT-00127	BRLW1	Eaton	padlock-attachment	LISTED OCTOBER 2016

Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mounted (BRLW1)

OEM part number	BRLW1	A	S46 pp. V12-T5-14..T5-16; oem_spec
Description	Padlockable handle lockoff for single-pole Type BR (handle mounted, set screw); qty 10	A	same as above
Status	listed October 2016	A	S46 oem_spec
Cross-links	Families: BR · Breakers: BR		
Not yet documented	Dimensions, Material		

3.2 CDP — Westinghouse CDP / HCDP panelboard

FAM-EAT-007 · panelboard · aka CDP, HCDP, CDP/HCDP, Westinghouse CDP · markings: Westinghouse, Cutler-Hammer

Westinghouse distribution (circuit-breaker) panelboard on a chassis with vertical phase busbars at 3.50 in centers and mounting rails 19.50 in apart; X unit = 1.38 in. Boxes 30, 38, 42, 48 and 50 in wide; neutral in side gutter. Branch breakers mount on breaker mounting brackets with copper connectors to the chassis bus; unused space closed by filler covers (KCDP_X). Sumter supplies KCDP connector kits (connectors+brackets+covers+hardware), KCDP retrofit kits (breaker + connector kit) and -H hardware-only kits. Older 'LB' style connectors accept Series C K-frame with TAD3 adapter.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL4B; parts and kits from Sumter Aftermarket Center	A	S38 pp. V12-T4-4, V12-T4-7, V12-T4-9; oem_spec
Era of manufacture	Westinghouse power panelboard; with FDP, encompassed most Westinghouse MCCBs for more than 34 years (to 1988 redesign); Cutler-Hammer also built CDP under supply agreement	A	S38 pp. V12-T4-2, V12-T4-3; oem_spec
Successor	PRL4B (Pow-R-Line 4B)	A	S38 p. V12-T4-7; oem_spec

Attribute	Value	Cl.	Sources
Main ampacity	1600 A maximum	A	S38 p. V12-T4-9; oem_spec
Branch breakers accepted	Westinghouse E, EA, EH, F, FA (pre-1974), EB, EHB, FB, HFB, CA, JA/KA/HKA, JB/KB/HKB, DA, LA/HLA/LAB, LB/LBB/HLB, LC/HLC, MA/HMA, MC/HMC, NB/HNB, NC/HNC, Tri-Pac FB-P/LA-P/NB-P, LCL; Series C upgrades EHD, FDB, FD, HFD, FDC, ED, JD, DK, KD, LD, MDL, ND	A	S38, S39 p. V12-T4-7; RP01400002E pp. 12-14; oem_spec
x_unit	One X = 1.38 in (35.1 mm) of panel height; blank fillers required for unused X space	A	S38 p. V12-T4-9; oem_spec
bus_geometry	Vertical busbars 1.38 in typ, phase centers 3.50 in, mounting rails 19.50 in (applies to CDP and FDP chassis)	A	S39, S38 RP01400002E p. 17 Fig. 2; V12-T4-10; oem_spec
box_widths	CDP and FDP standard widths 30.00, 38.00, 42.00, 48.00 and 50.00 in; neutral located in side gutter	A	S39 p. 2; oem_spec
layout	Main lug top gutter 7-1/2 in; main lug section 5X 225 A, 7X 250-400 A, 9X 600 A, 12X/13X 800-1600 A; thru-feed lugs 10X 225 A, 13X 250-400 A, 17X 600-800 A; 30 in box branch: 1P EB/EHB/HFB 1X, 2P EB/EHB/FB 2X, 3P 3X, CA/CAH 2X-3X, JB/KB/HKB 3X (5 in), DA/LB/LBB/HLB 4X, LA/LC/HLC 6X, MC/HMC/NC/HNC/LCL 6X (48 in box)	A	S38 p. V12-T4-9; oem_spec
breaker_mix_rule	Only breakers of the same frame size can be installed across from each other (same horizontal plane); KD breakers can be mounted across from LB breakers if a TAD3 line side adapter is used	A	S38 p. V12-T4-7 notes 4,6; oem_spec
single_pole_note	When only one EB, EHB or HFB single-pole breaker is required with other frame size breakers, the space required changes from 1X to 2X	A	S38 p. V12-T4-9 note 1; oem_spec
renewal_doc	Renewal parts data RP01400002E; pricing PL01400002E	A	S38 pp. V12-T4-9, V12-T4-23; oem_spec
subchassis_note	If the CDP panelboard has a subchassis lighting panel, contact Sumter Plant Aftermarket Center (803-481-6677) for breaker selection	A	S39 p. 11; oem_spec

Breaker families associated: CA, DA, E, EB, ED, EHB, EHD, F, FB, FD, HFB, JA, JB, JD, KA, KB, KD, LA, LB, LC, LD, MA, MC, MDL, NB, NC, ND, Tri-Pac
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD; S40 RP01400002E (2009) Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00004	**KCDPCA**	CDP breaker connector kit, twin-mount, for CA, CAH, HCA	CA, CAH, HCA A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00002	**KCDPED225**	CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC	FD, FDB, HFD, FDC, ED, EDH, EDC A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00001	**KCDPFB100**	CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum)	EHD, FDB, FD, HFD, FDC (100 A maximum) A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00003	**KCDPFBP**	CDP breaker connector kit, twin-mount, for FB-P, FCL	FB-P, FCL A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00005	**KCDPKB**	CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00007	**KCDPLA400**	CDP breaker connector kit, twin-mount, for LA-P	LA-P A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00008	**KCDPLA600**	CDP breaker connector kit, twin-mount, for LD, HLD, LDC	LD, HLD, LDC A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00006	**KCDPLB**	CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00009	**KCDPLCL**	CDP breaker connector kit, single-mount, for LCL	LCL A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00010	**KCDPMC**	CDP breaker connector kit, single-mount, for MDL, HMDL	MDL, HMDL A	available from Sumter Aftermarket Center per 2013 renewal pa
EDH-EAT-00012	**KCDPNBP**	CDP breaker connector kit, single-mount, for NB-P	NB-P A	available from Sumter Aftermarket Center per 2013 renewal pa

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00011	**KCDPNC**	CDP breaker connector kit, single-mount, for ND, HND	ND, HND **A**	available from Sumter Aftermarket Center per 2013 renewal pa

EDH-EAT-00004	KCDPCA	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for CA, CAH, HCA

OEM part number	KCDPCA	**A**	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	**A**	S39 p. 14; oem_spec
Application	branch	**A**	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	**A**	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	CA, CAH, HCA	**A**	S39 p. 14 Table 19; oem_spec
Poles	3	**A**	same as above
Current rating	225 A frame	**A**	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	**A**	S39 p. 14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	**A**	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	**B**	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	**A**	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: CA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00002	KCDPED225	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC

OEM part number	KCDPED225	**A**	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	**A**	S39 p. 14; oem_spec
Application	branch	**A**	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	**A**	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	FD, FDB, HFD, FDC, ED, EDH, EDC	**A**	S39 p. 14 Table 19; oem_spec
Poles	3	**A**	same as above
Current rating	225 A frame	**A**	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	**A**	S39 p. 14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	**A**	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	**B**	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	**A**	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: FD, ED		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00001	KCDPFB100	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum)

OEM part number	KCDPFB100	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (100 A maximum)	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A maximum	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse FB-frame designation; 100 A max (note a)	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: EHD, FD, FB, EB, EHB, HFB		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00003 **KCDPFBP** Cutler-Hammer branch-connector-kit **AVAILABLE FROM SUMTER**

CDP breaker connector kit, twin-mount, for FB-P, FCL

OEM part number	KCDPFBP	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	FB-P, FCL	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	100 A (FB-P 15-100 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00005 **KCDPKB** Cutler-Hammer branch-connector-kit **AVAILABLE FROM SUMTER**

CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC

OEM part number	KCDPKB	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec

Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	JD, JDB, HJD, JDC	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	250 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse KB-frame designation (KB/HKB -> JD per cross-reference)	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: JD, KB, JB		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00007 KCDPLA400 Cutler-Hammer branch-connector-kit AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for LA-P

OEM part number	KCDPLA400	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	LA-P	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A (LA-P 70-400 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00008 KCDPLA600 Cutler-Hammer branch-connector-kit AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for LD, HLD, LDC

OEM part number	KCDPLA600	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above

Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	LD, HLD, LDC	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	600 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LA-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: LD, LA, LC		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00006	**KCDPLB**	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC

OEM part number	KCDPLB	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); twin mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	400 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse LB-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: KD, LB, KA, DA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00009	KCDPLCL	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, single-mount, for LCL

OEM part number	KCDPLCL	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	LCL	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	LCL 125-400 A	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00010	KCDPMC	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, single-mount, for MDL, HMDL

OEM part number	KCDPMC	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	MDL, HMDL	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A frame	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Kit name retains Westinghouse MC-frame designation	C	S39 p. 14; inference
Cross-links	Families: CDP · Breakers: MDL, MC, MA		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00012	KCDPNBP	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, single-mount, for NB-P

OEM part number	KCDPNBP	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	NB-P	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	800 A (NB-P 300-800 A)	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Cross-links	Families: CDP · Breakers: Tri-Pac		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

EDH-EAT-00011	KCDPNC	Cutler-Hammer	branch-connector-kit	AVAILABLE FROM SUMTER

CDP breaker connector kit, single-mount, for ND, HND

OEM part number	KCDPNC	A	S39, S40 RP01400002E p. 14 Table 19; oem_spec
Description	CDP breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) on a CDP chassis (breaker not included)	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Installation location	CDP/HCDP panelboard chassis branch position, bolted to vertical chassis bus (3.50 in phase centers); single mounting	A	S39 pp. 10, 14, 17; oem_spec
Breaker compatibility	ND, HND	A	S39 p. 14 Table 19; oem_spec
Poles	3	A	same as above
Current rating	1200 A frame; not rated for 100 percent breakers	A	S39 pp. 12-14; oem_spec
Kit contents	Copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 14; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting)	A	S39 p. 14 Table 19; oem_spec
Status	available from Sumter Aftermarket Center per 2013 renewal parts data; current availability unverified	B	S39, S40 pp. 14, 20; oem_spec
Replacement / successor	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A	S39 pp. 12, 14; oem_spec
Identification features	Note b: connector kits are not rated for 100 percent breakers	A	S39 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: ND, NC, NB		
Not yet documented	Aftermarket / reproduction, Fasteners, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Are CDP connectors silver- or tin-plated copper?*		
Open question	*What instruction leaflet number ships with the kit?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00014	**KCDP_X**	CDP filler cover, any 1X increment (catalog pattern KCDPnX)	—	unknown

EDH-EAT-00014	KCDP_X	Cutler-Hammer	filler-plate	STATUS UNKNOWN

CDP filler cover, any 1X increment (catalog pattern KCDPnX)

OEM part number	KCDP_X (fill in number of X, e.g. KCDP3X) (pattern; example KCDP3X is constructed, not printed)	A	S39 p. 14 'CDP filler covers'; oem_spec
Description	CDP filler cover available in any increment of 1X = 1.38 in (35.1 mm); includes cover, mounting brackets and hardware	A	S39 p. 14; oem_spec
Installation location	Closes unused X space on CDP chassis; blank fillers are required for unused X space	A	S38 p. V12-T4-9; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	S39 p. 14; oem_spec
Dimensions	Height = n x 1.38 in (35.1 mm)	A	same as above
Cross-links	Families: CDP		
Not yet documented	Finish / plating, Mounting-hole pattern, Material, width		

Trim

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00069	**0080429**	Panelboard trim lock — T-handle lock	—	listed 2013; contact Sumter for price
EDH-EAT-00070	**114C247G01**	Panelboard trim lock — Lock used on lighting and small power panels as standard	—	listed 2013; contact Sumter for price
EDH-EAT-00071	**3457B16G01**	Panelboard trim lock — Lock used on lighting and small panels as standard	—	listed 2013; contact Sumter for price
EDH-EAT-00072	**5155C81G01**	Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3	—	No Longer Available
EDH-EAT-00068	**8450C62H39**	Panelboard trim lock — Trim lock for right-handed door (hinged on right side)	—	listed 2013; contact Sumter for price
EDH-EAT-00067	**K80522**	Panelboard trim lock — Trim lock for left-handed door (hinged on left side)	—	listed 2013; contact Sumter for price

EDH-EAT-00069	0080429	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — T-handle lock

OEM part number	0080429	A	S39 p. 19 Table 22; oem_spec
Description	T-handle lock; once used on all panels over 48.00 in high and on outdoor (N3R) panels	A	same as above
Dimensions	approx. 2.50 in (63.5 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00070	114C247G01	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Lock used on lighting and small power panels as standard

OEM part number	114C247G01	A	S39 p. 19 Table 22; oem_spec
Description	Lock used on lighting and small power panels as standard; replacement lock uses WEM-3 key	A	same as above
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00071	3457B16G01	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Lock used on lighting and small panels as standard

OEM part number	3457B16G01	A	S39 p. 19 Table 22; oem_spec
Description	Lock used on lighting and small panels as standard	A	same as above
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00072	5155C81G01	Westinghouse	trim	NO LONGER AVAILABLE

Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3

OEM part number	5155C81G01	A	S39 p. 19 Table 22; oem_spec
Description	Present-day lock used on standard PRL1, 2 and 3; WEM 2 key — No Longer Available	A	same as above
Status	No Longer Available	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00068	8450C62H39	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Trim lock for right-handed door (hinged on right side)

OEM part number	8450C62H39	A	S39 p. 19 Table 22; oem_spec
Description	Trim lock for right-handed door (hinged on right side)	A	same as above
Dimensions	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

EDH-EAT-00067	K80522	Westinghouse	trim	LISTED 2013; CONTACT S

Panelboard trim lock — Trim lock for left-handed door (hinged on left side)

OEM part number	K80522	A	S39 p. 19 Table 22; oem_spec
Description	Trim lock for left-handed door (hinged on left side)	A	same as above
Dimensions	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing (dimension-to-part association read from figure layout)	C	S39 p. 19 drawing; oem_drawing
Status	listed 2013; contact Sumter for price	A	S39 p. 19; oem_spec
Cross-links	Families: CDP, FDP, PRL1/PRL2, PRL3		
Not yet documented	key_code, Material		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00013	**KCDPFB100-H**	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix	—	listed 2013

EDH-EAT-00013	KCDPFB100-H	Cutler-Hammer	hardware-kit	LISTED 2013

CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of '-H' suffix

OEM part number	KCDPFB100-H	A	S39 p. 14 (Hardware kit example); oem_spec
Alternate / superseded numbers	KCDPFD100H (2009 edition prints the example as KCDPFD100H; 2013 prints KCDPFB100-H. Likely a typo/format change, not a separate part)	C	S40 alias; RP01400002E (2009) p. 14; oem_spec
Description	Hardware kit: mounting bracket(s), filler plates and mounting hardware ONLY. Formed by adding '-H' to the appropriate CDP connector kit catalog number	A	S39 p. 14; oem_spec
Application	branch	A	same as above
Kit contents	Mounting bracket(s), filler plates, mounting hardware (no copper connectors)	A	same as above
Status	listed 2013	B	S39, S40 p. 14; oem_spec
Cross-links	Families: CDP · Breakers: EHD, FD		
Not yet documented	Dimensions, Fasteners, Finish / plating, Mounting-hole pattern, Identification features, Material, Torque values		
Open question	*Is the -H suffix valid for every KCDP connector kit (e.g. KCDPLB-H, KCDPNC-H)?*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00073	**414A380G02**	Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)	—	unknown

EDH-EAT-00073	414A380G02	Westinghouse	fastener	STATUS UNKNOWN

Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)

OEM part number	414A380G02	A	S39 p. 19; oem_spec
Description	Trim clamp used to mount Fastrims (concealed trim-mounting hardware); bag of six; some larger panels need more than one bag	A	same as above
Application	accessory	A	same as above
Installation location	Used on CDP, FDP and NQB	A	same as above
Kit contents	Bag of six clamps	A	same as above
Dimensions	Overall length 2.50 in (63.5 mm)	A	same as above
Cross-links	Families: CDP, FDP, NLAB		
Not yet documented	Finish / plating, Material		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00024	**KCDPDK**	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	Replaces existing Westinghouse DA (250-400 A) with Series C DK A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00016	**KCDPEHD**	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse EB, EHB	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00018	**KCDPFD**	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HFB	Replaces existing Westinghouse HFB (15-150 A) with Series C FD A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00017	**KCDPFDB**	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse FB	Replaces existing Westinghouse FB (15-150 A) with Series C FDB A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00020	**KCDPHKD**	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse HKA	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00021	**KCDPJD**	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB, HKB	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD A	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00023	**KCDPJDB**	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse JB	Replaces existing Westinghouse JB (70-250 A) with Series C JDB A	listed in 2013 renewal parts data; order via Sumter (enter c

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00019	**KCDPKD**	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125- **A**	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00022	**KCDPKDB**	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse JA	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Ser **A**	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00025	**KCDPLD**	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA, HLA	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A **A**	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00026	**KCDPMDL**	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse MA, HMA	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) wit **A**	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00027	**KCDPND**	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB, HNB	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 **A**	listed in 2013 renewal parts data; order via Sumter (enter c
EDH-EAT-00015	**TAD3**	TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA **A**	unknown

EDH-EAT-00024	KCDPDK	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA

OEM part number	KCDPDK (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	**A**	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse DA breaker (existing breaker superseded by this Series C retrofit)	**A**	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C DK breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	**A**	S39 pp. 12-13; oem_spec
Application	branch	**A**	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse DA (250-400 A) with Series C DK	**A**	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	**A**	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	**B**	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: KD, DA		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00016	KCDPEHD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse EB, EHB

OEM part number	KCDPEHD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse EB, EHB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C EHD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse EB, EHB (15-100 A) with Series C EHD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: EHD, EB, EHB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00018	KCDPFD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HFB

OEM part number	KCDPFD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HFB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C FD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HFB (15-150 A) with Series C FD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: FD, HFB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00017	KCDPFDB	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse FB

OEM part number	KCDPFDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse FB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C FDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse FB (15-150 A) with Series C FDB	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: FD, FB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00020	KCDPHKD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse HKA

OEM part number	KCDPHKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse HKA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C HKD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse HKA (70-225 A) with Series C HKD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: KD, KA		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00021	KCDPJD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB, HKB

OEM part number	KCDPJD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KB, HKB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C JD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KB, HKB (70-250 A) with Series C JD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: JD, KB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00023	KCDPJDB	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse JB

OEM part number	KCDPJDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C JDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JB (70-250 A) with Series C JDB	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: JD, JB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00019	KCDPKD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA

OEM part number	KCDPKD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse KA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C KD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse KA (70-225 A), LB (70-400 A), HLB (125-400 A) with Series C KD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: KD, KA, LB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00022	KCDPKDB	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse JA

OEM part number	KCDPKDB (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse JA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C KDB breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse JA (70-225 A), LBB (125-400 A) with Series C KDB	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: KD, JA, LB		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00025	KCDPLD	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA, HLA

OEM part number	KCDPLD (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse LA, HLA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C LD breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse LA, HLA (250-600 A), LC, HLC (300-600 A) with Series C LD	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: LD, LA, LC		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00026	KCDPMDL	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse MA, HMA

OEM part number	KCDPMDL (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse MA, HMA breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C MDL breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse MA, HMA (125-800 A), MC (400-800 A) with Series C MDL	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: MDL, MA, MC		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00027	KCDPND	Cutler-Hammer	conversion-kit	LISTED IN 2013 RENEWAL

CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB, HNB

OEM part number	KCDPND (base); full catalog number appends poles and ampere rating, e.g. KCDPKD3400 = 3-pole 400 A KD	A	S39 pp. 12-13 Tables 17-18; oem_spec
Alternate / superseded numbers	Westinghouse NB, HNB breaker (existing breaker superseded by this Series C retrofit)	A	S39 supersedes; p. 13 Table 18; oem_spec
Description	CDP retrofit kit: one Series C ND breaker plus copper connectors, mounting brackets, covers, hardware and instructions; uses the same X space as the older breaker so no extra filler covers are needed	A	S39 pp. 12-13; oem_spec
Application	branch	A	S39 p. 12; oem_spec
Breaker compatibility	Replaces existing Westinghouse NB, HNB (700-1200 A), NC, HNC (600-1200 A) with Series C ND	A	S39 p. 13 Table 18; oem_spec
Kit contents	One breaker only (second breaker for twin mounting ordered separately), copper connectors, mounting brackets, covers, hardware, instructions	A	S39 p. 12; oem_spec
Status	listed in 2013 renewal parts data; order via Sumter (enter catalog number, list price, multiplier, location Q49/SUM)	B	S39, S40 pp. 2, 12; oem_spec
Cross-links	Families: CDP · Breakers: ND, NB, NC		
Not yet documented	Dimensions, OEM instruction document, Material		
Open question	*Does a twin-mount retrofit kit for the second breaker include connectors again or breaker only?*		

EDH-EAT-00015	TAD3	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors

OEM part number	TAD3	A	S39, S38 RP01400002E p. 13; V12-T3-11 note 1; V12-T4-7 note 6; oem_spec
Description	Adapter kit required when mounting a Series C KD-frame breaker onto existing LB-frame connectors; included in orders for KD retrofit kits or connector kits, also sold separately	A	S39 p. 13 note; oem_spec
Application	branch (line-side adapter)	A	S38 p. V12-T4-7 note 6; oem_spec
Installation location	Line side of K-frame breaker on CDP chassis existing LB connectors; allows KD opposite LB breakers	A	same as above
Breaker compatibility	Series C K family (DK, KD, KDB, HKD, KDC) replacing LB, HLB, LBB or JA in panelboard applications	A	S39, S38 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Cross-links	Families: CDP, PRL4 · Breakers: KD, LB, JA		
Not yet documented	Dimensions, Kit contents, Material		
Open question	*Exact contents of TAD3 (spacer blocks vs. extended line straps)?*		
Open question	*Is TAD3 also used on WF/WRP switchboard LB provisions?*		

3.3 FDP — Westinghouse FDP fusible panelboard

FAM-EAT-008 · panelboard · aka FDP, Westinghouse FDP · markings: Westinghouse

Westinghouse fusible distribution panelboard sharing CDP chassis geometry (3.50 in phase centers, 19.50 in rails). FDPW/FDPB switch connector kits fit only 3.50 in bus spacing; if bus spacing is 4.25 in no parts are available. Circuit breakers can be added to an FDP via a 'picture frame' transition (+2X).

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL4F	A	S38 p. V12-T4-7; oem_spec
Successor	PRL4F	A	same as above
Main ampacity	1600 A maximum	A	S38 p. V12-T4-10; oem_spec
Branch breakers accepted	FDP fusible switches 30-1200 A; current replacements FDPW (30-100 A twin, 400-1200 A) and FDPB (200 A) switches via KFDP connector/retrofit kits	A	S39 pp. 17-18; oem_spec
bus_spacing_limit	Vertical bus bars must be 3.50 in center-line phase to phase; if 4.25 in, switches will not fit and no parts are available	A	S39 p. 17; oem_spec

Attribute	Value	Cl.	Sources
breaker_in_fdp	To install circuit breakers in an FDP panel a 'picture frame' is required; add 2X to breaker size for the transition (contact Sumter)	A	S39 p. 18; oem_spec
layout	Main lug section 5X 225 A, 8X 250-400 A, 9X 600 A, 12X 800-1600 A; switches 30/60/100 A 4X, 100 A 600 V 5X, 200 A 6X, 400/600 A 11X, 800/1200 A 16X horizontal or 21X vertical	A	S38 p. V12-T4-10; oem_spec

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): K80522 (p.24), 8450C62H39 (p.24), 0080429 (p.23), 114C247G01 (p.23), 3457B16G01 (p.24), 5155C81G01 (p.24), 414A380G02 (p.25)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00028	**KFDP4XT**	FDP fusible switch connector kit 4X (30, 60)	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin s A	listed 2013
EDH-EAT-00029	**KFDP5XT**	FDP fusible switch connector kit 5X (100 A)	Three-pole switch: 100 A 600 V FDPWT3633R A	listed 2013
EDH-EAT-00030	**KFDPB6X-2**	FDP fusible switch connector kit 6X (200 A)	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V) A	listed 2013
EDH-EAT-00032	**KFDPW11X-6**	FDP fusible switch connector kit 11X (600 A)	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V) A	listed 2013
EDH-EAT-00033	**KFDPW11X-8**	FDP fusible switch connector kit 11X (800 A)	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V colu A	listed 2013
EDH-EAT-00034	**KFDPW15X-12**	FDP fusible switch connector kit 15X (1200 A)	Three-pole switch: 1200 A FDPW368 A	listed 2013
EDH-EAT-00031	**KFDPW9X-4**	FDP fusible switch connector kit 9X (400 A)	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V) A	listed 2013

EDH-EAT-00028	KFDP4XT	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 4X (30, 60)

OEM part number	KFDP4XT	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 30, 60 A (240/600 V) and 100 A (240 V) FDPWT twin switches: FDPWT3211R, FDPWT3611R, FDPWT3222R, FDPWT3622R, FDPWT3233R	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00029	KFDP5XT	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 5X (100 A)

OEM part number	KFDP5XT	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 100 A 600 V FDPWT3633R	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 6.88 in (174.8 mm) = 5X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00030	KFDPB6X-2	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 6X (200 A)

OEM part number	KFDPB6X-2	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 200 A FDPBS324R (240 V), FDPBS364R (600 V)	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 8.25 in (209.6 mm) = 6X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00032	KFDPW11X-6	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 11X (600 A)

OEM part number	KFDPW11X-6	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 600 A FDPW326R (240 V), FDPW366R (600 V)	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 15.13 in (384.3 mm) = 11X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00033	KFDPW11X-8	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 11X (800 A)

OEM part number	KFDPW11X-8	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 800 A FDPW367 (table prints 'FDPW36' for 600 V column, apparent truncation)	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 15.13 in (384.3 mm) = 11X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00034	KFDPW15X-12	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 15X (1200 A)

OEM part number	KFDPW15X-12	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 1200 A FDPW368	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 20.63 in (524.0 mm) = 15X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

EDH-EAT-00031	KFDPW9X-4	Cutler-Hammer	branch-connector-kit	LISTED 2013

FDP fusible switch connector kit 9X (400 A)

OEM part number	KFDPW9X-4	A	S39, S40 RP01400002E p. 18 Table 21; oem_spec
Description	FDPW/FDPB switch connector kit: copper connectors, extension wings (when required), mounting brackets, covers, hardware and instructions to mount one switch on an FDP panel chassis (switch not included)	A	S39 p. 18; oem_spec
Application	branch	A	same as above
Installation location	Vintage Westinghouse FDP panelboards and switchboards; vertical bus bars must be 3.50 in phase-to-phase (not 4.25 in)	A	S39 p. 17; oem_spec
Breaker compatibility	Three-pole switch: 400 A FDPW325R (240 V), FDPW365R (600 V)	A	S39 p. 18 Table 21; oem_spec
Poles	3	A	S39 p. 18; oem_spec
Dimensions	Occupies 12.38 in (314.5 mm) = 9X	A	S39 p. 18 Table 21; oem_spec
Status	listed 2013	B	S39, S40 p. 18; oem_spec
Cross-links	Families: FDP, WF/WRP		
Not yet documented	OEM instruction document, Material, Torque values		
Open question	*Are these kits also the 'connector kits for WF and WRP distribution sections' mentioned on p.20?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00035	**KFDP_X**	FDP filler cover, any 1X increment (catalog pattern KFDPnX)	—	unknown

EDH-EAT-00035	KFDP_X	Cutler-Hammer	filler-plate	STATUS UNKNOWN

FDP filler cover, any 1X increment (catalog pattern KFDPnX)

OEM part number	KFDP_X (fill in size)	A	S39 p. 17 'FDP filler covers'; oem_spec
Description	FDP filler cover available in any 1X (1.38 in / 35.1 mm) increment; includes cover, mounting brackets and hardware	A	S39 p. 17; oem_spec
Kit contents	Cover, mounting brackets, hardware	A	same as above
Cross-links	Families: FDP		
Not yet documented	Material, width		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00042	**KFDPBS324R**	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00043	**KFDPBS364R**	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00044	**KFDPW325R**	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00046	**KFDPW326R**	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00045	**KFDPW365R**	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00047	**KFDPW366R**	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00048	**KFDPW367**	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00049	**KFDPW368**	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	—	unknown
EDH-EAT-00036	**KFDPWT3211R**	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00038	**KFDPWT3222R**	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00040	**KFDPWT3233R**	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	—	unknown
EDH-EAT-00037	**KFDPWT3611R**	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00039	**KFDPWT3622R**	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	—	unknown
EDH-EAT-00041	**KFDPWT3633R**	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	—	unknown

EDH-EAT-00042 **KFDPBS324R** Cutler-Hammer conversion-kit **STATUS UNKNOWN**

FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)

OEM part number	KFDPBS324R	**A**	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	**A**	S39 p. 17; oem_spec
Application	branch	**A**	same as above
Poles	3	**A**	same as above
Voltage rating	240 V	**A**	S39 p. 17 Table 20; oem_spec
Current rating	200 A	**A**	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	**A**	S39 p. 17; oem_spec
Dimensions	6X of chassis height	**A**	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00043	KFDPBS364R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)

OEM part number	KFDPBS364R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	6X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00044	KFDPW325R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)

OEM part number	KFDPW325R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	9X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00046	KFDPW326R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)

OEM part number	KFDPW326R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00045	KFDPW365R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)

OEM part number	KFDPW365R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	400 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	9X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00047	KFDPW366R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)

OEM part number	KFDPW366R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	600 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00048	KFDPW367	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)

OEM part number	KFDPW367	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	800 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	11X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00049	KFDPW368	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)

OEM part number	KFDPW368	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240/600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	1200 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	15X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00036	KFDPWT3211R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)

OEM part number	KFDPWT3211R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00038	KFDPWT3222R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)

OEM part number	KFDPWT3222R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00040	KFDPWT3233R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)

OEM part number	KFDPWT3233R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	240 V	A	S39 p. 17 Table 20; oem_spec
Current rating	100 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00037	KFDPWT3611R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)

OEM part number	KFDPWT3611R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	30 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00039	KFDPWT3622R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)

OEM part number	KFDPWT3622R	A	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	A	S39 p. 17; oem_spec
Application	branch	A	same as above
Poles	3	A	same as above
Voltage rating	600 V	A	S39 p. 17 Table 20; oem_spec
Current rating	60 A	A	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	A	S39 p. 17; oem_spec
Dimensions	4X of chassis height	A	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00041	KFDPWT3633R	Cutler-Hammer	conversion-kit	STATUS UNKNOWN

FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)

OEM part number	KFDPWT3633R	**A**	S39 p. 17 Table 20; oem_spec
Description	FDP retrofit kit: one FDPW/FDPB switch plus copper connectors, covers, hardware and instructions for mounting on an FDP chassis	**A**	S39 p. 17; oem_spec
Application	branch	**A**	same as above
Poles	3	**A**	same as above
Voltage rating	600 V	**A**	S39 p. 17 Table 20; oem_spec
Current rating	100 A	**A**	same as above
Kit contents	Switch (rejection-type fuse clips up to 600 A; 800/1200 A for Class L fuses, fuses not included), copper connectors, covers, hardware, instructions	**A**	S39 p. 17; oem_spec
Dimensions	5X of chassis height	**A**	S39 p. 17 Table 20; oem_spec
Cross-links	Families: FDP		
Not yet documented	OEM instruction document, Material		

3.4 NAB — Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards

FAM-EAT-013 · panelboard · aka NAB, NA1B, NH1B, NHB, NDP, NHDP, NEB, NHEB, ABH, A2B · markings: Westinghouse

Westinghouse 1937-1988 lighting/appliance and distribution panelboards using E-family plug/bolt breakers. Branch breakers replaced by 'panelboard only' R-prefix breakers (REH, RHF, RHFA) supplied with mounting hardware; connector kits not available. The scope term 'NHB' is not used in Vol 12; nearest OEM designations are NH1B and NHEB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replacement panelboard PRL3a (NAB, NA1B, NDP, NEB, NHDP, NHEB, ABH) or PRL2a (NH1B); panelboard-only replacement breaker REH/RHFA	**A**	S38 p. V12-T4-7; oem_spec
Branch breakers accepted	E, EA, EAH, EH, FA, E-277 (replacement breaker REH; RHFA for FA)	**A**	same as above

Breaker families associated: E, F
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.5 NLAB — Westinghouse NLAB lighting panelboard

FAM-EAT-012 · panelboard · aka NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQP, NQC · markings: Westinghouse

Westinghouse plug-in/bolt-on lighting panelboards for Quicklag-type Q breakers. Vol 12 flags 'connectors not available' for this group; replacement is a new PRL1a/PRL3a interior. CDP/FDP/NQB trim clamp 414A380G02 still applies to NQB.

Attribute	Value	Cl.	Sources
Status	discontinued; connectors not available; replace panelboard with PRL1a (NLAB, NPLAB, NQB, NQP, NQC), PRL1aLX (NLAB-LX), PRL3a (NLAB-AB/ABH)	**A**	S38 p. V12-T4-7; oem_spec
Era of manufacture	Westinghouse panelboards manufactured between 1937 and 1988	**A**	same as above
Branch breakers accepted	NLAB: QC; NPLAB/NQP: QP (new breaker HQP); NQB: BA (new BAB); NQC: QC	**A**	same as above
connectors	Connectors not available (note 2) for NLAB, NLAB-LX, NLAB-AB, NLAB-ABH, NPLAB, NQB, NQC, NQP	**A**	same as above

Breaker families associated: BAB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions
Also fits this family (entry printed elsewhere): 414A380G02 (p.25)

3.6 PRL1/PRL2 — Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)

FAM-EAT-009 · panelboard · aka PRL1, PRL2, Pow-R-Line 1, Pow-R-Line 2, PRL1-LX · markings: Westinghouse

Vintage Westinghouse lighting (PRL1) and 480Y/277 V (PRL2) panelboards, 20 in wide boxes, neutral at top. Replacement connector kits KPRL1BAB / KPRL2GHB mount up to 12 poles.

Attribute	Value	Cl.	Sources
Status	discontinued; replaced by PRL1a / PRL2a	A	S38 p. V12-T4-8; oem_spec
Era of manufacture	Westinghouse panelboards manufactured after 1988 (1988 redesign for Series C)	A	S38 pp. V12-T4-2, V12-T4-8; oem_spec
Main ampacity	600 A maximum	A	S38 p. V12-T4-15; oem_spec
Branch breakers accepted	PRL1: BAB, QBHW, HQP, QPHW; PRL2: GB, GHB, GHBS	A	S38 p. V12-T4-8; oem_spec
box_width	Standard width 20.00 in; box depth 5.75 in	A	S39 pp. 2-3; oem_spec

Breaker families associated: BAB, GB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): K80522 (p.24), 8450C62H39 (p.24), 0080429 (p.23), 114C247G01 (p.23), 3457B16G01 (p.24), 5155C81G01 (p.24)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00050	**KPRL1BAB**	PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles	—	unknown
EDH-EAT-00051	**KPRL2GHB**	PRL2 replacement branch connector kit (GB/GHB), up to 12 poles	—	unknown

EDH-EAT-00050 **KPRL1BAB** Cutler-Hammer branch-connector-kit **STATUS UNKNOWN**

PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles

OEM part number	KPRL1BAB	A	S39 p. 3 Table 1; oem_spec
Description	Replacement connectors for vintage PRL1: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S39 p. 3; oem_spec
Application	branch	A	same as above
Current rating	Maximum amperes connected to any one connector cannot exceed 140 A	A	same as above
Material	Silver-plated copper connectors, suitable for copper or aluminum bus	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: BAB		
Not yet documented	Dimensions, Mounting-hole pattern, Torque values		

EDH-EAT-00051 **KPRL2GHB** Cutler-Hammer branch-connector-kit **STATUS UNKNOWN**

PRL2 replacement branch connector kit (GB/GHB), up to 12 poles

OEM part number	KPRL2GHB	A	S39 p. 3 Table 1; oem_spec
Description	Replacement connectors for vintage PRL2: two sets of A, B and C phase connectors, phase isolators, hardware and instructions for mounting up to 12 poles	A	S39 p. 3; oem_spec
Application	branch	A	same as above
Current rating	Maximum 140 A connected to any one connector	A	same as above
Material	Silver-plated copper connectors, suitable for copper or aluminum bus	A	same as above
Cross-links	Families: PRL1/PRL2 · Breakers: GB		
Not yet documented	Dimensions, Mounting-hole pattern, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00056	**5158C03G01**	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00055	**5158C03G02**	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00058	**5158C03G03**	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)	—	unknown
EDH-EAT-00057	**5158C03G04**	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)	—	unknown
EDH-EAT-00059	**5158C04G01**	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	—	unknown

EDH-EAT-00056 **5158C03G01** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G01	**A**	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S39 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes less than 30.00 in high	**A**	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00055 **5158C03G02** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G02	**A**	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S39 style_number; p. 2 item 3; oem_spec
Description	100 A neutral bar, boxes 30.00 in and above	**A**	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00058 **5158C03G03** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style number)

OEM part number	5158C03G03	**A**	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S39 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes less than 30.00 in high	**A**	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00057 **5158C03G04** Westinghouse neutral-assembly **STATUS UNKNOWN**

PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number)

OEM part number	5158C03G04	**A**	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	**A**	S39 style_number; p. 2 item 3; oem_spec
Description	225 A neutral bar, boxes 30.00 in and above	**A**	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

EDH-EAT-00059	5158C04G01	Westinghouse	neutral-assembly	STATUS UNKNOWN

PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)

OEM part number	5158C04G01	A	S39 p. 4 Table 3; oem_spec
Alternate / superseded numbers	No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	A	S39 style_number; p. 2 item 3; oem_spec
Description	400/600 A neutral bar	A	S39 p. 4 Table 3; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, lug_count, Material		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00061	**5158C05G01**	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00060	**5158C05G02**	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	—	unknown
EDH-EAT-00063	**5158C05G05**	PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)	—	unknown
EDH-EAT-00062	**5158C05G06**	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	—	unknown

EDH-EAT-00061	5158C05G01	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G01	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes less than 30.00 in high	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00060	5158C05G02	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G02	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	standard ground bar, boxes 30.00 in and above	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

EDH-EAT-00063	5158C05G05	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)

OEM part number	5158C05G05	A	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes less than 30.00 in high	A	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

EDH-EAT-00062	5158C05G06	Westinghouse	ground-bar	STATUS UNKNOWN

PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)

OEM part number	5158C05G06	**A**	S39 p. 5 Table 5; p. 6 Table 7; oem_spec
Description	isolated ground bar, boxes 30.00 in and above	**A**	S39 p. 5 Table 5; oem_spec
Cross-links	Families: PRL1/PRL2		
Not yet documented	Dimensions, Material		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00066	**3456B35H01**	PRL1/PRL2 blank cover 6.00 in high (style number)	—	unknown
EDH-EAT-00065	**3456B99H01**	PRL1/PRL2 blank cover 3.00 in high (style number)	—	unknown
EDH-EAT-00064	**3456B99H05**	PRL1/PRL2 blank cover 15.00 in high (style number)	—	unknown

EDH-EAT-00066	3456B35H01	Westinghouse	filler-plate	STATUS UNKNOWN

PRL1/PRL2 blank cover 6.00 in high (style number)

OEM part number	3456B35H01	**A**	S39 p. 4 Table 4; oem_spec
Description	Blank cover, height 6.00 in (152.4 mm)	**A**	same as above
Dimensions	Height 6.00 in (152.4 mm)	**A**	same as above
Cross-links	Families: PRL1/PRL2		
Not yet documented	Material, width		

EDH-EAT-00065	3456B99H01	Westinghouse	filler-plate	STATUS UNKNOWN

PRL1/PRL2 blank cover 3.00 in high (style number)

OEM part number	3456B99H01	**A**	S39 p. 4 Table 4; oem_spec
Description	Blank cover, height 3.00 in (76.2 mm)	**A**	same as above
Dimensions	Height 3.00 in (76.2 mm)	**A**	same as above
Cross-links	Families: PRL1/PRL2		
Not yet documented	Material, width		

EDH-EAT-00064	3456B99H05	Westinghouse	filler-plate	STATUS UNKNOWN

PRL1/PRL2 blank cover 15.00 in high (style number)

OEM part number	3456B99H05	**A**	S39 p. 4 Table 4; oem_spec
Description	Blank cover, height 15.00 in (381.0 mm)	**A**	same as above
Dimensions	Height 15.00 in (381.0 mm)	**A**	same as above
Cross-links	Families: PRL1/PRL2		
Not yet documented	Material, width		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00074	**414A380G01**	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	—	unknown
EDH-EAT-00075	**8712C73H01**	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	—	unknown

EDH-EAT-00074	414A380G01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)

OEM part number	414A380G01	A	S39 p. 8 Fastrim; oem_spec
Description	Flush Fastrim uses Style Number 414A380G01 trim clamps (supplied with the trim)	A	S39 p. 8; oem_spec
Dimensions	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 (p.19 shows a 3.13 in clamp for B10B/PRL1-3 next to 414A380G02; association with G01 inferred from layout and p.8)	C	S39 p. 19; oem_drawing
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Material		

EDH-EAT-00075	8712C73H01	Westinghouse	fastener	STATUS UNKNOWN

Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3

OEM part number	8712C73H01	A	S39 p. 8 Fastrim; oem_spec
Description	Surface Fastrim uses Style Number 8712C73H01 trim clamps; clamps included and shipped with the trim	A	S39 p. 8; oem_spec
Cross-links	Families: PRL1/PRL2, PRL3		
Not yet documented	Dimensions, Material		

3.7 PRL3 — Westinghouse Pow-R-Line 3 panelboard (vintage)

FAM-EAT-010 · panelboard · aka PRL3, Pow-R-Line 3, PRL3-LX · markings: Westinghouse

Vintage Westinghouse power panelboard with lighting subchassis and vertical-bus branch area, 20 in wide. KPRL3FD/KPRL3ED/KPRL3CA connector kits; the PRL3 kits also fit WEB, WCA, WEHB, WFB and HWFB panelboards.

Attribute	Value	Cl.	Sources
Status	discontinued; replaced by PRL3a	A	S38 p. V12-T4-8; oem_spec
Main ampacity	600 A maximum (400 A max bus rating for subchassis)	A	S38 p. V12-T4-16; oem_spec
Branch breakers accepted	BAB/QBH subchassis, GB/GHB, EHD, FDB, FD, HFD, FDC, ED, CA/CAH/HCA; mains up to JD, KD, LC/LA, LCL, LA-P	A	S38 pp. V12-T4-8, V12-T4-16; oem_spec

Breaker families associated: BAB, CA, ED, EHD, FD, GB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): 5158C05G02 (p.45), 5158C05G01 (p.45), K80522 (p.24), 8450C62H39 (p.24), 0080429 (p.23), 114C247G01 (p.23), 3457B16G01 (p.24), 5155C81G01 (p.24), 414A380G01 (p.47), 8712C73H01 (p.47)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00054	**KPRL3CA**	PRL3 replacement connector kit for CA, CAH, HCA	CA, CAH, HCA A	unknown
EDH-EAT-00053	**KPRL3ED**	PRL3 replacement connector kit for ED, EDH, EDC (240 V max)	ED, EDH, EDC (240 V max) A	unknown
EDH-EAT-00052	**KPRL3FD**	PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)	EHD, FDB, FD, HFD, FDC (240/480/600 V) A	unknown

EDH-EAT-00054	KPRL3CA	Cutler-Hammer	branch-connector-kit	STATUS UNKNOWN

PRL3 replacement connector kit for CA, CAH, HCA

OEM part number	KPRL3CA	A	S39 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware, cover and instructions to mount one two- or three-pole CA-frame breaker	A	S39 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	CA, CAH, HCA	A	S39 p. 7; oem_spec
Cross-links	Families: PRL3, WEB · Breakers: CA		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00053	KPRL3ED	Cutler-Hammer	branch-connector-kit	STATUS UNKNOWN

PRL3 replacement connector kit for ED, EDH, EDC (240 V max)

OEM part number	KPRL3ED	A	S39 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware, cover and instructions to mount one three-pole breaker (single-mount only)	A	S39 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	ED, EDH, EDC (240 V max)	A	S39 p. 7; oem_spec
Cross-links	Families: PRL3, WEB · Breakers: ED		
Not yet documented	Dimensions, Material, Torque values		

EDH-EAT-00052	KPRL3FD	Cutler-Hammer	branch-connector-kit	STATUS UNKNOWN

PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)

OEM part number	KPRL3FD	A	S39 p. 7 Tables 9-11; oem_spec
Description	A, B and C phase connectors, hardware and instructions to twin-mount two three-pole breakers; max 150 A per breaker and 200 A per connector (50-150 A)	A	S39 p. 7; oem_spec
Application	branch	A	same as above
Installation location	Vintage PRL3 interiors; also fits WEB, WCA, WEHB, WFB and HWFB panelboards	A	S39 p. 7 note; oem_spec
Breaker compatibility	EHD, FDB, FD, HFD, FDC (240/480/600 V)	A	S39 p. 7; oem_spec
Cross-links	Families: PRL3, WEB · Breakers: EHD, FD		
Not yet documented	Dimensions, Material, Torque values		

3.8 PRL4 — Pow-R-Line 4 panelboard (PRL4B / PRL4F)

FAM-EAT-014 · panelboard · aka PRL4B, PRL4F, Pow-R-Line 4, PRL4, PRL4X, Pow-R-Line 4B · markings: Westinghouse, Cutler-Hammer, Eaton

Westinghouse-origin power distribution panelboard (24, 36, 44 in box widths) that replaced CDP (PRL4B) and FDP (PRL4F). Its KPRL4 breaker connector kits (copper connectors, brackets, covers, hardware) are the most completely documented group-mount kits for Series C FD/JD/KD/LD/MDL/ND frames; included here because the same device X-spacing is used in Pow-R-Line C switchboard distribution chassis.

Attribute	Value	Cl.	Sources
Status	current (PRL4X / Pow-R-Line Xpert naming in 2022 RP01400001E)	A	S42 p. 32; oem_spec
Era of manufacture	PRL4B/F introduced October 1987 (originally a Westinghouse product)	A	S41, S38 RP01400001E (2017) p. 2 Table 1; V12-T4-18; oem_spec
Main ampacity	1200 A maximum	A	S38 p. V12-T4-18; oem_spec
box_widths	PRL4 standard widths 24.00, 36.00 and 44.00 in	A	S41 p. 2; oem_spec

Breaker families associated: CA, ED, EHD, FD, JD, KD, LD, MDL, ND, Tri-Pac
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S41 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S42 RP01400001E Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards
Also fits this family (entry printed elsewhere): TAD3 (p.32)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00108	**KPRL44X**	PRL4F fusible switch connector kit 4X (60 A)	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches) A	listed 2017 and 2022
EDH-EAT-00109	**KPRL45X1**	PRL4F fusible switch connector kit 5X (100 A)	100 A 600 V FDPWT3633R A	listed 2017 and 2022
EDH-EAT-00110	**KPRL4B6XS**	PRL4F fusible switch connector kit 6X (200 A)	200 A FDPBS324R/FDPBS364R A	listed 2017 and 2022

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00111	**KPRL4B6XT**	PRL4F fusible switch connector kit 6X (200 A)	200 A FDPBT3244R/FDPBT3644R (44 in box) **A**	listed 2017 and 2022
EDH-EAT-00103	**KPRL4CA**	PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA	CA/CAH/HCA **A**	current (May 2022)
EDH-EAT-00086	**KPRL4CKD**	PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)	CKD, CHKD (100% rated) **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00092	**KPRL4CND**	PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)	CND, CHND (100% rated) **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00081	**KPRL4ED**	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	ED, EDH, EDC **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00078	**KPRL4ED2**	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	ED, EDH, EDC **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00080	**KPRL4FBP**	PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD	FCL, FB-P, FD/LFD **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00079	**KPRL4FD**	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EHD, FD, FDB, HFD, FDC **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00076	**KPRL4FD1**	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EHD, FD, HFD **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00077	**KPRL4FD2**	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EHD, FD, FDB, HFD, FDC **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00102	**KPRL4FDCL**	PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mounting only)	FD current limiter (single mounting only) **A**	current (May 2022)
EDH-EAT-00082	**KPRL4JDS**	PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00083	**KPRL4JDT**	PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC	JD, JDB, HJD, JDC **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00084	**KPRL4KDS**	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00085	**KPRL4KDT**	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	DK, KD, KDB, HKD, KDC **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00088	**KPRL4LAP**	PRL4 breaker connector kit, single-mount 6X, for LA-P	LA-P **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00104	**KPRL4LC**	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA]	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC **A**	current (May 2022)
EDH-EAT-00087	**KPRL4LCL**	PRL4 breaker connector kit, single-mount 6X, for LCL	LCL **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00089	**KPRL4LD**	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	LD, LDB, HLD, LDC, CLD, LC **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00105	**KPRL4LG**	PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH	LHH **A**	current (May 2022)
EDH-EAT-00090	**KPRL4MC**	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	MDL, HMDL **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00107	**KPRL4MD**	PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated	CMDL/CHMDL (100% rated; density rated bus) **A**	current (May 2022)
EDH-EAT-00091	**KPRL4NBP**	PRL4 breaker connector kit, single-mount 6X, for NB-P	NB-P **A**	listed in both 2017 and May 2022 RP01400001E
EDH-EAT-00106	**KPRL4NC**	PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]	NC/NCY/HNC [NB/HNB] **A**	current (May 2022)
EDH-EAT-00093	**KPRL4ND**	PRL4 breaker connector kit, single-mount 6X, for ND, HND	ND, HND **A**	Listed Oct 2017; not listed for these frames in May 2022 edi
EDH-EAT-00113	**KPRL4W11X**	PRL4F fusible switch connector kit 11X (600 A)	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box) **A**	listed 2017 and 2022

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-EAT-00114	**KPRL4W15X**	PRL4F fusible switch connector kit 15X (1200 A)	1200 A FDPW328/FDPW368 (44 in box) **A**	listed 2017 and 2022
EDH-EAT-00112	**KPRL4W9X**	PRL4F fusible switch connector kit 9X (400 A)	400 A FDPW325R/FDPW365R **A**	listed 2017 and 2022
EDH-EAT-00094	**KPRL4X12**	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EHD/FDB/FD/HFD/FDC (PD2) **A**	current (May 2022)
EDH-EAT-00095	**KPRL4X22**	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2) **A**	current (May 2022)
EDH-EAT-00096	**KPRL4X32**	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2) **A**	current (May 2022)
EDH-EAT-00097	**KPRL4X334S**	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame	PD3 400 A frame **A**	current (May 2022)
EDH-EAT-00098	**KPRL4X334T**	PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame	PD3 400 A frame **A**	current (May 2022)
EDH-EAT-00099	**KPRL4X336**	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU **A**	current (May 2022)
EDH-EAT-00100	**KPRL4X34**	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	PD4; MDL/HMDL **A**	current (May 2022)
EDH-EAT-00101	**KPRL4X35**	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	PD5; ND/HND/NDC/NGS/NGH/NGC **A**	current (May 2022)

EDH-EAT-00108 KPRL44X — Cutler-Hammer — branch-connector-kit — LISTED 2017 AND 2022

PRL4F fusible switch connector kit 4X (60 A)

OEM part number	KPRL44X	**A**	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S41 p. 25; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	60 A FDPWT3222R/FDPWT3622R (also fits FDP and FDPW switches)	**A**	S41 p. 25 Table 38; oem_spec
Dimensions	4X switch height	**A**	S41 p. 25; oem_spec
Status	listed 2017 and 2022	**A**	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00109 KPRL45X1 — Cutler-Hammer — branch-connector-kit — LISTED 2017 AND 2022

PRL4F fusible switch connector kit 5X (100 A)

OEM part number	KPRL45X1	**A**	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	**A**	S41 p. 25; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	100 A 600 V FDPWT3633R	**A**	S41 p. 25 Table 38; oem_spec
Dimensions	5X switch height	**A**	S41 p. 25; oem_spec
Status	listed 2017 and 2022	**A**	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00110	KPRL4B6XS	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 6X (200 A)

OEM part number	KPRL4B6XS	A	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	200 A FDPBS324R/FDPBS364R	A	S41 p. 25 Table 38; oem_spec
Dimensions	6X switch height	A	S41 p. 25; oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00111	KPRL4B6XT	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 6X (200 A)

OEM part number	KPRL4B6XT	A	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	200 A FDPBT3244R/FDPBT3644R (44 in box)	A	S41 p. 25 Table 38; oem_spec
Dimensions	6X switch height	A	S41 p. 25; oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00103	KPRL4CA	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA

OEM part number	KPRL4CA	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	CA/CAH/HCA	A	S42 pp. 32-33; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: CA		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00086	KPRL4CKD	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)

OEM part number	KPRL4CKD	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	CKD, CHKD (100% rated)	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width; requires density rated bus in existing chassis	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: KD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00092	KPRL4CND	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)

OEM part number	KPRL4CND	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	CND, CHND (100% rated)	A	S41 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width; requires density rated bus	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: ND		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00081	KPRL4ED	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC

OEM part number	KPRL4ED	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4ED is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC	A	S41 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S41, S42 inference
Cross-links	Families: PRL4 · Breakers: ED		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00078	KPRL4ED2	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC

OEM part number	KPRL4ED2	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4ED2 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ED, EDH, EDC	A	S41 p. 24 Table 37; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S41, S42 inference
Cross-links	Families: PRL4 · Breakers: ED		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00080	KPRL4FBP	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD

OEM part number	KPRL4FBP	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	FCL, FB-P, FD/LFD	A	S41 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Cross-links	Families: PRL4 · Breakers: Tri-Pac, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00079	KPRL4FD	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC

OEM part number	KPRL4FD	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X32 (Same breaker frames/space listed under KPRL4X32 in May 2022 RP01400001E while KPRL4FD is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC	A	S41 p. 24 Table 37; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X32)	C	S41, S42 inference
Aftermarket / reproduction	Distributors list as 3P twin mount 225 A for EHD/FD/FDB/HFD/FDC; Elliott Electric marks item inactive	C	S50 distributor
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00076	KPRL4FD1	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD

OEM part number	KPRL4FD1	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X12 (Same breaker frames/space listed under KPRL4X12 in May 2022 RP01400001E while KPRL4FD1 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, HFD	A	S41 p. 24 Table 37; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X12)	C	S41, S42 inference
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00077	KPRL4FD2	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC

OEM part number	KPRL4FD2	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X22 (Same breaker frames/space listed under KPRL4X22 in May 2022 RP01400001E while KPRL4FD2 is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	EHD, FD, FDB, HFD, FDC	A	S41 p. 24 Table 37; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X22)	C	S41, S42 inference
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00102	KPRL4FDCL	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mounting only)

OEM part number	KPRL4FDCL	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	FD current limiter (single mounting only)	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	4.13 in (104.9 mm) = 3X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00082	KPRL4JDS	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC

OEM part number	KPRL4JDS	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Cross-links	Families: PRL4 · Breakers: JD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00083	KPRL4JDT	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC

OEM part number	KPRL4JDT	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	JD, JDB, HJD, JDC	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: JD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00084	KPRL4KDS	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC

OEM part number	KPRL4KDS	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	UPC 782114795996	A	S44 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X)	A	S44, S41 spec sheet; p. 24; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
Aftermarket / reproduction	Sold as surplus/reconditioned on eBay titled 'POW-R-LINE C' single-mount kit 400A 3P	C	S49 surplus_listing
Cross-links	Families: PRL4 · Breakers: KD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00085	KPRL4KDT	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC

OEM part number	KPRL4KDT	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	UPC 782114796412	A	S45 alias; spec sheet; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	DK, KD, KDB, HKD, KDC	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Finish / plating	Spec sheet weight 9.85 lb; certification UL 67	B	S45 spec sheet; oem_spec
Dimensions	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width required	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: KD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00088	KPRL4LAP	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for LA-P

OEM part number	KPRL4LAP	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LA-P	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: Tri-Pac		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00104	KPRL4LC	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA]

OEM part number	KPRL4LC	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4LD (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	LC/LCY/HLC/LD/HLD/LDC/LDB [LA]; 100%: CLD/CHLD/CLDC, LCC/HLCC	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: LD, LC, LA		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00087	KPRL4LCL	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for LCL

OEM part number	KPRL4LCL	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LCL	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00089	KPRL4LD	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC

OEM part number	KPRL4LD	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4LC (Same breaker frames/space listed under KPRL4LC in May 2022 RP01400001E while KPRL4LD is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	LD, LDB, HLD, LDC, CLD, LC	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4LC)	C	S41, S42 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: LD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00105	KPRL4LG	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH

OEM part number	KPRL4LG	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	LHH	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	5.50 in (139.7 mm) = 4X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00090	KPRL4MC	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL

OEM part number	KPRL4MC	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X34 (Same breaker frames/space listed under KPRL4X34 in May 2022 RP01400001E while KPRL4MC is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	MDL, HMDL	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X34)	C	S41, S42 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: MDL		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00107	KPRL4MD	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated

OEM part number	KPRL4MD	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	CMDL/CHMDL (100% rated; density rated bus)	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: MDL		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00091	KPRL4NBP	Cutler-Hammer	branch-connector-kit	LISTED IN BOTH 2017 AN

PRL4 breaker connector kit, single-mount 6X, for NB-P

OEM part number	KPRL4NBP	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	NB-P	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	listed in both 2017 and May 2022 RP01400001E	A	S41, S42 2017 p. 24; 2022 p. 33 Table 47; oem_spec
install_constraint	44.00 in box width required	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: Tri-Pac		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00106	KPRL4NC	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]

OEM part number	KPRL4NC	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	NC/NCY/HNC [NB/HNB]	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: NC, NB		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-EAT-00093	KPRL4ND	Cutler-Hammer	branch-connector-kit	LISTED OCT 2017; NOT L

PRL4 breaker connector kit, single-mount 6X, for ND, HND

OEM part number	KPRL4ND	A	S41 RP01400001E (2017) p. 24 Table 37; oem_spec
Alternate / superseded numbers	KPRL4X35 (Same breaker frames/space listed under KPRL4X35 in May 2022 RP01400001E while KPRL4ND is no longer listed for them; supersession inferred, not stated)	C	S41, S42 superseded_by; 2017 Table 37 vs 2022 Tables 46-47; inference
Description	PRL4 breaker connector kit: copper connectors, mounting brackets, covers, hardware and instructions for mounting breaker(s) in a PRL4; breakers not included	A	S41 p. 24; oem_spec
Application	branch	A	same as above
Installation location	PRL4B panelboard chassis. Applicability to Pow-R-Line C switchboard distribution chassis not stated by OEM	D	S41, S43 RP01400001E p. 24; CA08104001E Fig 21.1-9; inference
Breaker compatibility	ND, HND	A	S41 p. 24 Table 37; oem_spec
Poles	2, 3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover(s), hardware, instructions (hardware-only version: add 'H', e.g. KPRL4FD-H)	A	S41 pp. 24-25; oem_spec
Dimensions	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting	A	S41 p. 24 Table 37; oem_spec
Status	Listed Oct 2017; not listed for these frames in May 2022 edition (possibly superseded by KPRL4X35)	C	S41, S42 inference
install_constraint	36.00 in minimum box width	A	S41 p. 24 Table 37 notes b-d; oem_spec
Cross-links	Families: PRL4 · Breakers: ND		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is this kit (or a sibling) used for Pow-R-Line C switchboard group-mounted distribution chassis?*		

EDH-EAT-00113	KPRL4W11X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 11X (600 A)

OEM part number	KPRL4W11X	A	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	600 A FDPW326R/FDPW366R and 800 A FDPW327/FDPW367 (44 in box)	A	S41 p. 25 Table 38; oem_spec
Dimensions	11X switch height	A	S41 p. 25; oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00114	KPRL4W15X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 15X (1200 A)

OEM part number	KPRL4W15X	A	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	1200 A FDPW328/FDPW368 (44 in box)	A	S41 p. 25 Table 38; oem_spec
Dimensions	15X switch height	A	S41 p. 25; oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00112	KPRL4W9X	Cutler-Hammer	branch-connector-kit	LISTED 2017 AND 2022

PRL4F fusible switch connector kit 9X (400 A)

OEM part number	KPRL4W9X	A	S41, S42 2017 p. 25 Table 38; 2022 p. 34 Table 48; oem_spec
Description	Fusible switch connector kit: copper connectors, extension wings (when required), hardware and instructions to mount a fusible switch (switch not included)	A	S41 p. 25; oem_spec
Application	branch	A	same as above
Breaker compatibility	400 A FDPW325R/FDPW365R	A	S41 p. 25 Table 38; oem_spec
Dimensions	9X switch height	A	S41 p. 25; oem_spec
Status	listed 2017 and 2022	A	S41, S42 oem_spec
Cross-links	Families: PRL4		
Not yet documented	OEM instruction document, Material		

EDH-EAT-00094	KPRL4X12	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)

OEM part number	KPRL4X12	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD1 (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	EHD/FDB/FD/HFD/FDC (PD2)	A	S42 pp. 32-33; oem_spec
Poles	1 (two sets of twin-mounted single-pole)	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	2.75 in (69.9 mm) = 2X; twin mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: EHD, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00095	KPRL4X22	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)

OEM part number	KPRL4X22	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD2 (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED2 [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (PD2)	A	S42 pp. 32-33; oem_spec
Poles	2	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	2.75 in (69.9 mm) = 2X; twin mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: EHD, FD, ED		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00096	KPRL4X32	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)

OEM part number	KPRL4X32	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4FD (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
	KPRL4ED [supersedes] (earlier number for same frames/space; supersession inferred)	C	same as above
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDCE (PD2)	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	4.13 in (104.9 mm) = 3X; twin mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: ED, FD		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00097	KPRL4X334S	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame

OEM part number	KPRL4X334S	**A**	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	**A**	S42 p. 32; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	PD3 400 A frame	**A**	S42 pp. 32-33; oem_spec
Poles	3	**A**	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	**A**	same as above
Dimensions	5.50 in (139.7 mm) = 4X; single mounting	**A**	same as above
Status	current (May 2022)	**A**	S42 p. 33; oem_spec
Cross-links	Families: PRL4		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00098	KPRL4X334T	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame

OEM part number	KPRL4X334T	**A**	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	**A**	S42 p. 32; oem_spec
Application	branch	**A**	same as above
Breaker compatibility	PD3 400 A frame	**A**	S42 pp. 32-33; oem_spec
Poles	3	**A**	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	**A**	same as above
Dimensions	5.50 in (139.7 mm) = 4X; twin mounting	**A**	same as above
Status	current (May 2022)	**A**	S42 p. 33; oem_spec
Cross-links	Families: PRL4		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00099	KPRL4X336	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame

OEM part number	KPRL4X336	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	PD3 600 A frame; LGE/LGS/LGH/LGC/LGU	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00100	KPRL4X34	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4

OEM part number	KPRL4X34	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4MC (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	PD4; MDL/HMDL	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: MDL		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

EDH-EAT-00101	KPRL4X35	Cutler-Hammer	branch-connector-kit	CURRENT (MAY 2022)

PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5

OEM part number	KPRL4X35	A	S42 RP01400001E (2022) pp. 32-33 Tables 46-47; oem_spec
Alternate / superseded numbers	KPRL4ND (earlier number for same frames/space; supersession inferred)	C	S41, S42 supersedes; 2017 Table 37 vs 2022 Table 47; inference
Description	PRL4X/PRL4 breaker connector kit: copper connectors, mounting brackets, cover, hardware and instructions; breakers not included	A	S42 p. 32; oem_spec
Application	branch	A	same as above
Breaker compatibility	PD5; ND/HND/NDC/NGS/NGH/NGC	A	S42 pp. 32-33; oem_spec
Poles	3	A	same as above
Kit contents	Copper connectors, mounting brackets, cover, hardware, instructions; hardware-only version add 'H' (e.g. KPRL4X32-H)	A	same as above
Dimensions	8.25 in (209.6 mm) = 6X; single mounting	A	same as above
Status	current (May 2022)	A	S42 p. 33; oem_spec
Cross-links	Families: PRL4 · Breakers: ND		
Not yet documented	Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*What are the PD2-PD5 frame codes (Power Defense) mapping in Table 46?*		

3.9 WEB — Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards

FAM-EAT-011 · panelboard · aka WEB, WCA, WEHB, WFB, HWFB, WGB, WGHB · markings: Westinghouse

Westinghouse 1937-1988 era panelboards named for their branch breaker (E-frame, CA, F-frame, G-frame). PRL3 connector kits (KPRL3FD, KPRL3ED, KPRL3CA) fit WEB, WCA, WEHB, WFB and HWFB.

Attribute	Value	Cl.	Sources
Status	discontinued; replacement panelboard type PRL3a (WGB/WGHB -> PRL2a)	A	S38 p. V12-T4-7; oem_spec
Branch breakers accepted	WEB: EB (-> EB, EHD); WEHB: EHB; WFB: FB (-> FB, FDB); WCA: CA; WGB: GB; WGHB: GHB	A	same as above
kit_fit	The PRL3 connector kits will fit the following panelboards: WEB, WCA, WEHB, WFB, and HWFB	A	S39 p. 7 note; oem_spec

Breaker families associated: EB, EHB, FB, HFB
Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD
Also fits this family (entry printed elsewhere): KPRL3FD (p.48), KPRL3ED (p.48), KPRL3CA (p.47)

3.10 ES — Cutler-Hammer Type ES switchboard

FAM-EAT-003 · switchboard · aka ES switchboard, Type ES · markings: Cutler-Hammer

Cutler-Hammer branded service distribution switchboard using Westinghouse molded-case breakers under the 1960s supply agreement. Existing ES lineups can be extended with new Pow-R-Line C structures through a transition section.

Attribute	Value	Cl.	Sources
Status	discontinued (Vol 12 lists as legacy; new PRLC can connect via transition section)	A	S38 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1991 by Cutler-Hammer as replacement for their version of WF/WRP; Mullenbach (1962) heritage; used exclusively Westinghouse MCCBs	A	same as above
Voltage rating	120-600 V	A	same as above
Main ampacity	ES switchboard bus 600-4000 A; devices 15-4000 A; 10-200 kA	A	same as above

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions

3.11 IFS — Integrated Facility System switchboard

FAM-EAT-006 · switchboard · aka Integrated Facility Switchboard, IFS switchboard · markings: Eaton

Free-standing front-access UL 891 switchboard that integrates standard panelboards, dry-type transformers and other equipment in 'cells'; used with Type 1 Pow-R-Line C switchboard sections.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S43 p. 21.6-1; oem_spec
relationship	Used with Type 1 Pow-R-Line C switchboard sections; mains/feeders selected from Section 21.1 (PRLC)	A	same as above

Key documents: S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.12 PRLC — Pow-R-Line C switchboard

FAM-EAT-001 · switchboard · aka Pow-R-Line C, POW-R-LINE C, PRL-C, Pow-R-Line C switchboard, Type 1 Pow-R-Line C · markings: Westinghouse, Cutler-Hammer, Eaton

Eaton (originally Westinghouse) Class II service-distribution switchboard, UL 891 / NEMA PB-2, front- or rear-access, with individually mounted mains and group-mounted feeder chassis. Evolved from the Westinghouse WF/WRP St. Louis switchboard when the design moved to Sumter SC and Visalia CA in 1988 with the introduction of Series C breakers. Distribution chassis are laid out in X units (1X = 1-3/8 in) on 38X or 50X vertical panel space in 36 in or 45 in wide structures; device X requirements (EHD 1-3X, FD 2-3X, JD 3X, KD 4X, LD/MDL/ND 6X) parallel the PRL4 panelboard chassis. Vol 12 states breaker provisions 'are available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', but no PRLC-specific provision kit catalog numbers were found in public documents (factory/Sumter quoted).

Attribute	Value	Cl.	Sources
Status	current (listed in April 2018 consulting guide)	A	S43 p. 21.0-8; oem_spec
Era of manufacture	Introduced late 1980s (1988) by Westinghouse as successor to WF/WRP; built in Sumter SC and Visalia CA; current Eaton product	A	S38 p. V12-T15-5 (Chronology); oem_spec
Voltage rating	240-480-600 Vac, 250 Vdc (2018 guide); 208-600 V (Vol 12 rating table)	A	S43, S38 p. 21.0-9 Table 21.0-2; p. V12-T15-5; oem_spec
Main ampacity	Mains 400-6000 A; switchboard bus 600-6000 A (Vol 12)	A	same as above
Branch breakers accepted	Group-mounted feeders: bolt-on molded case breakers 15-1200 A (Table 21.0-2 lists bolt-on fixed MCCB 15-2500 A), drawout MCCB 70-1200 A, fusible switches 30-1200 A. Uses Series C MCCBs (EHD, FD/HFD/FDC, ED, JD, DK/KD/HKD/KDC, LD/HLD/LDC, MDL/HMDL, NG/ND, LG, etc.)	A	S43 pp. 21.0-8, 21.0-9, 21.1-12 Fig 21.1-9; oem_spec
x_unit	1X = 1-3/8 in (34.9 mm) in PRLC distribution layout	A	S43 p. 21.1-12 Fig 21.1-9; oem_spec
distribution_chassis	Distribution sections use 38X or 50X vertical panel space for devices (90 in high structures), widths 36 or 45 in	A	S43 p. 21.1-11 Fig 21.1-7; oem_spec
device_x_space	Fig 21.1-9 (36 in structure): EHD 100 A 1P 1X / 2P 2X / 3P 3X; FDB/FD/HFD/FDC 150 A 1-3P 1-3X; EDB/EDS/ED/EDH/EDC & FD/HFD/FDC 225 A 2P 2X 3P 3X; JD/HJD/JDC 250 A 3X; DK/KD/HKD/KDC/CKD/CHKD 400 A 4X; ELKD earth leakage 4X; LGE/LGH/LGC/LGU 600 A 4X; LD/HLD/LDC/CLD 600 A 6X; FB-P 3X; NHH/LA-P 6X; MDL/HMDL/CMDL 800 A 6X; NG/NGH/NGC 1200 A 6X. 45 in structure: twin DK/KD/HKD/KDC 4X, NB-P 6X, NG 6X. Breaker-to-fusible transition 1X; SPD 7X or 10X; customer metering 11X	A	S43 p. 21.1-12 Fig 21.1-9; oem_spec
main_lug_space	Main lugs only: 400/600 A 10X (2-#2-500) or 16X on 50X chassis (2-#250-750); 800 A 10X/16X; 1200-2000 A 12X/16X (38X chassis values 10-12X)	A	S43 p. 21.1-11 Table 21.1-11; oem_spec
renewal_parts	Eaton offers match-and-lineup PRLC structures, new breakers, breaker provisions/connectors 'available for all ratings of the Pow-R-Line C designs including all parts required to complete the cell', and switchboard structure parts	A	S38 p. V12-T15-5; oem_spec
bus_torque	Pow-R-Line CS (Canadian derivative) manual gives busbar torque #10 30 lb-in, 1/4 in 65, 5/16 in 130, 3/8 in 240, 1/2 in 600 lb-in; 70 lb-ft when two Belleville washers per bolt. Not verified for PRLC (IM01500001E not obtained)	C	S47 p. 17 Appendix A Table 2; oem_spec
branch_kit_relationship_to_prl4	A surplus listing titles the PRL4 connector kit KPRL4KDS as 'Pow-R-Line C'; the PRLC distribution X-space table matches PRL4 kit space requirements. Not OEM-confirmed that PRL4 KPRL4 kits are listed for PRLC switchboard chassis	D	S49, S43, S41 inference

Breaker families associated: ED, EHD, FD, JD, KD, LD, MDL, ND, RD

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S41 RP01400001E (2017) Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, ; S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21); S47 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual; S49 eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P; S51 Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard

3.13 PRLCS — Pow-R-Line CS switchboard

FAM-EAT-005 · switchboard · aka Pow-R-Line CS, PRL CS · markings: Eaton

Eaton Canada switchboard line documented by instruction manual IB015002EN (Nov 2021). Manual gives bus-joint torque table (Appendix A). No branch kit catalog numbers found.

Attribute	Value	Cl.	Sources
Status	current (Canadian market; manual IB015002EN effective Nov 2021)	B	S47 cover; oem_spec
bus_torque	Busbar connections: #10 30 lb-in; 1/4 in 65 lb-in; 5/16 in 130 lb-in; 3/8 in 240 lb-in; 1/2 in 600 lb-in; with two Belleville washers per bolt (convex side up) torque to 70 lb-ft	A	S47 p. 17 Appendix A Table 2; oem_spec

Key documents: S47 IB015002EN Eaton Pow-R-Line CS switchboards instruction manual

3.14 PRLi — Pow-R-Line i switchboard

FAM-EAT-004 · switchboard · aka Pow-R-Line i, PRL i, Pow-R-Line I · markings: Cutler-Hammer, Eaton

Rear-access, front- and rear-aligned UL 891 switchboard with individually compartmentalized feeder devices (not group-mounted). Included here for lineage; branch hardware is device-specific compartments rather than group-mounted connector kits.

Attribute	Value	Cl.	Sources
Status	current (2018 consulting guide)	A	S43 p. 21.0-11; oem_spec
Era of manufacture	Evolved in 1991 from Asheville 'Pow-R-I' (itself from WRI); built in Sumter SC	A	S38 p. V12-T15-2; oem_spec
Main ampacity	4000 A main bus maximum	A	S43 p. 21.0-11; oem_spec
Branch breakers accepted	Individually compartmentalized feeders: MCCB 15-1200 A compartmentalized, fusible switches 100-1200 A, Magnum SB/DS, NRX	A	same as above

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S43 CA08104001E Tab 21 (TB01500003E) Switchboards—Low Voltage (Consulting Application Guide Tab 21)

3.15 WF/WRP — Westinghouse WF/WRP switchboard

FAM-EAT-002 · switchboard · aka WF, WRP, Type WF, Type WRP, WF/WRP switchboard · markings: Westinghouse

Westinghouse St. Louis Class II switchboard. Type WF = front access (rear flush), Type WRP = rear access (front and rear flush). Feeders were panel-mounted molded-case breakers or FDP fusible switches — the same device family used in CDP/FDP panelboards. Eaton's Sumter aftermarket center offers 'retrofit kits for WF and WRP distribution sections' and 'connector kits for WF and WRP distribution sections' (RP01400002E p.20), and Vol 12 says provisions/connectors are available for most ratings of WF/WRP; no catalog numbers published.

Attribute	Value	Cl.	Sources
Status	discontinued (superseded by Pow-R-Line C)	A	S38 p. V12-T15-5; oem_spec
Era of manufacture	Introduced 1955 by Westinghouse, St. Louis MO; design transferred 1988 to Sumter SC and Visalia CA as Pow-R-Line C	A	same as above
Successor	Pow-R-Line C switchboard (new PRLC match/lineup structures can connect to existing WF/WRP)	A	same as above
Voltage rating	120-600 V	A	S38 p. V12-T15-5 ratings table; oem_spec
Main ampacity	Switchboard bus 600-4000 A; protective devices 15-4000 A; 10-200 kA	A	S38 p. V12-T15-5; oem_spec
Branch breakers accepted	Group (panel)-mounted molded-case breakers or FDP fusible switches as feeders; mains DS, SPB, bolted pressure switch (CBC) or MCCB	A	S38 pp. V12-T15-2, V12-T15-5; oem_spec
Aftermarket / reproduction	Sumter Plant Aftermarket Center offers retrofit kits and connector kits for WF and WRP distribution sections	A	S39 p. 20; oem_spec

Breaker families associated: FB, RD

Key documents: S38 CA08100014E Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions; S39 RP01400002E Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CD

Also fits this family (entry printed elsewhere): KFDP4XT (p.33), KFDP5XT (p.34), KFDPB6X-2 (p.34), KFDPW9X-4 (p.36), KFDPW11X-6 (p.35), KFDPW11X-8 (p.35), KFDPW15X-12 (p.36)

4 GE / ABB lineage

Lineage / brand markings: General Electric Industrial Solutions; ABB from 2018; ReliaGear

Family	Type	Status	Era	Entries	Pg
A-SERIES A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	panelboard	current as of BuyLog 07/2014	—	62	71
A-SERIES-COL A-Series Column Panelboards (ALC, AQC, AEC)	panelboard	unknown	—	6	88
A-SERIES-PWR A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	panelboard	current as of BuyLog 07/2014	—	35	88
CCB-QMR Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	panelboard	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	—	20	101
NHB NAB / NHB bolt-on panelboards (legacy)	panelboard	discontinued (legacy); hardware sold as new-surplus	—	1	106
RG-NEXT ReliaGear neXT Power Panelboards	panelboard	unknown	—	0	107
SCP-PLUS Spectra Series Type SCP Plus panelboards	panelboard	unknown	—	15	107
SPECTRA-PP Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	panelboard	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted'	—	147	112
AV-LINE AV-Line switchboards (legacy)	switchboard	unknown	—	0	172

4.1 A-SERIES — A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)

FAM-GEA-001 · panelboard · aka A Series, A-Series II, AQ, AE, AS, AL, AD, AD Plus, AQF, AEF, Pro-Stock · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's lighting/appliance panelboard platform. Symmetrical 20 in wide x 5.81 in deep galvanized boxes with removable endwalls, branch-bus direct connection and captive branch hardware. Type letter indicates breaker family: AL = plug-in Q-line, AQ = bolt-on Q-line (THQB), AE = bolt-on E-frame (TEY) 480Y/277 V, AD = 600 V TED/SE/FB. Pro-Stock unassembled interiors (AQU/AEU) are completed with MB main breaker kits, ML main lug kits and NK neutral kits. Pages in the 2014 BuyLog are headed 'A-Series II' on the column-panel kit page.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S16 p.11-1; oem_spec
Voltage rating	AL/AQ 240 Vac max; AE/AS 480Y/277 Vac, 125/250 Vdc; AD 600 Vac	A	S16 p.11-4 to 11-6; oem_spec
Main ampacity	Main lug 125-800 A (AD 150-800 A); main breaker up to 800 A (SK)	A	S16 p.11-4, 11-5, 11-6; oem_spec
Branch breakers accepted	AL plug-in THQL/THHQL/TXQL; AQ bolt-on THQB/THHQB/TXQB; AE bolt-on TEY/TEYF/TEYD/TEYH/TEYL; AD bolt-on TED/THED/SE/FB; subfeeds TQD/THQD (AQ) or TED/TFJ/SE/SF (AE/AD)	A	S16 p.11-4 to 11-6; oem_spec
Dimensions	Box width 20 in, depth 5.81 in; lengths 25.5-88.5 in	A	S16 p.11-4; oem_spec
seismic	IBC Zone 3/4 and CBC Zone 4 certified	A	S16 p.11-3; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, THQL / THHQL / TXQL, TJD / TJJ / TJK / THJK, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S17 BuyLog p.11-10 Rev. 11/13 GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Pa

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00059	**MB133**	A-Series Pro-Stock main/sub-feed breaker kit MB133	TED (18k) / THED (22k); SEHA/SELA/SEPA **A**	unknown
EDH-GEA-00060	**MB133WB**	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	SEHA + kit (breaker included) **A**	unknown
EDH-GEA-00051	**MB233**	A-Series Pro-Stock main/sub-feed breaker kit MB233	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00053	**MB2332**	A-Series Pro-Stock main/sub-feed breaker kit MB2332	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only) **A**	unknown
EDH-GEA-00054	**MB2332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	2nd SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00052	**MB233WB**	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	SFHA + kit (breaker included) **A**	unknown
EDH-GEA-00045	**MB332**	A-Series Pro-Stock main/sub-feed breaker kit MB332	SGHA (65k), SGLA (100k), SGPA (200k) **A**	unknown
EDH-GEA-00046	**MB332WB**	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00055	**MB333**	A-Series Pro-Stock main/sub-feed breaker kit MB333	SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00056	**MB333WB**	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	SGHA + kit (breaker included) **A**	unknown
EDH-GEA-00057	**MB423**	A-Series Pro-Stock main/sub-feed breaker kit MB423	TEY (14k) **A**	unknown
EDH-GEA-00058	**MB426**	A-Series Pro-Stock main/sub-feed breaker kit MB426	(2) TEY **A**	unknown
EDH-GEA-00044	**MB512**	A-Series Pro-Stock main/sub-feed breaker kit MB512	TQD (10k) / THQD (22k) **A**	unknown
EDH-GEA-00049	**MB513**	A-Series Pro-Stock main/sub-feed breaker kit MB513	TQD / THQD **A**	unknown
EDH-GEA-00050	**MB516**	A-Series Pro-Stock main/sub-feed breaker kit MB516	(2) TQD / (2) THQD **A**	unknown
EDH-GEA-00042	**MB612**	A-Series Pro-Stock main/sub-feed breaker kit MB612	THQB (10k) / THHQB (22k) **A**	unknown
EDH-GEA-00047	**MB613**	A-Series Pro-Stock main/sub-feed breaker kit MB613	THQB / THHQB **A**	unknown
EDH-GEA-00043	**MB614**	A-Series Pro-Stock main/sub-feed breaker kit MB614	(2) THQB / (2) THHQB **A**	unknown
EDH-GEA-00048	**MB616**	A-Series Pro-Stock main/sub-feed breaker kit MB616	(2) THQB / (2) THHQB **A**	unknown

EDH-GEA-00059	**MB133**	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133

OEM part number	MB133	**A**	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	**A**	S16 p.11-15 note; oem_spec
Breaker compatibility	TED (18k) / THED (22k); SEHA/SELA/SEPA	**A**	S16 p.11-15; oem_spec
Poles	3	**A**	same as above
Current rating	150 A	**A**	same as above
Kit contents	Breaker not included	**A**	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00060	MB133WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB133WB

OEM part number	MB133WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 150 A, 3 poles; breakers: SEHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SEHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	150 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00051	MB233	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233

OEM part number	MB233	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V and AEU3 480/277V 3ph interior, 225 A, 3 poles; breakers: SFHA, SFLA, SFPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00053	MB2332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332

OEM part number	MB2332 (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA (requires MB233 or MB233WB; 400/600 A interiors only)	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00054	MB2332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB2332WB

OEM part number	MB2332WB (Printed 'MB23325'/'MB2332WB5' where trailing 5 is footnote 5 (6-pole subfeed))	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400 A, 6 poles; breakers: 2nd SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	2nd SFHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		
Open question	*Requires MB233 or MB233WB to achieve 6 poles of subfeed*		

EDH-GEA-00052	MB233WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB233WB

OEM part number	MB233WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 225 A, 3 poles; breakers: SFHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SFHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00045	MB332	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332

OEM part number	MB332	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 400/600 A, 2 poles; breakers: SGHA (65k), SGLA (100k), SGPA (200k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA (65k), SGLA (100k), SGPA (200k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00046	MB332WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB332WB

OEM part number	MB332WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 600 A, 2 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00055	MB333	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333

OEM part number	MB333	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 400/600 A, 3 poles; breakers: SGHA, SGLA, SGPA	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA, SGLA, SGPA	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00056	MB333WB	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB333WB

OEM part number	MB333WB	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 and AEU3 interior, 600 A, 3 poles; breakers: SGHA + kit (breaker included)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	SGHA + kit (breaker included)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	600 A	A	same as above
Kit contents	'WB' kits include a breaker, mounting kit and load-side lugs; rating plugs ordered separately	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00057	MB423	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB423

OEM part number	MB423	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 3 poles; breakers: TEY (14k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TEY (14k)	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00058	MB426	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB426

OEM part number	MB426	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AEU3 480/277V 3ph interior, 100 A, 6 poles; breakers: (2) TEY	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) TEY	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00044	MB512	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB512

OEM part number	MB512	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 225 A, 2 poles; breakers: TQD (10k) / THQD (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TQD (10k) / THQD (22k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00049	MB513	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB513

OEM part number	MB513	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 225 A, 3 poles; breakers: TQD / THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	TQD / THQD	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	225 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00050	MB516	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB516

OEM part number	MB516	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 400 A, 6 poles; breakers: (2) TQD / (2) THQD	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) TQD / (2) THQD	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	400 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00042	MB612	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB612

OEM part number	MB612	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 2 poles; breakers: THQB (10k) / THHQB (22k)	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	THQB (10k) / THHQB (22k)	A	S16 p.11-15; oem_spec
Poles	2	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00047	MB613	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB613

OEM part number	MB613	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 3 poles; breakers: THQB / THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	THQB / THHQB	A	S16 p.11-15; oem_spec
Poles	3	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00043	MB614	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB614

OEM part number	MB614	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU1 240V 1ph interior, 100 A, 4 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S16 p.11-15; oem_spec
Poles	4	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

EDH-GEA-00048	MB616	GE	main-breaker-kit	STATUS UNKNOWN

A-Series Pro-Stock main/sub-feed breaker kit MB616

OEM part number	MB616	A	S16 p.11-15; oem_spec
Description	Pro-Stock main and/or sub-feed breaker kit for AQU3 208/120V 3ph interior, 100 A, 6 poles; breakers: (2) THQB / (2) THHQB	A	same as above
Application	main or sub-feed (400 A and 600 A kits cannot be used for sub-feed in Pro-Stock)	A	S16 p.11-15 note; oem_spec
Breaker compatibility	(2) THQB / (2) THHQB	A	S16 p.11-15; oem_spec
Poles	6	A	same as above
Current rating	100 A	A	same as above
Kit contents	Breaker not included	A	S16 p.11-15 footnote 1; oem_spec
Cross-links	Families: A-SERIES · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, field-installation into factory-assembled (non Pro-Stock) panels, OEM instruction document, Material, Status		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00061	**MLA1**	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	—	unknown
EDH-GEA-00062	**MLA2**	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00063	**MLA41**	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	—	unknown
EDH-GEA-00064	**MLA61**	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	—	unknown
EDH-GEA-00065	**MLA62**	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	—	unknown
EDH-GEA-00066	**MLR1**	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	—	unknown
EDH-GEA-00067	**MLR2**	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	—	unknown
EDH-GEA-00068	**MLR41**	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	—	unknown
EDH-GEA-00069	**MLR61**	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	—	unknown
EDH-GEA-00070	**MLT1**	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	—	unknown
EDH-GEA-00071	**MLT2**	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	—	unknown
EDH-GEA-00073	**MLT41**	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	—	unknown
EDH-GEA-00072	**MLT42**	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	—	unknown

EDH-GEA-00061 — MLA1

GE · main-lug-kit · **STATUS UNKNOWN**

A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)

OEM part number	MLA1	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure (mechanical), 225 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 6-350 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00062 — MLA2

GE · main-lug-kit · **STATUS UNKNOWN**

A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)

OEM part number	MLA2	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 225 A, oversized 225 A; also 225 A dual main	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	225 A	**A**	same as above
Kit contents	Wire range 1-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00063 — MLA41

GE · main-lug-kit · **STATUS UNKNOWN**

A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)

OEM part number	MLA41	**A**	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400 A, standard	**A**	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	**A**	same as above
Current rating	400 A	**A**	same as above
Kit contents	Wire range 2-600 MCM or (2) 1/0-250 MCM	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00064	MLA61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)

OEM part number	MLA61	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 600 A, standard 600 A; also 400 A dual main	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00065	MLA62	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)

OEM part number	MLA62	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Pressure, 400/600 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range 3/0-800 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00066	MLR1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)

OEM part number	MLR1	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4-350 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00067	MLR2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)

OEM part number	MLR2	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00068	MLR41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)

OEM part number	MLR41	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 1-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00069	MLR61	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)

OEM part number	MLR61	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Copper, 400/600 A, standard 600 A; oversized 400 A	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400/600 A	A	same as above
Kit contents	Wire range (2) 2/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00070	MLT1	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)

OEM part number	MLT1	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 2/0-300 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00071	MLT2	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)

OEM part number	MLT2	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 225 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	225 A	A	same as above
Kit contents	Wire range 4/0-500 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00073	MLT41	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)

OEM part number	MLT41	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, oversized	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 500-750 MCM (500 MCM Cu, 750 MCM Al)	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

EDH-GEA-00072	MLT42	GE	main-lug-kit	STATUS UNKNOWN

A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)

OEM part number	MLT42	A	S16 p.11-17; oem_spec
Description	Main lug kit, lug type Compression, 400 A, standard	A	same as above
Application	main lug and/or feed-thru (all lugs suitable for Cu or Al bus interiors)	A	same as above
Current rating	400 A	A	same as above
Kit contents	Wire range 250-600 MCM	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, lug count, Material, Status		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00038	**ASPFB12P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	—	listed 07/2014
EDH-GEA-00039	**ASPFB3P**	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	—	listed 07/2014
EDH-GEA-00036	**ASPTED3P**	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	—	listed 07/2014
EDH-GEA-00037	**ASPTQD3P**	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	—	listed 07/2014

EDH-GEA-00038 **ASPFB12P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles

OEM part number	ASPFB12P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Mounting screws and washers only (footnote 2)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00039 **ASPFB3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles

OEM part number	ASPFB3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00036 **ASPTED3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE

OEM part number	ASPTED3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TED/THED4/SE	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

EDH-GEA-00037 **ASPTQD3P** GE breaker-mounting-kit **LISTED 07/2014**

A-Series Breaker mounting hardware kit, breaker type TQD/THQD

OEM part number	ASPTQD3P (Printed as e.g. 'ASPTED3P3'/'ASPFB12P2' with trailing footnote digit)	**A**	S16 p.11-19; oem_spec
Description	Breaker mounting hardware kit, breaker type TQD/THQD	**A**	same as above
Application	branch (to mount breaker in existing space - footnote 1)	**A**	same as above
Kit contents	Screws, washers and A-Series panelboard connectors (footnote 3)	**A**	same as above
Status	listed 07/2014	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, which A-Series types (AQ/AE/AD) each fits		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00074	**NKA**	A-Series 200% neutral kit NKA (225 A)	—	unknown
EDH-GEA-00075	**NKA42**	A-Series 200% neutral kit NKA42 (400 A)	—	unknown
EDH-GEA-00080	**NKA4FT**	A-Series 200% neutral kit NKA4FT (400 A)	—	unknown
EDH-GEA-00076	**NKR**	A-Series 200% neutral kit NKR (225 A)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00077	**NKR4**	A-Series 200% neutral kit NKR4 (400 A)	—	unknown
EDH-GEA-00078	**NKT**	A-Series 200% neutral kit NKT (225 A)	—	unknown
EDH-GEA-00079	**NKT4**	A-Series 200% neutral kit NKT4 (400 A)	—	unknown

EDH-GEA-00074 **NKA** GE neutral-assembly **STATUS UNKNOWN**

A-Series 200% neutral kit NKA (225 A)

OEM part number	NKA	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 225 A	**A**	same as above
Current rating	225 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00075 **NKA42** GE neutral-assembly **STATUS UNKNOWN**

A-Series 200% neutral kit NKA42 (400 A)

OEM part number	NKA42	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Pressure lugs, 400 A	**A**	same as above
Current rating	400 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00080 **NKA4FT** GE neutral-assembly **STATUS UNKNOWN**

A-Series 200% neutral kit NKA4FT (400 A)

OEM part number	NKA4FT	**A**	S16 p.11-17 footnote 2; oem_spec
Description	200% neutral kit, Pressure, 200% neutral feed-thru lugs, 400 A; wire range (2) 2/0-600 MCM or (4) 4-250 MCM; ref. GO-101P	**A**	S16 p.11-17; oem_spec
Current rating	400 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00076 **NKR** GE neutral-assembly **STATUS UNKNOWN**

A-Series 200% neutral kit NKR (225 A)

OEM part number	NKR	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 225 A	**A**	same as above
Current rating	225 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00077 **NKR4** GE neutral-assembly **STATUS UNKNOWN**

A-Series 200% neutral kit NKR4 (400 A)

OEM part number	NKR4	**A**	S16 p.11-17; oem_spec
Description	200% neutral kit, Copper lugs, 400 A	**A**	same as above
Current rating	400 A	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00078	NKT	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT (225 A)

OEM part number	NKT	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 225 A	A	same as above
Current rating	225 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00079	NKT4	GE	neutral-assembly	STATUS UNKNOWN

A-Series 200% neutral kit NKT4 (400 A)

OEM part number	NKT4	A	S16 p.11-17; oem_spec
Description	200% neutral kit, Compression lugs, 400 A	A	same as above
Current rating	400 A	A	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00097	**EGS12**	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	—	unknown
EDH-GEA-00096	**TGL2**	A-Series Equipment ground, standard bonded to box, per 12 branch positions	—	unknown
EDH-GEA-00095	**TGL20**	A-Series Main lug for equipment ground terminal kits	—	unknown

EDH-GEA-00097	EGS12	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard isolated/insulated, per 12 branch positions

OEM part number	EGS12	A	S16, S17 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard isolated/insulated, per 12 branch positions	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00096	TGL2	GE	ground-bar	STATUS UNKNOWN

A-Series Equipment ground, standard bonded to box, per 12 branch positions

OEM part number	TGL2	A	S16, S17 p.11-19; p.11-10; oem_spec
Description	Equipment ground, standard bonded to box, per 12 branch positions ((11) 14-8 Cu/12-8 Al, (3) 14-4 Cu/6-4 Al)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00095	TGL20	GE	ground-bar	STATUS UNKNOWN

A-Series Main lug for equipment ground terminal kits

OEM part number	TGL20	A	S16, S17 p.11-19; p.11-10; oem_spec
Description	Main lug for equipment ground terminal kits (6-2/0 Cu/Al)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00089	**ASPAQLEBKT**	A-Series AQ/AL/AE rail bracket	—	unknown

EDH-GEA-00089	ASPAQLEBKT	GE	mounting-bracket	STATUS UNKNOWN

A-Series AQ/AL/AE rail bracket

OEM part number	ASPAQLEBKT	**A**	S16 p.11-20; oem_spec
Description	AQ/AL/AE rail bracket	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00087	**ASP25AD65KA**	A-Series AD 25 to 65 kAIC barrier kit	—	unknown

EDH-GEA-00087	ASP25AD65KA	GE	barrier	STATUS UNKNOWN

A-Series AD 25 to 65 kAIC barrier kit

OEM part number	ASP25AD65KA	**A**	S16 p.11-20; oem_spec
Description	AD 25 to 65 kAIC barrier kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00040	**TEDFP1**	A-Series filler plate for TQD/THQD/TED4/SE/FB	—	unknown
EDH-GEA-00041	**TQLFP1**	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	—	unknown

EDH-GEA-00040	TEDFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for TQD/THQD/TED4/SE/FB

OEM part number	TEDFP1	**A**	S16 p.11-19; oem_spec
Description	TQD/THQD/TED4/SE/FB Filler Plates	**A**	same as above
Installation location	A-Series deadfront	**B**	S16 inference
Cross-links	Families: A-SERIES · Breakers: TQD / THQD, TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA), Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

EDH-GEA-00041	TQLFP1	GE	filler-plate	STATUS UNKNOWN

A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY

OEM part number	TQLFP1	**A**	S16, S17 p.11-19; p.11-10; oem_spec
Description	THQB/THHQB/THQL/THHQL/TEY Filler Plates; 'Filler Plate for Q Line and TEY Breakers'	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL · Breakers: THQB / THHQB / TXQB, THQL / THHQL / TXQL, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Aftermarket / reproduction, Dimensions, Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00090	**139C5720G3**	A-Series AE front mounting kit	—	unknown
EDH-GEA-00091	**139C5720G6**	A-Series AQ/AL front mounting kit	—	unknown
EDH-GEA-00092	**139C5720G9**	A-Series AD front mounting kit	—	unknown
EDH-GEA-00081	**BNDKT**	A-Series Service entrance kit 225 A	—	unknown
EDH-GEA-00082	**BNDKT6**	A-Series Service entrance kit 400/600 A	—	unknown

EDH-GEA-00090	139C5720G3	GE	hardware-kit	STATUS UNKNOWN

A-Series AE front mounting kit

OEM part number	139C5720G3	**A**	S16 p.11-20; oem_spec
Description	AE front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00091	139C5720G6	GE	hardware-kit	STATUS UNKNOWN

A-Series AQ/AL front mounting kit

OEM part number	139C5720G6	**A**	S16 p.11-20; oem_spec
Description	AQ/AL front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00092	139C5720G9	GE	hardware-kit	STATUS UNKNOWN

A-Series AD front mounting kit

OEM part number	139C5720G9	**A**	S16 p.11-20; oem_spec
Description	AD front mounting kit	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00081	BNDKT	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 225 A

OEM part number	BNDKT	**A**	S16 p.11-17; oem_spec
Description	Service entrance kit 225 A (bonding strap with hardware and service entrance label)	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00082	BNDKT6	GE	hardware-kit	STATUS UNKNOWN

A-Series Service entrance kit 400/600 A

OEM part number	BNDKT6	**A**	S16 p.11-17; oem_spec
Description	Service entrance kit 400/600 A (bonding strap with hardware and SE label)	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00084	**APHBL**	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	—	unknown
EDH-GEA-00083	**APHBQ**	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	—	unknown
EDH-GEA-00086	**ASP2PTFJ3P**	A-Series 2P to 3P SF conversion kit for horizontal subfeed	—	unknown
EDH-GEA-00085	**ASP2PTQD3P**	A-Series 2P to 3P TQD conversion kit	—	unknown

EDH-GEA-00084	APHBL	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels

OEM part number	APHBL	**A**	S16 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00083	APHBQ	GE	conversion-kit	STATUS UNKNOWN

A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels

OEM part number	APHBQ	**A**	S16 p.11-20; oem_spec
Description	Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	**A**	same as above
Cross-links	Families: A-SERIES		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00086	ASP2PTFJ3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P SF conversion kit for horizontal subfeed

OEM part number	ASP2PTFJ3P	**A**	S16 p.11-20; oem_spec
Description	2P to 3P SF conversion kit for horizontal subfeed	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00085	ASP2PTQD3P	GE	conversion-kit	STATUS UNKNOWN

A-Series 2P to 3P TQD conversion kit

OEM part number	ASP2PTQD3P	**A**	S16 p.11-20; oem_spec
Description	2P to 3P TQD conversion kit	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Breaker Accessory

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00088	**TQDFM1**	A-Series 2-3 pole TQD mechanical interlock	—	unknown

EDH-GEA-00088	TQDFM1	GE	breaker-accessory	STATUS UNKNOWN

A-Series 2-3 pole TQD mechanical interlock

OEM part number	TQDFM1	**A**	S16 p.11-20; oem_spec
Description	2-3 pole TQD mechanical interlock	**A**	same as above
Cross-links	Families: A-SERIES · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00093	**APN48**	A-Series Permanent circuit number kit, Nos 1-48	—	unknown
EDH-GEA-00094	**APN84**	A-Series Permanent circuit number kit, Nos 43-84	—	unknown

EDH-GEA-00093	APN48	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 1-48

OEM part number	APN48	**A**	S16, S17 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 1-48 (AQ, AL, AE; AD version APN48AD)	**A**	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00094	APN84	GE	other	STATUS UNKNOWN

A-Series Permanent circuit number kit, Nos 43-84

OEM part number	APN84	A	S16, S17 p.11-20; p.11-10; oem_spec
Description	Permanent circuit number kit, Nos 43-84 (AQ, AL, AE; AD version APN84AD)	A	same as above
Cross-links	Families: A-SERIES, A-SERIES-COL		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

4.2 A-SERIES-COL — A-Series Column Panelboards (ALC, AQC, AEC)

FAM-GEA-003 · panelboard · aka ALC, AQC, AEC · markings: GE

Narrow column-type A-Series panels (8.62 in wide x 5.81 in deep). ALC plug-in Q-line, AQC bolt-on THQB, AEC bolt-on TEY 15-80 A.

Attribute	Value	Cl.	Sources
Main ampacity	Main lug 125-225 A; mains THQB/THHQB/TEY/SE 100 A, TQD/THQD/SF 225 A	A	S16 p.11-9; oem_spec
Dimensions	Width 8.62 in, depth 5.81 in; lengths 37.5-76.5 in	A	same as above

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;
Also fits this family (entry printed elsewhere): TQLFP1 (p.85), APN48 (p.87), APN84 (p.88), TGL20 (p.84), TGL2 (p.84), EGS12 (p.84)

4.3 A-SERIES-PWR — A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')

FAM-GEA-002 · panelboard · aka AQP, AEP, ADP, A-Series II Powerpanel, AD/AE/AQ Type P & N Power Panel · markings: GE, GE Industrial Solutions, ABB

Power-panel version of the A-Series: 30 in wide x 8 in deep box, single-piece deadfront (no filler plates needed per catalog), up to 600 A branch device, staggered center-mounted SF/SG breakers. Field breaker kits ASPP6xxxx (DEH40150-DEH40158) are installed into 'Un-Specified Space' on the interior, bolting branch bases/straps to the main bus next to the crossbar and replacing a blank shield insert on the deadfront with a breaker-specific filler plate.

Attribute	Value	Cl.	Sources
Status	current as of BuyLog 07/2014	A	S16 p.11-21; oem_spec
Main ampacity	Mains 125-800 A SG/SK breakers; main lug 600-800 A	A	S16 p.11-22; oem_spec
Branch breakers accepted	AQP: QB 15-100 A, double branch TQD/SE, center-mounted SF/SG. AEP: TEY/TEYF, double branch TED/SE, center SF/SG. ADP: FB, THED, double branch TED/SE, center SF/SG	A	same as above
Dimensions	Width 30 in, depth 8 in; lengths 25.5-88.5 in	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, THQB / THHQB / TXQB, TQD / THQD
Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S18 DEH40150 Rev.No.03 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Break; S19 DEH40151 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Break; S20 DEH40152 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Brea; S21 DEH40153 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit B; S22 DEH40154 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K; S23 DEH40155 Rev.No.02 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S24 DEH40156 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Break; S25 DEH40157 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Brea; S26 DEH40158 Rev.No.01 A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker K

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00009	**ASPP6EY12D**	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	TEY frame per kit title A	unknown
EDH-GEA-00008	**ASPP6EY6D**	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	TEY frame per kit title A	unknown
EDH-GEA-00005	**ASPP6FB6D**	A-Series II power panel FB three-phase circuit breaker kit, six-pole	FB frame per kit title A	unknown
EDH-GEA-00007	**ASPP6QB12D**	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	QB frame per kit title A	unknown
EDH-GEA-00006	**ASPP6QB6D**	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	QB frame per kit title A	unknown
EDH-GEA-00001	**ASPP6QD6D**	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)	TQD frame per kit title A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00002	**ASPP6SE6D**	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	SE frame per kit title **A**	unknown
EDH-GEA-00003	**ASPP6SF3S**	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	SF frame per kit title **A**	unknown
EDH-GEA-00004	**ASPP6SG3S**	A-Series II power panel SG three-phase circuit breaker kit, three-pole	SG frame per kit title **A**	unknown

EDH-GEA-00009 **ASPP6EY12D** GE branch-connector-kit **STATUS UNKNOWN**

A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6EY12D	**A**	S23 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S23 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S23 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S23 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S23 steps 4-11; oem_spec
OEM instruction document	DEH40155 Rev.No.02	**A**	S23 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Text step 9 also says 'ASPP6TEY12D' (typo in OEM doc).	**A**	S23 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00008 **ASPP6EY6D** GE branch-connector-kit **STATUS UNKNOWN**

A-Series II power panel TEY three-phase circuit breaker kit, six-pole

OEM part number	ASPP6EY6D	**A**	S25 p.1; oem_spec
Description	TEY three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S25 steps 4-13; oem_spec
Breaker compatibility	TEY frame per kit title	**A**	S25 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate TEY 139C5503P129; (4) N722P16006B6	**A**	S25 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S25 steps 4-11; oem_spec
OEM instruction document	DEH40157 Rev.No.01	**A**	S25 header; oem_spec
Identification features	Crossbar gap 0.06 in	**A**	S25 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5503P129 (EDH-GEA-00034)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00005	ASPP6FB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel FB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6FB6D	A	S24 p.1; oem_spec
Description	FB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S24 steps 4-13; oem_spec
Breaker compatibility	FB frame per kit title	A	S24 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1 (same as SE kit); (6) spool 10093207P2; (6) spool screw 10093208P2; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5700P86; (8) screw N667P16008B6; (4) screw N80P15046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S24 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler & deadfront 27-36 in-lb	A	S24 steps 4-11; oem_spec
OEM instruction document	DEH40156 Rev.No.01	A	S24 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, SE/TED/TQD 0 in	A	S24 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5700P86 (EDH-GEA-00026), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00007	ASPP6QB12D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole

OEM part number	ASPP6QB12D	A	S22 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, twelve-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S22 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	A	S22 p.1, title; oem_spec
Kit contents	(4) A & C phase 200A strap 315A7049P10; (2) center strap 315A7048P20; (2) 3X branch base 911E347P3; (6) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	A	S22 p.1 Table 1; oem_spec
Torque values	Straps 60 in-lb max; terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	A	S22 steps 4-11; oem_spec
OEM instruction document	DEH40154 Rev.No.02	A	S22 header; oem_spec
Identification features	Requires minimum 'X2, 12 inches' of unspecified space. Crossbar gap 0.06 in.	A	S22 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00006	ASPP6QB6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel THQB three-phase circuit breaker kit, six-pole

OEM part number	ASPP6QB6D	**A**	S26 p.1; oem_spec
Description	THQB three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S26 steps 4-13; oem_spec
Breaker compatibility	QB frame per kit title	**A**	S26 p.1, title; oem_spec
Kit contents	(2) A & C phase 200A strap 315A7049P10; (1) center strap 315A7048P20; (1) 3X branch base 911E347P3; (3) thread rolling screw & washer 315A7034P6; (1) filler plate QB 139C5362P2; (4) N722P16006B6	**A**	S26 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; breaker terminal screws 27-36 in-lb; filler & deadfront 27-36 in-lb	**A**	S26 steps 4-11; oem_spec
OEM instruction document	DEH40158 Rev.No.01	**A**	S26 header; oem_spec
Identification features	Crossbar gap 0.06 in; after SG 0.582, SF/TFJ, SE/TED(6P), FB/TQD(6P) 1.875 in	**A**	S26 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Requires	315A7049P10 (EDH-GEA-00027), 315A7048P20 (EDH-GEA-00028), 911E347P3 (EDH-GEA-00029), 139C5362P2 (EDH-GEA-00035)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00001	ASPP6QD6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD)

OEM part number	ASPP6QD6D	**A**	S20 p.1; oem_spec
Description	TQD three-phase circuit breaker kit, six-pole (double-branch, two 3P TQD); for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	**A**	same as above
Application	branch	**A**	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	**A**	S20 steps 4-13; oem_spec
Breaker compatibility	TQD frame per kit title	**A**	S20 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CQDG1; (6) spool 315A7036P19; (6) spool screw 315A7037P4; (6) spool washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P81; (8) bracket-to-rail screw N667P16008B6; (4) C/B-to-bracket screw N80P150046B6; (1) filler plate TQD 139C5503P64; (4) #10-32x3/8 screw N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	**A**	S20 p.1 Table 1; oem_spec
Torque values	Branch bases to main bus 60 in-lb max; bracket to rail 27-36 in-lb; 1/4-28 x 1-3/8 spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler plate & deadfront 27-36 in-lb	**A**	S20 steps 4-11; oem_spec
OEM instruction document	DEH40152 Rev.No.02	**A**	S20 header; oem_spec
Identification features	Crossbar gap 0.0525 in; after SG 0.582 in, after SF/TFJ 1.875 in	**A**	S20 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Requires	139C5702AQDG1 (EDH-GEA-00010), 139C5702BQDG1 (EDH-GEA-00013), 139C5702CQDG1 (EDH-GEA-00016), 139C5500P81 (EDH-GEA-00022), 139C5503P64 (EDH-GEA-00030)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00002	ASPP6SE6D	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole

OEM part number	ASPP6SE6D	A	S21 p.1; oem_spec
Description	SE/TED three-phase circuit breaker kit, six-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S21 steps 4-13; oem_spec
Breaker compatibility	SE frame per kit title	A	S21 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSEG1; (6) spool 315A7036P18; (6) spool screw 315A7037P3; (6) washer 75A105503P111; (6) bus screw 315A7034P8; (2) 3P bracket 139C5500P82; (8) screw N667P16008B6; (4) screw N80P150046B6; (1) filler plate SE/TED/FB 139C5503P77; (4) N722P16006B6; (6) nut N210P16B6; (4) cup washer 254V644P1	A	S21 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 in-lb; breaker to bracket 18-22 in-lb; filler/deadfront 27-36 in-lb	A	S21 steps 4-11; oem_spec
OEM instruction document	DEH40153 Rev.No.02	A	S21 header; oem_spec
Identification features	Crossbar gap 0.0575 in; after SG 0.582, SF/TFJ 1.875, TQD 0 in	A	S21 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	139C5702ASEG1 (EDH-GEA-00011), 139C5702BSEG1 (EDH-GEA-00014), 139C5702CSEG1 (EDH-GEA-00017), 139C5500P82 (EDH-GEA-00023), 139C5503P77 (EDH-GEA-00031)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00003	ASPP6SF3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SF three-phase circuit breaker kit, three-pole single

OEM part number	ASPP6SF3S	A	S19 p.1; oem_spec
Description	SF three-phase circuit breaker kit, three-pole single; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S19 steps 4-13; oem_spec
Breaker compatibility	SF frame per kit title	A	S19 p.1, title; oem_spec
Kit contents	(3) branch bases 139C5702A/B/CSFG1; (3) spool 315A7036P20; (3) spool screw 315A7037P1; (3) washer 75A105503P111; (3) bus screw 315A7034P6; (1) 3P bracket 139C5500P84; (2) screw N37P16060B6; (2) cup washer N405P40B6; (1) filler plate SF/TFJ 139C5503P90; (4) N722P16006B6	A	S19 p.1 Table 1; oem_spec
Torque values	Branch bases 60 in-lb max (left) / 50-70 in-lb (right side text); bracket 27-36 in-lb; spool screws 60 in-lb max; breaker to bracket 18-22 in-lb; filler 27-36 in-lb	A	S19 steps 4-11; oem_spec
OEM instruction document	DEH40151 Rev.No.02	A	S19 header; oem_spec
Identification features	Crossbar gap 0.061 in; after SG 0.582 in. Filler plate is flipped for right-side mounting.	A	S19 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	139C5702ASFG1 (EDH-GEA-00012), 139C5702BSFG1 (EDH-GEA-00015), 139C5702CSFG1 (EDH-GEA-00018), 139C5500P84 (EDH-GEA-00025), 139C5503P90 (EDH-GEA-00032)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

EDH-GEA-00004	ASPP6SG3S	GE	branch-connector-kit	STATUS UNKNOWN

A-Series II power panel SG three-phase circuit breaker kit, three-pole

OEM part number	ASPP6SG3S	A	S18 p.1; oem_spec
Description	SG three-phase circuit breaker kit, three-pole; for AD/AE/AQ Type P & N power panels ordered with Un-Specified Space	A	same as above
Application	branch	A	same as above
Installation location	On interior main bus adjacent to crossbar or previous breaker (left or right side of interior); filler plate replaces blank shield insert on deadfront	A	S18 steps 4-13; oem_spec
Breaker compatibility	SG frame per kit title	A	S18 p.1, title; oem_spec
Kit contents	(3) straps A/B/C 315A7046P7/P8/P9; (3) spool 315A7036P22; (3) spool screw 315A7037P5; (3) washer 75A105503P111; (3) bus screw 315A7034P7; (1) 3P bracket 139C5500P83; (2) screw N667P16008B6; (3) xmas tree 315A7077P1; (1) filler plate SG/TFG 139C5503P103; (4) N722P16006B6; (1) bracket insulation 10086929P11; insulators B/A/C 10086929P5/P7/P6; (2) breaker mounting screws N37P16060B6; (2) spring lock washer #12 N405P40B6	A	S18 p.1 Table 1; oem_spec
Torque values	Straps to main bus 60 in-lb max; bracket 27-36 in-lb; spool screws 50-70 lb-in; breaker to bracket 18-22 lb-in; filler/deadfront 27-36 lb-in	A	S18 steps 4-11; oem_spec
OEM instruction document	DEH40150 Rev.No.03	A	S18 header; oem_spec
Identification features	Crossbar gap 0.002 in	A	S18 final steps / Table 2; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	315A7046P7 (EDH-GEA-00019), 315A7046P8 (EDH-GEA-00020), 315A7046P9 (EDH-GEA-00021), 139C5500P83 (EDH-GEA-00024), 139C5503P103 (EDH-GEA-00033)		
Not yet documented	Aftermarket / reproduction, date of instruction, Dimensions, Material, Status		

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00010	**139C5702AQDG1**	Branch base, A phase, TQD (A-Series II)	—	unknown
EDH-GEA-00011	**139C5702ASEG1**	Branch base, A phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00012	**139C5702ASFG1**	Branch base, A phase, SF (A-Series II)	—	unknown
EDH-GEA-00013	**139C5702BQDG1**	Branch base, B phase, TQD (A-Series II)	—	unknown
EDH-GEA-00014	**139C5702BSEG1**	Branch base, B phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00015	**139C5702BSFG1**	Branch base, B phase, SF (A-Series II)	—	unknown
EDH-GEA-00016	**139C5702CQDG1**	Branch base, C phase, TQD (A-Series II)	—	unknown
EDH-GEA-00017	**139C5702CSEG1**	Branch base, C phase, SE/TED/FB (A-Series II)	—	unknown
EDH-GEA-00018	**139C5702CSFG1**	Branch base, C phase, SF (A-Series II)	—	unknown
EDH-GEA-00019	**315A7046P7**	SG breaker strap, A phase (A-Series II)	—	unknown
EDH-GEA-00020	**315A7046P8**	SG breaker strap, B phase (A-Series II)	—	unknown
EDH-GEA-00021	**315A7046P9**	SG breaker strap, C phase (A-Series II)	—	unknown
EDH-GEA-00028	**315A7048P20**	Center (B phase) strap (THQB/TEY, A-Series II)	—	unknown
EDH-GEA-00027	**315A7049P10**	A & C phase 200A strap (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00010	139C5702AQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, TQD (A-Series II)

OEM part number	139C5702AQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00011	139C5702ASEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SE/TED/FB (A-Series II)

OEM part number	139C5702ASEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00012	139C5702ASFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, A phase, SF (A-Series II)

OEM part number	139C5702ASFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR A PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to A phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00013	139C5702BQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, TQD (A-Series II)

OEM part number	139C5702BQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00014	139C5702BSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SE/TED/FB (A-Series II)

OEM part number	139C5702BSEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00015	139C5702BSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, B phase, SF (A-Series II)

OEM part number	139C5702BSFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR B PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to B phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00016	139C5702CQDG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, TQD (A-Series II)

OEM part number	139C5702CQDG1	A	S20 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (TQD kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P8, 60 in-lb max	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00017	139C5702CSEG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SE/TED/FB (A-Series II)

OEM part number	139C5702CSEG1	A	S21, S24 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (shared by SE/TED and FB kits)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar, 60 in-lb max	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00018	139C5702CSFG1	GE	connector-strap	STATUS UNKNOWN

Branch base, C phase, SF (A-Series II)

OEM part number	139C5702CSFG1	A	S19 Table 1; oem_spec
Description	BRANCH BASE FOR C PHASE (SF kit)	A	same as above
Application	branch	A	same as above
Installation location	Clamped to C phase main busbar with bus screw 315A7034P6	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00019	315A7046P7	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, A phase (A-Series II)

OEM part number	315A7046P7	A	S18 Table 1; oem_spec
Description	STRAP FOR A PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00020	315A7046P8	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, B phase (A-Series II)

OEM part number	315A7046P8	A	S18 Table 1; oem_spec
Description	STRAP FOR B PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00021	315A7046P9	GE	connector-strap	STATUS UNKNOWN

SG breaker strap, C phase (A-Series II)

OEM part number	315A7046P9	A	S18 Table 1; oem_spec
Description	STRAP FOR C PHASE (SG kit); insulated with insulator 10086929P5/P6/P7 and located with 'xmas tree' 315A7077P1	A	same as above
Application	branch	A	same as above
Installation location	Clamped to main busbar with bus screw 315A7034P7, 60 in-lb max; crosses over adjacent phase bars	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00028	315A7048P20	GE	connector-strap	STATUS UNKNOWN

Center (B phase) strap (THQB/TEY, A-Series II)

OEM part number	315A7048P20	A	S22, S23, S25, S26 Table 1; oem_spec
Description	STRAP, CENTER	A	same as above
Application	branch	A	same as above
Installation location	B phase main bus; located using 3X branch base placed against crossbar	A	S22, S23, S25, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00027	315A7049P10	GE	connector-strap	STATUS UNKNOWN

A & C phase 200A strap (THQB/TEY, A-Series II)

OEM part number	315A7049P10	A	S22, S23, S25, S26 Table 1; oem_spec
Description	A & C PHASE 200A STRAP	A	same as above
Application	branch	A	same as above
Installation location	Screwed to main bus with thread rolling screw & washer 315A7034P6, 60 in-lb max	A	S22, S23, S25, S26 installation steps; oem_spec
Current rating	200 A (per description)	A	S22 Table 1; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00022	**139C5500P81**	3P breaker support bracket (ASPP6QD6D)	—	unknown
EDH-GEA-00023	**139C5500P82**	3P breaker support bracket (ASPP6SE6D)	—	unknown
EDH-GEA-00024	**139C5500P83**	3P breaker support bracket (ASPP6SG3S)	—	unknown
EDH-GEA-00025	**139C5500P84**	3P breaker support bracket (ASPP6SF3S)	—	unknown
EDH-GEA-00026	**139C5700P86**	3P breaker support bracket (ASPP6FB6D)	—	unknown

EDH-GEA-00022	139C5500P81	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6QD6D)

OEM part number	139C5500P81	A	S20 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	A	S20 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00023	139C5500P82	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SE6D)

OEM part number	139C5500P82	A	S21 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S21 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D	A	S21 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00024	139C5500P83	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SG3S)

OEM part number	139C5500P83	A	S18 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	A	S18 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00025	139C5500P84	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6SF3S)

OEM part number	139C5500P84	A	S19 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00026	139C5700P86	GE	mounting-bracket	STATUS UNKNOWN

3P breaker support bracket (ASPP6FB6D)

OEM part number	139C5700P86	A	S24 Table 1; oem_spec
Description	3P BRACKET	A	same as above
Application	branch	A	same as above
Installation location	Interior rail, opposite (load) end of breaker; screws to rail 27-36 in-lb; breaker to bracket 18-22 in-lb	A	S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6FB6D	A	S24 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Insulator

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00029	**911E347P3**	3X branch base (THQB/TEY, A-Series II)	—	unknown

EDH-GEA-00029 **911E347P3** GE insulator **STATUS UNKNOWN**

3X branch base (THQB/TEY, A-Series II)

OEM part number	911E347P3	A	S22, S23, S25, S26 Table 1; oem_spec
Description	3X BRANCH BASE; load end of breaker snaps into base lancing slot	A	same as above
Application	branch	A	same as above
Installation location	Interior, adjacent to crossbar; supports load end of THQB/TEY	A	S22, S23, S25, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D, ASPP6EY6D, ASPP6EY12D	A	S22, S23, S25, S26 Table 1; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in per GE convention)	B	S22, S16 Table 1; BuyLog p.11-40; inference
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB, TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00035	**139C5362P2**	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	—	unknown
EDH-GEA-00033	**139C5503P103**	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	—	unknown
EDH-GEA-00034	**139C5503P129**	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	—	unknown
EDH-GEA-00030	**139C5503P64**	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	—	unknown
EDH-GEA-00031	**139C5503P77**	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	—	unknown
EDH-GEA-00032	**139C5503P90**	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	—	unknown

EDH-GEA-00035 **139C5362P2** GE filler-plate **STATUS UNKNOWN**

Deadfront filler plate (shield insert) - QB (A-Series II power panel)

OEM part number	139C5362P2	A	S22, S26 Table 1; oem_spec
Description	FILLER PLATE, QB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S22, S26 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QB6D, ASPP6QB12D	A	S22, S26 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S22 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: THQB / THHQB / TXQB		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00033	139C5503P103	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)

OEM part number	139C5503P103	**A**	S18 Table 1; oem_spec
Description	FILLER PLATE, SG/TFG	**A**	same as above
Application	branch	**A**	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	**A**	S18 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SG3S	**A**	S18 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	**A**	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00034	139C5503P129	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TEY (A-Series II power panel)

OEM part number	139C5503P129	**A**	S23, S25 Table 1; oem_spec
Description	FILLER PLATE, TEY	**A**	same as above
Application	branch	**A**	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	**A**	S23, S25 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6EY6D, ASPP6EY12D	**A**	S23, S25 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	**A**	S23 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00030	139C5503P64	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - TQD (A-Series II power panel)

OEM part number	139C5503P64	**A**	S20 Table 1; oem_spec
Description	FILLER PLATE, TQD	**A**	same as above
Application	branch	**A**	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	**A**	S20 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6QD6D	**A**	S20 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	**A**	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: TQD / THQD		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00031	139C5503P77	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)

OEM part number	139C5503P77	A	S21, S24 Table 1; oem_spec
Description	FILLER PLATE, SE/TED/FB	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S21, S24 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SE6D, ASPP6FB6D	A	S21, S24 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	S21 Table 1; oem_spec
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA), TEB / TED / THED / TED4 / TED6, Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

EDH-GEA-00032	139C5503P90	GE	filler-plate	STATUS UNKNOWN

Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)

OEM part number	139C5503P90	A	S19 Table 1; oem_spec
Description	FILLER PLATE, SF/TFJ	A	same as above
Application	branch	A	same as above
Installation location	Deadfront: replaces blank shield insert, fastened with four #10-32 x 3/8 screws N722P16006B6 at 27-36 in-lb	A	S19 installation steps; oem_spec
Kit contents	Supplied as item in kit(s) ASPP6SF3S	A	S19 Table 1; oem_spec
Fasteners	(4) #10-32 x 3/8 screws N722P16006B6	A	same as above
Cross-links	Families: A-SERIES-PWR · Breakers: Spectra SF (SFHA/SFLA/SFPA), TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, Finish / plating, Material, separate orderability, Status		
Open question	*Is this GE drawing/part number orderable separately as a renewal part?*		

4.4 CCB-QMR — Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)

FAM-GEA-006 · panelboard · aka CCB, QMR, CDP? · markings: GE, General Electric

Older GE power panelboards. Breakers mount with copper strap kits suffixed DPK (dual/twin mount) or SPK (single mount) usable on Cu or Al main bus; device product number + suffix ordered as a unit. Replacement CCB fronts CBAxxxxS/F and boxes DASW/DACB; filler plates CCBFPx/QMRFPx. QMR used THFP fusible switches. CDP is named in the batch scope but no CDP-specific data was found.

Attribute	Value	Cl.	Sources
Status	Renewal parts still listed 2014; QMR fusible switches 'Limited availability. Obsolete when inventory depleted.'	A	S16 p.11-49 to 11-51; oem_spec

Breaker families associated: Spectra SF (SFHA/SFLA/SFPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TFJ / TFK / THFK / TFL, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00262	**SF2DPK**	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	SFH/SFL A	unknown
EDH-GEA-00266	**SK12SPK**	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	SKH12 A	unknown
EDH-GEA-00265	**SK8SPK**	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	SKH8 A	unknown
EDH-GEA-00256	**TED1DPK**	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	TEB/TED A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00261	**TEL1DPK**	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	TEL **A**	unknown
EDH-GEA-00257	**TF2DPK**	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	TFJ/TFK/TFL **A**	unknown
EDH-GEA-00259	**TJ4DPK**	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	TJD/TJJ/TJK **A**	unknown
EDH-GEA-00260	**TJ6DPK**	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	TJK **A**	unknown
EDH-GEA-00264	**TK12SPK**	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	TKM12/THKM12 **A**	unknown
EDH-GEA-00263	**TK8SPK**	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	TKM8/THKM8 **A**	unknown
EDH-GEA-00258	**TQ2DPK**	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	TQD **A**	unknown

EDH-GEA-00262 SF2DPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)

OEM part number	SF2DPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, SFH/SFL, 225 A kit. Footnotes: if mounting hardware exists must order SFCARE for additional insulators; 225 A max	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SFH/SFL	**A**	same as above
Current rating	225 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00266 SK12SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)

OEM part number	SK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH12, 1200 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH12	**A**	same as above
Current rating	1200 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00265 SK8SPK — GE — branch-connector-kit — STATUS UNKNOWN

CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)

OEM part number	SK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	**A**	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, SKH8, 800 A kit. Deep mounted interior required	**A**	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	**A**	same as above
Breaker compatibility	SKH8	**A**	same as above
Current rating	800 A	**A**	same as above
Material	Copper straps	**A**	same as above
Cross-links	Families: CCB-QMR · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00256	TED1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)

OEM part number	TED1DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEB/TED, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEB/TED	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00261	TEL1DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)

OEM part number	TEL1DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TEL, 150 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TEL	A	same as above
Current rating	150 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00257	TF2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)

OEM part number	TF2DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TFJ/TFK/TFL, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TFJ/TFK/TFL	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00259	TJ4DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)

OEM part number	TJ4DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJD/TJJ/TJK, 400 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJD/TJJ/TJK	A	same as above
Current rating	400 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00260	TJ6DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)

OEM part number	TJ6DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TJK, 600 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TJK	A	same as above
Current rating	600 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00264	TK12SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)

OEM part number	TK12SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM12/THKM12, 1200 A kit. Deep mounted interior required; requires 7X at extreme end or 8X if mounted in center of interior	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM12/THKM12	A	same as above
Current rating	1200 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00263	TK8SPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)

OEM part number	TK8SPK (Printed with trailing footnote digits (e.g. 'SF2DPK1,2', 'TK12SPK3,4'))	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, single mounted, TKM8/THKM8, 800 A kit. Deep mounted interior required	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TKM8/THKM8	A	same as above
Current rating	800 A	A	same as above
Material	Copper straps	A	same as above
Cross-links	Families: CCB-QMR · Breakers: TKM / THKM		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

EDH-GEA-00258	TQ2DPK	GE	branch-connector-kit	STATUS UNKNOWN

CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)

OEM part number	TQ2DPK	A	S16 p.11-49; oem_spec
Description	Mounting hardware - copper straps for use on Cu or Al main bus, dual mounted, TQD, 225 A kit	A	same as above
Application	Type CCB and QMR panelboards; suffix DPK = twin (double) mount, SPK = single mount; device ordered as product number plus suffix for unit shipment	A	same as above
Breaker compatibility	TQD	A	same as above
Current rating	225 A	A	same as above
Material	Copper straps	A	same as above
Aftermarket / reproduction	Distributor listings (e.g. Stanion 'tq2dpkge') describe TQ2DPK as 'For Use With: TQD Frame 125 to 225 A Circuit Breaker and Spectra Series CCB, QMR Panelboard' (Stanion page seen only via search summary; returned 404 on fetch)	C	S36 distributor
Cross-links	Families: CCB-QMR · Breakers: TQD / THQD		
Not yet documented	Dimensions, OEM instruction document, Kit contents, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00275	**75C145005G703**	QMR panelboard filler plate 3X	—	unknown
EDH-GEA-00270	**75C145005G711**	CCB panelboard filler plate 2X	—	unknown
EDH-GEA-00271	**75C145005G715**	CCB panelboard filler plate 6X	—	unknown
EDH-GEA-00267	**CCBFP1**	CCB panelboard filler plate 1X	—	unknown
EDH-GEA-00268	**CCBFP3**	CCB panelboard filler plate 3X	—	unknown
EDH-GEA-00269	**CCBFP5**	CCB panelboard filler plate 5X	—	unknown
EDH-GEA-00272	**QMRFP1**	QMR panelboard filler plate 1X	—	unknown
EDH-GEA-00273	**QMRFP2**	QMR panelboard filler plate 2X	—	unknown
EDH-GEA-00274	**QMRFP5**	QMR panelboard filler plate 5X	—	unknown

EDH-GEA-00275 **75C145005G703** GE filler-plate **STATUS UNKNOWN**

QMR panelboard filler plate 3X

OEM part number	75C145005G703	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00270 **75C145005G711** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 2X

OEM part number	75C145005G711	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 2X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00271 **75C145005G715** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 6X

OEM part number	75C145005G715	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 6X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00267 **CCBFP1** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 1X

OEM part number	CCBFP1	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 1X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00268 **CCBFP3** GE filler-plate **STATUS UNKNOWN**

CCB panelboard filler plate 3X

OEM part number	CCBFP3	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00269	CCBFP5	GE	filler-plate	STATUS UNKNOWN

CCB panelboard filler plate 5X

OEM part number	CCBFP5	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type CCB, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00272	QMRFP1	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 1X

OEM part number	QMRFP1	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00273	QMRFP2	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 2X

OEM part number	QMRFP2	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

EDH-GEA-00274	QMRFP5	GE	filler-plate	STATUS UNKNOWN

QMR panelboard filler plate 5X

OEM part number	QMRFP5	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type QMR, 5X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: CCB-QMR		
Not yet documented	Material, Status, width		

4.5 NHB — NAB / NHB bolt-on panelboards (legacy)

FAM-GEA-007 · panelboard · aka NAB, NHB, NLAB? · markings: General Electric

Legacy GE bolt-on panelboard line. Only distributor evidence found (NHB150PK twin-mount hardware). No OEM document for NHB or NLAB located in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued (legacy); hardware sold as new-surplus	C	S32 surplus_listing
Branch breakers accepted	E-frame bolt-on TEB/TED/TEC/THED and SEDA (per distributor)	C	same as above

Breaker families associated: TEB / TED / THED / TED4 / TED6

Key documents: S32 NHB150PK General Electric / GE Mounting Hardware (product page); S33 General Electric NHB150PK Twin Mount Mounting Hardware (product page)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00280	**NHB150PK**	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SE C	discontinued; new-surplus stock

EDH-GEA-00280	NHB150PK	GE	branch-connector-kit	DISCONTINUED; NEW-SURP

NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole

OEM part number	NHB150PK	B	S32, S33 distributor
Description	Direct replacement mounting hardware for GE NHB bolt-on style panelboards; dual/twin branch mounting; copper; 150 A, 600 V max	C	S32 surplus_listing
Breaker compatibility	TEB, TED, TEC, THED, SEDA (description); spec list adds SEHA, SELA, SEPA (Distributor lists disagree)	C	same as above
Kit contents	Screws, a panel cover and brackets (SuperBreakers)	C	S33 distributor
Material	Copper	C	S32 surplus_listing
Status	discontinued; new-surplus stock	C	same as above
Cross-links	Families: NHB · Breakers: TEB / TED / THED / TED4 / TED6, Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM confirmation, Dimensions, OEM instruction document		
Open question	*Does NHB150PK also fit NLAB panels? No evidence found.*		

4.6 RG-NEXT — ReliaGear neXT Power Panelboards

FAM-GEA-008 · panelboard · aka ReliaGear neXT, ReliaGear OEM neXT · markings: ABB, GE

ABB's post-2018 power panelboard (doc 1SXU900191B0201, 2022). ABB states there is a single catalog number for all circuit breaker installation kits; that number was not found in accessible sources.

Attribute	Value	Cl.	Sources
Voltage rating	up to 600 Vac 3ph3w / 600Y/347 V	A	S31 oem_spec
Main ampacity	Bus 250-1200 A Cu or Al; MLO, MCB (vertical or horizontal) or feed-through lug pads	A	same as above
Branch breakers accepted	Tmax XT1/XT4/XT5/XT6/XT7, Record Plus FB (FBV/FBN/FBH/FBL), TEY (TEYD/TEYH/TEYL); 15-1200 A	A	same as above

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), TEY / TEYF / TEYD / TEYH / TEYL
Key documents: S31 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S34 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

4.7 SCP-PLUS — Spectra Series Type SCP Plus panelboards

FAM-GEA-005 · panelboard · aka SCP+, SCP · markings: GE

Spectra-family power panel variant with its own ACB boxes (31 and 40 in wide x 11.5 in deep), ACF fronts, ACTMK/ACSMK mounting hardware kits (hardware + straps), ACTFPK/ACSFPK filler kits and ACTHK/ACSHK single-breaker hardware. Filler plates for SCP+ are to be ordered from the Houston equipment plant.

Attribute	Value	Cl.	Sources
box	ACB31xxxx 31 in W x 11.5 in D; ACB40xxxx 40 in W x 11.5 in D; X heights 15-42	A	S16 p.11-48; oem_spec

Breaker families associated: Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TJD / TJJ / TJK / THJK
Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards;

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00254	**ACSMKSG**	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)	SGD, SGH, SGL, SGP A	unknown
EDH-GEA-00255	**ACSMKSK**	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	SKH, SKL A	unknown
EDH-GEA-00246	**ACTMKEB1P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00247	**ACTMKEB2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00248	**ACTMKEB3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)	TEB, TED, THED A	unknown
EDH-GEA-00252	**ACTMKJD**	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	TJD, TJJ, TJK A	unknown
EDH-GEA-00250	**ACTMKQD2P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	TQD, THQD A	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00251	**ACTMKQD3P**	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00245	**ACTMKSE**	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)	SHE (SEH), SEL, SED, SEP **A**	unknown
EDH-GEA-00249	**ACTMKSF**	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)	TFK, SFH, SFL, SFP **A**	unknown
EDH-GEA-00253	**ACTMKSG**	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)	SGD, SGH, SGL, SGP **A**	unknown

EDH-GEA-00254 ACSMKSG — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, single)

OEM part number	ACSMKSG	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSG [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SGD, SGH, SGL, SGP, 400/800 A	**A**	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	**A**	same as above
Current rating	400/800 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00255 ACSMKSK — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)

OEM part number	ACSMKSK	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACSFPKSK [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACSHKSK [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, single mounted, SKH, SKL, 800/1200 A	**A**	same as above
Breaker compatibility	SKH, SKL	**A**	same as above
Current rating	800/1200 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACSFPKSK listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00246 ACTMKEB1P — GE — branch-connector-kit — STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dual)

OEM part number	ACTMKEB1P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB1P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB1P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 1-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB1P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00247	ACTMKEB2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dual)

OEM part number	ACTMKEB2P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB2P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB2P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 2-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00248	ACTMKEB3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dual)

OEM part number	ACTMKEB3P	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKEB3P [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKEB3P [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TEB, TED, THED, 150 A, 3-pole	**A**	same as above
Breaker compatibility	TEB, TED, THED	**A**	same as above
Current rating	150 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKEB3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00252	ACTMKJD	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)

OEM part number	ACTMKJD	**A**	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKJD [equivalent] (Companion filler plate and filler hardware kit (same row))	**A**	same as above
	ACTHKJD [equivalent] (Companion hardware to mount one breaker (same row))	**A**	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TJD, TJJ, TJK, 400 A	**A**	same as above
Breaker compatibility	TJD, TJJ, TJK	**A**	same as above
Current rating	400 A max	**A**	same as above
Cross-links	Families: SCP-PLUS · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKJD listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00250	ACTMKQD2P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)

OEM part number	ACTMKQD2P	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD2P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD2P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 2-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD2P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00251	ACTMKQD3P	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)

OEM part number	ACTMKQD3P	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKQD3P [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKQD3P [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TQD, THQD, 225 A, 3-pole	A	same as above
Breaker compatibility	TQD, THQD	A	same as above
Current rating	225 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKQD3P listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00245	ACTMKSE	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED, SEP, dual)

OEM part number	ACTMKSE	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSE [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSE [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SHE (SEH), SEL, SED, SEP, 150 A	A	same as above
Breaker compatibility	SHE (SEH), SEL, SED, SEP	A	same as above
Current rating	150 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSE listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00249	ACTMKSF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, dual)

OEM part number	ACTMKSF	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSF [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSF [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, TFK, SFH, SFL, SFP, 250 A	A	same as above
Breaker compatibility	TFK, SFH, SFL, SFP	A	same as above
Current rating	250 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSF listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

EDH-GEA-00253	ACTMKSG	GE	branch-connector-kit	STATUS UNKNOWN

Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, dual)

OEM part number	ACTMKSG	A	S16 p.11-48; oem_spec
Alternate / superseded numbers	ACTFPKSG [equivalent] (Companion filler plate and filler hardware kit (same row))	A	same as above
	ACTHKSG [equivalent] (Companion hardware to mount one breaker (same row))	A	same as above
Description	Mounting hardware - hardware kit and straps, dual mounted, SGD, SGH, SGL, SGP, 400/600 A	A	same as above
Breaker compatibility	SGD, SGH, SGL, SGP	A	same as above
Current rating	400/600 A max	A	same as above
Cross-links	Families: SCP-PLUS · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		
Open question	*Filler kits ACTFPKSG listed, yet note says SCP+ filler plates must be obtained from Houston plant - clarify.*		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00276	**SCPFP1**	SCP+ panelboard filler plate 1X	—	unknown
EDH-GEA-00277	**SCPFP2**	SCP+ panelboard filler plate 2X	—	unknown
EDH-GEA-00278	**SCPFP3**	SCP+ panelboard filler plate 3X	—	unknown
EDH-GEA-00279	**SCPFP5**	SCP+ panelboard filler plate 5X	—	unknown

EDH-GEA-00276	SCPFP1	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 1X

OEM part number	SCPFP1	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 1X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00277	SCPFP2	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 2X

OEM part number	SCPFP2	A	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 2X height (order from local sales office or equipment plant)	A	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00278	SCPFP3	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 3X

OEM part number	SCPFP3	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 3X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

EDH-GEA-00279	SCPFP5	GE	filler-plate	STATUS UNKNOWN

SCP+ panelboard filler plate 5X

OEM part number	SCPFP5	**A**	S16 p.11-50; oem_spec
Description	Filler plate, panel type SCP+, 5X height (order from local sales office or equipment plant)	**A**	same as above
Cross-links	Families: SCP-PLUS		
Not yet documented	Material, Status, width		

4.8 SPECTRA-PP — Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)

FAM-GEA-004 · panelboard · aka Spectra, Spectra Series, SpectraRMS, APN, APNB, Spectra Bolt-On (SBO), Spectra Plug-In · markings: GE, General Electric, GE Industrial Solutions, ABB

GE's power distribution panelboard. Two interior styles: APN plug-in (breakers bolt to AMC circuit breaker mounting modules that latch onto the interior rail and clip onto the bus; ADS fusible switch modules) and APNB bolt-on (breakers bolt to copper straps AMCB kits fastened with carriage bolts/antiturn clips to the vertical bus). Vertical space measured in X units (1X = 1-3/8 in). Box widths 27/31/36/40/44 in, APB boxes and APF fronts, AML main-lug modules, ANK/ANKN neutral kits, AEG ground kits. NOTE on 'APN': in GE nomenclature APN is the Spectra plug-in interior type code (APNB = bolt-on), while APN48/APN84/APN126 (A-Series) and APN49/APN99 (Spectra) are permanent circuit-number tab kits; no 'A-Series power panel' code APN was found.

Attribute	Value	Cl.	Sources
Status	Listed as current in 2014 BuyLog; a 2021/2022 ABB BuyLog TOC reportedly labels Spectra bolt-on mounting hardware 'obsoleted' (Obsolescence wording seen only in a search-engine summary of the blocked ABB BuyLog.)	**C**	S16, S34 inference
Successor	ReliaGear neXT power panelboards (ABB) - inferred from ABB BuyLog placing 'Retrofit kit for Spectra panelboards' alongside ReliaGear neXT	**D**	S34, S31 inference
Voltage rating	600 Vac / 250 Vdc max	**A**	S16 p.11-24; oem_spec
Main ampacity	Main bus 250-1200 A Cu or Al; mains up to 1200 A lugs, breaker (SF/SG/SK/FG) or fusible switch	**A**	same as above
Branch breakers accepted	Double-branch SE, SF, SG, FG, FB, TEY, TEB, TQD (and THQB); center-mounted SK; plug-in version also ADS fusible switches 30-1200 A	**A**	same as above
x_unit	1X = 1 3/8 in vertical panel space	**A**	S16 p.11-40 note; oem_spec
box_widths	27, 31, 36, 40, 44 in	**A**	S16 p.11-34, 11-35; oem_spec
apn_meaning	APN = Panelboard Interior Type (plug-in); APNB = Panelboard Interior Type bolt-on; structure APN<X-height><amps>U[B4]	**A**	S16 p.11-37; oem_spec
plug_in_vs_bolt_on	Main lug kits bolt directly to interior bus bars (either APN Plug-In Style or APNB Bolt-On Style)	**A**	S16 p.11-28; oem_spec

Breaker families associated: Record Plus FB (FBV/FBN/FBH/FBL), Record Plus FC (FCS/FCV/FCN/FCH/FCL), Record Plus FG (FGV/FGN/FGH/FGL/FGP), Spectra SE (SEDA/SEHA/SELA/SEPA), Spectra SF (SFHA/SFLA/SFPA), Spectra SG (SGDA/SGHA/SGLA/SGPA), Spectra SK (SKHA/SKLA/SKPA), TEB / TED / THED / TED4 / TED6, TEY / TEYF / TEYD / TEYH / TEYL, TFJ / TFK / THFK / TFL, THQB / THHQB / TXQB, TJD / TJJ / TJK / THJK, TKM / THKM, TQD / THQD

Key documents: S16 BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014) BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; ; S27 DEH065 R02 Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD); S28 GEH5674 R03 Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM); S29 DEH40392 R01 Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL; S30 DEH212 R02 Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S; S31 1SXU900191B0201 ReliaGear neXT Power Panelboards (brochure); S34 BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (o

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00231	**AML3120CFP**	Spectra main lug module AML3120CFP (1200 A compression)	—	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00226	**AML3120FP**	Spectra main lug module AML3120FP (1200 A mechanical)	—	unknown
EDH-GEA-00227	**AML3250CFP**	Spectra main lug module AML3250CFP (250 A compression)	—	unknown
EDH-GEA-00220	**AML3250FP**	Spectra main lug module AML3250FP (250 A mechanical)	—	unknown
EDH-GEA-00219	**AML3250SFP**	Spectra main lug module AML3250SFP (250 A mechanical)	—	unknown
EDH-GEA-00228	**AML3400CFP**	Spectra main lug module AML3400CFP (400 A compression)	—	unknown
EDH-GEA-00222	**AML3400FP**	Spectra main lug module AML3400FP (400 A mechanical)	—	unknown
EDH-GEA-00221	**AML3400SFP**	Spectra main lug module AML3400SFP (400 A mechanical)	—	unknown
EDH-GEA-00229	**AML3600CFP**	Spectra main lug module AML3600CFP (600 A compression)	—	unknown
EDH-GEA-00224	**AML3600FP**	Spectra main lug module AML3600FP (600 A mechanical)	—	unknown
EDH-GEA-00223	**AML3600SFP**	Spectra main lug module AML3600SFP (600 A mechanical)	—	unknown
EDH-GEA-00230	**AML3800CFP**	Spectra main lug module AML3800CFP (800 A compression)	—	unknown
EDH-GEA-00225	**AML3800FP**	Spectra main lug module AML3800FP (800 A mechanical)	—	unknown

EDH-GEA-00231 **AML3120CFP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120CFP (1200 A compression)

OEM part number	AML3120CFP	**A**	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00226 **AML3120FP** GE main-lug-kit **STATUS UNKNOWN**

Spectra main lug module AML3120FP (1200 A mechanical)

OEM part number	AML3120FP	**A**	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 1200 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	**A**	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	**A**	same as above
Current rating	1200 A	**A**	same as above
Dimensions	6X module height; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00227	AML3250CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250CFP (250 A compression)

OEM part number	AML3250CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00220	AML3250FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250FP (250 A mechanical)

OEM part number	AML3250FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	6X module height; box width 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00219	AML3250SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3250SFP (250 A mechanical)

OEM part number	AML3250SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 250 A, Mechanical lugs, 1 lug(s) per phase, 1 wire(s) per lug, #6-350kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	250 A	A	same as above
Dimensions	4X module height; box width 27, 36 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00228	AML3400CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400CFP (400 A compression)

OEM part number	AML3400CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00222	AML3400FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400FP (400 A mechanical)

OEM part number	AML3400FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00221	AML3400SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3400SFP (400 A mechanical)

OEM part number	AML3400SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 400 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	400 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00229	AML3600CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600CFP (600 A compression)

OEM part number	AML3600CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Compression lugs, 2 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00224	AML3600FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600FP (600 A mechanical)

OEM part number	AML3600FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00223	AML3600SFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3600SFP (600 A mechanical)

OEM part number	AML3600SFP (Printed with footnote '1' suffix (4X modules cannot be converted to compression))	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 600 A, Mechanical lugs, 1 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML4X	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	600 A	A	same as above
Dimensions	4X module height; box width 27, 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00230	AML3800CFP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800CFP (800 A compression)

OEM part number	AML3800CFP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Compression lugs, 4 lug(s) per phase, 1 wire(s) per lug, 500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

EDH-GEA-00225	AML3800FP	GE	main-lug-kit	STATUS UNKNOWN

Spectra main lug module AML3800FP (800 A mechanical)

OEM part number	AML3800FP	A	S16 p.11-45; oem_spec
Description	Spectra plug-in lug kit/module, 800 A, Mechanical lugs, 2 lug(s) per phase, 2 wire(s) per lug, #2-500kcmil, includes cover plate AFPML6XW	A	same as above
Application	main lug; convertible to feed-thru with AFL cover plate kit; to dual main with AMK lug kits; mechanical to compression with AMKP	A	same as above
Current rating	800 A	A	same as above
Dimensions	6X module height; box width 36, 44 in	A	same as above
OEM instruction document	GEH-5588 (Type AML Main Lug Kits); GEH-5630 (AML Feed Thru)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	bus connection hole pattern, Material, Status		

Through Feed Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00243	**AFL120**	Spectra feed-thru lug cover plate kit AFL120	—	unknown
EDH-GEA-00242	**AFL600**	Spectra feed-thru lug cover plate kit AFL600	—	unknown

EDH-GEA-00243	AFL120	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL120

OEM part number	AFL120	**A**	S16 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	**A**	same as above
Current rating	800/1200 A	**A**	same as above
Dimensions	12X; box width 36, 44 in	**A**	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

EDH-GEA-00242	AFL600	GE	through-feed-lug-kit	STATUS UNKNOWN

Spectra feed-thru lug cover plate kit AFL600

OEM part number	AFL600	**A**	S16 p.11-46; oem_spec
Description	Feed thru lug cover plate kit: converts AML main lug module to feed-thru lug module; includes barrier and oversized cover plates (discard original cover plates)	**A**	same as above
Current rating	250/400/600 A	**A**	same as above
Dimensions	9X; box width 27, 36, 44 in	**A**	same as above
OEM instruction document	GEH-5630 (Type AML Feed Thru Main Lug Kits)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Material, Status		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00119	**AMCB2FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00117	**AMCB2FJFP**	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00118	**AMCB2FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00120	**AMCB2GMFP**	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00126	**AMCB2KMFP**	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00123	**AMCB3FGMFP**	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00121	**AMCB3FJFP**	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00122	**AMCB3FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00124	**AMCB3GMFP**	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00127	**AMCB3KMFP**	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)	SKH, SKL, SKP, TKM, THKM **A**	unknown
EDH-GEA-00125	**AMCB3LBFP**	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	SKP (as printed; LB code = THLC2/THLC4 per nomenclature) **A**	unknown
EDH-GEA-00098	**AMCB4EBFP**	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	TEB, TED **A**	unknown
EDH-GEA-00099	**AMCB4EYFP**	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	TEY **A**	unknown
EDH-GEA-00100	**AMCB4FBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)	FBV, FBN, FBH, FBL **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00101	**AMCB4FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00113	**AMCB4FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00109	**AMCB4FJFP**	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00111	**AMCB4FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00114	**AMCB4GBFP**	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00102	**AMCB4QDFP**	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	TQD, THQD **A**	unknown
EDH-GEA-00103	**AMCB4SEFP**	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)	THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00104	**AMCB6EBFP**	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00105	**AMCB6EYFP**	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	TEY **A**	unknown
EDH-GEA-00106	**AMCB6FBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00107	**AMCB6FDBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00115	**AMCB6FGBFP**	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00110	**AMCB6FJFP**	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00112	**AMCB6FJFPTF**	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00116	**AMCB6GBFP**	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00108	**AMCB6QDFP**	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	TQD, THQD **A**	unknown

EDH-GEA-00119 — AMCB2FGMFP

GE | branch-connector-kit | **STATUS UNKNOWN**

Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P single)

OEM part number	AMCB2FGMFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	**A**	S16 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00117	AMCB2FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P single)

OEM part number	AMCB2FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00118	AMCB2FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P single)

OEM part number	AMCB2FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00120	AMCB2GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P single)

OEM part number	AMCB2GMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00126	AMCB2KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THKM, 2P single)

OEM part number	AMCB2KMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB2KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00123	AMCB3FGMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P single)

OEM part number	AMCB3FGMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FGM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00121	AMCB3FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P single)

OEM part number	AMCB3FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00122	AMCB3FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P single)

OEM part number	AMCB3FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00124	AMCB3GMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P single)

OEM part number	AMCB3GMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3GM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00127	AMCB3KMFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THKM, 3P single)

OEM part number	AMCB3KMFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3KM (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKH, SKL, SKP, TKM, THKM	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00125	AMCB3LBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)

OEM part number	AMCB3LBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB3LB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), single mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (single-mounted)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SKP (as printed; LB code = THLC2/THLC4 per nomenclature)	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-061 (SKH, SKL, SKP, TKM, THKM straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		
Open question	*AMCB3LBFP is listed for 'SKP 2-pole' but LB code = THLC2/THLC4 and the 3 = 3 poles: verify against OEM*		

EDH-GEA-00098	AMCB4EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)

OEM part number	AMCB4EBFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED	**A**	S16 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00099	AMCB4EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)

OEM part number	AMCB4EYFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	**A**	S16 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-062 (TEY)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00100	AMCB4FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P dual)

OEM part number	AMCB4FBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00101	AMCB4FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FCL, 2P dual)

OEM part number	AMCB4FDBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00113	AMCB4FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P dual)

OEM part number	AMCB4FGBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00109	AMCB4FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)

OEM part number	AMCB4FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00111	AMCB4FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P dual)

OEM part number	AMCB4FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00114	AMCB4GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)

OEM part number	AMCB4GBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00102	AMCB4QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)

OEM part number	AMCB4QDFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Poles	2	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S27 DEH065 Table 1; oem_spec
Dimensions	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in	A	S16 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S27 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S27 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S27, S16 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S27 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00103	AMCB4SEFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SEP, 2P dual)

OEM part number	AMCB4SEFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB4SE (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 2-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	THED, SED, SEH, SEL, SEP	**A**	S16 p.11-43; oem_spec
Poles	2	**A**	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00104	AMCB6EBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SEH, SEL, SEP, 3P dual)

OEM part number	AMCB6EBFP	**A**	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	**B**	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	**A**	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	**A**	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	**A**	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	**A**	S16 p.11-43; oem_spec
Poles	3	**A**	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	**A**	same as above
OEM instruction document	DEH-047 (TEB, TED, THED, SED, SEH, SEL, SEP straps)	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00105	AMCB6EYFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)

OEM part number	AMCB6EYFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6EY (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TEY	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
OEM instruction document	DEH-062 (TEY)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00106	AMCB6FBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P dual)

OEM part number	AMCB6FBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00107	AMCB6FDBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FCL, 3P dual)

OEM part number	AMCB6FDBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FDB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00115	AMCB6FGBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P dual)

OEM part number	AMCB6FGBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FGB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00110	AMCB6FJFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)

OEM part number	AMCB6FJFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJ (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in	A	same as above
OEM instruction document	DEH-059 (listed as 'SGH, SFL, SFP' - likely SFH/SFL/SFP)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00112	AMCB6FJFPTF	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P dual)

OEM part number	AMCB6FJFPTF	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6FJTF (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	hole pattern, OEM instruction document, Material, Status, strap dimensions		

EDH-GEA-00116	AMCB6GBFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)

OEM part number	AMCB6GBFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6GB (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Dimensions	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in	A	same as above
OEM instruction document	DEH-060 (SGH, SGL, SGP straps)	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

EDH-GEA-00108	AMCB6QDFP	GE	branch-connector-kit	STATUS UNKNOWN

Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)

OEM part number	AMCB6QDFP	A	S16 p.11-43; oem_spec
Alternate / superseded numbers	AMCB6QD (Nomenclature: 'FP' accessory suffix adds filler plate kit; base number without FP is the strap kit alone (e.g. DEH065 covers AMCB4QD/AMCB6QD))	B	S16 alias; p.11-38 nomenclature; inference
Description	Spectra bolt-on mounting kit with filler plate (hardware, straps, brackets and filler plate), dual mounted, 3-pole	A	S16 p.11-43; oem_spec
Application	main or branch (double-branch)	A	S16 p.11-43; nomenclature p.11-38; oem_spec
Installation location	APNB bolt-on interior: straps bolt to vertical bus, brackets to side rails	A	S16, S27 p.11-43; DEH065 p.1; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Poles	3	A	same as above
Kit contents	A&C pole outer strap; A&C pole inner strap; carriage bolt 1/4-20; conical spring washer; nut 1/4-20; B pole strap; inner mounting bracket; thread-forming screw; outer mounting bracket; screw 1/4-20; conical spring washer; screw #10-32 x 2-x/x in; lock washer #10; antiturn clip (quantities not legible in mirror)	A	S27 DEH065 Table 1; oem_spec
Dimensions	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in	A	S16 p.11-43; oem_spec
Fasteners	1/4-20 carriage bolts with antiturn clips, conical spring washers and nuts; unused strap surfaces insulated with UL 105 C tape (min 0.013 in)	A	S27 DEH065 steps 3, 6; oem_spec
Torque values	Bracket thread-forming screws 35 in-lb; breaker-to-bracket #10-32 screws 35 in-lb; line terminal to strap 1/4-20 screws 50 in-lb	A	S27 DEH065 steps 4-5; oem_spec
OEM instruction document	DEH065 (Spectra Series Power Panelboards Bolt-On Circuit Breaker Kits AMCB6QD/AMCB4QD)	A	S27, S16 DEH065 p.1; BuyLog p.11-52; oem_spec
Identification features	Straps mount on the side of the interior where distance from nearest vertical bus face to inner face of bus-support rail is 2.75 in; carriage bolt with antiturn clip in square bus hole	A	S27 DEH065 step 2-3; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	hole pattern, Material, Status, strap dimensions		

Breaker Mounting Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00181	**AMC2FGMFP**	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00179	**AMC2FJFP**	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00178	**AMC2FJFPTF**	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00184	**AMC2FLSFP**	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00182	**AMC2GMFP**	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00180	**AMC2JKFP**	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00183	**AMC2KMFP**	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00162	**AMC3FGMFP**	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00160	**AMC3FJFP**	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00159	**AMC3FJFPTF**	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00165	**AMC3FLSFP**	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00163	**AMC3GMFP**	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00161	**AMC3JKFP**	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00164	**AMC3KMFP**	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in) **A**	unknown
EDH-GEA-00167	**AMC4EBFP**	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	TEB, TED **A**	unknown
EDH-GEA-00176	**AMC4EBSFP**	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00166	**AMC4FDBFP**	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00175	**AMC4FDSFP**	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00173	**AMC4FGBFP**	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00171	**AMC4FJFP**	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00170	**AMC4FJFPTF**	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00177	**AMC4FLSFP**	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00174	**AMC4GBFP**	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA **A**	unknown
EDH-GEA-00172	**AMC4JKFP**	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00169	**AMC4QDFP**	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown
EDH-GEA-00168	**AMC4SEFP**	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)	SEDA, SEHA, SELA, SEPA, THED **A**	unknown
EDH-GEA-00149	**AMC6EBFP**	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)	TEB, TED, THED, SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00157	**AMC6EBSFP**	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)	SEDA, SEHA, SELA, SEPA **A**	unknown
EDH-GEA-00146	**AMC6EYFP**	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	TEY **A**	unknown
EDH-GEA-00147	**AMC6FBFP**	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00148	**AMC6FDBFP**	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00156	**AMC6FDSPF**	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)	FCS, FCV, FCN, FCH, FCL **A**	unknown
EDH-GEA-00154	**AMC6FGBFP**	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)	FGL, FGN, FGH, FGP **A**	unknown
EDH-GEA-00152	**AMC6FJFP**	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00151	**AMC6FJFPTF**	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00158	**AMC6FLSFP**	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)	SFHA, SFLA, SFPA **A**	unknown
EDH-GEA-00155	**AMC6GBFP**	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max) **A**	unknown
EDH-GEA-00153	**AMC6JKFP**	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)	TJD, TJJ / TJK, THJK **A**	unknown
EDH-GEA-00145	**AMC6QBFP**	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	THQB, THHQB **A**	unknown
EDH-GEA-00150	**AMC6QDFP**	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	TQD, THQD **A**	unknown

EDH-GEA-00181	AMC2FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC2FGMFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00179	AMC2FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC2FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00178	AMC2FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC2FJFPTF	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00184	AMC2FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC2FLSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00182	AMC2GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC2GMFP	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	**B**	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	**A**	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	**A**	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	**A**	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	**A**	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	**A**	S28 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	**A**	S28, S16 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	**A**	S28 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00180	AMC2JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC2JKFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00183	AMC2KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC2KMFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC2KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00162	AMC3FGMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single branch or main)

OEM part number	AMC3FGMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FGM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4FGS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGS (EDH-GEA-00141)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00160	AMC3FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branch or main)

OEM part number	AMC3FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 250 A, includes filler plate kit AFP3SFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFS (EDH-GEA-00139)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00159	AMC3FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branch or main)

OEM part number	AMC3FJFPTF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 225 A, includes filler plate kit AFP3TFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFS (EDH-GEA-00140)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00165	AMC3FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single branch or main adjacent to switch)

OEM part number	AMC3FLSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main adjacent to switch, max 250 A, includes filler plate kit AFP4SFS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00163	AMC3GMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single branch or main)

OEM part number	AMC3GMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3GM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 600 A, includes filler plate kit AFP4SGS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Torque values	Bus clip screws 27-32 in-lb; hex-head screws with Belleville washers 90-110 in-lb (stud-post side); round-head screws with flat washers 40-50 in-lb; latch screws 25 in-lb	A	S28 GEH5674 steps 1-3; oem_spec
OEM instruction document	GEH5674 (2-pole) / GEH-5673 (3-pole) SGDA/SGHA/SGLA/SGPA modules	A	S28, S16 GEH5674 p.1; BuyLog p.11-52; oem_spec
Identification features	Module has stud posts, two latches with latch screws, and a movable bus clip assembly (A/C phase as received; reposition to B for phase balancing of 2-pole devices)	A	S28 GEH5674 figs 1-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGS (EDH-GEA-00142)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00161	AMC3JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single branch or main)

OEM part number	AMC3JKFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 400/600 A, includes filler plate kit AFP6TJS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00164	AMC3KMFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single branch or main)

OEM part number	AMC3KMFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC3KM (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Single branch or main, max 1200 A, includes filler plate kit AFP6SKS	A	S16 p.11-40 (3-pole table); oem_spec
Application	Single branch or main	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TKM, THKM, SKHA, SKLA (40-44 in); SKPA (44 in)	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	1200 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6SKS); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5623 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Requires	AFP6SKS (EDH-GEA-00144)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00167	AMC4EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)

OEM part number	AMC4EBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP2TED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2TED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP2TED (EDH-GEA-00129)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00176	AMC4EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC4EBSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00166	AMC4FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC4FDBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00175	AMC4FDSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC4FDSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FDS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00173	AMC4FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double branch)

OEM part number	AMC4FGBFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00171	AMC4FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC4FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00170	AMC4FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC4FJFPTF	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00177	AMC4FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC4FLSFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00174	AMC4GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC4GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00172	AMC4JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC4JKFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00169	AMC4QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)

OEM part number	AMC4QDFP	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	**B**	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 225 A, includes filler plate kit AFP2QDD	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	**A**	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	**A**	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	225 A max breaker	**A**	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP2QDD); breaker not included	**A**	S16 p.11-40 product features; oem_spec
Dimensions	2X vertical (1X = 1-3/8 in); box width range 27-44 in	**A**	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	**A**	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP2QDD (EDH-GEA-00128)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00168	AMC4SEFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED; double branch)

OEM part number	AMC4SEFP	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Alternate / superseded numbers	AMC4SE (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 2-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA, THED	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (2-pole table, continued p.11-40/41); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00149	AMC6EBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SELA, SEPA; double branch)

OEM part number	AMC6EBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 150 A, includes filler plate kit AFP3SED	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEB, TED, THED, SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Requires	AFP3SED (EDH-GEA-00134)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00157	AMC6EBSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; double branch adjacent to switch)

OEM part number	AMC6EBSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EBS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 150 A, includes filler plate kit AFP4SED	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SEDA, SEHA, SELA, SEPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	150 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SED); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5625 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00146	AMC6EYFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)

OEM part number	AMC6EYFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6EY (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3EYD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TEY	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3EYD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Requires	AFP3EYD (EDH-GEA-00130)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00147	AMC6FBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double branch)

OEM part number	AMC6FBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FBD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FBD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Requires	AFP3FBD (EDH-GEA-00132)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00148	AMC6FDBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; double branch)

OEM part number	AMC6FDBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3FDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00156	AMC6FDSPF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; double branch adjacent to switch)

OEM part number	AMC6FDSPF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FDSPF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 100 A, includes filler plate kit AFP4FDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00154	AMC6FGBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double branch)

OEM part number	AMC6FGBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FGB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4FGD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	FGL, FGN, FGH, FGP	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4FGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Requires	AFP4FGD (EDH-GEA-00137)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00152	AMC6FJFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branch)

OEM part number	AMC6FJFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJ (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 250 A, includes filler plate kit AFP3SFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Requires	AFP3SFD (EDH-GEA-00135)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00151	AMC6FJFPTF	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branch)

OEM part number	AMC6FJFPTF	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FJFPTF (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3TFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3TFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 31-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Requires	AFP3TFD (EDH-GEA-00136)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00158	AMC6FLSFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double branch adjacent to switch)

OEM part number	AMC6FLSFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6FLS (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch adjacent to switch, max 250 A, includes filler plate kit AFP4SFD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch adjacent to switch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SFHA, SFLA, SFPA	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	250 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SFD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 36, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5626 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00155	AMC6GBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double branch)

OEM part number	AMC6GBFP (Printed with trailing footnote digit (e.g. 'AMC6FJFP1', 'AMC6GBFP2'))	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6GB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 600 A, includes filler plate kit AFP4SGD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	SGDA, SGHA, SGLA, SGPA (SGDA 400 A max)	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP4SGD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	4X vertical (1X = 1-3/8 in); box width range 40, 44 in	A	S16 p.11-40 (3-pole table); oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Requires	AFP4SGD (EDH-GEA-00138)		
Not yet documented	bus clip/connector part numbers, OEM instruction document, Material, Status		

EDH-GEA-00153	AMC6JKFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double branch)

OEM part number	AMC6JKFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6JK (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 400/600 A, includes filler plate kit AFP6TJD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TJD, TJJ / TJK, THJK	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	400/600 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP6TJD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	6X vertical (1X = 1-3/8 in); box width range 44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5624 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00145	AMC6QBFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)

OEM part number	AMC6QBFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QB (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 100 A, includes filler plate kit AFP3QBD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	THQB, THHQB	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	100 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QBD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5677 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: THQB / THHQB / TXQB		
Not yet documented	bus clip/connector part numbers, Material, Status		

EDH-GEA-00150	AMC6QDFP	GE	breaker-mounting-kit	STATUS UNKNOWN

Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)

OEM part number	AMC6QDFP	A	S16 p.11-40 (3-pole table); oem_spec
Alternate / superseded numbers	AMC6QD (Module without FP filler plate kit suffix (e.g. AMC4QD, AMC6GB, AMC3GM listed in p.11-44 AHK cross-reference))	B	S16 alias; p.11-38 nomenclature; p.11-44 AHK table; inference
Description	Spectra plug-in circuit breaker mounting module, 3-pole table, Double branch, max 225 A, includes filler plate kit AFP3QDD	A	S16 p.11-40 (3-pole table); oem_spec
Application	Double branch	A	same as above
Installation location	Latches onto APN plug-in interior rail and engages bus bars	A	S28 GEH5674 step 3; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-40 (3-pole table); oem_spec
Current rating	225 A max breaker	A	same as above
Kit contents	Module with all necessary hardware; FP = all AFP filler plates with handle cutouts for all applicable box widths (AFP3QDD); breaker not included	A	S16 p.11-40 product features; oem_spec
Dimensions	3X vertical (1X = 1-3/8 in); box width range 27-44 in	A	S16 p.11-40 (3-pole table); oem_spec
OEM instruction document	GEH-5643 (Circuit Breaker Mounting Instructions (Modules))	A	S16 p.11-52; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Requires	AFP3QDD (EDH-GEA-00133)		
Not yet documented	bus clip/connector part numbers, Material, Status		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00235	**ANK120D**	Spectra neutral kit ANK120D	—	unknown
EDH-GEA-00234	**ANK800D**	Spectra neutral kit ANK800D	—	unknown
EDH-GEA-00233	**ANKN120**	Spectra neutral kit ANKN120	—	unknown
EDH-GEA-00232	**ANKN400**	Spectra neutral kit ANKN400	—	unknown

EDH-GEA-00235	ANK120D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK120D

OEM part number	ANK120D	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 1200 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00234	ANK800D	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANK800D

OEM part number	ANK800D	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit plug-in, 800 A dual main: 8 main #2-500kcmil, 8 x #14-2/0, 10 x #6-300kcmil, 4 x #2-500kcmil; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	800 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00233	ANKN120	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN120

OEM part number	ANKN120	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 600/800/1200 A, single/dual: 8 main #2-600kcmil, 9 x #14-2/0, 10 x #6-300kcmil, 10 x #14-#4; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	600-1200 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00232	ANKN400	GE	neutral-assembly	STATUS UNKNOWN

Spectra neutral kit ANKN400

OEM part number	ANKN400	A	S16 p.11-45; p.11-25/27; oem_spec
Description	Neutral kit bolt-on, 250/400 A, single/dual main: 2 main lugs #2-600kcmil, 16 x #14-2/0, 5 x #6-300kcmil, 24 x #14-#4; includes mechanical lugs and bonding strap	A	S16 p.11-45; oem_spec
Current rating	250/400 A	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00236	**AEG10**	Spectra equipment ground kit AEG10	—	unknown
EDH-GEA-00237	**AEG21**	Spectra equipment ground kit AEG21	—	unknown
EDH-GEA-00238	**AEG21S**	Spectra equipment ground kit AEG21S	—	unknown
EDH-GEA-00239	**AEG31S**	Spectra equipment ground kit AEG31S	—	unknown
EDH-GEA-00240	**AEG47**	Spectra equipment ground kit AEG47	—	unknown
EDH-GEA-00241	**AEG47S**	Spectra equipment ground kit AEG47S	—	unknown

EDH-GEA-00236	AEG10	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG10

OEM part number	AEG10	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 10 circuits, 10 wires #6-2/0 Cu/Al (cartons of 10)	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00237	AEG21	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21

OEM part number	AEG21	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, bonded, 21 circuits, 9 wires	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00238	AEG21S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG21S

OEM part number	AEG21S	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 21 circuits	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00239	AEG31S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG31S

OEM part number	AEG31S	A	S16 p.11-45; oem_spec
Description	Equipment ground kit, insulated/isolated, 31 circuits, 10 wires #6-2/0	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, OEM instruction document, Material, Status		

EDH-GEA-00240	AEG47	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47

OEM part number	AEG47	A	S30 DEH212; oem_spec
Description	Equipment ground, bonded for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S30 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S30 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S30 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

EDH-GEA-00241	AEG47S	GE	ground-bar	STATUS UNKNOWN

Spectra equipment ground kit AEG47S

OEM part number	AEG47S	A	S30 DEH212; oem_spec
Description	Equipment ground, isolated for Spectra Series panelboards	A	same as above
Installation location	Box back, positioned as required	A	S30 DEH212 step 1; oem_spec
Fasteners	Four #10-32 self-tapping screws in field-drilled 0.173 in holes in box back (no mounting holes provided)	A	same as above
Torque values	#10-32 mounting screws 32 in-lb	A	S30 DEH212 step 2; oem_spec
OEM instruction document	DEH212 R02	A	S30 oem_spec
Cross-links	Families: SPECTRA-PP		
Not yet documented	Dimensions, Material, number of terminals, Status		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00131	**AFP2FBD**	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00128	**AFP2QDD**	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00129	**AFP2TED**	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	TEB, TED **A**	unknown
EDH-GEA-00130	**AFP3EYD**	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	TEY **A**	unknown
EDH-GEA-00132	**AFP3FBD**	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	FBV, FBN, FBH, FBL **A**	unknown
EDH-GEA-00133	**AFP3QDD**	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	TQD, THQD **A**	unknown
EDH-GEA-00134	**AFP3SED**	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)	TEB, TED, THED, SED, SEH, SEL, SEP **A**	unknown
EDH-GEA-00135	**AFP3SFD**	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	SFH, SFL, SFP **A**	unknown
EDH-GEA-00139	**AFP3SFS**	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	SFH, SFL, SFP **A**	unknown

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00136	**AFP3TFD**	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00140	**AFP3TFS**	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	TFJ, TFK, THFK **A**	unknown
EDH-GEA-00137	**AFP4FGD**	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00141	**AFP4FGS**	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	FGV, FGN, FGH, FGP **A**	unknown
EDH-GEA-00138	**AFP4SGD**	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00142	**AFP4SGS**	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	SGH, SGL, SGP **A**	unknown
EDH-GEA-00143	**AFP5LCS**	Spectra breaker filler plate kit AFP5LCS (SKP, single)	SKP **A**	unknown
EDH-GEA-00144	**AFP6SKS**	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	SKP, SKH, SKL, TKM, THKM **A**	unknown
EDH-GEA-00244	**AMCB6TEDL**	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	—	unknown
EDH-GEA-00202	**APP1**	Spectra blank filler plate 1X (36, 40 in box)	—	unknown
EDH-GEA-00201	**APP1S**	Spectra blank filler plate 1X (27, 31 in box)	—	unknown
EDH-GEA-00203	**APP1W**	Spectra blank filler plate 1X (44 in box)	—	unknown
EDH-GEA-00205	**APP2**	Spectra blank filler plate 2X (36, 40 in box)	—	unknown
EDH-GEA-00204	**APP2S**	Spectra blank filler plate 2X (27, 31 in box)	—	unknown
EDH-GEA-00206	**APP2W**	Spectra blank filler plate 2X (44 in box)	—	unknown
EDH-GEA-00208	**APP3**	Spectra blank filler plate 3X (36, 40 in box)	—	unknown
EDH-GEA-00207	**APP3S**	Spectra blank filler plate 3X (27, 31 in box)	—	unknown
EDH-GEA-00209	**APP3W**	Spectra blank filler plate 3X (44 in box)	—	unknown
EDH-GEA-00211	**APP4**	Spectra blank filler plate 4X (36, 40 in box)	—	unknown
EDH-GEA-00210	**APP4S**	Spectra blank filler plate 4X (27, 31 in box)	—	unknown
EDH-GEA-00212	**APP4W**	Spectra blank filler plate 4X (44 in box)	—	unknown
EDH-GEA-00214	**APP5**	Spectra blank filler plate 5X (36, 40 in box)	—	unknown
EDH-GEA-00213	**APP5S**	Spectra blank filler plate 5X (27, 31 in box)	—	unknown
EDH-GEA-00215	**APP5W**	Spectra blank filler plate 5X (44 in box)	—	unknown
EDH-GEA-00217	**APP6**	Spectra blank filler plate 6X (36, 40 in box)	—	unknown
EDH-GEA-00216	**APP6S**	Spectra blank filler plate 6X (27, 31 in box)	—	unknown
EDH-GEA-00218	**APP6W**	Spectra blank filler plate 6X (44 in box)	—	unknown

EDH-GEA-00131 AFP2FBD GE filler-plate STATUS UNKNOWN

Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP2FBD	**A**	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	**A**	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	**A**	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	**A**	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00128	AFP2QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)

OEM part number	AFP2QDD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S27 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00129	AFP2TED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)

OEM part number	AFP2TED	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED	A	S16 p.11-43; oem_spec
Dimensions	2X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00130	AFP3EYD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3EYD (TEY, dual)

OEM part number	AFP3EYD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEY	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TEY / TEYF / TEYD / TEYH / TEYL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00132	AFP3FBD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)

OEM part number	AFP3FBD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FBV, FBN, FBH, FBL	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00133	AFP3QDD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)

OEM part number	AFP3QDD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TQD, THQD	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
OEM instruction document	Used with AMCB4QD/AMCB6QD per DEH065	A	S27 DEH065 p.1; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00134	AFP3SED	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, dual)

OEM part number	AFP3SED	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TEB, TED, THED, SED, SEH, SEL, SEP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00135	AFP3SFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)

OEM part number	AFP3SFD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 31-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00139	AFP3SFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)

OEM part number	AFP3SFS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SFH, SFL, SFP	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00136	AFP3TFD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)

OEM part number	AFP3TFD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Dimensions	2X, 3X vertical; box width 36-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00140	AFP3TFS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)

OEM part number	AFP3TFS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	TFJ, TFK, THFK	A	S16 p.11-43; oem_spec
Dimensions	3X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TFJ / TFK / THFK / TFL		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00137	AFP4FGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)

OEM part number	AFP4FGD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 40, 44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00141	AFP4FGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)

OEM part number	AFP4FGS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	FGV, FGN, FGH, FGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00138	AFP4SGD	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)

OEM part number	AFP4SGD	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), dual mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 40-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00142	AFP4SGS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)

OEM part number	AFP4SGS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2, 3-pole	A	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	A	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SGH, SGL, SGP	A	S16 p.11-43; oem_spec
Dimensions	4X vertical; box width 27-44 in	A	same as above
OEM instruction document	GEH5674: install filler plate kit AFP4SGS on AMC2GM/AMC3GM module	A	S28 GEH5674 step 5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00143	AFP5LCS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP5LCS (SKP, single)

OEM part number	AFP5LCS	A	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 2-pole	A	same as above
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	A	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP	A	S16 p.11-43; oem_spec
Dimensions	6X vertical; box width 27-44 in	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00144	AFP6SKS	GE	filler-plate	STATUS UNKNOWN

Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)

OEM part number	AFP6SKS	**A**	S16 p.11-43; oem_spec
Description	Spectra filler plate kit (filler plate and associated hardware only), single mounted, 3-pole	**A**	same as above
Application	Also listed as filler plate kit for plug-in AMC modules	**A**	S16 p.11-40; oem_spec
Installation location	Front of breaker module/straps; plate with cutouts for breaker handles covering breaker space	**A**	S16 p.11-40 features / p.11-43; oem_spec
Breaker compatibility	SKP, SKH, SKL, TKM, THKM	**A**	S16 p.11-43; oem_spec
Dimensions	6X vertical; box width 44 in	**A**	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	exact plate dimensions per box width, Finish / plating, Material, Status		

EDH-GEA-00244	AMCB6TEDL	GE	filler-plate	STATUS UNKNOWN

Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter

OEM part number	AMCB6TEDL	**A**	S29 p.1; oem_spec
Description	Circuit breaker cover kit for TED136 breaker with TEDL36 current limiter on Spectra APNB bolt-on interiors; 3X (4.125 in) vertical space	**A**	same as above
Kit contents	(1) filler 36/40W TEDL DB 3X 168D1930P3; (1) filler 44/45W 168D1930P4; (2) cover support 3X 208C1850P3; (1) barrier center 252B1667P1; (1) spacer plate TED6 w/TEDL 252B2056P8; (2) steel drive rivet #10 x 1/2 331A3329P2; (2) thread-forming screw 10-32 x 3/8 N722EP16006B6; instruction DEH40392	**A**	S29 Table 1; oem_spec
Dimensions	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards	**A**	S29 p.1; oem_spec
OEM instruction document	DEH40392 R01	**A**	S29 oem_spec
Identification features	Push-on filler snaps over flexible prongs on filler supports; barrier center riveted to filler	**A**	S29 steps 2-5; oem_spec
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Material, Status		

EDH-GEA-00202	APP1	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (36, 40 in box)

OEM part number	APP1	**A**	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	**A**	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	**A**	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00201	APP1S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (27, 31 in box)

OEM part number	APP1S	**A**	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	**A**	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	**A**	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00203	APP1W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 1X (44 in box)

OEM part number	APP1W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 1X space	A	same as above
Dimensions	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00205	APP2	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (36, 40 in box)

OEM part number	APP2	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00204	APP2S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (27, 31 in box)

OEM part number	APP2S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00206	APP2W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 2X (44 in box)

OEM part number	APP2W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 2X space	A	same as above
Dimensions	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00208	APP3	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (36, 40 in box)

OEM part number	APP3	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00207	APP3S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (27, 31 in box)

OEM part number	APP3S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00209	APP3W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 3X (44 in box)

OEM part number	APP3W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 3X space	A	same as above
Dimensions	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00211	APP4	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (36, 40 in box)

OEM part number	APP4	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00210	APP4S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (27, 31 in box)

OEM part number	APP4S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00212	APP4W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 4X (44 in box)

OEM part number	APP4W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 4X space	A	same as above
Dimensions	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00214	APP5	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (36, 40 in box)

OEM part number	APP5	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00213	APP5S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (27, 31 in box)

OEM part number	APP5S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00215	APP5W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 5X (44 in box)

OEM part number	APP5W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 5X space	A	same as above
Dimensions	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00217	APP6	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (36, 40 in box)

OEM part number	APP6	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00216	APP6S	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (27, 31 in box)

OEM part number	APP6S	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

EDH-GEA-00218	APP6W	GE	filler-plate	STATUS UNKNOWN

Spectra blank filler plate 6X (44 in box)

OEM part number	APP6W	A	S16 p.11-44; oem_spec
Description	Filler plate, plug-in or bolt-on Spectra, to cover unused spaces; includes filler plate support brackets and hardware; 6X space	A	same as above
Dimensions	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in	A	same as above
Cross-links	Families: SPECTRA-PP		
Not yet documented	Finish / plating, Material, Status		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-GEA-00194	**AHKBE1**	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	SE A	unknown
EDH-GEA-00195	**AHKBF1**	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	SF A	unknown
EDH-GEA-00200	**AHKBFB1**	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	FB A	unknown
EDH-GEA-00198	**AHKBFD1**	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	FCS, FCV, FCN, FCH, FCL A	unknown
EDH-GEA-00199	**AHKBFG1**	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	FGV, FGN, FGH, FGP A	unknown
EDH-GEA-00196	**AHKBG1**	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	SG A	unknown
EDH-GEA-00197	**AHKBQ1**	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	THQD A	unknown
EDH-GEA-00185	**AHKE1**	Spectra plug-in single-breaker mounting hardware AHKE1	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS A	unknown
EDH-GEA-00186	**AHKEL1**	Spectra plug-in single-breaker mounting hardware AHKEL1	For AMC modules: AMC6EL A	unknown
EDH-GEA-00187	**AHKF1**	Spectra plug-in single-breaker mounting hardware AHKF1	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC A	unknown
EDH-GEA-00192	**AHKFD1**	Spectra plug-in single-breaker mounting hardware AHKFD1	For AMC modules: FCS/FCV/FCN/FCH/FCL modules A	unknown
EDH-GEA-00193	**AHKFG1**	Spectra plug-in single-breaker mounting hardware AHKFG1	For AMC modules: FGV/FGN/FGH/FGP modules A	unknown
EDH-GEA-00188	**AHKG1**	Spectra plug-in single-breaker mounting hardware AHKG1	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM A	unknown
EDH-GEA-00189	**AHKJ1**	Spectra plug-in single-breaker mounting hardware AHKJ1	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK A	unknown
EDH-GEA-00190	**AHKLB1**	Spectra plug-in single-breaker mounting hardware AHKLB1	For AMC modules: AMC3LB, AMC6LB A	unknown
EDH-GEA-00191	**AHKQ1**	Spectra plug-in single-breaker mounting hardware AHKQ1	For AMC modules: AMC4QD, AMC6QD A	unknown

EDH-GEA-00194	AHKBE1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)

OEM part number	AHKBE1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SE	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SE (SEDA/SEHA/SELA/SEPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00195	AHKBF1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)

OEM part number	AHKBF1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SF	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00200	AHKBFB1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)

OEM part number	AHKBFB1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FB	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FB (FBV/FBN/FBH/FBL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00198	AHKBFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)

OEM part number	AHKBFD1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FCS, FCV, FCN, FCH, FCL	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00199	AHKBFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)

OEM part number	AHKBFG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	FGV, FGN, FGH, FGP	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00196	AHKBG1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)

OEM part number	AHKBG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	SG	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00197	AHKBQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)

OEM part number	AHKBQ1	A	S16 p.11-44; oem_spec
Description	Mounting hardware - hardware only; no brackets or straps - bolt-on Spectra	A	same as above
Breaker compatibility	THQD	A	same as above
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	OEM instruction document, Kit contents, Material, Status		

EDH-GEA-00185	AHKE1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKE1

OEM part number	AHKE1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EB, AMC4SE, AMC4EB, AMC6EBS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00186	AHKEL1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKEL1

OEM part number	AHKEL1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC6EL (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TEB / TED / THED / TED4 / TED6		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00187	AHKF1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKF1

OEM part number	AHKF1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2FLS, AMC6FJ, AMC4FJ, AMC3FJ, AMC2FJ, AMC6FLS, AMC3FLS, AMC4FLS (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SF (SFHA/SFLA/SFPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00192	AHKFD1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFD1

OEM part number	AHKFD1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FCS/FCV/FCN/FCH/FCL modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FC (FCS/FCV/FCN/FCH/FCL)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00193	AHKFG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKFG1

OEM part number	AHKFG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: FGV/FGN/FGH/FGP modules (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Record Plus FG (FGV/FGN/FGH/FGL/FGP)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00188	AHKG1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKG1

OEM part number	AHKG1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2GM, AMC6GB, AMC4GB, AMC3GM (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SG (SGDA/SGHA/SGLA/SGPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00189	AHKJ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKJ1

OEM part number	AHKJ1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC2JK, AMC6JK, AMC4JK, AMC3JK (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TJD / TJJ / TJK / THJK		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00190	AHKLB1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKLB1

OEM part number	AHKLB1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC3LB, AMC6LB (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: Spectra SK (SKHA/SKLA/SKPA)		
Not yet documented	Kit contents, Material, Status		

EDH-GEA-00191	AHKQ1	GE	hardware-kit	STATUS UNKNOWN

Spectra plug-in single-breaker mounting hardware AHKQ1

OEM part number	AHKQ1	A	S16 p.11-44; oem_spec
Description	Mounting hardware, single breaker, plug-in Spectra: screws and washers to mount one circuit breaker on an AMC module; included when ordering AMC module, only required when mounting breaker on existing module	A	same as above
Breaker compatibility	For AMC modules: AMC4QD, AMC6QD (Column alignment in PDF text extraction; mapping of module rows to AHK numbers should be checked against the original page layout)	A	same as above
OEM instruction document	GEH-5913 (Circuit Breaker Mounting Hardware Kits)	B	S16 p.11-52; inference
Cross-links	Families: SPECTRA-PP · Breakers: TQD / THQD		
Not yet documented	Kit contents, Material, Status		

4.9 AV-LINE — AV-Line switchboards (legacy)

FAM-GEA-009 · switchboard · aka AV Line, AV-Line · markings: General Electric

Legacy GE distribution switchboard; only surplus listings (800-1600 A, 208Y/120 to 480Y/277 V, Power Break mains) were found. No OEM document located.

Attribute	Value	Cl.	Sources
ratings	Surplus units listed at 800, 1200, 1600 A; 120/208 and 480 V 3ph4w	C	S37 surplus_listing

Key documents: S37 Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)

5 Siemens lineage

Lineage / brand markings: Siemens, ITE, ITE Imperial, Gould, Murray

Family	Type	Status	Era	Entries	Pg
P1 Type P1 (original)	panelboard	discontinued (kits still offered)	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	40	173
P2 Type P2 panelboard	panelboard	current	—	49	182
P3 Type P3 panelboard	panelboard	current	—	44	194
P4 Type P4 / S4 / Sentron SPP (10in deep) power panelboard	panelboard	current	—	38	199
P5 Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	panelboard	current	—	47	214
RP1 Type P1 (Revised P1)	panelboard	current	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014'	72	232
S1/S2 Type S1 / S2 lighting panelboards	panelboard	discontinued; some kits available	—	29	265
SE Type SE panelboard	panelboard	discontinued	—	10	267
CDP6 Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	switchboard	discontinued equipment; strap kits still catalogued (Canada)	Strap kits fit switchboards manufactured since 1974	55	267
SB Type SB1 / SB2 / SB3 distribution switchboards	switchboard	current	—	69	280

5.1 P1 — Type P1 (original)

FAM-SIE-002 · panelboard · aka Original P1, P1 (pre-2014/2015) · markings: Siemens

Original Siemens P1 lighting panelboard (pre-revision), 20in wide x 5.75in deep, main lug or main/subfeed strap kits through 400A. Subfeed space standard. Catalog numbers like Revised P1 but without the T suffix, up to 42 circuits. Kits for original P1 (MBKBL1, MBKED3, MBKQR3, MLKA3 etc.) are strap-only (breakers not included) and also fit 250A-max S1/S2 panels.

Attribute	Value	Cl.	Sources
Status	discontinued (kits still offered)	A	S1 p.11-15; oem_spec
Era of manufacture	Pre-2014/2015 (replaced by Revised P1); listed in SPEEDFAX 2007-2008	A	S1, S4 s1 p.11-7, s4 p.10-17; oem_spec
Successor	Revised P1 (RP1)	A	S1 p.11-7; oem_spec
Branch breakers accepted	BL, BLH, HBL, BQD, NGB/HGB/LGB	A	S4 p.10-18; oem_spec

Breaker families associated: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S4 SPEEDFAX 2007-2008 pp.10-17..10-22 SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22
Also fits this family (entry printed elsewhere): DFFP1A (p.259), QF3 (p.280), DFFP01B (p.258), DFFPFD01 (p.259), DFFPJD01 (p.260), DFFPQJ01 (p.260), DFFPQJ02 (p.261), MBKQRFK (p.262), P1SCRWS (p.264), IMK1 (p.263), EGK (p.253), ECGK (p.253), IGK (p.254), ICGK (p.254), SEBKP1P2P3V1 (p.255), EWK1 (p.262), EWK3 (p.263), EWK1B (p.263)

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00045	**MBKBC3**	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	3-pole BQD 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00043	**MBKBL1**	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	2-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00044	**MBKBL3**	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	3-pole BL/BLH/HBL 15A-100A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00048	**MBKED1**	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	2-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00049	**MBKED3**	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	3-pole ED4/HED4 50A-125A A	listed for Original P1 (2021); strap only, breaker kits not

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00052	**MBKFD1**	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	2-pole F(X)D6/HF(X)D6 70A-250A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00053	**MBKFD3**	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	3-pole F(X)D6/HF(X)D6 70A-250A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00054	**MBKJD1**	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00055	**MBKJD3**	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00046	**MBKNB1**	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	2-pole NGB/LGB/HGB 15A-125A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00047	**MBKNB3**	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	3-pole NGB/LGB/HGB 15A-125A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00050	**MBKQR1**	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	2-pole QR(H)2/HQR2(H) 125A-225A **A**	listed for Original P1 (2021); strap only, breaker kits not
EDH-SIE-00051	**MBKQR3**	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	3-pole QR(H)2/HQR2(H) 125A-225A **A**	listed for Original P1 (2021); strap only, breaker kits not

EDH-SIE-00045 — MBKBC3

Siemens · main-breaker-kit · **LISTED FOR ORIGINAL P1**

Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A

OEM part number	MBKBC3	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BQD 15A-100A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	3-pole BQD 15A-100A	**A**	same as above
Current rating	100A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BQD		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00043 — MBKBL1

Siemens · main-breaker-kit · **LISTED FOR ORIGINAL P1**

Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL1	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole BL/BLH/HBL 15A-100A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	2-pole BL/BLH/HBL 15A-100A	**A**	same as above
Current rating	100A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00044	MBKBL3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A

OEM part number	MBKBL3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole BL/BLH/HBL 15A-100A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole BL/BLH/HBL 15A-100A	A	same as above
Current rating	100A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00048	MBKED1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A

OEM part number	MBKED1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00049	MBKED3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A

OEM part number	MBKED3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole ED4/HED4 50A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole ED4/HED4 50A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00052	MBKFD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00053	MBKFD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A

OEM part number	MBKFD3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole F(X)D6/HF(X)D6 70A-250A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole F(X)D6/HF(X)D6 70A-250A	A	same as above
Current rating	250A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00054	MBKJD1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00055	MBKJD3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A

OEM part number	MBKJD3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A; breaker not included	A	same as above
Application	main only (not available for subfeed)	A	same as above
Breaker compatibility	3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	A	same as above
Current rating	400A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00046	MBKNB1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB1	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	2-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00047	MBKNB3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A

OEM part number	MBKNB3	A	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole NGB/LGB/HGB 15A-125A; breaker not included	A	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	3-pole NGB/LGB/HGB 15A-125A	A	same as above
Current rating	125A max	A	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	A	same as above
Cross-links	Families: P1, S1/S2 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00050	MBKQR1	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR1	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 2-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	2-pole QR(H)2/HQR2(H) 125A-225A	**A**	same as above
Current rating	225A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

EDH-SIE-00051	MBKQR3	Siemens	main-breaker-kit	LISTED FOR ORIGINAL P1

Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A

OEM part number	MBKQR3	**A**	S1 p.11-15, 'Strap kits for Original P1 product only - Breaker kits not available'; oem_spec
Description	Original P1 main/subfeed strap kit for 3-pole QR(H)2/HQR2(H) 125A-225A; breaker not included	**A**	same as above
Application	main or sub-feed (Original P1 kits for 250A-and-below also work for 250A-max S1/S2 panels)	**A**	same as above
Breaker compatibility	3-pole QR(H)2/HQR2(H) 125A-225A	**A**	same as above
Current rating	225A max	**A**	same as above
Status	listed for Original P1 (2021); strap only, breaker kits not available	**A**	same as above
Cross-links	Families: P1, S1/S2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 equivalents: is MBKBL3 the predecessor of MBKBL3A (now MBKVA41B)? Part-number pattern suggests so but SpeedFax states Revised P1 kits are not interchangeable with original P1.*		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00029	**4MLKA1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00030	**4MLKA3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00031	**4MLKC1**	Original P1 400A main lug kit, 1-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00032	**4MLKC3**	Original P1 400A main lug kit, 3-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00025	**MLKA1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00026	**MLKA3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00027	**MLKC1**	Original P1 250A main lug kit, 1-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)
EDH-SIE-00028	**MLKC3**	Original P1 250A main lug kit, 3-ph	n/a (lug kit) **A**	listed as available for Original P1 (2021)

EDH-SIE-00029	4MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKA1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00030	4MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKA3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00031	4MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 1-ph

OEM part number	4MLKC1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00032	4MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 400A main lug kit, 3-ph

OEM part number	4MLKC3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 400A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes')	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (2) 1/0-4/0 or (1) 1/0-600 kcmil	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*400/600A S1/S2 MLO kits no longer available (p.11-15) - were they different part numbers?*		

EDH-SIE-00025	MLKA1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKA1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00026	MLKA3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKA3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (MLO kits available for SE panels - AL 250A only (MLKA1/MLKA3); original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	A	same as above
Cross-links	Families: P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00027	MLKC1	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 1-ph

OEM part number	MLKC1	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 1-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00028	MLKC3	Siemens	main-lug-kit	LISTED AS AVAILABLE FO

Original P1 250A main lug kit, 3-ph

OEM part number	MLKC3	A	S1 p.11-15, 'MLO kits for Original P1 product only'; oem_spec
Description	Original P1 250A main lug (MLO) kit, 3-phase; also usable as P1 feed-thru lugs	A	same as above
Application	main lug or feed-thru ('Available for P1 Feed-thru: yes') (original P1 kits for 250A-and-below also fit 250A-max S1/S2 panels)	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	250A	A	same as above
Status	listed as available for Original P1 (2021)	A	same as above
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above
Cross-links	Families: P1, S1/S2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00069	**DFFPED01**	P1 main filler for 100-125A frames ED	—	replaced by DFFPVA41A

EDH-SIE-00069	DFFPED01	Siemens	filler-plate	REPLACED BY DFFPVA41A

P1 main filler for 100-125A frames ED

OEM part number	DFFPED01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPVA41A	A	S1 superseded_by; p.11-20; oem_spec
Description	P1 main filler for 100-125A frames ED, BL/BQD or xGB (replaced by DFFPVA41A)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Application	main / subfeed deadfront opening	A	same as above
Status	replaced by DFFPVA41A	A	S1 pp.11-13, 11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1802-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: P1, RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.2 P2 — Type P2 panelboard

FAM-SIE-005 · panelboard · aka P2 · markings: Siemens

Siemens bolt-on lighting/distribution panelboard with unit-space construction; branch devices installed via field strap kits (BBK*) in 3in or 6in increments; deadfront uses center strips (DFK*) and blank plates (DFFP3/DFFP6).

Attribute	Value	Cl.	Sources
Status	current	A	S1 p.11-42; oem_spec
Branch breakers accepted	BL/BQD, xGB/3VA41, ED, GB2, QR, 3VA52/61/62 via strap kits	A	S1 p.11-53; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S6 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)
Also fits this family (entry printed elsewhere): DFFP1A (p.259), QF3 (p.280), DFFPVA5363A (p.262), DFFPFD01 (p.259), DFFPJD01 (p.260), IMK1 (p.263), EGK (p.253), ECGK (p.253), IGK (p.254), ICGK (p.254), SEBKP1P2P3V1 (p.255), EWK1 (p.262), EWK2 (p.197), EWK3 (p.263), EWK1B (p.263), EWK2B (p.198)

Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00117	**BNK350N**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00117	BNK350N	Siemens	lug-kit	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK350N	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, narrow 350 kcmil lug with two mounting screws; used in P2/P3 neutrals	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1869-61	A	same as above
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00102	**BBKB32**	P2/P3 BL/BQD 100A max twin-mount branch strap kit	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole **A**	current
EDH-SIE-00104	**BBKED32**	P2/P3 ED twin-mount branch strap kit	P2/P3 ED twin-mount branch strap kit **A**	field replacement only; use 3VA41 with BBKVA4P2P3 where poss
EDH-SIE-00106	**BBKGB32**	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00105	**BBKNB32**	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit **A**	field replacement only; use BBKVA4P2P3 where possible
EDH-SIE-00110	**BBKQ1**	P2 QJ single-mount branch strap kit	P2 QJ single-mount branch strap kit **A**	discontinued - QJ not available, use new kit BBKQR1
EDH-SIE-00108	**BBKQR1**	P2 QR 225A max single-mount branch strap kit	P2 QR 225A max single-mount branch strap kit **A**	current
EDH-SIE-00103	**BBKVA4P2P3**	P2/P3 3VA41/xGB 125A max twin-mount strap kit	P2/P3 3VA41/xGB 125A max twin-mount strap kit **A**	current
EDH-SIE-00112	**BBKVA5262P2S**	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit **A**	current

EDH-SIE-00102 — BBKB32 — Siemens — branch-connector-kit — CURRENT

P2/P3 BL/BQD 100A max twin-mount branch strap kit

OEM part number	BBKB32	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole, uses 3in of unit space for 6 circuits	**A**	same as above
Application	branch (unit space) (BL/BQD kits also accept GFCI/AFCI breakers, BT twin and BSPD surge devices (s6))	**A**	same as above
Breaker compatibility	P2/P3 BL/BQD 100A max twin-mount branch strap kit; 6-pole	**A**	same as above
Current rating	100A max	**A**	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	**A**	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	**A**	same as above
Identification features	Drawing ref 11-D-2267-01	**A**	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00104	BBKED32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 ED twin-mount branch strap kit

OEM part number	BBKED32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 ED twin-mount branch strap kit, 6-pole, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 ED twin-mount branch strap kit	A	same as above
Kit contents	breaker support, inter-phase barriers, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use 3VA41 with BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00106	BBKGB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit

OEM part number	BBKGB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00105	BBKNB32	Siemens	branch-connector-kit	FIELD REPLACEMENT ONLY

P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit

OEM part number	BBKNB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit, 6-pole, 3in for 6 circuits	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	field replacement only; use BBKVA4P2P3 where possible	A	same as above
Cross-links	Families: P2, P3 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00110	BBKQ1	Siemens	branch-connector-kit	DISCONTINUED - QJ NOT

P2 QJ single-mount branch strap kit

OEM part number	BBKQ1	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QJ single-mount branch strap kit, 6in for one 2-p or 3-p breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QJ single-mount branch strap kit	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	discontinued - QJ not available, use new kit BBKQR1	A	same as above
Cross-links	Families: P2 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00108	BBKQR1	Siemens	branch-connector-kit	CURRENT

P2 QR 225A max single-mount branch strap kit

OEM part number	BBKQR1	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2 QR 225A max single-mount branch strap kit, 6in of unit space for one 2-pole or 3-pole breaker	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P2 QR 225A max single-mount branch strap kit	A	same as above
Current rating	225A max	A	same as above
Dimensions	Unit space: 6in / 1 breaker	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 11-D-2636-01	A	S1 p.11-53; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00103	BBKVA4P2P3	Siemens	branch-connector-kit	CURRENT

P2/P3 3VA41/xGB 125A max twin-mount strap kit

OEM part number	BBKVA4P2P3	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P2/P3 3VA41/xGB 125A max twin-mount strap kit, 3in of unit space for 6 circuits	A	same as above
Application	branch (unit space) (3VA41/xGB kits also accept BSPD surge devices (s6))	A	same as above
Breaker compatibility	P2/P3 3VA41/xGB 125A max twin-mount strap kit	A	same as above
Current rating	125A max	A	same as above
Dimensions	Unit space: 3in / 6 circuits	A	same as above
Status	current	A	same as above
Identification features	Drawing ref 13-D-2011-13	A	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00112	BBKVA5262P2S	Siemens	branch-connector-kit	CURRENT

P2/P3 250A max 3VA52/61/62 single-mount branch strap kit

OEM part number	BBKVA5262P2S	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Alternate / superseded numbers	BBKVA5262S (Spelling in P3 data sheet; likely same kit)	A	S6 alias; oem_spec
Description	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit, 1ph or 3ph, 6in for one 2-pole or 3-pole breaker	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Application	branch (unit space)	A	same as above
Breaker compatibility	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	includes 1 BBKVA5262P2HW hardware kit	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 1 breaker	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Identification features	Drawing ref 11-D-2894-01	A	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA5262P2HW (EDH-SIE-00113)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00116	**BNK2**	Neutral lug kit	—	listed (2019-2021)
EDH-SIE-00119	**BNKP2EX1**	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	—	listed (2019-2021)
EDH-SIE-00118	**LPP2NB01**	Neutral lug kit	—	listed (2019-2021)

EDH-SIE-00116	BNK2	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	BNK2	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 3-step, for P2 neutrals and others: (14x) #14-1/0 max and (14x) #14-#6 max connections, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-A-1862	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00119	BNKP2EX1	Siemens	neutral-assembly	LISTED (2019-2021)

P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)

OEM part number	BNKP2EX1	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/GFCI pigtail breakers; requires 1/0 CU cable to main neutral (not included)	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 11-1850-01 / 11-C-2011-01	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00118	LPP2NB01	Siemens	neutral-assembly	LISTED (2019-2021)

Neutral lug kit

OEM part number	LPP2NB01	A	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	Neutral lug kit, 2-step, for P2 neutrals: (3x) #6-1/0 max and (18x) #14-#6 max, with hardware & instructions	A	same as above
Status	listed (2019-2021)	A	same as above
Identification features	Drawing ref 15-A-1800-61	A	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00232	**SEBKP2V1**	SEB kit, P2 BL/BQD horizontal main	—	unknown
EDH-SIE-00233	**SEBKP2V2**	SEB kit, P2 xGB horizontal main	—	unknown
EDH-SIE-00234	**SEBKP2V3**	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	—	unknown
EDH-SIE-00235	**SEBKP2V4**	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	—	unknown
EDH-SIE-00236	**SEBKP2V5**	SEB kit (P2, P2 w/SEM3) ED horizontal main	—	unknown
EDH-SIE-00237	**SEBKP2V6**	SEB kit (P2, P2 w/SEM3) ED vertical main	—	unknown
EDH-SIE-00238	**SEBKP2V7**	SEB kit, P2/P3 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00232	SEBKP2V1	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 BL/BQD horizontal main

OEM part number	SEBKP2V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 BL/BQD horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2733-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00233	SEBKP2V2	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2 xGB horizontal main

OEM part number	SEBKP2V2	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2 xGB horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2734-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00234	SEBKP2V3	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main

OEM part number	SEBKP2V3	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2735-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00235	SEBKP2V4	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main

OEM part number	SEBKP2V4	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2736-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00236	SEBKP2V5	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED horizontal main

OEM part number	SEBKP2V5	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2738-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00237	SEBKP2V6	Siemens	barrier	STATUS UNKNOWN

SEB kit (P2, P2 w/SEM3) ED vertical main

OEM part number	SEBKP2V6	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (P2, P2 w/SEM3) ED vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2739-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00238	SEBKP2V7	Siemens	barrier	STATUS UNKNOWN

SEB kit, P2/P3 3VA52/61/62 horizontal main

OEM part number	SEBKP2V7	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit, P2/P3 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-D-2898-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Deadfront

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00086	**DFK07**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00087	**DFK08**	P2/P3 deadfront center strip	—	listed (2021)
EDH-SIE-00085	**DFK1**	P2/P3 deadfront center strip kit	—	listed (2021)

EDH-SIE-00086	DFK07	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK07	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 21in of unit space, with hardware	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-67	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00087	DFK08	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip

OEM part number	DFK08	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip, 24in of unit space, with hardware (DFK09-DFK21 = 27in-63in in 3in steps)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3018-68	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00085	DFK1	Siemens	deadfront	LISTED (2021)

P2/P3 deadfront center strip kit

OEM part number	DFK1	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2/P3 deadfront center strip kit: 7 lengths (3, 6, 9, 12, 15, 18, 21in of branch height) with mounting hardware, for 1in-pole breakers	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2273-01 (strips 11-D-3018-01 thru -07)	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00076	**DFFP3**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00077	**DFFP6**	Deadfront filler kit	—	listed (2021)
EDH-SIE-00078	**DFFPVA5262P2A**	3VA52/61/62 filler for single mount P2/P3 applications	—	listed (2021)
EDH-SIE-00079	**DFFPVA5262P2B**	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	—	listed (2021)
EDH-SIE-00084	**DFP3AP01**	P3 adapter plate	—	listed (2021)
EDH-SIE-00082	**P2QRFP01**	P2 QR deadfront filler	—	listed (2021)

EDH-SIE-00076	DFFP3	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP3	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 3in high blank steel plates for both P2 (11-D-3014-02) and P3 (11-D-3035-02, 2.97in); hardware & instructions included	A	same as above
Material	steel	A	S1 p.11-23; oem_spec
Dimensions	3in high (P3 plate 2.97in)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2269-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00077	DFFP6	Siemens	filler-plate	LISTED (2021)

Deadfront filler kit

OEM part number	DFFP6	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	Deadfront filler kit, 6in high blank steel plates for both P2 (11-D-3014-01) and P3 (11-D-3035-01, 5.97in); hardware & instructions included	A	same as above
Material	steel	A	S1 p.11-23; oem_spec
Dimensions	6in high (P3 plate 5.97in)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2270-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00078	DFFPVA5262P2A	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 filler for single mount P2/P3 applications

OEM part number	DFFPVA5262P2A	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 filler for single mount P2/P3 applications, 1 piece	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4610-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00079	DFFPVA5262P2B	Siemens	filler-plate	LISTED (2021)

3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)

OEM part number	DFFPVA5262P2B	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or P3)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3340-01 / 11-D-4614-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00084	DFP3AP01	Siemens	filler-plate	LISTED (2021)

P3 adapter plate

OEM part number	DFP3AP01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 adapter plate: fills 3in of unit space on one side of the deadfront so BL/BQD/ED/xGB/3VA41 breakers and DFFP1A fillers fit	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-3033-61 (11-D-3033-01)	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2, P3 · Breakers: BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00082	P2QRFP01	Siemens	filler-plate	LISTED (2021)

P2 QR deadfront filler

OEM part number	P2QRFP01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 QR deadfront filler, plastic snap-in, vertical main position, 1 per package	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4564-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00113	**BBKVA5262P2HW**	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	Hardware kit for branch/main horizontal single mount or vertical mount **A**	current
EDH-SIE-00120	**P2BK1**	P2 250A max horizontal main breaker bonding strap kit	—	listed (2019-2021)
EDH-SIE-00121	**P2BK2**	P2 125A max main lug bonding strap assembly	—	listed (2019-2021)
EDH-SIE-00122	**P2BK3**	P2 250-600A MLO and all vertical MB bonding kit	—	listed (2019-2021)

EDH-SIE-00113 **BBKVA5262P2HW** Siemens hardware-kit **CURRENT**

Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3

OEM part number	BBKVA5262P2HW	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/62 in P2 or P3	**A**	same as above
Status	current	**A**	same as above
Identification features	Drawing ref 11-D-2895-61	**A**	S1 p.11-53; oem_spec
Cross-links	Families: P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00120 **P2BK1** Siemens hardware-kit **LISTED (2019-2021)**

P2 250A max horizontal main breaker bonding strap kit

OEM part number	P2BK1	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250A max horizontal main breaker bonding strap kit	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-01	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00121 **P2BK2** Siemens hardware-kit **LISTED (2019-2021)**

P2 125A max main lug bonding strap assembly

OEM part number	P2BK2	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 125A max main lug bonding strap assembly	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-02	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00122	P2BK3	Siemens	hardware-kit	LISTED (2019-2021)

P2 250-600A MLO and all vertical MB bonding kit

OEM part number	P2BK3	**A**	S1 p.11-54 'Neutral, Ground Bar, & Bond Kits'; oem_spec
Description	P2 250-600A MLO and all vertical MB bonding kit	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref 11-D-2068-03	**A**	same as above
Cross-links	Families: P2		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00080	**BBKQRP1FK**	P2 filler kit for QR	—	listed (2021)

EDH-SIE-00080	BBKQRP1FK	Siemens	conversion-kit	LISTED (2021)

P2 filler kit for QR

OEM part number	BBKQRP1FK	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P2 filler kit for QR, horizontal or vertical mount; all cover plates to change from QJ to QR, 2- and 3-pole	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-2644-01 (contains 11-D-3282-01, 11-D-4563-01, 11-D-4564-01)	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P2 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.3 P3 — Type P3 panelboard

FAM-SIE-006 · panelboard · aka P3 · markings: Siemens

Siemens 24in wide x 7.75in deep lighting/distribution panelboard sized like a lighting panel; unit-space construction with twin-mount strap kits (BBKB32 etc.), QJ/QR twin kits and 3VA52 twin kits (max 6 large-frame breakers in unit space).

Attribute	Value	Cl.	Sources
Status	current	**A**	S1 p.11-58; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', NEB / HEB, QJ2 / QJH2 / QJ2-H / HQJ2H, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S6 Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)

Also fits this family (entry printed elsewhere): LNLK4X11B (p.251), LNLK6X17B (p.252), LNLK7X20B (p.253), DFFP1A (p.259), QF3 (p.280), DFFPVA5363A (p.262), DFFPFD01 (p.259), DFFPJD01 (p.260), DFFP3 (p.191), DFFP6 (p.191), DFFPVA5262P2A (p.192), DFFPVA5262P2B (p.192), DFP3AP01 (p.192), DFK1 (p.191), DFK07 (p.190), DFK08 (p.190), IMK1 (p.263), EGK (p.253), ECGK (p.253), IGK (p.254), ICGK (p.254), BBKB32 (p.183), BBKVA4P2P3 (p.186), BBKED32 (p.184), BBKNB32 (p.185), BBKGB32 (p.184), BBKVA5262P2S (p.186), BBKVA5262P2HW (p.193), BNK350N (p.182), SEBKP1P2P3V1 (p.255), SEBKP2V3 (p.188), SEBKP2V4 (p.189), SEBKP2V7 (p.190)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00107	**BBKEB32**	P3 NEB/HEB 6-pole 3in branch breaker kit	P3 NEB/HEB 6-pole 3in branch breaker kit **A**	listed 2019 (p.11-67)
EDH-SIE-00111	**BBKQ2**	P3 branch breaker kit for 2- and 3-pole QJ twin mount	P3 branch breaker kit for 2- and 3-pole QJ twin mount **A**	listed 2019 (p.11-67); QJ superseded by QR
EDH-SIE-00109	**BBKQR2**	P3 twin breaker mounting kit for QR	P3 twin breaker mounting kit for QR **A**	current
EDH-SIE-00114	**BBKVA52P3T**	P3 strap kit	P3 strap kit **A**	current

EDH-SIE-00107	BBKEB32	Siemens	branch-connector-kit	LISTED 2019 (P.11-67)

P3 NEB/HEB 6-pole 3in branch breaker kit

OEM part number	BBKEB32	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 NEB/HEB 6-pole 3in branch breaker kit	A	same as above
Kit contents	top barrier, (3) A/C connectors, (1) B connector, hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 3in / 6 circuits	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	listed 2019 (p.11-67)	A	same as above
Cross-links	Families: P3 · Breakers: NEB / HEB		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00111	BBKQ2	Siemens	branch-connector-kit	LISTED 2019 (P.11-67);

P3 branch breaker kit for 2- and 3-pole QJ twin mount

OEM part number	BBKQ2	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 branch breaker kit for 2- and 3-pole QJ twin mount	A	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S1 p.11-67; oem_spec
Status	listed 2019 (p.11-67); QJ superseded by QR	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00109	BBKQR2	Siemens	branch-connector-kit	CURRENT

P3 twin breaker mounting kit for QR

OEM part number	BBKQR2	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 twin breaker mounting kit for QR, 1-phase/3-phase (limit 6 QR per panel)	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 twin breaker mounting kit for QR	A	same as above
Current rating	225A max	A	same as above
Kit contents	all connectors and cover plates to mount both 2- and 3-pole breakers	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

EDH-SIE-00114	BBKVA52P3T	Siemens	branch-connector-kit	CURRENT

P3 strap kit

OEM part number	BBKVA52P3T	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 strap kit, twin mount 3VA52 (TMTU) branch, 1ph or 3ph, 250A max	A	same as above
Application	branch (unit space)	A	same as above
Breaker compatibility	P3 strap kit	A	same as above
Current rating	250A max	A	same as above
Kit contents	2x BBKVA52P3HW, barrier, straps, mounting hardware	A	S1 p.11-67; oem_spec
Dimensions	Unit space: 6in / 2 breakers	A	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Status	current	A	same as above
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Requires	BBKVA52P3HW (EDH-SIE-00115)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Adding a strap kit in the field may require changing the deadfront center strip (DFK1 etc.) - confirm per kit*		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00239	**SEBKP3V1**	Service entrance barrier kit CFD, FD (P3 only)	—	unknown

EDH-SIE-00239	SEBKP3V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier kit CFD, FD (P3 only)

OEM part number	SEBKP3V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	Service entrance barrier kit CFD, FD (P3 only); field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref (p.11-67)	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00083	**EBF1**	NEB/HEB filler plate (EB deadfront filler)	—	listed (2021)

EDH-SIE-00083	EBF1	Siemens	filler-plate	LISTED (2021)

NEB/HEB filler plate (EB deadfront filler)

OEM part number	EBF1	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	NEB/HEB filler plate (EB deadfront filler)	A	same as above
Status	listed (2021)	A	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4529-01	A	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3, P4, P5 · Breakers: NEB / HEB		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00241	**EWK2**	End wall kit with knockouts (24in W x 7.75in D) 24in	—	unknown
EDH-SIE-00244	**EWK2B**	End wall kit without knockouts (24in W x 7.75in D) 24in	—	unknown

EDH-SIE-00241	EWK2	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2	A	S1 p.11-34; oem_spec
Description	End wall kit with knockouts (24in W x 7.75in D), Type 1 only	A	same as above
Dimensions	24in W x 7.75in D	A	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00244	EWK2B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (24in W x 7.75in D) 24in

OEM part number	EWK2B	**A**	S1 p.11-34; oem_spec
Description	End wall kit without knockouts (24in W x 7.75in D), Type 1 only	**A**	same as above
Dimensions	24in W x 7.75in D	**A**	same as above
Cross-links	Families: P3, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00115	**BBKVA52P3HW**	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & **A**	current
EDH-SIE-00123	**P3BK1**	P3 bonding kit 800A max MLO+MB	—	listed (2019-2021)

EDH-SIE-00115	BBKVA52P3HW	Siemens	hardware-kit	CURRENT

P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws

OEM part number	BBKVA52P3HW	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Description	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	same as above
Application	branch (unit space)	**A**	same as above
Breaker compatibility	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting screws	**A**	same as above
Kit contents	screw retainers & mounting screws	**A**	S1 p.11-67; oem_spec
Status	current	**A**	S1 p.11-53 'Spare Parts and Field installable Kits for P2/P3 Panels - Strap Kits'; p.11-67 'Breaker Kits and Accessories'; oem_spec
Cross-links	Families: P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00123	P3BK1	Siemens	hardware-kit	LISTED (2019-2021)

P3 bonding kit 800A max MLO+MB

OEM part number	P3BK1	**A**	S1 p.11-67; oem_spec
Description	P3 bonding kit 800A max MLO+MB: bonding strap and hardware	**A**	same as above
Status	listed (2019-2021)	**A**	same as above
Identification features	Drawing ref (p.11-67)	**A**	same as above
Cross-links	Families: P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00081	**BBKQRP2FK**	P3 filler kit for QR	—	listed (2021)

EDH-SIE-00081	BBKQRP2FK	Siemens	conversion-kit	LISTED (2021)

P3 filler kit for QR

OEM part number	BBKQRP2FK	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Description	P3 filler kit for QR, dual mount horizontal; cover plates to change from QJ to QR (1-phase panel: both breakers must change)	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-53; oem_spec
Identification features	Eng./drawing ref 11-D-4565-01, 11-D-3283-01, 11-D-3284-01, 11-D-3288-01, 12-6812-34	**A**	S1 p.11-53 / p.11-23 / p.11-67; oem_spec
Cross-links	Families: P3 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.4 P4 — Type P4 / S4 / Sentron SPP (10in deep) power panelboard

FAM-SIE-007 · panelboard · aka S4, SPP, Sentron SPP shallow, F1, FPP (10in) · markings: Siemens

Siemens 10in-deep distribution (power) panelboard. Branch circuit breakers mount in unit space on 'Connecting Strap Kits' (S* series, e.g. SBL, SE6, SQR, SF6, SJ1, SL6) supplied without breaker; fusible branches use F6xx kits. Same strap kit family serves Type S4 and Sentron SPP shallow panels.

Attribute	Value	Cl.	Sources
Status	current	**A**	S1 p.11-89; oem_spec
Main ampacity	Branch devices to 800A (MG1) per strap kit table	**A**	S1 p.11-96; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): DFFP1A (p.259), EBF1 (p.197)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00149	**MG1**	MG1 connecting strap kit - VL MG (8.75in, single)	VL MG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00125	**S3VA41T**	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00129	**S3VA52T**	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00135	**S3VA53T**	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00142	**S3VA54T**	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00136	**S3VA63T**	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00143	**S3VA64T**	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00124	**SBL**	SBL connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00128	**SCE**	SCE connecting strap kit - CED (3.75in, twin)	CED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00134	**SCF**	SCF connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00139	**SCJ**	SCJ connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00146	**SCL**	SCL connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00130	**SDGD**	SDGD connecting strap kit - VL DG (5.00in, twin)	VL DG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00127	**SE6**	SE6 connecting strap kit - ED (3.75in, twin)	ED [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00133	**SF6**	SF6 connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00132	**SFG**	SFG connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00126	**SGB2**	SGB2 connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00138	**SJ1**	SJ1 connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00137	**SJG**	SJG connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00145	**SL6**	SL6 connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1] **A**	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00144	**SLG**	SLG connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00131	**SQR**	SQR connecting strap kit - QR (5.00in, twin)	QR [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00141	**SSCJ**	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	Sentron SCJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00148	**SSCL**	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00140	**SSJ1**	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	Sentron SJD [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00147	**SSL6**	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1] **A**	listed in SpeedFax 2021

EDH-SIE-00149	**MG1**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1 connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	VL MG [s1]	**A**	S1 p.11-96 (s1); oem_spec
Current rating	800A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00125	**S3VA41T**	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41T	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	3VA41, xGB [s1] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00129	S3VA52T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	150/250A max (table max-amp rating)	A	same as above
Kit contents	see note (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	A	S2 oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-96 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00135	S3VA53T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53T connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA53 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00142	S3VA54T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54T connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA54 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00136	S3VA63T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63T connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA63 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00143	S3VA64T	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64T connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64T	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	3VA64 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00124	SBL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBL connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBL	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	BL, BQD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Distributor listings for SBL disagree (one calls it a padlock kit / QR frame); SpeedFax p.11-96 shows BL/BQD 100A twin 3.75in - physical verification advised*		

EDH-SIE-00128	SCE	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCE connecting strap kit - CED (3.75in, twin)

OEM part number	SCE	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	CED [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00134	SCF	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCF connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCF	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CFD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00139	SCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJ connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJ	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CJD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00146	SCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCL connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCL	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron CLD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00130	SDGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SDGD connecting strap kit - VL DG (5.00in, twin)

OEM part number	SDGD	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL DG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL DG [s1]	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Current rating	150A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-96 (s1) | p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4, P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Same catalog number SDGD listed in both P4 (10in) and P5 (12.75in) tables - verify one kit serves both depths*		

EDH-SIE-00127	SE6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6 connecting strap kit - ED (3.75in, twin)

OEM part number	SE6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	ED [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00133	SF6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6 connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron FD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00132	SFG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFG connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL FG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00126	SGB2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2 connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	xGB2 [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00138	SJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1 connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron JD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00137	SJG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL JG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00145	SL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6 connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron LD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00144	SLG	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLG connecting strap kit - VL LG (6.25in, single)

OEM part number	SLG	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	VL LG [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00131	SQR	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SQR connecting strap kit - QR (5.00in, twin)

OEM part number	SQR	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	QR [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00141	SSCJ	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCJ connecting strap kit - Sentron SCJD (8.75in, single)

OEM part number	SSCJ	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCJD branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SCJD [s1]	**A**	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00148	SSCL	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCL connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCL	**A**	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	**A**	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SCLD [s1]	**A**	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00140	SSJ1	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSJ1 connecting strap kit - Sentron SJD (8.75in, single)

OEM part number	SSJ1	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SJD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00147	SSL6	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6 connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6	A	S1 p.11-96 'Type S4/P4/SPP (10in deep) Connecting Strap Kits - w/o Circuit Breaker'; oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-96 (s1); oem_spec
Installation location	P4 / S4 / Sentron SPP shallow (10in deep) panel unit space	A	S1 p.11-96; oem_spec
Breaker compatibility	Sentron SLD [s1]	A	S1 p.11-96 (s1); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P4 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00217	**SEBP4V1**	Service entrance barrier for (S)JD, (S)LD, MG mains	—	unknown
EDH-SIE-00218	**SEBP4V2**	Service entrance barrier for CJD, CLD	—	unknown
EDH-SIE-00219	**SEBP4V3**	Service entrance barrier for JG, LG	—	unknown

EDH-SIE-00217	SEBP4V1	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for (S)JD, (S)LD, MG mains

OEM part number	SEBP4V1	A	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)JD, (S)LD, MG mains	A	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00218	SEBP4V2	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for CJD, CLD

OEM part number	SEBP4V2	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for CJD, CLD	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00219	SEBP4V3	Siemens	barrier	STATUS UNKNOWN

Service entrance barrier for JG, LG

OEM part number	SEBP4V3	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for JG, LG	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P4, P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00211	**6FPB01**	6FPB01 blank plate, 1.25in unit space	—	current
EDH-SIE-00212	**6FPB02**	6FPB02 blank plate, 2.5in unit space	—	current
EDH-SIE-00213	**6FPB03**	6FPB03 blank plate, 3.75in unit space	—	current
EDH-SIE-00214	**6FPB05**	6FPB05 blank plate, 5in unit space	—	current
EDH-SIE-00215	**6FPB10**	6FPB10 blank plate, 10in unit space	—	current

EDH-SIE-00211	6FPB01	Siemens	filler-plate	CURRENT

6FPB01 blank plate, 1.25in unit space

OEM part number	6FPB01	**A**	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 1.25in unit height	**A**	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	**A**	S1, S2, S3 oem_spec
Dimensions	1.25in unit height	**A**	same as above
Status	current	**A**	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $154.00	**A**	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00212	6FPB02	Siemens	filler-plate	CURRENT

6FPB02 blank plate, 2.5in unit space

OEM part number	6FPB02	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 2.5in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	2.5in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00213	6FPB03	Siemens	filler-plate	CURRENT

6FPB03 blank plate, 3.75in unit space

OEM part number	6FPB03	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 3.75in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	3.75in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00214	6FPB05	Siemens	filler-plate	CURRENT

6FPB05 blank plate, 5in unit space

OEM part number	6FPB05	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 5in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	5in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $175.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00215	6FPB10	Siemens	filler-plate	CURRENT

6FPB10 blank plate, 10in unit space

OEM part number	6FPB10	A	S1 s1 pp.11-96, 11-110; s2 p.11-14, 11-15; s3 p.8-13; oem_spec
Description	Blank plate (circuit breaker and Vacu-Break / fusible switch), 10in unit height	A	S1, S2, S3 s1 p.11-96; s2 p.11-14; s3 p.8-13; oem_spec
Application	cover unused unit space in P4/S4/SPP, P5/S5, SB1/SB2/SB3/SB4, FCI/FCII switchboards and Series 5/6 VB and CDP panelboards	A	S1, S2, S3 oem_spec
Dimensions	10in unit height	A	same as above
Status	current	A	S1, S2 oem_spec
Identification features	Series 6 blank plate; 2005 list price $239.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P4, P5, SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00205	**S3VA52PR**	3VA52/61/62 breaker provision hardware kit (twin mount)	—	current

EDH-SIE-00205	S3VA52PR	Siemens	hardware-kit	CURRENT

3VA52/61/62 breaker provision hardware kit (twin mount)

OEM part number	S3VA52PR	A	S1 s1 pp.11-96, 11-110; s2 p.11-14; oem_spec
Description	Only required when installing a 3VA52, 3VA61 or 3VA62 breaker to an existing provision in the field; parts included with kit S3VA52T/S3VA52TD	A	S1 pp.11-96, 11-110; oem_spec
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	A	S2 p.11-14; oem_spec
Status	current	A	S1, S2 oem_spec
Cross-links	Families: P4, P5, SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Other

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00210	**SQRC**	QR cover plate for P4/P5/SPP power panels	—	unknown

EDH-SIE-00210	SQRC	Siemens	other	STATUS UNKNOWN

QR cover plate for P4/P5/SPP power panels

OEM part number	SQRC	A	S1 pp.11-96, 11-110 'Cover Plates'; oem_spec
Description	Cover plate for QR breaker; 'To replace a QJ with a QR only a new cover is needed'	A	S1 pp.11-96, 11-110; oem_spec
Application	branch (QJ to QR conversion cover)	A	S1 p.11-96; oem_spec
Cross-links	Families: P4, P5 · Breakers: QR2 / QRH2 / HQR2 / HQR2H, QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.5 P5 — Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard

FAM-SIE-008 · panelboard · aka S5, SPP deep, Sentron Deep, F2, FPP deep · markings: Siemens

Siemens 12.75in-deep distribution panelboard. Branch connecting strap kits carry a 'D' suffix (SBLBD, SE6D, SF6D, SJ1D, SMND...). SpeedFax footnote: these kits also fit Types FCI, FCII, SB1 and SB2 switchboards.

Attribute	Value	Cl.	Sources
Status	current	A	S1 p.11-103; oem_spec
Main ampacity	Branch devices to 1200A (NG1D/SMND)	A	S1 p.11-110; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, NEB / HEB, QR2 / QRH2 / HQR2 / HQR2H, Sentron VL (DG, FG, JG, LG, MG, NG)

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards

Also fits this family (entry printed elsewhere): DFFP1A (p.259), EBF1 (p.197), SDGD (p.205), S3VA52PR (p.213), SQRC (p.213), 6FPB01 (p.211), 6FPB02 (p.212), 6FPB03 (p.212), 6FPB05 (p.212), 6FPB10 (p.213), SEBP4V1 (p.210), SEBP4V2 (p.211), SEBP4V3 (p.211)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00155	**6CLE2**	6CLE2 connecting strap kit - CED (3.75in, twin)	CED [s1]; CED6 [s3]; CED6 [s2] A	listed in SpeedFax 2021, 2005 price list, Siemens Canada cat
EDH-SIE-00157	**6QR2**	6QR2 connecting strap kit - QR (5.00in, twin)	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00175	**MG1D**	MG1D connecting strap kit - VL MG (8.75in, single)	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00179	**NG1D**	NG1D connecting strap kit - VL NG (10.00in, single)	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3] A	listed in SpeedFax 2021, 2005 price list
EDH-SIE-00151	**S3VA41TD**	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00152	**S3VA41TDHD**	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	3VA41, xGB [s1]; 3VA41 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00156	**S3VA52TD**	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00161	**S3VA53TD**	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	3VA53 [s1]; 3VA53, 3VA63 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00168	**S3VA54TD**	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	3VA54 [s1]; 3VA54, 3VA64 [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00162	**S3VA63TD**	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	3VA63 [s1] A	listed in SpeedFax 2021
EDH-SIE-00169	**S3VA64TD**	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	3VA64 [s1] A	listed in SpeedFax 2021
EDH-SIE-00150	**SBLBD**	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00160	**SCFD**	SCFD connecting strap kit - Sentron CFD (5.00in, single)	Sentron CFD [s1]; CFD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00167	**SCJD**	SCJD connecting strap kit - Sentron CJD (8.75in, single)	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; S A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00172	**SCLD**	SCLD connecting strap kit - Sentron CLD (8.75in, single)	Sentron CLD [s1]; CLD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00154	**SE6D**	SE6D connecting strap kit - ED (3.75in, twin)	ED [s1]; ED [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00159	**SF6D**	SF6D connecting strap kit - Sentron FD (5.00in, twin)	Sentron FD [s1]; FD [s2] A	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00158	**SFGD**	SFGD connecting strap kit - VL FG (5.00in, twin)	VL FG [s1] A	listed in SpeedFax 2021
EDH-SIE-00153	**SGB2D**	SGB2D connecting strap kit - xGB2 (3.75in, twin)	xGB2 [s1] A	listed in SpeedFax 2021

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00165	**SJ1D**	SJ1D connecting strap kit - Sentron JD (8.75in, single)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00166	**SJ2D**	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	Sentron JD [s1]; JD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00164	**SJG1D**	SJG1D connecting strap kit - VL JG (6.25in, single)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00163	**SJG2D**	SJG2D connecting strap kit - VL JG (6.25in, twin)	VL JG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00171	**SL6D**	SL6D connecting strap kit - Sentron LD (8.75in, single)	Sentron LD [s1]; LD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00170	**SLGD**	SLGD connecting strap kit - VL LG (6.25in, single)	VL LG [s1] **A**	listed in SpeedFax 2021
EDH-SIE-00176	**SLM1D**	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00177	**SMND**	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005
EDH-SIE-00174	**SSCLD**	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	Sentron SCLD [s1]; SCLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00173	**SSL6D**	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	Sentron SLD [s1]; SLD [s2] **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025
EDH-SIE-00178	**SSMND**	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, S **A**	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005

EDH-SIE-00155 6CLE2 Siemens branch-connector-kit LISTED IN SPEEDFAX 202

6CLE2 connecting strap kit - CED (3.75in, twin)

OEM part number	6CLE2	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S1, S3, S2 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CED [s1]; CED6 [s3]; CED6 [s2]	**A**	same as above
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S1, S3, S2 p.11-110 | p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S2 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S3, S2 p.11-110 (s1) | p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, 2005 price list, Siemens Canada catalogue 2025	**A**	S1, S3, S2 oem_spec
Identification features	2005 list price $845.00	**A**	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00157	6QR2	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

6QR2 connecting strap kit - QR (5.00in, twin)

OEM part number	6QR2	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Alternate / superseded numbers	6QR2CAN	**A**	S2 alias; p.11-15; oem_spec
	6QR2CCAN [alias]	**A**	same as above
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	QR [s1]; QR2, QR2H, HQR2, HQR2H [s2]	**A**	same as above
Current rating	225A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S1, S2 p.11-110 | p.11-15; oem_spec
Material	QR filler plates only: 6QR2FKCAN; copper QR kit 6QR2CCAN (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S2 p.11-15; oem_spec
Dimensions	Unit height 5 / 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00175	MG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

MG1D connecting strap kit - VL MG (8.75in, single)

OEM part number	MG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL MG branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL MG [s1]; NM, HM, LM, SNM, SHM, SLM [s3]	A	same as above
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S1, S3 oem_spec
Identification features	2005 list price $2938.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 list maps NM/HM/LM (VL 800A) to MG1D while SpeedFax maps VL MG to MG1D - confirm whether 'NM/HM/LM' are VL MG-frame trip variants*		

EDH-SIE-00179	NG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

NG1D connecting strap kit - VL NG (10.00in, single)

OEM part number	NG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL NG branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Breaker compatibility	VL NG [s1]; NN, HN, LN, SNN, SHN, SLN [s3]	A	same as above
Current rating	1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S3 p.11-110 (s1) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, 2005 price list	A	S1, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00151	S3VA41TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)

OEM part number	S3VA41TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00152	S3VA41TDHD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)

OEM part number	S3VA41TDHD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA41, xGB branch breaker(s), twin, high density (six 2-pole breakers) mount, 7.50in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, high density, Twin, high density (six 2-pole breakers)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA41, xGB [s1]; 3VA41 [s2] (SpeedFax/Canada: strap kit can also accommodate xGB (P4/P5) / xGB2 (SB) breakers - reference installation instructions)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 7.50 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA41, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00156	S3VA52TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)

OEM part number	S3VA52TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA61; 3VA52, 3VA62 branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA61; 3VA52, 3VA62 [s1]; 3VA61; 3VA52, 3VA62 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	150/250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote c: includes qty 1 kit S3VA52PR; SpeedFax: 'Parts are included with kit S3VA52T(D)')	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00161	S3VA53TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA53TD connecting strap kit - 3VA53 (6.25in, single)

OEM part number	S3VA53TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA53 [s1]; 3VA53, 3VA63 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00168	S3VA54TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA54TD connecting strap kit - 3VA54 (6.25in, single)

OEM part number	S3VA54TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA54 [s1]; 3VA54, 3VA64 [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b) (SB table footnote d: includes qty 1 kit S3VA53PR)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00162	S3VA63TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA63TD connecting strap kit - 3VA63 (6.25in, single)

OEM part number	S3VA63TD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA63 branch breaker(s), single mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	3VA63 [s1]	**A**	same as above
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00169	S3VA64TD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

S3VA64TD connecting strap kit - 3VA64 (6.25in, single)

OEM part number	S3VA64TD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA64 branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	3VA64 [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00150	SBLBD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SBLBD connecting strap kit - BL, BQD (3.75in, twin)

OEM part number	SBLBD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for BL, BQD branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	BL, BQD [s1]; BQD [s2]; BL, BLH, HBL, BQD [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	100A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $768.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: BL, BQD		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00160	SCFD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCFD connecting strap kit - Sentron CFD (5.00in, single)

OEM part number	SCFD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CFD branch breaker(s), single mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CFD [s1]; CFD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00167	SCJD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCJD connecting strap kit - Sentron CJD (8.75in, single)

OEM part number	SCJD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CJD (P5 table also lists SJD against SCJD - likely misprint; SB table gives SSJ1D for SJD) [s1]; CJD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*P5 table pairs both CJD and SJD with SCJD; SB table pairs SJD with SSJ1D - which is correct for SJD in P5?*		

EDH-SIE-00172	SCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SCLD connecting strap kit - Sentron CLD (8.75in, single)

OEM part number	SCLD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron CLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron CLD [s1]; CLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00154	SE6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SE6D connecting strap kit - ED (3.75in, twin)

OEM part number	SE6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for ED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	ED [s1]; ED [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00159	SF6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SF6D connecting strap kit - Sentron FD (5.00in, twin)

OEM part number	SF6D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron FD branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	Sentron FD [s1]; FD [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00158	SFGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SFGD connecting strap kit - VL FG (5.00in, twin)

OEM part number	SFGD	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL FG branch breaker(s), twin mount, 5.00in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL FG [s1]	**A**	same as above
Current rating	250A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00153	SGB2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SGB2D connecting strap kit - xGB2 (3.75in, twin)

OEM part number	SGB2D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for xGB2 branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S1 p.11-110 (s1); oem_spec
Breaker compatibility	xGB2 [s1]	**A**	same as above
Current rating	125A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	**A**	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00165	SJ1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ1D connecting strap kit - Sentron JD (8.75in, single)

OEM part number	SJ1D	**A**	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), single mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	**A**	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	**A**	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00166	SJ2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJ2D connecting strap kit - Sentron JD (8.75in, twin)

OEM part number	SJ2D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron JD branch breaker(s), twin mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron JD [s1]; JD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00164	SJG1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG1D connecting strap kit - VL JG (6.25in, single)

OEM part number	SJG1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00163	SJG2D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SJG2D connecting strap kit - VL JG (6.25in, twin)

OEM part number	SJG2D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL JG branch breaker(s), twin mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL JG [s1]	A	same as above
Current rating	400A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00171	SL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SL6D connecting strap kit - Sentron LD (8.75in, single)

OEM part number	SL6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron LD [s1]; LD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00170	SLGD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLGD connecting strap kit - VL LG (6.25in, single)

OEM part number	SLGD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for VL LG branch breaker(s), single mount, 6.25in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1 p.11-110 (s1); oem_spec
Breaker compatibility	VL LG [s1]	A	same as above
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	A	S1 p.11-110 (s1); oem_spec
Status	listed in SpeedFax 2021	A	S1 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: Sentron VL (DG, FG, JG, LG, MG, NG)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00176	SLM1D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SLM1D connecting strap kit - Sentron LMD (8.75in, single)

OEM part number	SLM1D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron LMD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron LMD [s1]; LMD [s2]; LMD6, HLMD6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $2938.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00177	SMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)

OEM part number	SMND	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron MD, CMD; ND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for ND)in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron MD, CMD; ND [s1]; MD, CMD; ND [s2]; MD6, HMD6, CMD6 [s3]; ND6, HND6, CND6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00174	SSCLD	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSCLD connecting strap kit - Sentron SCLD (8.75in, single)

OEM part number	SSCLD	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SCLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SCLD [s1]; SCLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00173	SSL6D	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSL6D connecting strap kit - Sentron SLD (8.75in, single)

OEM part number	SSL6D	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SLD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SLD [s1]; SLD [s2]	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b)	A	S1 p.11-110; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2 p.11-110 (s1) | p.11-5 (s2); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025	A	S1, S2 oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00178	SSMND	Siemens	branch-connector-kit	LISTED IN SPEEDFAX 202

SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)

OEM part number	SSMND	A	S1 p.11-110 'Types P5 and SPP/FPP, F2 (12 3/4in deep) Connecting Strap Kits - Circuit Breaker' (footnote c: also fits Types FCI, FCII, SB1 and SB2 switchboards); oem_spec
Description	Connecting strap kit (breaker not included) for Sentron SMD; SND branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for SND)in	A	S2 p.11-5; oem_spec
Breaker compatibility	Sentron SMD; SND [s1]; SMD; SND [s2]; SMD6, SHMD6, SCMD6 [s3]; SND6, SHND6, SCND6 [s3]	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Current rating	800/1200A max (table max-amp rating)	A	same as above
Kit contents	Includes cover plate and mounting hardware, less circuit breaker (P5 table footnote b); Includes copper straps, cover plates and necessary hardware (2005)	A	S1, S3 p.11-110 | p.8-13; oem_spec
Material	copper straps	A	S3 p.8-13; oem_spec
Dimensions	Unit height 10 / 10.00 in (Unit-space height consumed on the interior, not part outline)	A	S1, S2, S3 p.11-110 (s1) | p.11-5 (s2) | p.8-13 (2005) (s3); oem_spec
Status	listed in SpeedFax 2021, Siemens Canada catalogue 2025, 2005 price list	A	S1, S2, S3 oem_spec
Identification features	2005 list price $3489.00	A	S3 p.8-13; oem_spec
Cross-links	Families: P5, SB, CDP6 · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00220	**SEBP5V1**	Service entrance barrier for (S)MD, (S)ND without shield	—	unknown
EDH-SIE-00221	**SEBP5V2**	Service entrance barrier for (S)MD, (S)ND with shield	—	unknown
EDH-SIE-00222	**SEBP5V3**	Service entrance barrier for Vacu-Break switches	—	unknown
EDH-SIE-00223	**SEBP5V4**	Service entrance barrier for HCP switches	—	unknown

EDH-SIE-00220 **SEBP5V1** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND without shield

OEM part number	SEBP5V1	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND without shield	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00221 **SEBP5V2** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for (S)MD, (S)ND with shield

OEM part number	SEBP5V2	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for (S)MD, (S)ND with shield	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00222 **SEBP5V3** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for Vacu-Break switches

OEM part number	SEBP5V3	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for Vacu-Break switches	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00223 **SEBP5V4** Siemens barrier **STATUS UNKNOWN**

Service entrance barrier for HCP switches

OEM part number	SEBP5V4	**A**	S1 pp.11-96, 11-110 'Service Entrance Barriers'; oem_spec
Description	Field installable barrier to meet UL 67 service entrance requirements; Service entrance barrier for HCP switches	**A**	S1 pp.11-96, 11-110; oem_spec
Cross-links	Families: P5		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.6 RP1 — Type P1 (Revised P1)

FAM-SIE-001 · panelboard · aka Revised P1, New Revised P1, NextGen P1, P1...T, P1...N · markings: Siemens

Siemens 20in wide x 5.75in deep bolt-on lighting/appliance panelboard, 250A or 400A bus, split (cross-bussed) neutral at both ends of an open-ended bus. Field-convertible mains: main lug kits (MLK*) or horizontal main/subfeed strap kits (MBK*) through 250A, vertical 400A main. Catalog numbers end in T (feed-thru/subfeed space) or N (non-feed-thru, 6in shorter box). Revised P1 kits are not interchangeable with original P1, S1/S2 or SE panels.

Attribute	Value	Cl.	Sources
Status	current	A	S1 p.11-11; oem_spec
Era of manufacture	Introduced 2015 per SpeedFax p.11-7 note ('Revised P1 was introduced in 2015'); p.11-11 table header says 'Revised P1 introduced 2014' (OEM document is internally inconsistent (2014 vs 2015))	A	S1 pp.11-7, 11-11; oem_spec
Voltage rating	240V AC max for P1A/P1X; 480Y/277V for P1E/P18; 600Y/347V limited (factory only)	A	S1 pp.11-7, 11-24; oem_spec
Main ampacity	250A or 400A bus; 400A max mains	A	same as above
Branch breakers accepted	BL/BLH/HBL, BQD, BT twin (P1A/P1X/P1E); xGB (NGB/HGB/LGB) and 3VA41 (P18 interiors only)	A	S1 pp.11-7, 11-16; oem_spec
branch_connection_limit	All configurations allow 125A per connection max (250A per pair); 18-circuit 250A Revised P1 limited to 100A per connection (200A per pair) with BL/BQD/xGB across from each other	A	S1 p.11-12 footnote; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), QR2 / QRH2 / HQR2 / HQR2H
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S5 SIE_CS_P1 / Siemens SIOS 109799956 Type P1 Panelboard data sheet (SIE_CS_P1); S8 SI-LP-1633 NextGen P1 panelboard brochure (Siemens Canada)
Also fits this family (entry printed elsewhere): DFFPED01 (p.182)

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00003	**MBKED1A**	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00004	**MBKED3A**	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	ED (125A max) A	current (2021)
EDH-SIE-00007	**MBKFD1A**	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00008	**MBKFD3A**	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	FD (250A max) A	current (2021)
EDH-SIE-00012	**MBKJD3B**	RP1 400A JD strap kit 1ph/3ph, 2 fillers	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A B	current (2021)
EDH-SIE-00005	**MBKQR1A**	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00006	**MBKQR3A**	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	QR (225A max) A	current (2021)
EDH-SIE-00001	**MBKVA41A**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00002	**MBKVA41B**	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter) A	current (2021)
EDH-SIE-00009	**MBKVA5262A**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	3VA52/61/62 (250A max) A	current (2021)
EDH-SIE-00010	**MBKVA5262B**	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	3VA52/61/62 (250A max) A	current (2021)
EDH-SIE-00011	**MBKVA5363A**	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	3VA53/3VA63 A	current (2021)

EDH-SIE-00003	MBKED1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 1-ph, 125A

OEM part number	MBKED1A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for ED (125A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00004	MBKED3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, ED, 3-ph, 125A

OEM part number	MBKED3A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for ED (125A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	ED (125A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA41A (replacing DFFPED01)	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00007	MBKFD1A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, FD, 1-ph, 250A				
OEM part number	MBKFD1A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for FD (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00008	MBKFD3A	Siemens	main-breaker-kit	CURRENT (2021)
Revised P1 main/subfeed strap kit, FD, 3-ph, 250A				
OEM part number	MBKFD3A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for FD (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	FD (250A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPFD01	**A**	same as above
Status	current (2021)	**A**	same as above
Replacement / successor	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6) (Same mounting family, sold with breaker installed; listed for reference)	**A**	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00012	MBKJD3B	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A JD strap kit 1ph/3ph, 2 fillers

OEM part number	MBKJD3B	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKJD1A [supersedes]	A	same as above
	MBKJD3A [supersedes]	A	same as above
Description	RP1 400A JD strap kit 1ph/3ph, 2 fillers; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S1, S8 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S1 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	JD frame (JXD2/JXD6/JD6/HJ(X)D6) 400A (Table says 'JD'; frame variants from original P1 MBKJD1/3 row)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	400A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	includes DFFPJD02 (large) and DFFPJD01 (small) filler	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00005	MBKQR1A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 1-ph, 225A

OEM part number	MBKQR1A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00006	MBKQR3A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, QR, 3-ph, 225A

OEM part number	MBKQR3A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for QR (225A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	QR (225A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	225A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler MBKQRFK	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00001	MBKVA41A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A

OEM part number	MBKVA41A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL1A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC1NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 1-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00002	MBKVA41B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A

OEM part number	MBKVA41B	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	MBKBL3A [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
	MBKBC3NBA [supersedes] (Old kit: 'Parts will no longer be available after inventory is depleted')	**A**	same as above
Description	Revised P1 3-phase main/subfeed strap kit for BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	BL/BQD/GB/3VA41 (any of the 4 breaker types with included adapter)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	125A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes deadfront filler DFFPVA41A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00009	MBKVA5262A	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A

OEM part number	MBKVA5262A	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 1-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	**A**	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	**A**	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	**B**	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	2-pole (1-phase) (Inferred from 1PH/3PH designation)	**B**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	**A**	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	**A**	same as above
Status	current (2021)	**A**	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00010	MBKVA5262B	Siemens	main-breaker-kit	CURRENT (2021)

Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A

OEM part number	MBKVA5262B	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Revised P1 3-phase main/subfeed strap kit for 3VA52/61/62 (250A max); breaker not included	A	same as above
Application	main or sub-feed (horizontal mount, field installable; usable top or bottom feed)	A	S1 pp.11-13, 11-14; oem_spec
Installation location	Main/subfeed position at end of P1 interior bus (not unit space) (Inferred from P1 layout description)	B	S1 pp.11-8, 11-9; oem_spec
Breaker compatibility	3VA52/61/62 (250A max)	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Poles	3-pole (3-phase) (Inferred from 1PH/3PH designation)	B	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; inference
Current rating	250A max	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	Includes DF filler DFFPVA5262A	A	same as above
Status	current (2021)	A	same as above
Replacement / successor	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA) (Same mounting family, sold with breaker installed; listed for reference)	A	S1 p.11-14; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Revised P1 kits cannot be used with original P1 / S1 / S2 / SE (s1 p.11-13 note b) - confirm by physical strap geometry*		

EDH-SIE-00011	MBKVA5363A	Siemens	main-breaker-kit	CURRENT (2021)

RP1 400A 3VA53/63 main strap kit, 1ph or 3ph

OEM part number	MBKVA5363A	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph; breaker not included	A	same as above
Application	main only (400A kit is main only, not allowed for subfeed)	A	S1, S8 s1 p.11-13; s8 kit table footnote 1; oem_spec
Installation location	Vertical 400A main position	A	S1 p.11-24 footnote b (400A main breaker is vertical mounted); oem_spec
Breaker compatibility	3VA53/3VA63	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Current rating	400A max	A	same as above
Kit contents	includes MBKVA5363JD (large) filler; 'These new 400A kits include both small and large filler plates'	A	same as above
Status	current (2021)	A	same as above
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Main Lug Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00019	**4MLKA1A**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00023	**4MLKA1B**	Revised P1 400A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00020	**4MLKA3A**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00024	**4MLKA3B**	Revised P1 400A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00021	**4MLKC1A**	Revised P1 400A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00022	**4MLKC3A**	Revised P1 400A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00015	**MLKA1A**	Revised P1 250A AL main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00016	**MLKA3A**	Revised P1 250A AL main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00017	**MLKC1A**	Revised P1 250A CU main/feed-thru lug kit, 1-ph	n/a (lug kit) A	current (2021)
EDH-SIE-00018	**MLKC3A**	Revised P1 250A CU main/feed-thru lug kit, 3-ph	n/a (lug kit) A	current (2021)

EDH-SIE-00019 — 4MLKA1A — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00023 — 4MLKA1B — Siemens — main-lug-kit — CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 1-ph

OEM part number	4MLKA1B	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 1-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	same as above
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00020	4MLKA3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (2) 1/0-250 kcmil or (1) #2 AWG-600 kcmil	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00024	4MLKA3B	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A AL main/feed-thru lug kit, 3-ph

OEM part number	4MLKA3B	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Description	Revised P1 400A AL main or feed-thru lug kit, 3-phase (includes neutral) (750 kcmil main lug kits introduced with Revised P1 (s8: '750 kcmil Main Lug kits are now available'))	A	same as above
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) AL 1/0-750 kcmil or (2) AL/CU 250 kcmil max [max (1) 600 kcmil CU]	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00021	4MLKC1A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 1-ph

OEM part number	4MLKC1A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00022	4MLKC3A	Siemens	main-lug-kit	CURRENT (2021)

Revised P1 400A CU main/feed-thru lug kit, 3-ph

OEM part number	4MLKC3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Alternate / superseded numbers	4MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec
Description	Revised P1 400A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Application	main lug or through-feed (feed-thru) lugs	A	same as above
Breaker compatibility	n/a (lug kit)	A	same as above
Current rating	400A	A	same as above
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec
Status	current (2021)	A	same as above
Identification features	Wire range (1) 1/0-600 kcmil, CU cable only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00015	MLKA1A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 1-ph				
OEM part number	MLKA1A	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 1-phase (includes neutral)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00016	MLKA3A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A AL main/feed-thru lug kit, 3-ph				
OEM part number	MLKA3A	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKA3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	**A**	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A AL main or feed-thru lug kit, 3-phase (includes neutral)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	**A**	same as above	
Breaker compatibility	n/a (lug kit)	**A**	same as above	
Current rating	250A	**A**	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	**B**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	AL lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	**A**	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	**A**	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU or AL)	**A**	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00017	MLKC1A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A CU main/feed-thru lug kit, 1-ph				
OEM part number	MLKC1A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKC1 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A CU main or feed-thru lug kit, 1-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	A	same as above	
Breaker compatibility	n/a (lug kit)	A	same as above	
Current rating	250A	A	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	A	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

EDH-SIE-00018	MLKC3A	Siemens	main-lug-kit	CURRENT (2021)
Revised P1 250A CU main/feed-thru lug kit, 3-ph				
OEM part number	MLKC3A	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Alternate / superseded numbers	MLKC3 (Original P1 equivalent number (no 'A' suffix); not interchangeable with Revised P1)	A	S1 equivalent; p.11-15; oem_spec	
Description	Revised P1 250A CU main or feed-thru lug kit, 3-phase (includes neutral)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Application	main lug or through-feed (feed-thru) lugs	A	same as above	
Breaker compatibility	n/a (lug kit)	A	same as above	
Current rating	250A	A	same as above	
Kit contents	Line lugs plus neutral lug ('Wire Range (includes Neutral)')	B	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); inference	
Material	CU lug kit ('Mat.' column) (Column refers to lug/connector material; body alloy and plating not stated)	A	S1 p.11-13, 'Lug Kits - Main or Feed Thru' (Revised P1); oem_spec	
Status	current (2021)	A	same as above	
Identification features	Wire range (1) #6 AWG-350 kcmil (CU)	A	same as above	
Cross-links	Families: RP1			
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values			

Connector Strap

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00097	**P1CONACPHAL**	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	—	unknown - may be discontinued (only CU A/C kit listed 2021,
EDH-SIE-00088	**P1CONACPHCU**	RP1 A/C-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) B	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00089	**P1CONBPHAL**	RP1 B-phase replacement aluminum branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)
EDH-SIE-00090	**P1CONBPHCU**	RP1 B-phase replacement copper branch connectors	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space) **B**	listed (2021)

EDH-SIE-00097 P1CONACPHAL — Siemens — connector-strap — UNKNOWN - MAY BE DISCO

RP1 A/C-phase replacement aluminum branch connectors, kit of 6

OEM part number	P1CONACPHAL	**A**	S1 oem_spec
Description	A- or C-phase aluminum connector kit, 6 pieces (search-summary of a Siemens spec sheet) (Not present in SpeedFax 2021 p.11-21 table; reported in a web search summary of stoneway.com Siemens spec sheet (page returned HTML, not retrievable))	**C**	S1 distributor
Status	unknown - may be discontinued (only CU A/C kit listed 2021, 'Also can be used to replace AL A/C-Phase Connectors')	**C**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Confirm P1CONACPHAL exists as an OEM catalog number*		

EDH-SIE-00088 P1CONACPHCU — Siemens — connector-strap — LISTED (2021)

RP1 A/C-phase replacement copper branch connectors

OEM part number	P1CONACPHCU	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 A/C-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware; can also replace AL A/C-phase connectors	**A**	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	**B**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	**B**	S1 p.11-16; inference
Kit contents	qty/kit 6	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	**A**	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	**B**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	**A**	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2572-02	**A**	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Connector geometry differs between A/C and B phase; is AL A/C-phase kit (P1CONACPHAL) still offered? Earlier web listings name P1CONACPHAL but 2021 SpeedFax omits it.*		

EDH-SIE-00089	P1CONBPHAL	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement aluminum branch connectors

OEM part number	P1CONBPHAL	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement aluminum branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S1 p.11-16; inference
Kit contents	qty/kit 6	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	aluminum	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-01	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00090	P1CONBPHCU	Siemens	connector-strap	LISTED (2021)

RP1 B-phase replacement copper branch connectors

OEM part number	P1CONBPHCU	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	RP1 B-phase replacement copper branch connectors, kit of 6 pcs plus mounting hardware	A	same as above
Application	branch (replacement bus-to-breaker connectors in unit space) ('connectors' per SpeedFax; branch use inferred from P1 construction)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Breaker compatibility	BL/BQD/xGB/3VA41 1in bolt-on branch breakers (P1 unit space)	B	S1 p.11-16; inference
Kit contents	qty/kit 6	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Material	copper	A	same as above
Fasteners	Breaker to connector: 10-32 x 0.312in HWH screws (P1SCRWS)	B	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; inference
Status	listed (2021)	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Identification features	Drawing ref 11-D-2573-02	A	same as above
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Requires	P1SCRWS (EDH-SIE-00091)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Neutral Assembly

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00040	**2NLK42B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00041	**2NLK54B**	RP1 250A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00042	**42NLK54B**	RP1 400A 200% neutral lug kit	—	current (2021); Revised P1 only
EDH-SIE-00038	**CNLK42B**	RP1 CU neutral lug kit 42B	—	current (2021); Revised P1 only
EDH-SIE-00039	**CNLK54B**	RP1 CU neutral lug kit 54B	—	current (2021); Revised P1 only
EDH-SIE-00035	**LNLK4X11B**	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long	—	current (2021); Revised P1 only
EDH-SIE-00033	**LNLK5X12A**	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00036	**LNLK6X17B**	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	—	current (2021); Revised P1 only
EDH-SIE-00034	**LNLK7X18A**	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	—	current (2021); Revised P1 only
EDH-SIE-00037	**LNLK7X20B**	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	—	current (2021); Revised P1 only

EDH-SIE-00040 — 2NLK42B — Siemens — neutral-assembly — CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK42B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	2NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: CU strips (2 short, 2 long; 17 & 25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware; 200% kits require CU neutrals	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00041	2NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 250A 200% neutral lug kit

OEM part number	2NLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	2NLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (54, 66 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 250A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lug (350 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00042	42NLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 400A 200% neutral lug kit

OEM part number	42NLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	42NLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	42NLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
	42NLK54A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 400A 200% neutral lug kit: 4 long CU strips (25 pos), CU neutral extensions, additional AL line lugs (600 kcmil and 300 kcmil) and hardware	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00038	CNLK42B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 42B

OEM part number	CNLK42B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
	CNLK42A [supersedes] (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	same as above
Description	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A (18, 30, 42 ckt)	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 42B: 2 short & 2 long CU strips (17 & 25 pos), CU riser extension and all hardware; CU strips 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00039	CNLK54B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 CU neutral lug kit 54B

OEM part number	CNLK54B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	CNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	all 400A (30, 54, 66) and 250A 54/66 ckt	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 CU neutral lug kit 54B: 4 long CU strips (25 pos), CU riser extension and hardware; 1/0 max, CU cable only	A	same as above
Material	copper neutral strips	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00035	LNLK4X11B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long

OEM part number	LNLK4X11B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK30A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strips 6.17in long; 2 strips per pack	A	same as above
Dimensions	strip length 6.17 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00033	LNLK5X12A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]

OEM part number	LNLK5X12A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]; short 1/0 replacement neutral strip (17 pos), 5.80in long; 2 strips per pack	A	same as above
Dimensions	strip length 5.80 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00036	LNLK6X17B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long

OEM part number	LNLK6X17B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK42A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.67 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00034	LNLK7X18A	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]

OEM part number	LNLK7X18A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]; long 1/0 replacement neutral strip (25 pos), 8.14in long; 2 strips per pack	A	same as above
Dimensions	strip length 8.14 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00037	LNLK7X20B	Siemens	neutral-assembly	CURRENT (2021); REVISE

RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long

OEM part number	LNLK7X20B	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Alternate / superseded numbers	LNLK54A (Earlier Revised P1 neutral kit numbers (s7 lists them by circuit count))	A	S1, S7 supersedes; p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Application	neutral (replacement / upgrade of split neutral strips)	A	same as above
Installation location	Split neutral strips on both sides of the interior, cross-bussed	B	S1 pp.11-8, 11-9; inference
Current rating	250A & 400A	A	S1 p.11-13, 'Neutral Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Kit contents	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long; 2 strips per pack	A	same as above
Dimensions	strip length 9.92 in	A	same as above
Status	current (2021); Revised P1 only	A	same as above
Cross-links	Families: RP1, P3		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Ground Bar

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00099	**ECGK**	Copper equipment ground bus kit	—	current (2021)
EDH-SIE-00098	**EGK**	Al/Cu equipment ground bus kit	—	current (2021)
EDH-SIE-00101	**ICGK**	Insulated copper ground bus kit	—	current (2021)
EDH-SIE-00100	**IGK**	Insulated Al/Cu ground bus kit	—	current (2021)

EDH-SIE-00099	ECGK	Siemens	ground-bar	CURRENT (2021)

Copper equipment ground bus kit

OEM part number	ECGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Copper equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes); CU cable only	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00098	EGK	Siemens	ground-bar	CURRENT (2021)

Al/Cu equipment ground bus kit

OEM part number	EGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Al/Cu equipment ground bus kit: (6) #14-1/0 and (15) #14-6 connections (21 holes)	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00101	ICGK	Siemens	ground-bar	CURRENT (2021)

Insulated copper ground bus kit

OEM part number	ICGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Insulated copper ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

EDH-SIE-00100	IGK	Siemens	ground-bar	CURRENT (2021)

Insulated Al/Cu ground bus kit

OEM part number	IGK	A	S1 pp.11-20, 11-22; oem_spec
Description	Insulated Al/Cu ground bus kit (bar on Glastic insulator), 21 holes	A	same as above
Installation location	Left or right gutter; mounting provisions in opposing corners of box	A	S1 pp.11-8, 11-22; oem_spec
Torque values	Small terminal: #14-#12 (1-2 wires) 20 lb-in, #10 20 lb-in, #8-#6 30 lb-in; Large terminal: #14-#10 (1-3 wires) 35 lb-in, #8 40 lb-in, #6-#4 45 lb-in, #3-1/0 50 lb-in	A	S1 p.11-22; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material		

Mounting Bracket

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00092	**P1DFS250AFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00093	**P1DFS250ANFT**	P1 250A deadfront support	—	listed (2021)
EDH-SIE-00094	**P1DFS400A**	P1 400A deadfront support (new for 3VA)	—	listed (2021)

EDH-SIE-00092	P1DFS250AFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250AFT	A	S1 p.11-20; oem_spec
Description	P1 250A deadfront support, feed-thru interiors only (4 per interior); part 11-D-3323-01 replaces 11-D-3212-01	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00093	P1DFS250ANFT	Siemens	mounting-bracket	LISTED (2021)

P1 250A deadfront support

OEM part number	P1DFS250ANFT	A	S1 p.11-20; oem_spec
Description	P1 250A deadfront support, non-feed-thru interiors only (4 per interior); part 11-D-3323-02 replaces 11-D-3212-02	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3323	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00094	P1DFS400A	Siemens	mounting-bracket	LISTED (2021)

P1 400A deadfront support (new for 3VA)

OEM part number	P1DFS400A	A	S1 p.11-20; oem_spec
Description	P1 400A deadfront support (new for 3VA), FT and NFT interiors; 11-D-3315-01 replaces 11-D-3004-01 (4 per interior)	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-D-3315	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Barrier

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00231	**SEBKP1P2P3V1**	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	—	unknown
EDH-SIE-00224	**SEBKRP1V1**	SEB kit for RP1 with FD, QJ or QR horizontal main	—	unknown
EDH-SIE-00225	**SEBKRP1V2**	SEB kit for RP1 with ED horizontal main	—	unknown
EDH-SIE-00226	**SEBKRP1V3**	SEB kit for RP1 with back-fed BL/BQD main in unit space	—	unknown
EDH-SIE-00227	**SEBKRP1V4**	SEB kit for RP1 with back-fed xGB main in unit space	—	unknown
EDH-SIE-00228	**SEBKRP1V5**	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	—	unknown
EDH-SIE-00229	**SEBKRP1V6**	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	—	unknown
EDH-SIE-00230	**SEBKRP1V7**	SEB kit for RP1 with 3VA52/61/62 horizontal main	—	unknown

EDH-SIE-00231	SEBKP1P2P3V1	Siemens	barrier	STATUS UNKNOWN

SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main

OEM part number	SEBKP1P2P3V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	A	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1157-01 / 11-D-2740-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00224	SEBKRP1V1	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with FD, QJ or QR horizontal main

OEM part number	SEBKRP1V1	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with FD, QJ or QR horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00225	SEBKRP1V2	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with ED horizontal main

OEM part number	SEBKRP1V2	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with ED horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1148-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00226	SEBKRP1V3	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed BL/BQD main in unit space

OEM part number	SEBKRP1V3	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed BL/BQD main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00227	SEBKRP1V4	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with back-fed xGB main in unit space

OEM part number	SEBKRP1V4	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with back-fed xGB main in unit space; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1149-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00228	SEBKRP1V5	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets

OEM part number	SEBKRP1V5	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1165-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00229	SEBKRP1V6	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit

OEM part number	SEBKRP1V6	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-A-1194-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00230	SEBKRP1V7	Siemens	barrier	STATUS UNKNOWN

SEB kit for RP1 with 3VA52/61/62 horizontal main

OEM part number	SEBKRP1V7	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Description	SEB kit for RP1 with 3VA52/61/62 horizontal main; field installable per UL 67 service entrance requirement	A	same as above
Kit contents	barrier, mounting brackets, and hardware (Contents stated on p.11-67 for P3-applicable SEB kits; assumed similar for others)	B	S1 p.11-67; oem_spec
Identification features	Drawing ref 11-B-1060-01	A	S1 p.11-20 / p.11-54 / p.11-67 'Service Entrance Barriers Kits (SEB)'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00064	**DFFP01B**	P1 main or subfeed 250A blank filler plate	—	listed (2021)
EDH-SIE-00065	**DFFP01C**	Revised P1 400A main blank filler plate	—	listed (2021)
EDH-SIE-00062	**DFFP1A**	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	BL/BQD/xGB/xGB2/ED/3VA 41 blank positions; suitable for replacing QF3 a A	current (2021)
EDH-SIE-00070	**DFFPFD01**	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	—	listed (2021)
EDH-SIE-00071	**DFFPJD01**	JD main filler plate (plastic)	—	listed (2021)

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00072	**DFFPJD02**	JD main filler plate for Revised P1 400A with large MB opening only	—	listed (2021)
EDH-SIE-00073	**DFFPQJ01**	QJ main filler plate	—	listed (2021)
EDH-SIE-00074	**DFFPQJ02**	QJ main filler plate	—	listed (2021)
EDH-SIE-00066	**DFFPVA41A**	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	—	listed (2021)
EDH-SIE-00067	**DFFPVA5262A**	RP1 main or subfeed filler	—	listed (2021)
EDH-SIE-00068	**DFFPVA5363A**	RP1 400A main filler for 3VA53/63	—	listed (2021)
EDH-SIE-00075	**MBKQRFK**	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	—	listed (2021)

EDH-SIE-00064 **DFFP01B** Siemens filler-plate **LISTED (2021)**

P1 main or subfeed 250A blank filler plate

OEM part number	DFFP01B	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP01A [supersedes]	**A**	same as above
	11-D-4560-01 [supersedes]	**A**	same as above
	12-A-1801-01 [supersedes]	**A**	same as above
Description	P1 main or subfeed 250A blank filler plate, 1 piece (Original or Revised P1; also S1/S2/SE); installs vertical for 400A main w/ small DF opening	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4612-01	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00065 **DFFP01C** Siemens filler-plate **LISTED (2021)**

Revised P1 400A main blank filler plate

OEM part number	DFFP01C	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	Revised P1 400A main blank filler plate, 1 piece, for large MB opening only	**A**	same as above
Application	main / subfeed deadfront opening	**A**	same as above
Status	listed (2021)	**A**	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4600-01	**A**	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00062	DFFP1A	Siemens	filler-plate	CURRENT (2021)

1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)

OEM part number	DFFP1A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFP1 (Earlier number; DFFP1 fits tighter in the opening than QF3 (stronger spring tabs))	A	S1 supersedes; pp.11-23, 11-67, 11-96; oem_spec
	12-1800-01 (old reference/drawing number)	A	S1 alias; p.11-20; oem_spec
	11-D-4554-01 [alias] (old eng. ref; current eng ref 11-D-4613-01)	A	same as above
	QF3 (QF3 is approved in all panelboards/switchboards and is the only one approved in residential products; slides out when P1-P3 deadfront removed)	A	S1 equivalent; p.11-23 footnotes a,b; oem_spec
Description	Blank filler, 1 inch snap-in; replaced old QF3 and DFFP1 in Systems products	A	S1 p.11-20; oem_spec
Application	blank 1in branch positions; also fills void where a 2-pole breaker is installed in a 3-pole position	A	S1 p.11-23 footnote a; oem_spec
Installation location	Deadfront branch openings (horizontal or vertical)	A	S1 p.11-23 row A1; oem_spec
Breaker compatibility	BL/BQD/xGB/xGB2/ED/3VA41 blank positions; suitable for replacing QF3 and DFFP1 in P1-P5 panelboards and switchboards	A	S1 p.11-23; oem_spec
Status	current (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng. ref 11-D-4613-01; snap-in with small spring side tabs	A	S1 pp.11-20, 11-23; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3, P4, P5, SB · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', ED (ED2/ED4/ED6/HED4/HHED6) and CED6, 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Exact outline dimensions of DFFP1A vs QF3 (distributor s13 gives QF3 12.9in x 5.2in which is likely packaging)*		

EDH-SIE-00070	DFFPFD01	Siemens	filler-plate	LISTED (2021)

FD main filler plate (plastic) for 1-ph and 3-ph P1 panels

OEM part number	DFFPFD01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels; also P2/P3 and S1/S2/SE	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S1 p.11-53; oem_spec
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1803-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, SE, P2, P3 · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00071	DFFPJD01	Siemens	filler-plate	LISTED (2021)

JD main filler plate (plastic)

OEM part number	DFFPJD01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate (plastic), 1-ph and 3-ph P1, small MB opening; also P2/P3 and S1/S2	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Material	plastic	A	S1 p.11-53; oem_spec
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4522-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1, S1/S2, P2, P3 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00072	DFFPJD02	Siemens	filler-plate	LISTED (2021)

JD main filler plate for Revised P1 400A with large MB opening only

OEM part number	DFFPJD02	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	JD main filler plate for Revised P1 400A with large MB opening only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4598-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00073	DFFPQJ01	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 3-phase (3-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-61	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00074	DFFPQJ02	Siemens	filler-plate	LISTED (2021)

QJ main filler plate

OEM part number	DFFPQJ02	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	QJ main filler plate, 1-phase (2-pole) P1 panels	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 12-A-1804-62	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00066	DFFPVA41A	Siemens	filler-plate	LISTED (2021)

RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max

OEM part number	DFFPVA41A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Alternate / superseded numbers	DFFPED01 [supersedes]	A	same as above
	12-A-1802-01 [supersedes]	A	same as above
Description	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4604-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA41, BL, BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00067	DFFPVA5262A	Siemens	filler-plate	LISTED (2021)

RP1 main or subfeed filler

OEM part number	DFFPVA5262A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 main or subfeed filler, single mount 3VA52/61/62 (150-250A)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4617-01	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00068	DFFPVA5363A	Siemens	filler-plate	LISTED (2021)

RP1 400A main filler for 3VA53/63

OEM part number	DFFPVA5363A	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	RP1 400A main filler for 3VA53/63, large MB opening only (also used in P2/P3)	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-4599-01 (p.11-23) / 11-D-4617-01 (p.11-20)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P2, P3 · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00075	MBKQRFK	Siemens	filler-plate	LISTED (2021)

P1 / Revised P1 deadfront filler for 1PH/3PH QR main

OEM part number	MBKQRFK	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Description	P1 / Revised P1 deadfront filler for 1PH/3PH QR main, horizontal mount only	A	same as above
Application	main / subfeed deadfront opening	A	same as above
Status	listed (2021)	A	S1 p.11-20; oem_spec
Identification features	Eng./drawing ref 11-D-2643-01 (p.11-20) / 11-D-4563-01 (p.11-23)	A	S1 p.11-23 'Deadfront Filler Chart - P1, P2, P3, C1, C2'; p.11-20 'Filler Plates'; oem_spec
Cross-links	Families: RP1, P1 · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Box/Enclosure

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00240	**EWK1**	End wall kit with knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00243	**EWK1B**	End wall kit without knockouts (20in W x 5.75in D) 20in	—	unknown
EDH-SIE-00242	**EWK3**	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	—	unknown

EDH-SIE-00240	EWK1	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit with knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1	A	S1 p.11-34; oem_spec
Description	End wall kit with knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00243	EWK1B	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit without knockouts (20in W x 5.75in D) 20in

OEM part number	EWK1B	A	S1 p.11-34; oem_spec
Description	End wall kit without knockouts (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

EDH-SIE-00242	EWK3	Siemens	box/enclosure	STATUS UNKNOWN

End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in

OEM part number	EWK3	A	S1 p.11-34; oem_spec
Description	End wall kit - open center space - ref B74FLR (20in W x 5.75in D), Type 1 only	A	same as above
Dimensions	20in W x 5.75in D	A	same as above
Cross-links	Families: RP1, P1, P2		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Which P2 enclosure widths use EWK1 vs EWK2? Family mapping inferred from 20in (P1) / 24in (P3) widths*		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00096	**BK1A**	Revised P1 bonding kit including service disconnect label	—	listed (2021)
EDH-SIE-00095	**IMK1**	Interior mounting kit with adjustment provisions for P1/P2/P3	—	listed (2021)
EDH-SIE-00014	**MBKBFA**	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	—	unknown

EDH-SIE-00096	BK1A	Siemens	hardware-kit	LISTED (2021)

Revised P1 bonding kit including service disconnect label

OEM part number	BK1A	A	S1 p.11-20; oem_spec
Description	Revised P1 bonding kit including service disconnect label	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00095	IMK1	Siemens	hardware-kit	LISTED (2021)

Interior mounting kit with adjustment provisions for P1/P2/P3

OEM part number	IMK1	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	Interior mounting kit with adjustment provisions for P1/P2/P3	A	same as above
Kit contents	qty/kit 1	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2024-01	A	same as above
Cross-links	Families: RP1, P1, P2, P3		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00014	MBKBFA	Siemens	hardware-kit	STATUS UNKNOWN

P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)

OEM part number	MBKBFA	A	S9 oem_spec
Description	KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER; field installable kit	A	same as above
Application	main (back-fed breaker in unit space; uses 2 or 3 positions of unit space)	A	S1 p.11-7 note 1; oem_spec
Kit contents	'MAIN' label and instructions for back-fed BL/BQD or GB main (s8 table: 'Label Kit # MBKBFA ... MAIN label and'; s7 lists 'MBKDFA - Back Fed Main Breaker Label and Instructions for BL/BQD or GB breaker' (likely typo of MBKBFA))	B	S8, S7 oem_spec
Cross-links	Families: RP1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB'		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Is 'MBKDFA' in the flyer (s7) a typo of MBKBFA?*		
Open question	*Does the kit include a hold-down/retaining clip as required for back-fed breakers? Not stated.*		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00091	**P1SCRWS**	P1 branch breaker mounting screws	—	listed (2021)

EDH-SIE-00091	P1SCRWS	Siemens	fastener	LISTED (2021)

P1 branch breaker mounting screws

OEM part number	P1SCRWS	A	S1 p.11-21 'Spare Parts Kits for Revised P1 Panels (cont.)'; oem_spec
Description	P1 branch breaker mounting screws, pack of 42 (part 11-A-1505-03), 10-32 x 0.312in hex washer head - do not substitute	A	same as above
Kit contents	qty/kit 42	A	same as above
Fasteners	10-32 x 0.312in hex washer head screw, part 11-A-1505-03	A	same as above
Status	listed (2021)	A	same as above
Identification features	Drawing ref 11-A-2010-01	A	same as above
Cross-links	Families: RP1, P1 · Breakers: BL, BQD, GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB', 3VA41		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Conversion Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00013	**MBKVA5363JD**	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	—	'to be available 2021' / 'tbd - being developed'

EDH-SIE-00013	MBKVA5363JD	Siemens	conversion-kit	'TO BE AVAILABLE 2021'

RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)

OEM part number	MBKVA5363JD	A	S1 p.11-13, 'Main and Subfeed Strap Kits for Revised P1 (after neutral updates - April 2020)'; oem_spec
Description	Allows 3VA53/63 in old 400A RP1 with small deadfront opening; no access to breaker adjustments without removing deadfront	A	same as above
Application	main (400A)	A	same as above
Status	'to be available 2021' / 'tbd - being developed'	A	S1 pp.11-13, 11-20; oem_spec
Cross-links	Families: RP1 · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		
Open question	*Was MBKVA5363JD ever released? SpeedFax 2021 lists it as tbd/being developed*		

5.7 S1/S2 — Type S1 / S2 lighting panelboards

FAM-SIE-003 · panelboard · aka S1, S2, Sentron S1, Sentron S2 · markings: Siemens

Earlier Siemens (Sentron-era) bolt-on lighting panelboards preceding P1/P2. SpeedFax states that all original P1 kits for 250A-and-below panels work in 250A-max S1/S2 panels; 400/600A S1/S2 use the SMBK* strap kits. Revised P1 kits will not work in S1/S2.

Attribute	Value	Cl.	Sources
Status	discontinued; some kits available	A	S1 pp.11-15, 11-20; oem_spec
Successor	P1 / P2 (Implied by SpeedFax grouping; not stated explicitly)	C	S1 inference

Breaker families associated: BL, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)
Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1 (p.180), MLKA3 (p.180), MLKC1 (p.181), MLKC3 (p.181), 4MLKA1 (p.179), 4MLKA3 (p.179), 4MLKC1 (p.179), 4MLKC3 (p.180), MBKBL1 (p.174), MBKBL3 (p.175), MBKBC3 (p.174), MBKNB1 (p.177), MBKNB3 (p.177), MBKED1 (p.175), MBKED3 (p.175), MBKQR1 (p.178), MBKQR3 (p.178), MBKFD1 (p.176), MBKFD3 (p.176), DFFP1A (p.259), DFFP01B (p.258), DFFPFD01 (p.259), DFFPJD01 (p.260)

Main Breaker Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00056	**SMBKED1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	2-pole ED2, ED4, ED6, HED4, HHED6 **A**	listed (2021)
EDH-SIE-00057	**SMBKED3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	3-pole ED2, ED4, ED6, HED4, HHED6 **A**	listed (2021)
EDH-SIE-00058	**SMBKFD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	2-pole FXD6, FD6, HFXD6, HFD6 **A**	listed (2021)
EDH-SIE-00059	**SMBKFD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	3-pole FXD6, FD6, HFXD6, HFD6 **A**	listed (2021)
EDH-SIE-00060	**SMBKJD1**	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	2-pole JD6, JXD6, HJD6, HJXD6 **A**	listed (2021)
EDH-SIE-00061	**SMBKJD3**	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	3-pole JD6, JXD6, HJD6, HJXD6 **A**	listed (2021)

EDH-SIE-00056 **SMBKED1** Siemens main-breaker-kit **LISTED (2021)**

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph

OEM part number	SMBKED1	**A**	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	2-pole ED2, ED4, ED6, HED4, HHED6	**A**	same as above
Current rating	125A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00057	SMBKED3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph

OEM part number	SMBKED3	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole ED2, ED4, ED6, HED4, HHED6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole ED2, ED4, ED6, HED4, HHED6	A	same as above
Current rating	125A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00058	SMBKFD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph

OEM part number	SMBKFD1	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	2-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00059	SMBKFD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph

OEM part number	SMBKFD3	A	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole FXD6, FD6, HFXD6, HFD6; breaker not included	A	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	A	same as above
Breaker compatibility	3-pole FXD6, FD6, HFXD6, HFD6	A	same as above
Current rating	250A max	A	same as above
Status	listed (2021)	A	same as above
Cross-links	Families: S1/S2, SE · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00060	SMBKJD1	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph

OEM part number	SMBKJD1	**A**	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 2-pole JD6, JXD6, HJD6, HJXD6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	2-pole JD6, JXD6, HJD6, HJXD6	**A**	same as above
Current rating	400A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00061	SMBKJD3	Siemens	main-breaker-kit	LISTED (2021)

S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph

OEM part number	SMBKJD3	**A**	S1 p.11-15, 'Strap kits for 400/600A S1/S2 and all SE panels - breakers not included'; oem_spec
Description	Main/subfeed strap kit for 400/600A S1/S2 and all SE panels, for 3-pole JD6, JXD6, HJD6, HJXD6; breaker not included	**A**	same as above
Application	main or sub-feed ('Available for Subfeed: yes')	**A**	same as above
Breaker compatibility	3-pole JD6, JXD6, HJD6, HJXD6	**A**	same as above
Current rating	400A max	**A**	same as above
Status	listed (2021)	**A**	same as above
Cross-links	Families: S1/S2, SE · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.8 SE — Type SE panelboard

FAM-SIE-004 · panelboard · aka SE panels · markings: Siemens

Legacy Siemens panelboard type grouped with S1/S2 in SpeedFax replacement tables. SMBK* strap kits fit all SE panels; only AL 250A MLO kits (MLKA1/MLKA3) available for SE. Construction details unknown.

Attribute	Value	Cl.	Sources
Status	discontinued	**A**	S1 p.11-15; oem_spec

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards
Also fits this family (entry printed elsewhere): MLKA1 (p.180), MLKA3 (p.180), SMBKED1 (p.265), SMBKED3 (p.266), SMBKFD1 (p.266), SMBKFD3 (p.266), SMBKJD1 (p.267), SMBKJD3 (p.267), DFFP01B (p.258), DFFPFD01 (p.259)

5.9 CDP6 — Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)

FAM-SIE-010 · switchboard · aka CDP-5, CDP-6, CDP6, SPP6, VB-5, VB-6, FC20, FC-20, FCI, FC-I, FCII, FC-II, FCRS, Class II · markings: ITE, Gould ITE, Siemens-Allis, Siemens

Legacy distribution panelboard and switchboard lines served by the Series 6 connecting strap kits (6E62, 6F62, 6JJ62, 6LL61...) and 6FPB blank plates. 2005 Siemens price list states these kits fit 'switchboards manufactured since 1974'. Equipment lineage (ITE/Gould-ITE/Siemens-Allis) for each type not confirmed in OEM documents in this batch.

Attribute	Value	Cl.	Sources
Status	discontinued equipment; strap kits still catalogued (Canada) (Equipment status inferred from absence in current US SpeedFax)	**B**	S2 p.11-15; oem_spec
Era of manufacture	Strap kits fit switchboards manufactured since 1974	**A**	S3 p.8-13; oem_spec

Breaker families associated: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QJ2 / QJH2 / QJ2-H / HQJ2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S2 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S3 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio
Also fits this family (entry printed elsewhere): SDGD (p.205), SBLBD (p.221), S3VA41TD (p.218), S3VA41TDHD (p.218), SGB2D (p.225), SE6D (p.223), 6CLE2 (p.215), S3VA52TD (p.219), 6QR2 (p.216), SFGD (p.224), SF6D (p.224), SCFD (p.222), S3VA53TD (p.219), S3VA63TD (p.220), SJG2D (p.227), SJG1D (p.226), SJ1D (p.225), SJ2D (p.226), SCJD (p.222), S3VA54TD (p.220), S3VA64TD (p.221), SLGD (p.228), SL6D (p.227), SCLD (p.223), SSL6D (p.230), SSCLD (p.229), MG1D (p.217), SLM1D (p.228), SMND (p.229), SSMND (p.230), NG1D (p.217), 6FPB01 (p.211), 6FPB02 (p.212), 6FPB03 (p.212), 6FPB05 (p.212), 6FPB10 (p.213), 6FPB15 (p.284)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00201	**6BL2C**	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	BQ, BQH, HB, BL, BLH, HBL [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00191	**6CLF1**	6CLF1 connecting strap kit - CFD6 (5in, single)	CFD6 [s3]; CFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00194	**6CLJ1**	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	CJD6 [s3]; CJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00198	**6CLL1**	6CLL1 connecting strap kit - CLD6 (8.75in, single)	CLD6 [s3]; CLD6, SCLD [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00188	**6E62**	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00190	**6F62**	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00192	**6JJ61**	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)	JXD2, JXD6, JD6, HJD6 single branch [s3] **A**	listed in 2005 price list
EDH-SIE-00193	**6JJ62**	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00197	**6LL61**	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00203	**6M61C**	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00204	**6N61C**	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00189	**6QJ2**	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	QJ2, QJH2, QJ2-H [s3] **A**	listed in 2005 price list
EDH-SIE-00196	**6SCJ1**	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00200	**6SCL1**	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	SCLD6 [s3] **A**	listed in 2005 price list
EDH-SIE-00202	**6SCL61C**	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	SCJD6 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00195	**6SJL1**	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2] **A**	listed in 2005 price list, Siemens Canada catalogue 2025
EDH-SIE-00199	**6SLL1**	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	SLL, SLD6, SHLD6 [s3] **A**	listed in 2005 price list

EDH-SIE-00201	6BL2C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)

OEM part number	6BL2C	**A**	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for BQ, BQH, HB, BL, BLH, HBL branch breaker(s), twin mount, 3.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	BQ, BQH, HB, BL, BLH, HBL [s2]	**A**	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S2 p.11-15; oem_spec
Material	copper only (footnote e) (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	**A**	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: BQ / BQH / HBQ (bolt-on, legacy), BL		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*Distributor listings disagree on breaker list (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB) - Canadian OEM table lists 'BQ, BQH, HB, BL, BLH, HBL'*		

EDH-SIE-00191	6CLF1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLF1 connecting strap kit - CFD6 (5in, single)

OEM part number	6CLF1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLF1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CFD6 branch breaker(s), single (s) mount, 5in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CFD6 [s3]; CFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLF1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $1553.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00194	6CLJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLJ1 connecting strap kit - CJD6 (8.75in, single)

OEM part number	6CLJ1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLJ1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CJD6 [s3]; CJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLJ1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00198	6CLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6CLL1 connecting strap kit - CLD6 (8.75in, single)

OEM part number	6CLL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6CLL1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for CLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	CLD6 [s3]; CLD6, SCLD [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6CLL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00188	6E62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)

OEM part number	6E62	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for ED2, ED4, ED6, HED4, HED6 branch breaker(s), twin (d) mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	ED2, ED4, ED6, HED4, HED6 [s3]; ED2, ED4, ED6, HED4 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $845.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00190	6F62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)

OEM part number	6F62	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for FXD6, FD6, HFD6 branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	FXD6, FD6, HFD6 [s3]; FXD6, FD6, HFD6, HHFD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $1529.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00192	6JJ61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single)

OEM part number	6JJ61	**A**	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 single branch branch breaker(s), single (s) mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Single (S)	**A**	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 single branch [s3]	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	**A**	S3 p.8-13; oem_spec
Material	copper straps	**A**	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	**A**	S3 oem_spec
Identification features	2005 list price $2122.00	**A**	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00193	6JJ62	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)

OEM part number	6JJ62	**A**	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for JXD2, JXD6, JD6, HJD6 double branch branch breaker(s), twin (d) mount, 8.75in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin, Twin (D)	**A**	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	JXD2, JXD6, JD6, HJD6 double branch [s3]; JXD6, JD6, HJD6, HHJD6 [s2]	**A**	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	**A**	S3, S2 p.8-13 | p.11-15; oem_spec
Material	aluminum connectors; add suffix C for copper (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	**A**	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	**A**	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	**A**	S3, S2 oem_spec
Identification features	2005 list price $2349.00	**A**	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		
Open question	*2005 US list says kits include copper straps; Canadian catalogue says base number has aluminum connectors (suffix C = copper). Are US and Canadian base numbers physically the same kit?*		

EDH-SIE-00197	6LL61	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)

OEM part number	6LL61	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6LL61C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for LXD6, LD6, HLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	LXD6, LD6, HLD6 [s3]; LXD6, LD6, HLD6, HHLD6, SLD6, SHLD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6LL61C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00203	6M61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)

OEM part number	6M61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00204	6N61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)

OEM part number	6N61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for NXD6, ND6, HND6, CND6, SHND6, SCND6 branch breaker(s), single mount, 10in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	NXD6, ND6, HND6, CND6, SHND6, SCND6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 10 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00189	6QJ2	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)

OEM part number	6QJ2	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for QJ2, QJH2, QJ2-H branch breaker(s), twin (d) mount, 5in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin (D)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	QJ2, QJH2, QJ2-H [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 5 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $1529.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: QJ2 / QJH2 / QJ2-H / HQJ2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00196	6SCJ1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCJ1 connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCJ1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCJD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00200	6SCL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SCL1 connecting strap kit - SCLD6 (8.75in, single)

OEM part number	6SCL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SCLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SCLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00202	6SCL61C	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

6SCL61C connecting strap kit - SCJD6 (8.75in, single)

OEM part number	6SCL61C	A	S2 p.11-15 (Table 15) 'Connecting Strap Kits for use with Circuit Breakers in CSA SMP SWBD Distribution Sections' (connector kits also accommodate S5, F2, CDP6 panelboards, FCRS, FCI, FCII interiors or CDP6/SPP6 series panels); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD6 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SCJD6 [s2]	A	same as above
Kit contents	Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S2 p.11-15; oem_spec
Material	copper only (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S2 p.11-15 (Table 15) (s2); oem_spec
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00195	6SJL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)

OEM part number	6SJL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Alternate / superseded numbers	6SJL1C	A	S2 alias; p.11-15; oem_spec
Description	Connecting strap kit (breaker not included) for SJL, SJD6, SHJD6 branch breaker(s), single (s) mount, 8.75in unit height	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Application	branch (unit-space mounted); mounting: Single, Single (S)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Breaker compatibility	SJL, SJD6, SHJD6 [s3]; SJD6, SHJD6 [s2]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005); Connecting straps, hardware and cover plates; breakers ordered separately (Canada footnote h)	A	S3, S2 p.8-13 | p.11-15; oem_spec
Material	copper only; Canadian catalogue lists as 6SJL1C (Canada: 'These are aluminum connectors. If copper is required please add suffix C'; some kits copper only)	A	S2 p.11-15; oem_spec
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3, S2 p.8-13 (2005) (s3) | p.11-15 (Table 15) (s2); oem_spec
Status	listed in 2005 price list, Siemens Canada catalogue 2025	A	S3, S2 oem_spec
Identification features	2005 list price $2122.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

EDH-SIE-00199	6SLL1	Siemens	branch-connector-kit	LISTED IN 2005 PRICE L

6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)

OEM part number	6SLL1	A	S3 p.8-13 (2005) 'Connecting Strap Kits - Circuit Breaker' for Series 5 or 6 CDP panelboards, FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, SB3 (switchboards manufactured since 1974); oem_spec
Description	Connecting strap kit (breaker not included) for SLL, SLD6, SHLD6 branch breaker(s), single (s) mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single (S)	A	S3 p.8-13 (2005) (s3); oem_spec
Breaker compatibility	SLL, SLD6, SHLD6 [s3]	A	same as above
Kit contents	Includes copper straps, cover plates and necessary hardware (2005)	A	S3 p.8-13; oem_spec
Material	copper straps	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	S3 p.8-13 (2005) (s3); oem_spec
Status	listed in 2005 price list	A	S3 oem_spec
Identification features	2005 list price $2525.00	A	S3 p.8-13; oem_spec
Cross-links	Families: CDP6, SB · Breakers: LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00063	**QF3**	QF3 1-pole plastic filler plate (load center / legacy switchboard)	—	still approved in panelboards/switchboards; only QF3 approve

EDH-SIE-00063	QF3	Siemens	filler-plate	STILL APPROVED IN PANE

QF3 1-pole plastic filler plate (load center / legacy switchboard)

OEM part number	QF3	**A**	S3 oem_spec
Alternate / superseded numbers	DFFP1A	**A**	S1 superseded_by; p.11-20; oem_spec
	12-1800-01 ('sub no. 12-1800-01')	**C**	S13 alias; distributor
Description	Filler plate, per pole, for BQ, BQH, HBQ, E2, E4, E6, HE4, HE6, E2-A..HE6-A and ED2, ED4, ED6, HED4, HED6 frames in Series 5/6 CDP panelboards and FC-20, Class II, FCI, FCII, SB1, SB2, SB3 switchboards	**A**	S3 p.8-13 'Filler Plates'; oem_spec
Application	blank 1-pole branch positions	**A**	S3 p.8-13; oem_spec
Status	still approved in panelboards/switchboards; only QF3 approved for residential load centers, meter combos	**A**	S1 p.11-23 footnote b-c; oem_spec
Cross-links	Families: CDP6, SB, P1, P2, P3 · Breakers: BQ / BQH / HBQ (bolt-on, legacy), ED (ED2/ED4/ED6/HED4/HHED6) and CED6, BL		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

5.10 SB — Type SB1 / SB2 / SB3 distribution switchboards

FAM-SIE-009 · switchboard · aka SB1, SB2, SB3, SB4 (blank plates only) · markings: Siemens

Siemens front-accessible distribution switchboards. Branch MCCBs mount in distribution sections via 'Connection Strap Kits' (same D-suffix kits as P5: SBLBD, SE6D, SF6D, SJ1D, SMND etc. plus S3VA*TD kits), unit space covered with 6FPB blank plates.

Attribute	Value	Cl.	Sources
Status	current	**A**	S2 p.11-2; oem_spec

Breaker families associated: 3VA41, 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67), BL, BQ / BQH / HBQ (bolt-on, legacy), BQD, ED (ED2/ED4/ED6/HED4/HHED6) and CED6, FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6), JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6), LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6), MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6, QR2 / QRH2 / HQR2 / HQR2H

Key documents: S1 SPEEDFAX Section 11 (last modified 06/24/21) SPEEDFAX Product Catalog - Section 11 Panelboards; S2 Power Product Catalogue Section 11 Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/; S3 Discount Schedule A, page 8-13 2005 Electrical Distribution Products price list - Switchboard Replacement and Modificatio

Also fits this family (entry printed elsewhere): DFFP1A (p.259), QF3 (p.280), SDGD (p.205), SBLBD (p.221), S3VA41TD (p.218), S3VA41TDHD (p.218), SGB2D (p.225), SE6D (p.223), 6CLE2 (p.215), S3VA52TD (p.219), 6QR2 (p.216), SFGD (p.224), SF6D (p.224), SCFD (p.222), S3VA53TD (p.219), S3VA63TD (p.220), SJG2D (p.227), SJG1D (p.226), SJ1D (p.225), SJ2D (p.226), SCJD (p.222), S3VA54TD (p.220), S3VA64TD (p.221), SLGD (p.228), SL6D (p.227), SCLD (p.223), SSL6D (p.230), SSCLD (p.229), MG1D (p.217), SLM1D (p.228), SMND (p.229), SSMND (p.230), NG1D (p.217), 6E62 (p.273), 6QJ2 (p.277), 6F62 (p.273), 6CLF1 (p.270), 6JJ61 (p.274), 6JJ62 (p.274), 6CLJ1 (p.271), 6SJL1 (p.279), 6SCJ1 (p.277), 6LL61 (p.275), 6CLL1 (p.272), 6SLL1 (p.279), 6SCL1 (p.278), 6BL2C (p.269), 6SCL61C (p.278), 6M61C (p.276), 6N61C (p.276), S3VA52PR (p.213), 6FPB01 (p.211), 6FPB02 (p.212), 6FPB03 (p.212), 6FPB05 (p.212), 6FPB10 (p.213)

Branch Connector Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00182	**S3VA53T2D**	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	3VA53, 3VA63 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00185	**S3VA54T2D**	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	3VA54, 3VA64 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00186	**S3VA55TD**	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	3VA55, 3VA65; 3VA66 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00187	**S3VA57TD**	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	3VA57, 3VA67 [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00180	**SCED**	SCED connecting strap kit - CED (3.75in, twin)	CED [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00181	**SQRD**	SQRD connecting strap kit - QR (5.00in, twin)	QR [s2] **A**	listed in Siemens Canada catalogue 2025
EDH-SIE-00184	**SSCJD**	SSCJD connecting strap kit - SCJD (8.75in, single)	SCJD [s2] **A**	listed in Siemens Canada catalogue 2025

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00183	**SSJ1D**	SSJ1D connecting strap kit - SJD (8.75in, single)	SJD [s2] **A**	listed in Siemens Canada catalogue 2025

EDH-SIE-00182	S3VA53T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)

OEM part number	S3VA53T2D	**A**	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA53, 3VA63 branch breaker(s), twin mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA53, 3VA63 [s2]	**A**	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in Siemens Canada catalogue 2025	**A**	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00185	S3VA54T2D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)

OEM part number	S3VA54T2D	**A**	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA54, 3VA64 branch breaker(s), twin mount, 6.25in unit height	**A**	same as above
Application	branch (unit-space mounted); mounting: Twin	**A**	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 46in	**A**	S2 p.11-5; oem_spec
Breaker compatibility	3VA54, 3VA64 [s2]	**A**	S2 p.11-5 (s2); oem_spec
Current rating	600A max (table max-amp rating)	**A**	same as above
Dimensions	Unit height 6.25 in (Unit-space height consumed on the interior, not part outline)	**A**	same as above
Status	listed in Siemens Canada catalogue 2025	**A**	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00186	S3VA55TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)

OEM part number	S3VA55TD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA55, 3VA65; 3VA66 branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32 (38 for 3VA66)in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA55, 3VA65; 3VA66 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	800/1000A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00187	S3VA57TD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)

OEM part number	S3VA57TD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for 3VA57, 3VA67 branch breaker(s), single mount, 10.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 38in	A	S2 p.11-5; oem_spec
Breaker compatibility	3VA57, 3VA67 [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	1200A max (table max-amp rating)	A	same as above
Dimensions	Unit height 10.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00180	SCED	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SCED connecting strap kit - CED (3.75in, twin)

OEM part number	SCED	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for CED branch breaker(s), twin mount, 3.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	CED [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	125A max (table max-amp rating)	A	same as above
Dimensions	Unit height 3.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: ED (ED2/ED4/ED6/HED4/HHED6) and CED6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00181	SQRD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SQRD connecting strap kit - QR (5.00in, twin)

OEM part number	SQRD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for QR branch breaker(s), twin mount, 5.00in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Twin	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	QR [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	225A max (table max-amp rating)	A	same as above
Dimensions	Unit height 5.00 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: QR2 / QRH2 / HQR2 / HQR2H		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00184	SSCJD	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSCJD connecting strap kit - SCJD (8.75in, single)

OEM part number	SSCJD	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SCJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	SCJD [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00183	SSJ1D	Siemens	branch-connector-kit	LISTED IN SIEMENS CANA

SSJ1D connecting strap kit - SJD (8.75in, single)

OEM part number	SSJ1D	A	S2 p.11-5 'SB Switchboard Replacement Parts & Modification Kits - Connection Strap Kits' (for use with SB1, SB2, SB3); oem_spec
Description	Connecting strap kit (breaker not included) for SJD branch breaker(s), single mount, 8.75in unit height	A	same as above
Application	branch (unit-space mounted); mounting: Single	A	S2 p.11-5 (s2); oem_spec
Installation location	SB1/SB2/SB3 distribution section; min. section width 32in	A	S2 p.11-5; oem_spec
Breaker compatibility	SJD [s2]	A	S2 p.11-5 (s2); oem_spec
Current rating	400A max (table max-amp rating)	A	same as above
Dimensions	Unit height 8.75 in (Unit-space height consumed on the interior, not part outline)	A	same as above
Status	listed in Siemens Canada catalogue 2025	A	S2 oem_spec
Cross-links	Families: SB · Breakers: JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6)		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Filler Plate

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00216	**6FPB15**	6FPB15 blank plate, 15in unit space	—	unknown

EDH-SIE-00216	6FPB15	Siemens	filler-plate	STATUS UNKNOWN

6FPB15 blank plate, 15in unit space

OEM part number	6FPB15	A	S2 p.11-15; oem_spec
Description	Blank filler plate 15.00in (381mm) for distribution switch or circuit breaker (CSA SMP / FCI / FCII)	A	S2 p.11-15 Table 17; oem_spec
Dimensions	15.00in (381mm)	A	S2 p.11-15; oem_spec
Cross-links	Families: SB, CDP6		
Not yet documented	Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Hardware Kit

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00206	**S3VA53PR**	3VA53/63/54/64 single-mount breaker provision hardware kit	—	unknown

EDH-SIE-00206 **S3VA53PR** Siemens hardware-kit **STATUS UNKNOWN**

3VA53/63/54/64 single-mount breaker provision hardware kit

OEM part number	S3VA53PR	**A**	S2 p.11-14; oem_spec
Description	Provision kit for single mount 3VA53, 3VA63, 3VA54 or 3VA64 breakers on factory-provisioned configurations	**A**	same as above
Kit contents	(3) bus extensions, (3) 3VA5 nut keepers, (3) 3VA6 nut keepers and hardware	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

Fastener

Catalogue ID	OEM part no.	Description	Breakers	Status
EDH-SIE-00207	**3VA9233-0QA00**	3VA52 250A nut keeper kit (3)	—	unknown
EDH-SIE-00208	**3VA9243-0QA00**	3VA61/62 150A/250A nut keeper kit (3)	—	unknown
EDH-SIE-00209	**3VA9473-0QA00**	3VA5, 3VA6 400A/600A nut keeper kit (3)	—	unknown

EDH-SIE-00207 **3VA9233-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA52 250A nut keeper kit (3)

OEM part number	3VA9233-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA52 250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00208 **3VA9243-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA61/62 150A/250A nut keeper kit (3)

OEM part number	3VA9243-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA61/62 150A/250A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

EDH-SIE-00209 **3VA9473-0QA00** Siemens fastener **STATUS UNKNOWN**

3VA5, 3VA6 400A/600A nut keeper kit (3)

OEM part number	3VA9473-0QA00	**A**	S2 p.11-14; oem_spec
Description	3VA5, 3VA6 400A/600A nut keeper kit (3); switchboards with ship date June 2021 or later require one of these when adding breakers	**A**	same as above
Cross-links	Families: SB · Breakers: 3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)		
Not yet documented	Dimensions, Finish / plating, Mounting-hole pattern, OEM instruction document, Material, Torque values		

6 Breaker Family Register

Breaker families referenced by the hardware entries. Mounting style and frame determine which connector and mounting kits apply.

BAB BRK-EAT-030 · Eaton lineage · aka QBHW, HQP, QPHW, BA, QBH, QBGF, QBHGF

Mounting	Bolt-on 1 in per pole; mounted on PRL1/PRL3 subchassis; KPRL1BAB connectors mount up to 12 poles	A	S39 p. 3; oem_spec
Replacement / successor	B10B/W10B/NQB BA -> BAB; NPLAB/NQP/Q10P/W10P QP -> HQP; W22B/Q22B QBH -> QBHW; W22P/Q22P QPH -> QPHW	A	S38 p. V12-T4-7; oem_spec
Used in	PRL1/PRL2, PRL3, NLAB		

BR BRK-EAT-032 · Eaton lineage · aka BW, BWH, BD, BQ, BQC

Mounting	1 in plug-on Type BR loadcenter breakers	A	S46 p. V12-T5-14; oem_spec
Used in	BR		

CA BRK-EAT-022 · Eaton lineage · aka CAH, HCA

Ampere range	100-225 A, 240 V; not recommended for motor loads	A	S39 p. 11 Table 15; oem_spec
dimensions_3p	W 4.13 x H 6.50 x D 2.69 in; frame obsolete	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRL3, PRL4		

DA BRK-EAT-009 · Eaton lineage · aka Westinghouse DA

Ampere range	250-400 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C DK (KCDPDK)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

E BRK-EAT-017 · Eaton lineage · aka EA, EH, Westinghouse E-frame

Status	out of production; last manufactured 1974	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	E/EA: W 4.13 x H 6.00 x D 3.38 in; EH: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	Panelboard-only replacement breakers RE/REA (obsolete) -> REH (3-pole only)	A	S38 p. V12-T3-81; oem_spec
Used in	CDP, NAB		

EB BRK-EAT-001 · Eaton lineage · aka Westinghouse EB

Ampere range	15-100 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Still manufactured as a 'replacement circuit breaker' for exact replacement (frame listed obsolete; see cross-reference)	A	S38 p. V12-T3-10 note 1; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in (3-pole)	A	S38 p. V12-T3-10; oem_spec
Replacement / successor	Series C EHD; CDP retrofit kit KCDPEHD; same X space	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

ED BRK-EAT-021 · Eaton lineage · aka EDH, EDC, EDB, EDS

Ampere range	100-225 A (EDC 15-225 A); 240 V max	A	S39 p. 11 Table 15; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

EHB BRK-EAT-002 · Eaton lineage · aka Westinghouse EHB

Ampere range	15-100 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	same as above
Replacement / successor	Series C EHD (KCDPEHD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

EHD BRK-EAT-019 · Eaton lineage

Breaker frame	100 A frame (E-frame Series C)	A	S39 p. 11 Table 15; oem_spec
Ampere range	15-100 A	A	same as above
Interrupting ratings	1P 277 V 14 kA; 2/3P 240 V 18 kA, 480 V 14 kA	A	same as above
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

F BRK-EAT-018 · Eaton lineage · aka FA, HF, HFA, Westinghouse F-frame

Status	out of production; last manufactured 1974	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	F/HF: W 4.13 x H 9.38 x D 4.06 in; FA/HFA: W 4.13 x H 6.50 x D 3.38 in	A	same as above
Replacement / successor	RHF (F/HF), RHFA (FA/HFA), three-pole only	A	S38 p. V12-T3-81; V12-T4-4; oem_spec
Used in	CDP, NAB		

FB BRK-EAT-003 · Eaton lineage · aka Westinghouse FB

Ampere range	15-150 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured; frame obsolete	A	S38 p. V12-T3-10, p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	Series C FDB (KCDPFDB); PRL4B replacement FDB	A	S39, S38 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP, WEB, WF/WRP		

FD BRK-EAT-020 · Eaton lineage · aka FDB, HFD, FDC, FD-frame

Breaker frame	225 A F-frame Series C (FDB 15-225, FD/HFD/FDC 15-225)	A	S39 p. 11 Table 15; oem_spec
Interrupting ratings	FDB 480 V 14 kA; FD 25 kA; HFD 65 kA; FDC 100 kA at 480 V	A	same as above
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-10; oem_spec
Used in	CDP, PRLC, PRL4, PRL3		

GB BRK-EAT-031 · Eaton lineage · aka GHB, GHBS

Mounting	Bolt-on; PRL2 subchassis via KPRL2GHB; GB/GHB cannot be mixed on same subchassis as BAB/QBH	A	S39 p. 3; V12-T4-16 note 3; oem_spec
Used in	PRL1/PRL2, PRL3		

HFB BRK-EAT-004 · Eaton lineage · aka Westinghouse HFB

Ampere range	15-150 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	Replacement circuit breaker still manufactured	A	S38 p. V12-T3-10; oem_spec
dimensions_3p	W 4.13 x H 6.00 x D 3.38 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	Series C FD (KCDPFD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP, WEB		

JA BRK-EAT-007 · Eaton lineage · aka Westinghouse JA

Ampere range	70-225 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	Series C KDB (KCDPKDB); when upgrading JA to Series C K-frame in panelboard, order TAD3 spacer kit	A	S39, S38 RP01400002E p. 13 Table 18; Vol12 Tab 3 JA note; oem_spec
Used in	CDP		

JB BRK-EAT-008 · Eaton lineage · aka Westinghouse JB

Ampere range	70-250 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JDB (KCDPJDB)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

JD BRK-EAT-023 · Eaton lineage · aka JDB, HJD, JDC

Ampere range	70-250 A	A	S39 p. 11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

KA BRK-EAT-005 · Eaton lineage · aka HKA, Westinghouse KA

Ampere range	70-225 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11 note 2; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Replacement / successor	KA -> KD (KCDPKD); HKA -> HKD (KCDPHKD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KB BRK-EAT-006 · Eaton lineage · aka HKB, Westinghouse KB

Ampere range	70-250 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 4.13 x H 10.00 x D 4.06 in	A	same as above
Replacement / successor	Series C JD (KCDPJD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

KD BRK-EAT-024 · Eaton lineage · aka DK, KDB, HKD, KDC, CKD, CHKD

Ampere range	KD/KDB/HKD/KDC 100-400 A; DK 250-400 A 240 V	A	S39 p. 11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
adapter	Requires TAD3 adapter/spacer kit when mounted onto existing LB-frame connectors or when upgrading HLB/LBB/JA in a panelboard	A	S39, S38 RP01400002E p. 13; V12-T3-11 note 1; oem_spec
Used in	CDP, PRLC, PRL4		

LA BRK-EAT-010 · Eaton lineage · aka HLA, LAB, Westinghouse LA

Ampere range	250-600 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame (HLA still in panelboard-only list)	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD); LAB -> LDB	A	S39, S38 RP01400002E p. 13 Table 18; V12-T4-4; oem_spec
Used in	CDP		

LB BRK-EAT-011 · Eaton lineage · aka LBB, HLB, Westinghouse LB

Ampere range	LB 70-400 A; LBB/HLB 125-400 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 5.50 x H 10.13 x D 4.06 in	A	same as above
Replacement / successor	LB/HLB -> KD (KCDPKD); LBB -> KDB (KCDPKDB); Series C K-family requires TAD3 adapter kit when mounting on existing LB connectors	A	S39 RP01400002E p. 13 Table 18 and note; oem_spec
Used in	CDP		

LC BRK-EAT-012 · Eaton lineage · aka HLC, Westinghouse LC

Ampere range	300-600 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	replacement breaker still manufactured (LC obsolete per note 2)	A	S38 p. V12-T3-11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	same as above
Replacement / successor	Series C LD (KCDPLD)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

LD BRK-EAT-025 · Eaton lineage · aka HLD, LDC, LDB, CLD

Ampere range	300-600 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 10.75 x D 4.06 in	A	S38 p. V12-T3-11; oem_spec
Used in	CDP, PRLC, PRL4		

MA BRK-EAT-013 · Eaton lineage · aka HMA, Westinghouse MA

Ampere range	125-800 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	MA obsolete; HMA replacement breaker	A	S38 p. V12-T3-12; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	same as above
Replacement / successor	Series C MDL (KCDPMDL)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MC BRK-EAT-014 · Eaton lineage · aka HMC, MCC, Westinghouse MC

Ampere range	400-800 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C MDL (KCDPMDL)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

MDL BRK-EAT-026 · Eaton lineage · aka HMDL, CMDL

Ampere range	300-800 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 4.06 in	A	S38 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

NB BRK-EAT-015 · Eaton lineage · aka HNB, Westinghouse NB

Ampere range	700-1200 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	same as above
Replacement / successor	Series C ND (KCDPND)	A	S39 RP01400002E p. 13 Table 18; oem_spec
Used in	CDP		

NC BRK-EAT-016 · Eaton lineage · aka HNC, Westinghouse NC

Ampere range	600-1200 A	A	S39 RP01400002E p. 13 Table 18; oem_spec
Status	obsolete frame	A	S38 p. V12-T3-12; oem_spec
Replacement / successor	Series C ND (KCDPND)	A	S39 RP01400002E p. 13 Table 18; oem_spec
box_depth	In MP40 panels only NC/HNC require 11.38 in deep box (standard 10.50 in)	A	S38 p. V12-T4-12 note 3; oem_spec
Used in	CDP		

ND BRK-EAT-027 · Eaton lineage · aka HND, NDC, CND

Ampere range	600-1200 A	A	S39 p. 11; oem_spec
dimensions_3p	W 8.25 x H 16.00 x D 5.50 in	A	S38 p. V12-T3-12; oem_spec
Used in	CDP, PRLC, PRL4		

RD BRK-EAT-028 · Eaton lineage · aka RG

Ampere range	1600/2000/2500 A	A	S38 p. V12-T3-12; oem_spec
dimensions_3p	W 15.50 x H 16.00 x D 9.75 in	A	same as above
Replacement / successor	RD replaces PC, PCC and PB breakers for 2000 and 2500 A only	A	S38 p. V12-T3-12 note 1; oem_spec
Used in	PRLC, WF/WRP		

Tri-Pac BRK-EAT-029 · Eaton lineage · aka FB-P, LA-P, NB-P, TRI-PAC

Ampere range	FB-P 15-100 A; LA-P 70-400 A; NB-P 300-800 A; 200 kA at 600 V	A	S39 p. 11 Table 15; oem_spec
Used in	CDP, PRL4		

Record Plus FB (FBV/FBN/FBH/FBL) BRK-GEA-010 · GE / ABB lineage · aka FB

Mounting	bolt-on	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

Record Plus FC (FCS/FCV/FCN/FCH/FCL) BRK-GEA-011 · GE / ABB lineage · aka FC, FD

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 100 A	A	same as above
Used in	SPECTRA-PP		

Record Plus FG (FGV/FGN/FGH/FGL/FGP) BRK-GEA-012 · GE / ABB lineage · aka FG

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 600 A	A	same as above
Used in	SPECTRA-PP		

Spectra SE (SEDA/SEHA/SELA/SEPA) BRK-GEA-006 · GE / ABB lineage · aka SE-frame, Spectra RMS E

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

Spectra SF (SFHA/SFLA/SFPA) BRK-GEA-007 · GE / ABB lineage · aka SF-frame

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	70-250 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

Spectra SG (SGDA/SGHA/SGLA/SGPA) BRK-GEA-008 · GE / ABB lineage · aka SG-frame

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	125-600 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, SCP-PLUS		

Spectra SK (SKHA/SKLA/SKPA) BRK-GEA-009 · GE / ABB lineage · aka SK-frame, K

Mounting	single-mounted / center-mounted	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TEB / TED / THED / TED4 / TED6 BRK-GEA-005 · GE / ABB lineage · aka E-frame, EB

Mounting	bolt-on	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-150 A	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR, NHB		

TEY / TEYF / TEYD / TEYH / TEYL BRK-GEA-003 · GE / ABB lineage · aka E-frame TEY, EY

Mounting	bolt-on (AE/AEP; Spectra double-branch; ReliaGear neXT)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A (110/125 A TEYD/H/L in AS)	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, RG-NEXT		

TFJ / TFK / THFK / TFL BRK-GEA-013 · GE / ABB lineage · aka F-frame, FJ

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	up to 225 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, CCB-QMR		

THQB / THHQB / TXQB BRK-GEA-001 · GE / ABB lineage · aka Q-line bolt-on, QB

Mounting	bolt-on (A-Series AQ; Spectra double-branch)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A, 1-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP		

THQL / THHQL / TXQL BRK-GEA-002 · GE / ABB lineage · aka Q-line plug-in

Mounting	plug-in (A-Series AL)	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	15-100 A	A	same as above
Used in	A-SERIES		

TJD / TJJ / TJK / THJK BRK-GEA-014 · GE / ABB lineage · aka J-frame, JK

Mounting	bolt-on / module	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	250-600 A	A	same as above
Used in	A-SERIES, SPECTRA-PP, SCP-PLUS, CCB-QMR		

TKM / THKM BRK-GEA-015 · GE / ABB lineage · aka K-frame, KM

Mounting	single-mounted	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	800-1200 A	A	same as above
Used in	SPECTRA-PP, CCB-QMR		

TQD / THQD BRK-GEA-004 · GE / ABB lineage · aka Q-frame QD

Mounting	bolt-on via strap kits / branch bases	A	S16 p.11-4 to 11-7; oem_spec
Ampere range	100-225 A, 2-3P	A	same as above
Used in	A-SERIES, A-SERIES-PWR, SPECTRA-PP, CCB-QMR		

3VA41 BRK-SIE-004 · Siemens lineage · aka 3VA41

Breaker frame	1in per pole (1-pole 1in wide; 2P 2in; 3P 3in)	A	S1 pp.11-18, 11-19; oem_spec
Ampere range	15-125A	A	S1 p.11-18; oem_spec
Interrupting ratings	SEAB/MEAB/HEAB: 25/35/65kA @277V-480Y/277V	A	S1 pp.11-18, 11-19; oem_spec
Used in	RP1, P2, P3, P4, P5, SB		

3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67)

BRK-SIE-012 · Siemens lineage · aka 3VA52, 3VA53, 3VA54, 3VA61, 3VA62, 3VA63, 3VA64

Used in	RP1, P2, P3, P4, P5, SB		

BL BRK-SIE-001 · Siemens lineage · aka BL, BLH, HBL, BLF, BLE, BAF, BT twin (B1515/B2020)

Mounting	bolt-on	A	S1 p.11-16; oem_spec
Breaker frame	1in per pole bolt-on	A	same as above
Ampere range	15-100A	A	same as above
Voltage rating	120/240V	A	same as above
Interrupting ratings	BL 10kA, BLH 22kA, HBL 65kA	A	same as above
Used in	RP1, P1, S1/S2, P2, P3, P4, P5, SB		

BQ / BQH / HBQ (bolt-on, legacy) BRK-SIE-015 · Siemens lineage · aka BQ, BQH, HBQ, HB

Status	unknown	D	S1 inference
Used in	CDP6, SB		

BQD BRK-SIE-002 · Siemens lineage · aka BQD, BQD6

Mounting	bolt-on, 1in per pole	A	S1 p.11-16; oem_spec
Ampere range	15-100A	A	same as above
Voltage rating	480Y/277V	A	same as above
Interrupting ratings	14kA @480Y/277V, 65kA @240V	A	same as above
Used in	RP1, P1, P2, P3, P4, P5, SB		

ED (ED2/ED4/ED6/HED4/HHED6) and CED6 BRK-SIE-005 · Siemens lineage · aka ED2, ED4, ED6, HED4, HED6, HHED6, CED6, E2, E4, E6, HE4, HE6

Ampere range	15-125A	A	S1 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P2, P4, P5, SB, CDP6		

FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) BRK-SIE-008 · Siemens lineage · aka FXD6, FD6, HFD6, HFXD6, HHFD6, HHFXD6, CFD6

Ampere range	70-250A	A	S1 p.11-94; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' BRK-SIE-003 · Siemens lineage · aka xGB, NGB, HGB, LGB, xGB2, NGB2, HGB2, LGB2

Ampere range	15-125A	A	S1 p.11-16; oem_spec
Voltage rating	480Y/277V; 600Y/347V 14kA	A	same as above
Interrupting ratings	NGB 25kA, HGB 35kA, LGB 65kA @480Y/277V; 100kA @240V	A	same as above
Used in	RP1, P2, P3, P4, P5		

JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) BRK-SIE-009 · Siemens lineage · aka JXD2, JXD6, JD6, HJD6, HJXD6, HHJXD6, CJD6, SJD6, SHJD6, SCJD6

Ampere range	200-400A	A	S1 p.11-95; oem_spec
Used in	RP1, P1, S1/S2, P4, P5, SB, CDP6		

LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) BRK-SIE-010 · Siemens lineage · aka LXD6, LD6, HLD6, HLXD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6

Ampere range	250-600A	A	S1 p.11-95; oem_spec
Used in	P4, P5, SB, CDP6		

MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 BRK-SIE-011 · Siemens lineage · aka MXD6, MD6, HMD6, CMD6, SMD6, SHMD6, SCMD6, NXD6, ND6, HND6, CND6, SND6, SHND6, SCND6, LMD6, HLMD6

Ampere range	MD to 800A, ND to 1200A (Frame ratings from strap kit table max-amp column)	B	S1 inference
Used in	P5, SB, CDP6		

NEB / HEB BRK-SIE-014 · Siemens lineage · aka NEB, HEB

Status	legacy (replacement parts only)	B	S1 p.11-53; inference
Used in	P3, P4, P5		

QJ2 / QJH2 / QJ2-H / HQJ2H BRK-SIE-006 · Siemens lineage · aka QJ2, QJH2, QJ2-H, HQJ2H

Ampere range	60-225A	A	S4 p.10-18; oem_spec
Status	discontinued; replaced by QR (QJ kits not available, use QR)	A	S1 p.11-53; oem_spec
Used in	P1, P2, P3, CDP6		

QR2 / QRH2 / HQR2 / HQR2H BRK-SIE-007 · Siemens lineage · aka QR, QR2, QRH2, HQR2, HQR2H

Ampere range	100-225A (QR rated 250A frame but limited to 225A in panelboard)	A	S1 pp.11-94, 11-96; oem_spec
Voltage rating	240V max	A	S6 oem_spec
Used in	RP1, P1, P2, P3, P4, P5, SB		

Sentron VL (DG, FG, JG, LG, MG, NG) BRK-SIE-013 · Siemens lineage · aka DG, FG, JG, LG, MG, NG, NF/HF/LF, NJ/HJ/LJ, NL/HL/LL, NM/HM/LM

Used in	P4, P5		

7 Cross-Reference Tables

7.1 Supersession and alternate numbers

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
11-D-4554-01	alias	DFFP1A	EDH-SIE-00062	A	259
11-D-4560-01	supersedes	DFFP01B	EDH-SIE-00064	A	258
12-1800-01	alias	DFFP1A	EDH-SIE-00062	A	259
12-1800-01	alias	QF3	EDH-SIE-00063	C	280
12-A-1801-01	supersedes	DFFP01B	EDH-SIE-00064	A	258
12-A-1802-01	supersedes	DFFPVA41A	EDH-SIE-00066	A	261
2NLK30A	supersedes	2NLK42B	EDH-SIE-00040	A	248
2NLK42A	supersedes	2NLK42B	EDH-SIE-00040	A	248
2NLK54A	supersedes	2NLK54B	EDH-SIE-00041	A	249
42NLK30A	supersedes	42NLK54B	EDH-SIE-00042	A	249
42NLK42A	supersedes	42NLK54B	EDH-SIE-00042	A	249
42NLK54A	supersedes	42NLK54B	EDH-SIE-00042	A	249
4MLKA1	equivalent	4MLKA1A	EDH-SIE-00019	A	241
4MLKA3	equivalent	4MLKA3A	EDH-SIE-00020	A	242
4MLKC1	equivalent	4MLKC1A	EDH-SIE-00021	A	243
4MLKC3	equivalent	4MLKC3A	EDH-SIE-00022	A	243
6CLF1C	alias	6CLF1	EDH-SIE-00191	A	270
6CLJ1C	alias	6CLJ1	EDH-SIE-00194	A	271
6CLL1C	alias	6CLL1	EDH-SIE-00198	A	272
6LL61C	alias	6LL61	EDH-SIE-00197	A	275
6QR2CAN	alias	6QR2	EDH-SIE-00157	A	216
6QR2CCAN	alias	6QR2	EDH-SIE-00157	A	216
6SJL1C	alias	6SJL1	EDH-SIE-00195	A	279
ACSFPKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	108
ACSFPKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	108
ACSHKSG	equivalent	ACSMKSG	EDH-GEA-00254	A	108
ACSHKSK	equivalent	ACSMKSK	EDH-GEA-00255	A	108
ACTFPKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	108
ACTFPKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	109
ACTFPKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	109
ACTFPKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	109
ACTFPKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	110
ACTFPKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	110
ACTFPKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	110
ACTFPKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	111
ACTFPKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	111
ACTHKEB1P	equivalent	ACTMKEB1P	EDH-GEA-00246	A	108
ACTHKEB2P	equivalent	ACTMKEB2P	EDH-GEA-00247	A	109
ACTHKEB3P	equivalent	ACTMKEB3P	EDH-GEA-00248	A	109
ACTHKJD	equivalent	ACTMKJD	EDH-GEA-00252	A	109
ACTHKQD2P	equivalent	ACTMKQD2P	EDH-GEA-00250	A	110
ACTHKQD3P	equivalent	ACTMKQD3P	EDH-GEA-00251	A	110
ACTHKSE	equivalent	ACTMKSE	EDH-GEA-00245	A	110
ACTHKSF	equivalent	ACTMKSF	EDH-GEA-00249	A	111
ACTHKSG	equivalent	ACTMKSG	EDH-GEA-00253	A	111
AMC2FGM	alias	AMC2FGMFP	EDH-GEA-00181	B	135
AMC2FJ	alias	AMC2FJFP	EDH-GEA-00179	B	135

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMC2FJFPTF	alias	AMC2FJFPTF	EDH-GEA-00178	B	136
AMC2FLS	alias	AMC2FLSFP	EDH-GEA-00184	B	136
AMC2GM	alias	AMC2GMFP	EDH-GEA-00182	B	137
AMC2JK	alias	AMC2JKFP	EDH-GEA-00180	B	138
AMC2KM	alias	AMC2KMFP	EDH-GEA-00183	B	138
AMC3FGM	alias	AMC3FGMFP	EDH-GEA-00162	B	139
AMC3FJ	alias	AMC3FJFP	EDH-GEA-00160	B	139
AMC3FJFPTF	alias	AMC3FJFPTF	EDH-GEA-00159	B	140
AMC3FLS	alias	AMC3FLSFP	EDH-GEA-00165	B	140
AMC3GM	alias	AMC3GMFP	EDH-GEA-00163	B	141
AMC3JK	alias	AMC3JKFP	EDH-GEA-00161	B	141
AMC3KM	alias	AMC3KMFP	EDH-GEA-00164	B	142
AMC4EB	alias	AMC4EBFP	EDH-GEA-00167	B	142
AMC4EBS	alias	AMC4EBSFP	EDH-GEA-00176	B	143
AMC4FDB	alias	AMC4FDBFP	EDH-GEA-00166	B	143
AMC4FDS	alias	AMC4FDSFP	EDH-GEA-00175	B	144
AMC4FGB	alias	AMC4FGBFP	EDH-GEA-00173	B	144
AMC4FJ	alias	AMC4FJFP	EDH-GEA-00171	B	145
AMC4FJFPTF	alias	AMC4FJFPTF	EDH-GEA-00170	B	146
AMC4FLS	alias	AMC4FLSFP	EDH-GEA-00177	B	146
AMC4GB	alias	AMC4GBFP	EDH-GEA-00174	B	147
AMC4JK	alias	AMC4JKFP	EDH-GEA-00172	B	147
AMC4QD	alias	AMC4QDFP	EDH-GEA-00169	B	148
AMC4SE	alias	AMC4SEFP	EDH-GEA-00168	B	149
AMC6EB	alias	AMC6EBFP	EDH-GEA-00149	B	149
AMC6EBS	alias	AMC6EBSFP	EDH-GEA-00157	B	150
AMC6EY	alias	AMC6EYFP	EDH-GEA-00146	B	150
AMC6FB	alias	AMC6FBFP	EDH-GEA-00147	B	151
AMC6FDB	alias	AMC6FDBFP	EDH-GEA-00148	B	151
AMC6FDSPF	alias	AMC6FDSPF	EDH-GEA-00156	B	152
AMC6FGB	alias	AMC6FGBFP	EDH-GEA-00154	B	152
AMC6FJ	alias	AMC6FJFP	EDH-GEA-00152	B	153
AMC6FJFPTF	alias	AMC6FJFPTF	EDH-GEA-00151	B	153
AMC6FLS	alias	AMC6FLSFP	EDH-GEA-00158	B	154
AMC6GB	alias	AMC6GBFP	EDH-GEA-00155	B	154
AMC6JK	alias	AMC6JKFP	EDH-GEA-00153	B	155
AMC6QB	alias	AMC6QBFP	EDH-GEA-00145	B	155
AMC6QD	alias	AMC6QDFP	EDH-GEA-00150	B	156
AMCB2FGM	alias	AMCB2FGMFP	EDH-GEA-00119	B	118
AMCB2FJ	alias	AMCB2FJFP	EDH-GEA-00117	B	119
AMCB2FJTF	alias	AMCB2FJFPTF	EDH-GEA-00118	B	119
AMCB2GM	alias	AMCB2GMFP	EDH-GEA-00120	B	120
AMCB2KM	alias	AMCB2KMFP	EDH-GEA-00126	B	120
AMCB3FGM	alias	AMCB3FGMFP	EDH-GEA-00123	B	121
AMCB3FJ	alias	AMCB3FJFP	EDH-GEA-00121	B	121
AMCB3FJTF	alias	AMCB3FJFPTF	EDH-GEA-00122	B	122
AMCB3GM	alias	AMCB3GMFP	EDH-GEA-00124	B	122
AMCB3KM	alias	AMCB3KMFP	EDH-GEA-00127	B	123
AMCB3LB	alias	AMCB3LBFP	EDH-GEA-00125	B	123
AMCB4EB	alias	AMCB4EBFP	EDH-GEA-00098	B	124
AMCB4EY	alias	AMCB4EYFP	EDH-GEA-00099	B	124
AMCB4FB	alias	AMCB4FBFP	EDH-GEA-00100	B	125

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
AMCB4FDB	alias	AMCB4FDBFP	EDH-GEA-00101	B	125
AMCB4FGB	alias	AMCB4FGBFP	EDH-GEA-00113	B	125
AMCB4FJ	alias	AMCB4FJFP	EDH-GEA-00109	B	126
AMCB4FJTF	alias	AMCB4FJFPTF	EDH-GEA-00111	B	126
AMCB4GB	alias	AMCB4GBFP	EDH-GEA-00114	B	127
AMCB4QD	alias	AMCB4QDFP	EDH-GEA-00102	B	127
AMCB4SE	alias	AMCB4SEFP	EDH-GEA-00103	B	128
AMCB6EB	alias	AMCB6EBFP	EDH-GEA-00104	B	128
AMCB6EY	alias	AMCB6EYFP	EDH-GEA-00105	B	129
AMCB6FB	alias	AMCB6FBFP	EDH-GEA-00106	B	129
AMCB6FDB	alias	AMCB6FDBFP	EDH-GEA-00107	B	130
AMCB6FGB	alias	AMCB6FGBFP	EDH-GEA-00115	B	130
AMCB6FJ	alias	AMCB6FJFP	EDH-GEA-00110	B	131
AMCB6FJTF	alias	AMCB6FJFPTF	EDH-GEA-00112	B	131
AMCB6GB	alias	AMCB6GBFP	EDH-GEA-00116	B	132
AMCB6QD	alias	AMCB6QDFP	EDH-GEA-00108	B	132
BBKVA5262S	alias	BBKVA5262P2S	EDH-SIE-00112	A	186
CNLK30A	supersedes	CNLK42B	EDH-SIE-00038	A	250
CNLK42A	supersedes	CNLK42B	EDH-SIE-00038	A	250
CNLK54A	supersedes	CNLK54B	EDH-SIE-00039	A	250
DFFP01A	supersedes	DFFP01B	EDH-SIE-00064	A	258
DFFP1	supersedes	DFFP1A	EDH-SIE-00062	A	259
DFFP1A	superseded_by	QF3	EDH-SIE-00063	A	280
DFFPED01	supersedes	DFFPVA41A	EDH-SIE-00066	A	261
DFFPVA41A	superseded_by	DFFPED01	EDH-SIE-00069	A	182
KCDPFD100H	alias	KCDPFB100-H	EDH-EAT-00013	C	25
KPRL4ED	supersedes	KPRL4X32	EDH-EAT-00096	C	65
KPRL4ED2	supersedes	KPRL4X22	EDH-EAT-00095	C	65
KPRL4FD	supersedes	KPRL4X32	EDH-EAT-00096	C	65
KPRL4FD1	supersedes	KPRL4X12	EDH-EAT-00094	C	64
KPRL4FD2	supersedes	KPRL4X22	EDH-EAT-00095	C	65
KPRL4LC	superseded_by	KPRL4LD	EDH-EAT-00089	C	60
KPRL4LD	supersedes	KPRL4LC	EDH-EAT-00104	C	59
KPRL4MC	supersedes	KPRL4X34	EDH-EAT-00100	C	67
KPRL4ND	supersedes	KPRL4X35	EDH-EAT-00101	C	68
KPRL4X12	superseded_by	KPRL4FD1	EDH-EAT-00076	C	55
KPRL4X22	superseded_by	KPRL4FD2	EDH-EAT-00077	C	55
KPRL4X22	superseded_by	KPRL4ED2	EDH-EAT-00078	C	53
KPRL4X32	superseded_by	KPRL4FD	EDH-EAT-00079	C	54
KPRL4X32	superseded_by	KPRL4ED	EDH-EAT-00081	C	53
KPRL4X34	superseded_by	KPRL4MC	EDH-EAT-00090	C	61
KPRL4X35	superseded_by	KPRL4ND	EDH-EAT-00093	C	63
LNLK30A	supersedes	LNLK4X11B	EDH-SIE-00035	A	251
LNLK42A	supersedes	LNLK6X17B	EDH-SIE-00036	A	252
LNLK54A	supersedes	LNLK7X20B	EDH-SIE-00037	A	253
MBKBC1NBA	supersedes	MBKVA41A	EDH-SIE-00001	A	237
MBKBC3NBA	supersedes	MBKVA41B	EDH-SIE-00002	A	238
MBKBL1A	supersedes	MBKVA41A	EDH-SIE-00001	A	237
MBKBL3A	supersedes	MBKVA41B	EDH-SIE-00002	A	238
MBKJD1A	supersedes	MBKJD3B	EDH-SIE-00012	A	235
MBKJD3A	supersedes	MBKJD3B	EDH-SIE-00012	A	235
MLKA1	equivalent	MLKA1A	EDH-SIE-00015	A	244

Number	Relation	Primary OEM PN	Catalogue ID	Cl.	Pg
MLKA3	equivalent	MLKA3A	EDH-SIE-00016	A	244
MLKC1	equivalent	MLKC1A	EDH-SIE-00017	A	245
MLKC3	equivalent	MLKC3A	EDH-SIE-00018	A	245
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G02	EDH-EAT-00055	A	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G01	EDH-EAT-00056	A	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G04	EDH-EAT-00057	A	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C03G03	EDH-EAT-00058	A	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	5158C04G01	EDH-EAT-00059	A	45
QF3	equivalent	DFFP1A	EDH-SIE-00062	A	259
UPC 782114795996	alias	KPRL4KDS	EDH-EAT-00084	A	57
UPC 782114796412	alias	KPRL4KDT	EDH-EAT-00085	A	58
Westinghouse DA breaker	supersedes	KCDPDK	EDH-EAT-00024	A	26
Westinghouse EB, EHB breaker	supersedes	KCDPEHD	EDH-EAT-00016	A	27
Westinghouse FB breaker	supersedes	KCDPFDB	EDH-EAT-00017	A	28
Westinghouse HFB breaker	supersedes	KCDPFD	EDH-EAT-00018	A	27
Westinghouse HKA breaker	supersedes	KCDPHKD	EDH-EAT-00020	A	28
Westinghouse JA breaker	supersedes	KCDPKDB	EDH-EAT-00022	A	30
Westinghouse JB breaker	supersedes	KCDPJDB	EDH-EAT-00023	A	29
Westinghouse KA breaker	supersedes	KCDPKD	EDH-EAT-00019	A	30
Westinghouse KB, HKB breaker	supersedes	KCDPJD	EDH-EAT-00021	A	29
Westinghouse LA, HLA breaker	supersedes	KCDPLD	EDH-EAT-00025	A	31
Westinghouse MA, HMA breaker	supersedes	KCDPMDL	EDH-EAT-00026	A	31
Westinghouse NB, HNB breaker	supersedes	KCDPND	EDH-EAT-00027	A	32

7.2 Replacement and successor statements

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00004	KCDPCA	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00002	KCDPED225	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00001	KCDPFB100	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00003	KCDPFBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00005	KCDPKB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00007	KCDPLA400	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00008	KCDPLA600	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00006	KCDPLB	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00009	KCDPLCL	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00010	KCDPMC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-EAT-00012	KCDPNBP	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A

Catalogue ID	OEM PN	Replacement / successor	Cl.
EDH-EAT-00011	KCDPNC	Order KCDP retrofit kit (breaker + connector kit) or add '-H' for hardware-only (brackets, filler plates, hardware)	A
EDH-SIE-00004	MBKED3A	Factory kits with breaker: MBKED3100A, MBKED3125A (3-pole ED4)	A
EDH-SIE-00008	MBKFD3A	Kits with breaker: MBKFD3150A, MBKFD3175A, MBKFD3200A, MBKFD3225A, MBKFD3250A (3P FXD6)	A
EDH-SIE-00005	MBKQR1A	Kits with breaker: MBKQR1125A..MBKQR1225A (2P QR2 125-225A, 10kA); MBKQR1125HA..MBKQR1225HA (2P HQR2, 65kA)	A
EDH-SIE-00006	MBKQR3A	Kits with breaker: MBKQR3125A..MBKQR3225A (3P QR2); MBKQR3125HA..MBKQR3225HA (3P HQR2)	A
EDH-SIE-00010	MBKVA5262B	Kits with breaker: MBKVAM3150A/3200A/3225A/3250A (3VA52 MFAS 35kA), MBKVAH3200A/3250A (3VA52 HFAS 65kA)	A

7.3 Companion parts required for installation

Part	Requires
ASPP6QD6D (EDH-GEA-00001)	139C5702AQDG1, 139C5702BQDG1, 139C5702CQDG1, 139C5500P81, 139C5503P64
ASPP6SE6D (EDH-GEA-00002)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5500P82, 139C5503P77
ASPP6SF3S (EDH-GEA-00003)	139C5702ASFG1, 139C5702BSFG1, 139C5702CSFG1, 139C5500P84, 139C5503P90
ASPP6SG3S (EDH-GEA-00004)	315A7046P7, 315A7046P8, 315A7046P9, 139C5500P83, 139C5503P103
ASPP6FB6D (EDH-GEA-00005)	139C5702ASEG1, 139C5702BSEG1, 139C5702CSEG1, 139C5700P86, 139C5503P77
ASPP6QB6D (EDH-GEA-00006)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6QB12D (EDH-GEA-00007)	315A7049P10, 315A7048P20, 911E347P3, 139C5362P2
ASPP6EY6D (EDH-GEA-00008)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
ASPP6EY12D (EDH-GEA-00009)	315A7049P10, 315A7048P20, 911E347P3, 139C5503P129
AMCB4QDFP (EDH-GEA-00102)	AFP2QDD
AMCB6QDFP (EDH-GEA-00108)	AFP3QDD
AMC6EYFP (EDH-GEA-00146)	AFP3EYD
AMC6FBFP (EDH-GEA-00147)	AFP3FBD
AMC6EBFP (EDH-GEA-00149)	AFP3SED
AMC6QDFP (EDH-GEA-00150)	AFP3QDD
AMC6FJFPTF (EDH-GEA-00151)	AFP3TFD
AMC6FJFP (EDH-GEA-00152)	AFP3SFD
AMC6FGBFP (EDH-GEA-00154)	AFP4FGD
AMC6GBFP (EDH-GEA-00155)	AFP4SGD
AMC3FJFPTF (EDH-GEA-00159)	AFP3TFS
AMC3FJFP (EDH-GEA-00160)	AFP3SFS
AMC3FGMFP (EDH-GEA-00162)	AFP4FGS
AMC3GMFP (EDH-GEA-00163)	AFP4SGS
AMC3KMFP (EDH-GEA-00164)	AFP6SKS
AMC4EBFP (EDH-GEA-00167)	AFP2TED
AMC4SEFP (EDH-GEA-00168)	AFP3SED
AMC4QDFP (EDH-GEA-00169)	AFP2QDD
AMC4FJFPTF (EDH-GEA-00170)	AFP3TFD
AMC4FJFP (EDH-GEA-00171)	AFP3SFD
AMC4FGBFP (EDH-GEA-00173)	AFP4FGD
AMC4GBFP (EDH-GEA-00174)	AFP4SGD
AMC2FJFPTF (EDH-GEA-00178)	AFP3TFS
AMC2FJFP (EDH-GEA-00179)	AFP3SFS
AMC2FGMFP (EDH-GEA-00181)	AFP4FGS
AMC2GMFP (EDH-GEA-00182)	AFP4SGS
AMC2KMFP (EDH-GEA-00183)	AFP6SKS

Part	Requires
P1CONACPHCU (EDH-SIE-00088)	P1SCRWS
P1CONBPHAL (EDH-SIE-00089)	P1SCRWS
P1CONBPHCU (EDH-SIE-00090)	P1SCRWS
P1CONACPHAL (EDH-SIE-00097)	P1SCRWS
BBKVA5262P2S (EDH-SIE-00112)	BBKVA5262P2HW
BBKVA52P3T (EDH-SIE-00114)	BBKVA52P3HW

8 Indexes

8.1 Manufacturer index

Code	Lineage	Brand markings	Families	Parts	Pg
EAT	Eaton lineage	Eaton, Cutler-Hammer, Westinghouse (distribution products), Challenger, Bryant	15	127	11
GEA	GE / ABB lineage	General Electric Industrial Solutions; ABB from 2018; ReliaGear	9	280	71
SIE	Siemens lineage	Siemens, ITE, ITE Imperial, Gould, Murray	10	244	173

8.2 Equipment family index (including aliases)

Name / alias	Family	Mfr	Type	ID	Pg
A Series	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
A-SERIES	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
A-Series Column Panelboards (ALC, AQC, AEC)	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	88
A-Series II	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
A-Series II Powerpanel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
A-SERIES-COL	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	88
A-SERIES-PWR	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
A2B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
ABH	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
AD	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AD Plus	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AD/AE/AQ Type P & N Power Panel	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
ADP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
AE	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AEC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	88
AEF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AEP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
AL	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71

Name / alias	Family	Mfr	Type	ID	Pg
ALC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	88
APN	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
APNB	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
AQ	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AQC	A-Series Column Panelboards (ALC, AQC, AEC)	GEA	panelboard	FAM-GEA-003	88
AQF	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AQP	A-Series Power Panelboards / A-Series II Power Panel (Types AQP, AEP, ADP; 'Type P & N')	GEA	panelboard	FAM-GEA-002	88
AS	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
AV Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	172
AV-Line	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	172
AV-LINE	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	172
AV-Line switchboards (legacy)	AV-Line switchboards (legacy)	GEA	switchboard	FAM-GEA-009	172
BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	12
Bryant BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	12
CCB	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	101
CCB-QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	101
CDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	15
CDP-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
CDP-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
CDP/HCDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	15
CDP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
CDP?	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	101
Challenger BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	12
Class II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
Cutler-Hammer Type ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	68
ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	68
ES switchboard	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	68
F1	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
F2	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
FC-20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FC-I	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267

Name / alias	Family	Mfr	Type	ID	Pg
FC-II	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FC20	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FCI	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FCII	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FCRS	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
FDP	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	32
FPP (10in)	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
FPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
HCDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	15
HWFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
IFS	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	69
IFS switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	69
Integrated Facility Switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	69
Integrated Facility System switchboard	Integrated Facility System switchboard	EAT	switchboard	FAM-EAT-006	69
NA1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NAB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NAB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	106
NAB / NHB bolt-on panelboards (legacy)	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	106
NDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
New Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
NextGen P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
NH1B	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NHB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NHB	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	106
NHDP	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NHEB	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
NLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NLAB-AB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NLAB-ABH	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NLAB-LX	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NLAB?	NAB / NHB bolt-on panelboards (legacy)	GEA	panelboard	FAM-GEA-007	106
NPLAB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NQB	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
NQC	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42

Name / alias	Family	Mfr	Type	ID	Pg
NQP	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
Original P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	173
P1	Type P1 (original)	SIE	panelboard	FAM-SIE-002	173
P1 (pre-2014/2015)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	173
P1...N	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
P1...T	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
P2	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	182
P3	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	194
P4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
P5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
Pow-R-Line 1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
Pow-R-Line 2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
Pow-R-Line 3	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	47
Pow-R-Line 4	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
Pow-R-Line 4 panelboard (PRL4B / PRL4F)	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
Pow-R-Line 4B	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
POW-R-LINE C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
Pow-R-Line C switchboard	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
Pow-R-Line CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	70
Pow-R-Line CS switchboard	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	70
Pow-R-Line I	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	70
Pow-R-Line i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	70
Pow-R-Line i switchboard	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	70
PRL CS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	70
PRL i	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	70
PRL-C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
PRL1	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
PRL1-LX	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
PRL1/PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
PRL2	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
PRL3	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	47
PRL3-LX	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	47
PRL4	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
PRL4B	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
PRL4F	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
PRL4X	Pow-R-Line 4 panelboard (PRL4B / PRL4F)	EAT	panelboard	FAM-EAT-014	48
PRLC	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
PRLCS	Pow-R-Line CS switchboard	EAT	switchboard	FAM-EAT-005	70
PRLi	Pow-R-Line i switchboard	EAT	switchboard	FAM-EAT-004	70
Pro-Stock	A-Series Lighting Panelboards (Types AL, AQ, AE/AS, AD / AD Plus, Lighting Control Panel, Pro-Stock AQU/AEU)	GEA	panelboard	FAM-GEA-001	71
QMR	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	101
ReliaGear neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	107

Name / alias	Family	Mfr	Type	ID	Pg
ReliaGear neXT Power Panelboards	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	107
ReliaGear OEM neXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	107
Revised P1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
RG-NEXT	ReliaGear neXT Power Panelboards	GEA	panelboard	FAM-GEA-008	107
RP1	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
S1/S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
S4	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
S5	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
SB	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
SB1	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
SB2	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
SB3	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
SB4 (blank plates only)	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
SCP	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	107
SCP+	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	107
SCP-PLUS	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	107
SE	Type SE panelboard	SIE	panelboard	FAM-SIE-004	267
SE panels	Type SE panelboard	SIE	panelboard	FAM-SIE-004	267
Sentron Deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
Sentron S1	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
Sentron S2	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
Sentron SPP shallow	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
Spectra	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
Spectra Bolt-On (SBO)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
Spectra Plug-In	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
Spectra Series	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
Spectra Series Type SCP Plus panelboards	Spectra Series Type SCP Plus panelboards	GEA	panelboard	FAM-GEA-005	107
SPECTRA-PP	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
SpectraRMS	Spectra Series Power Panelboards (Plug-In interior type APN; Bolt-On interior type APNB)	GEA	panelboard	FAM-GEA-004	112
SPP	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
SPP deep	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
SPP6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267

Name / alias	Family	Mfr	Type	ID	Pg
Type 1 Pow-R-Line C	Pow-R-Line C switchboard	EAT	switchboard	FAM-EAT-001	69
Type BR	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	12
Type BR loadcenter	Type BR loadcenter	EAT	loadcenter	FAM-EAT-015	12
Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	Type CCB and QMR power panelboards (legacy; listed under Spectra Series Power renewal parts)	GEA	panelboard	FAM-GEA-006	101
Type ES	Cutler-Hammer Type ES switchboard	EAT	switchboard	FAM-EAT-003	68
Type P1 (original)	Type P1 (original)	SIE	panelboard	FAM-SIE-002	173
Type P1 (Revised P1)	Type P1 (Revised P1)	SIE	panelboard	FAM-SIE-001	232
Type P2 panelboard	Type P2 panelboard	SIE	panelboard	FAM-SIE-005	182
Type P3 panelboard	Type P3 panelboard	SIE	panelboard	FAM-SIE-006	194
Type P4 / S4 / Sentron SPP (10in deep) power panelboard	Type P4 / S4 / Sentron SPP (10in deep) power panelboard	SIE	panelboard	FAM-SIE-007	199
Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	Type P5 / S5 / Sentron SPP deep (12.75in deep) power panelboard	SIE	panelboard	FAM-SIE-008	214
Type S1 / S2 lighting panelboards	Type S1 / S2 lighting panelboards	SIE	panelboard	FAM-SIE-003	265
Type SB1 / SB2 / SB3 distribution switchboards	Type SB1 / SB2 / SB3 distribution switchboards	SIE	switchboard	FAM-SIE-009	280
Type SE panelboard	Type SE panelboard	SIE	panelboard	FAM-SIE-004	267
Type WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70
Type WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70
VB-5	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
VB-6	Series 5 / Series 6 CDP, VB5/VB6 panelboards and FC20 / FCI / FCII switchboards (ITE / Siemens-Allis heritage)	SIE	switchboard	FAM-SIE-010	267
WCA	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
WEB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
WEHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
Westinghouse CDP	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	15
Westinghouse CDP / HCDP panelboard	Westinghouse CDP / HCDP panelboard	EAT	panelboard	FAM-EAT-007	15
Westinghouse FDP	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	32
Westinghouse FDP fusible panelboard	Westinghouse FDP fusible panelboard	EAT	panelboard	FAM-EAT-008	32
Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	Westinghouse NAB / NA1B / NH1B / NDP / NEB panelboards	EAT	panelboard	FAM-EAT-013	42
Westinghouse NLAB lighting panelboard	Westinghouse NLAB lighting panelboard	EAT	panelboard	FAM-EAT-012	42
Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	Westinghouse Pow-R-Line 1 / Pow-R-Line 2 panelboard (vintage)	EAT	panelboard	FAM-EAT-009	43
Westinghouse Pow-R-Line 3 panelboard (vintage)	Westinghouse Pow-R-Line 3 panelboard (vintage)	EAT	panelboard	FAM-EAT-010	47
Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
Westinghouse WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70
WF	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70
WF/WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70
WF/WRP switchboard	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70

Name / alias	Family	Mfr	Type	ID	Pg
WFB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
WGB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
WGHB	Westinghouse WEB/WCA/WEHB/WFB/HWFB panelboards	EAT	panelboard	FAM-EAT-011	68
WRP	Westinghouse WF/WRP switchboard	EAT	switchboard	FAM-EAT-002	70

8.3 Part-number index (primary and alternate numbers)

Sorted by normalised number (punctuation and spaces removed). Search a partial number by its leading characters.

Number	Type	Mfr	Description	Catalogue ID	Pg
0080429	primary	EAT	Panelboard trim lock — T-handle lock	EDH-EAT-00069	23
114C247G01	primary	EAT	Panelboard trim lock — Lock used on lighting and small power panels as standard	EDH-EAT-00070	23
11-D-4554-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	259
11-D-4560-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	258
12-1800-01	alias	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	259
12-1800-01	alias	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	280
12-A-1801-01	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	258
12-A-1802-01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	261
139C5362P2	primary	GEA	Deadfront filler plate (shield insert) - QB (A-Series II power panel)	EDH-GEA-00035	99
139C5500P81	primary	GEA	3P breaker support bracket (ASPP6QD6D)	EDH-GEA-00022	97
139C5500P82	primary	GEA	3P breaker support bracket (ASPP6SE6D)	EDH-GEA-00023	98
139C5500P83	primary	GEA	3P breaker support bracket (ASPP6SG3S)	EDH-GEA-00024	98
139C5500P84	primary	GEA	3P breaker support bracket (ASPP6SF3S)	EDH-GEA-00025	98
139C5503P103	primary	GEA	Deadfront filler plate (shield insert) - SG/TFG (A-Series II power panel)	EDH-GEA-00033	100
139C5503P129	primary	GEA	Deadfront filler plate (shield insert) - TEY (A-Series II power panel)	EDH-GEA-00034	100
139C5503P64	primary	GEA	Deadfront filler plate (shield insert) - TQD (A-Series II power panel)	EDH-GEA-00030	100
139C5503P77	primary	GEA	Deadfront filler plate (shield insert) - SE/TED/FB (A-Series II power panel)	EDH-GEA-00031	101
139C5503P90	primary	GEA	Deadfront filler plate (shield insert) - SF/TFJ (A-Series II power panel)	EDH-GEA-00032	101
139C5700P86	primary	GEA	3P breaker support bracket (ASPP6FB6D)	EDH-GEA-00026	98
139C5702AQDG1	primary	GEA	Branch base, A phase, TQD (A-Series II)	EDH-GEA-00010	93
139C5702ASEG1	primary	GEA	Branch base, A phase, SE/TED/FB (A-Series II)	EDH-GEA-00011	94
139C5702ASFG1	primary	GEA	Branch base, A phase, SF (A-Series II)	EDH-GEA-00012	94
139C5702BQDG1	primary	GEA	Branch base, B phase, TQD (A-Series II)	EDH-GEA-00013	94
139C5702BSEG1	primary	GEA	Branch base, B phase, SE/TED/FB (A-Series II)	EDH-GEA-00014	94
139C5702BSFG1	primary	GEA	Branch base, B phase, SF (A-Series II)	EDH-GEA-00015	95
139C5702CQDG1	primary	GEA	Branch base, C phase, TQD (A-Series II)	EDH-GEA-00016	95
139C5702CSEG1	primary	GEA	Branch base, C phase, SE/TED/FB (A-Series II)	EDH-GEA-00017	95
139C5702CSFG1	primary	GEA	Branch base, C phase, SF (A-Series II)	EDH-GEA-00018	95
139C5720G3	primary	GEA	A-Series AE front mounting kit	EDH-GEA-00090	86
139C5720G6	primary	GEA	A-Series AQ/AL front mounting kit	EDH-GEA-00091	86
139C5720G9	primary	GEA	A-Series AD front mounting kit	EDH-GEA-00092	86
2NLK30A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	248
2NLK42A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	248
2NLK42B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00040	248
2NLK54A	supersedes	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	249
2NLK54B	primary	SIE	RP1 250A 200% neutral lug kit	EDH-SIE-00041	249

Number	Type	Mfr	Description	Catalogue ID	Pg
315A7046P7	primary	GEA	SG breaker strap, A phase (A-Series II)	EDH-GEA-00019	96
315A7046P8	primary	GEA	SG breaker strap, B phase (A-Series II)	EDH-GEA-00020	96
315A7046P9	primary	GEA	SG breaker strap, C phase (A-Series II)	EDH-GEA-00021	96
315A7048P20	primary	GEA	Center (B phase) strap (THQB/TEY, A-Series II)	EDH-GEA-00028	97
315A7049P10	primary	GEA	A & C phase 200A strap (THQB/TEY, A-Series II)	EDH-GEA-00027	97
3456B35H01	primary	EAT	PRL1/PRL2 blank cover 6.00 in high (style number)	EDH-EAT-00066	46
3456B99H01	primary	EAT	PRL1/PRL2 blank cover 3.00 in high (style number)	EDH-EAT-00065	46
3456B99H05	primary	EAT	PRL1/PRL2 blank cover 15.00 in high (style number)	EDH-EAT-00064	46
3457B16G01	primary	EAT	Panelboard trim lock — Lock used on lighting and small panels as standard	EDH-EAT-00071	24
3BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRS225)	EDH-EAT-00119	13
3BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (3BRSF150)	EDH-EAT-00118	13
3VA9233-0QA00	primary	SIE	3VA52 250A nut keeper kit (3)	EDH-SIE-00207	285
3VA9243-0QA00	primary	SIE	3VA61/62 150A/250A nut keeper kit (3)	EDH-SIE-00208	285
3VA9473-0QA00	primary	SIE	3VA5, 3VA6 400A/600A nut keeper kit (3)	EDH-SIE-00209	285
414A380G01	primary	EAT	Fastrim trim clamp for flush trim, PRL1/PRL2/PRL3 (3.13 in)	EDH-EAT-00074	47
414A380G02	primary	EAT	Replacement panelboard trim clamp, 2.50 in (CDP, FDP, NQB)	EDH-EAT-00073	25
42NLK30A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	249
42NLK42A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	249
42NLK54A	supersedes	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	249
42NLK54B	primary	SIE	RP1 400A 200% neutral lug kit	EDH-SIE-00042	249
4MLKA1	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	241
4MLKA1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00029	179
4MLKA1A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00019	241
4MLKA1B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00023	241
4MLKA3	equivalent	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	242
4MLKA3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00030	179
4MLKA3A	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00020	242
4MLKA3B	primary	SIE	Revised P1 400A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00024	242
4MLKC1	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	243
4MLKC1	primary	SIE	Original P1 400A main lug kit, 1-ph	EDH-SIE-00031	179
4MLKC1A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00021	243
4MLKC3	equivalent	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	243
4MLKC3	primary	SIE	Original P1 400A main lug kit, 3-ph	EDH-SIE-00032	180
4MLKC3A	primary	SIE	Revised P1 400A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00022	243
5155C81G01	primary	EAT	Panelboard trim lock — Present-day lock used on standard PRL1, 2 and 3	EDH-EAT-00072	24
5158C03G01	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00056	44
5158C03G02	primary	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00055	44
5158C03G03	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00058	44
5158C03G04	primary	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00057	44
5158C04G01	primary	EAT	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	EDH-EAT-00059	45
5158C05G01	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00061	45
5158C05G02	primary	EAT	PRL1/PRL2/PRL3 standard ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00060	45
5158C05G05	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes less than 30.00 in high (style number)	EDH-EAT-00063	45
5158C05G06	primary	EAT	PRL1/PRL2/PRL3 isolated ground bar, boxes 30.00 in and above (style number)	EDH-EAT-00062	46

Number	Type	Mfr	Description	Catalogue ID	Pg
6BL2C	primary	SIE	6BL2C connecting strap kit - BQ, BQH, HB, BL, BLH, HBL (3.75in, twin)	EDH-SIE-00201	269
6CLE2	primary	SIE	6CLE2 connecting strap kit - CED (3.75in, twin)	EDH-SIE-00155	215
6CLF1	primary	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	270
6CLF1C	alias	SIE	6CLF1 connecting strap kit - CFD6 (5in, single)	EDH-SIE-00191	270
6CLJ1	primary	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	271
6CLJ1C	alias	SIE	6CLJ1 connecting strap kit - CJD6 (8.75in, single)	EDH-SIE-00194	271
6CLL1	primary	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	272
6CLL1C	alias	SIE	6CLL1 connecting strap kit - CLD6 (8.75in, single)	EDH-SIE-00198	272
6E62	primary	SIE	6E62 connecting strap kit - ED2, ED4, ED6, HED4, HED6 (3.75in, twin)	EDH-SIE-00188	273
6F62	primary	SIE	6F62 connecting strap kit - FXD6, FD6, HFD6 (5in, twin)	EDH-SIE-00190	273
6FPB01	primary	SIE	6FPB01 blank plate, 1.25in unit space	EDH-SIE-00211	211
6FPB02	primary	SIE	6FPB02 blank plate, 2.5in unit space	EDH-SIE-00212	212
6FPB03	primary	SIE	6FPB03 blank plate, 3.75in unit space	EDH-SIE-00213	212
6FPB05	primary	SIE	6FPB05 blank plate, 5in unit space	EDH-SIE-00214	212
6FPB10	primary	SIE	6FPB10 blank plate, 10in unit space	EDH-SIE-00215	213
6FPB15	primary	SIE	6FPB15 blank plate, 15in unit space	EDH-SIE-00216	284
6JJ61	primary	SIE	6JJ61 connecting strap kit - JXD2, JXD6, JD6, HJD6 single branch (8.75in, single	EDH-SIE-00192	274
6JJ62	primary	SIE	6JJ62 connecting strap kit - JXD2, JXD6, JD6, HJD6 double branch (8.75in, twin)	EDH-SIE-00193	274
6LL61	primary	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	275
6LL61C	alias	SIE	6LL61 connecting strap kit - LXD6, LD6, HLD6 (8.75in, single)	EDH-SIE-00197	275
6M61C	primary	SIE	6M61C connecting strap kit - MXD6, MD6, HMD6, CMD6, SHMD6, SCMD6 (10in, single)	EDH-SIE-00203	276
6N61C	primary	SIE	6N61C connecting strap kit - NXD6, ND6, HND6, CND6, SHND6, SCND6 (10in, single)	EDH-SIE-00204	276
6QJ2	primary	SIE	6QJ2 connecting strap kit - QJ2, QJH2, QJ2-H (5in, twin)	EDH-SIE-00189	277
6QR2	primary	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	216
6QR2CAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	216
6QR2CCAN	alias	SIE	6QR2 connecting strap kit - QR (5.00in, twin)	EDH-SIE-00157	216
6SCJ1	primary	SIE	6SCJ1 connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00196	277
6SCL1	primary	SIE	6SCL1 connecting strap kit - SCLD6 (8.75in, single)	EDH-SIE-00200	278
6SCL61C	primary	SIE	6SCL61C connecting strap kit - SCJD6 (8.75in, single)	EDH-SIE-00202	278
6SJL1	primary	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	279
6SJL1C	alias	SIE	6SJL1 connecting strap kit - SJL, SJD6, SHJD6 (8.75in, single)	EDH-SIE-00195	279
6SLL1	primary	SIE	6SLL1 connecting strap kit - SLL, SLD6, SHLD6 (8.75in, single)	EDH-SIE-00199	279
75C145005G703	primary	GEA	QMR panelboard filler plate 3X	EDH-GEA-00275	105
75C145005G711	primary	GEA	CCB panelboard filler plate 2X	EDH-GEA-00270	105
75C145005G715	primary	GEA	CCB panelboard filler plate 6X	EDH-GEA-00271	105
8450C62H39	primary	EAT	Panelboard trim lock — Trim lock for right-handed door (hinged on right side)	EDH-EAT-00068	24
8712C73H01	primary	EAT	Fastrim trim clamp for surface trim, PRL1/PRL2/PRL3	EDH-EAT-00075	47
911E347P3	primary	GEA	3X branch base (THQB/TEY, A-Series II)	EDH-GEA-00029	99
ACSFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	108
ACSFPKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	108
ACSHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	108
ACSHKSK	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	108
ACSMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSG (SGD, SGH, SGL, SGP, s	EDH-GEA-00254	108

Number	Type	Mfr	Description	Catalogue ID	Pg
ACSMKSK	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACSMKSK (SKH, SKL, single)	EDH-GEA-00255	108
ACTFPKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	108
ACTFPKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	109
ACTFPKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	109
ACTFPKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	109
ACTFPKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	110
ACTFPKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	110
ACTFPKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	110
ACTFPKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	111
ACTFPKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	111
ACTHKEB1P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	108
ACTHKEB2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	109
ACTHKEB3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	109
ACTHKJD	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	109
ACTHKQD2P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	110
ACTHKQD3P	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	110
ACTHKSE	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	110
ACTHKSF	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	111
ACTHKSG	equivalent	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	111
ACTMKEB1P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB1P (TEB, TED, THED, dua	EDH-GEA-00246	108
ACTMKEB2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB2P (TEB, TED, THED, dua	EDH-GEA-00247	109
ACTMKEB3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKEB3P (TEB, TED, THED, dua	EDH-GEA-00248	109
ACTMKJD	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKJD (TJD, TJJ, TJK, dual)	EDH-GEA-00252	109
ACTMKQD2P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD2P (TQD, THQD, dual)	EDH-GEA-00250	110
ACTMKQD3P	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKQD3P (TQD, THQD, dual)	EDH-GEA-00251	110
ACTMKSE	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSE (SHE (SEH), SEL, SED,	EDH-GEA-00245	110
ACTMKSF	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSF (TFK, SFH, SFL, SFP, d	EDH-GEA-00249	111
ACTMKSG	primary	GEA	Spectra SCP Plus mounting hardware kit and straps ACTMKSG (SGD, SGH, SGL, SGP, d	EDH-GEA-00253	111
AEG10	primary	GEA	Spectra equipment ground kit AEG10	EDH-GEA-00236	157
AEG21	primary	GEA	Spectra equipment ground kit AEG21	EDH-GEA-00237	157
AEG21S	primary	GEA	Spectra equipment ground kit AEG21S	EDH-GEA-00238	157
AEG31S	primary	GEA	Spectra equipment ground kit AEG31S	EDH-GEA-00239	158

Number	Type	Mfr	Description	Catalogue ID	Pg
AEG47	primary	GEA	Spectra equipment ground kit AEG47	EDH-GEA-00240	158
AEG47S	primary	GEA	Spectra equipment ground kit AEG47S	EDH-GEA-00241	158
AFL120	primary	GEA	Spectra feed-thru lug cover plate kit AFL120	EDH-GEA-00243	117
AFL600	primary	GEA	Spectra feed-thru lug cover plate kit AFL600	EDH-GEA-00242	117
AFP2FBD	primary	GEA	Spectra breaker filler plate kit AFP2FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00131	159
AFP2QDD	primary	GEA	Spectra breaker filler plate kit AFP2QDD (TQD, THQD, dual)	EDH-GEA-00128	160
AFP2TED	primary	GEA	Spectra breaker filler plate kit AFP2TED (TEB, TED, dual)	EDH-GEA-00129	160
AFP3EYD	primary	GEA	Spectra breaker filler plate kit AFP3EYD (TEY, dual)	EDH-GEA-00130	160
AFP3FBD	primary	GEA	Spectra breaker filler plate kit AFP3FBD (FBV, FBN, FBH, FBL, dual)	EDH-GEA-00132	161
AFP3QDD	primary	GEA	Spectra breaker filler plate kit AFP3QDD (TQD, THQD, dual)	EDH-GEA-00133	161
AFP3SED	primary	GEA	Spectra breaker filler plate kit AFP3SED (TEB, TED, THED, SED, SEH, SEL, SEP, du	EDH-GEA-00134	161
AFP3SFD	primary	GEA	Spectra breaker filler plate kit AFP3SFD (SFH, SFL, SFP, dual)	EDH-GEA-00135	161
AFP3SFS	primary	GEA	Spectra breaker filler plate kit AFP3SFS (SFH, SFL, SFP, single)	EDH-GEA-00139	162
AFP3TFD	primary	GEA	Spectra breaker filler plate kit AFP3TFD (TFJ, TFK, THFK, dual)	EDH-GEA-00136	162
AFP3TFS	primary	GEA	Spectra breaker filler plate kit AFP3TFS (TFJ, TFK, THFK, single)	EDH-GEA-00140	162
AFP4FGD	primary	GEA	Spectra breaker filler plate kit AFP4FGD (FGV, FGN, FGH, FGP, dual)	EDH-GEA-00137	162
AFP4FGS	primary	GEA	Spectra breaker filler plate kit AFP4FGS (FGV, FGN, FGH, FGP, single)	EDH-GEA-00141	163
AFP4SGD	primary	GEA	Spectra breaker filler plate kit AFP4SGD (SGH, SGL, SGP, dual)	EDH-GEA-00138	163
AFP4SGS	primary	GEA	Spectra breaker filler plate kit AFP4SGS (SGH, SGL, SGP, single)	EDH-GEA-00142	163
AFP5LCS	primary	GEA	Spectra breaker filler plate kit AFP5LCS (SKP, single)	EDH-GEA-00143	163
AFP6SKS	primary	GEA	Spectra breaker filler plate kit AFP6SKS (SKP, SKH, SKL, TKM, THKM, single)	EDH-GEA-00144	164
AHKBE1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBE1 (SE)	EDH-GEA-00194	168
AHKBF1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBF1 (SF)	EDH-GEA-00195	169
AHKBFB1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFB1 (FB)	EDH-GEA-00200	169
AHKBFD1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFD1 (FCS, FCV, FCN, FCH, FCL)	EDH-GEA-00198	169
AHKBFG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBFG1 (FGV, FGN, FGH, FGP)	EDH-GEA-00199	169
AHKBG1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBG1 (SG)	EDH-GEA-00196	169
AHKBQ1	primary	GEA	Spectra bolt-on breaker mounting hardware only AHKBQ1 (THQD)	EDH-GEA-00197	169
AHKE1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKE1	EDH-GEA-00185	170
AHKEL1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKEL1	EDH-GEA-00186	170
AHKF1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKF1	EDH-GEA-00187	170
AHKFD1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFD1	EDH-GEA-00192	170
AHKFG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKFG1	EDH-GEA-00193	171
AHKG1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKG1	EDH-GEA-00188	171
AHKJ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKJ1	EDH-GEA-00189	171
AHKLB1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKLB1	EDH-GEA-00190	171
AHKQ1	primary	GEA	Spectra plug-in single-breaker mounting hardware AHKQ1	EDH-GEA-00191	172
AMC2FGM	alias	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	135
AMC2FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00181	135

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC2FJ	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	135
AMC2FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00179	135
AMC2FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	136
AMC2FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC2FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00178	136
AMC2FLS	alias	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	136
AMC2FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC2FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00184	136
AMC2GM	alias	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	137
AMC2GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00182	137
AMC2JK	alias	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	138
AMC2JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC2JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00180	138
AMC2KM	alias	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	138
AMC2KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC2KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00183	138
AMC3FGM	alias	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	139
AMC3FGMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FGMFP (FGV, FGN, FGH, FGP; single br	EDH-GEA-00162	139
AMC3FJ	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	139
AMC3FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFP (SFHA, SFLA, SFPA; single branc	EDH-GEA-00160	139
AMC3FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	140
AMC3FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC3FJFPTF (TFJ, TFK, THFK; single branc	EDH-GEA-00159	140
AMC3FLS	alias	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	140
AMC3FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC3FLSFP (SFHA, SFLA, SFPA; single bran	EDH-GEA-00165	140
AMC3GM	alias	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	141
AMC3GMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3GMFP (SGDA, SGHA, SGLA, SGPA; single	EDH-GEA-00163	141
AMC3JK	alias	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	141
AMC3JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC3JKFP (TJD, TJJ / TJK, THJK; single b	EDH-GEA-00161	141
AMC3KM	alias	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	142
AMC3KMFP	primary	GEA	Spectra plug-in breaker mounting module AMC3KMFP (TKM, THKM, SKHA, SKLA; single	EDH-GEA-00164	142
AMC4EB	alias	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	142
AMC4EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBFP (TEB, TED; double branch)	EDH-GEA-00167	142
AMC4EBS	alias	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	143
AMC4EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00176	143

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC4FDB	alias	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	143
AMC4FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00166	143
AMC4FDS	alias	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	144
AMC4FDSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FDSFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00175	144
AMC4FGB	alias	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	144
AMC4FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FGBFP (FGV, FGN, FGH, FGP; double br	EDH-GEA-00173	144
AMC4FJ	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	145
AMC4FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00171	145
AMC4FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	146
AMC4FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC4FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00170	146
AMC4FLS	alias	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	146
AMC4FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC4FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00177	146
AMC4GB	alias	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	147
AMC4GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC4GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00174	147
AMC4JK	alias	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	147
AMC4JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC4JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00172	147
AMC4QD	alias	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	148
AMC4QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC4QDFP (TQD, THQD; double branch)	EDH-GEA-00169	148
AMC4SE	alias	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	149
AMC4SEFP	primary	GEA	Spectra plug-in breaker mounting module AMC4SEFP (SEDA, SEHA, SELA, SEPA, THED;	EDH-GEA-00168	149
AMC6EB	alias	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	149
AMC6EBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBFP (TEB, TED, THED, SEDA, SEHA, SE	EDH-GEA-00149	149
AMC6EBS	alias	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	150
AMC6EBSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EBSFP (SEDA, SEHA, SELA, SEPA; doubl	EDH-GEA-00157	150
AMC6EY	alias	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	150
AMC6EYFP	primary	GEA	Spectra plug-in breaker mounting module AMC6EYFP (TEY; double branch)	EDH-GEA-00146	150
AMC6FB	alias	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	151
AMC6FBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FBFP (FBV, FBN, FBH, FBL; double bra	EDH-GEA-00147	151
AMC6FDB	alias	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	151
AMC6FDBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FDBFP (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00148	151

Number	Type	Mfr	Description	Catalogue ID	Pg
AMC6FDSPF	primary	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	152
AMC6FDSPF	alias	GEA	Spectra plug-in breaker mounting module AMC6FDSPF (FCS, FCV, FCN, FCH, FCL; doub	EDH-GEA-00156	152
AMC6FGB	alias	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	152
AMC6FGBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FGBFP (FGL, FGN, FGH, FGP; double br	EDH-GEA-00154	152
AMC6FJ	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	153
AMC6FJFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFP (SFHA, SFLA, SFPA; double branc	EDH-GEA-00152	153
AMC6FJFPTF	primary	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	153
AMC6FJFPTF	alias	GEA	Spectra plug-in breaker mounting module AMC6FJFPTF (TFJ, TFK, THFK; double branc	EDH-GEA-00151	153
AMC6FLS	alias	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	154
AMC6FLSFP	primary	GEA	Spectra plug-in breaker mounting module AMC6FLSFP (SFHA, SFLA, SFPA; double bran	EDH-GEA-00158	154
AMC6GB	alias	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	154
AMC6GBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6GBFP (SGDA, SGHA, SGLA, SGPA; double	EDH-GEA-00155	154
AMC6JK	alias	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	155
AMC6JKFP	primary	GEA	Spectra plug-in breaker mounting module AMC6JKFP (TJD, TJJ / TJK, THJK; double b	EDH-GEA-00153	155
AMC6QB	alias	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	155
AMC6QBFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QBFP (THQB, THHQB; double branch)	EDH-GEA-00145	155
AMC6QD	alias	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	156
AMC6QDFP	primary	GEA	Spectra plug-in breaker mounting module AMC6QDFP (TQD, THQD; double branch)	EDH-GEA-00150	156
AMCB2FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	118
AMCB2FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FGMFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00119	118
AMCB2FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	119
AMCB2FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFP (SFH, SFL, SFP, 2P singl	EDH-GEA-00117	119
AMCB2FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	119
AMCB2FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2FJFPTF (TFJ, TFK, THFK, 2P si	EDH-GEA-00118	119
AMCB2GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	120
AMCB2GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2GMFP (SGH, SGL, SGP, 2P singl	EDH-GEA-00120	120
AMCB2KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	120
AMCB2KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB2KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00126	120
AMCB3FGM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	121
AMCB3FGMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FGMFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00123	121

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB3FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	121
AMCB3FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFP (SFH, SFL, SFP, 3P singl	EDH-GEA-00121	121
AMCB3FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	122
AMCB3FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3FJFPTF (TFJ, TFK, THFK, 3P si	EDH-GEA-00122	122
AMCB3GM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	122
AMCB3GMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3GMFP (SGH, SGL, SGP, 3P singl	EDH-GEA-00124	122
AMCB3KM	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	123
AMCB3KMFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3KMFP (SKH, SKL, SKP, TKM, THK	EDH-GEA-00127	123
AMCB3LB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	123
AMCB3LBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB3LBFP (SKP, 2P single)	EDH-GEA-00125	123
AMCB4EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	124
AMCB4EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EBFP (TEB, TED, 2P dual)	EDH-GEA-00098	124
AMCB4EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	124
AMCB4EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4EYFP (TEY, 2P dual)	EDH-GEA-00099	124
AMCB4FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	125
AMCB4FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FBFP (FBV, FBN, FBH, FBL, 2P	EDH-GEA-00100	125
AMCB4FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	125
AMCB4FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00101	125
AMCB4FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	125
AMCB4FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FGBFP (FGV, FGN, FGH, FGP, 2P	EDH-GEA-00113	125
AMCB4FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	126
AMCB4FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFP (SFH, SFL, SFP, 2P dual)	EDH-GEA-00109	126
AMCB4FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	126
AMCB4FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4FJFPTF (TFJ, TFK, THFK, 2P du	EDH-GEA-00111	126
AMCB4GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	127
AMCB4GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4GBFP (SGH, SGL, SGP, 2P dual)	EDH-GEA-00114	127
AMCB4QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	127
AMCB4QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4QDFP (TQD, THQD, 2P dual)	EDH-GEA-00102	127
AMCB4SE	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	128
AMCB4SEFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB4SEFP (THED, SED, SEH, SEL, SE	EDH-GEA-00103	128

Number	Type	Mfr	Description	Catalogue ID	Pg
AMCB6EB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	128
AMCB6EBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EBFP (TEB, TED, THED, SED, SE	EDH-GEA-00104	128
AMCB6EY	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	129
AMCB6EYFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6EYFP (TEY, 3P dual)	EDH-GEA-00105	129
AMCB6FB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	129
AMCB6FBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FBFP (FBV, FBN, FBH, FBL, 3P	EDH-GEA-00106	129
AMCB6FDB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	130
AMCB6FDBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FDBFP (FCS, FCV, FCN, FCH, FC	EDH-GEA-00107	130
AMCB6FGB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	130
AMCB6FGBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FGBFP (FGV, FGN, FGH, FGP, 3P	EDH-GEA-00115	130
AMCB6FJ	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	131
AMCB6FJFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFP (SFH, SFL, SFP, 3P dual)	EDH-GEA-00110	131
AMCB6FJFPTF	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	131
AMCB6FJTF	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6FJFPTF (TFJ, TFK, THFK, 3P du	EDH-GEA-00112	131
AMCB6GB	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	132
AMCB6GBFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6GBFP (SGH, SGL, SGP, 3P dual)	EDH-GEA-00116	132
AMCB6QD	alias	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	132
AMCB6QDFP	primary	GEA	Spectra bolt-on breaker strap kit with filler AMCB6QDFP (TQD, THQD, 3P dual)	EDH-GEA-00108	132
AMCB6TEDL	primary	GEA	Spectra circuit breaker cover (filler) kit for TED6 with TEDL current limiter	EDH-GEA-00244	164
AML3120CFP	primary	GEA	Spectra main lug module AML3120CFP (1200 A compression)	EDH-GEA-00231	113
AML3120FP	primary	GEA	Spectra main lug module AML3120FP (1200 A mechanical)	EDH-GEA-00226	113
AML3250CFP	primary	GEA	Spectra main lug module AML3250CFP (250 A compression)	EDH-GEA-00227	114
AML3250FP	primary	GEA	Spectra main lug module AML3250FP (250 A mechanical)	EDH-GEA-00220	114
AML3250SFP	primary	GEA	Spectra main lug module AML3250SFP (250 A mechanical)	EDH-GEA-00219	114
AML3400CFP	primary	GEA	Spectra main lug module AML3400CFP (400 A compression)	EDH-GEA-00228	114
AML3400FP	primary	GEA	Spectra main lug module AML3400FP (400 A mechanical)	EDH-GEA-00222	115
AML3400SFP	primary	GEA	Spectra main lug module AML3400SFP (400 A mechanical)	EDH-GEA-00221	115
AML3600CFP	primary	GEA	Spectra main lug module AML3600CFP (600 A compression)	EDH-GEA-00229	115
AML3600FP	primary	GEA	Spectra main lug module AML3600FP (600 A mechanical)	EDH-GEA-00224	115
AML3600SFP	primary	GEA	Spectra main lug module AML3600SFP (600 A mechanical)	EDH-GEA-00223	116
AML3800CFP	primary	GEA	Spectra main lug module AML3800CFP (800 A compression)	EDH-GEA-00230	116
AML3800FP	primary	GEA	Spectra main lug module AML3800FP (800 A mechanical)	EDH-GEA-00225	116
ANK120D	primary	GEA	Spectra neutral kit ANK120D	EDH-GEA-00235	156
ANK800D	primary	GEA	Spectra neutral kit ANK800D	EDH-GEA-00234	156
ANKN120	primary	GEA	Spectra neutral kit ANKN120	EDH-GEA-00233	157
ANKN400	primary	GEA	Spectra neutral kit ANKN400	EDH-GEA-00232	157
APHBL	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - plug-on AL panels	EDH-GEA-00084	86

Number	Type	Mfr	Description	Catalogue ID	Pg
APHBQ	primary	GEA	A-Series Delta hi-leg conversion kit, to add B-phase - bolt-on AE/AQ panels	EDH-GEA-00083	87
APN48	primary	GEA	A-Series Permanent circuit number kit, Nos 1-48	EDH-GEA-00093	87
APN84	primary	GEA	A-Series Permanent circuit number kit, Nos 43-84	EDH-GEA-00094	88
APP1	primary	GEA	Spectra blank filler plate 1X (36, 40 in box)	EDH-GEA-00202	164
APP1S	primary	GEA	Spectra blank filler plate 1X (27, 31 in box)	EDH-GEA-00201	164
APP1W	primary	GEA	Spectra blank filler plate 1X (44 in box)	EDH-GEA-00203	165
APP2	primary	GEA	Spectra blank filler plate 2X (36, 40 in box)	EDH-GEA-00205	165
APP2S	primary	GEA	Spectra blank filler plate 2X (27, 31 in box)	EDH-GEA-00204	165
APP2W	primary	GEA	Spectra blank filler plate 2X (44 in box)	EDH-GEA-00206	165
APP3	primary	GEA	Spectra blank filler plate 3X (36, 40 in box)	EDH-GEA-00208	165
APP3S	primary	GEA	Spectra blank filler plate 3X (27, 31 in box)	EDH-GEA-00207	166
APP3W	primary	GEA	Spectra blank filler plate 3X (44 in box)	EDH-GEA-00209	166
APP4	primary	GEA	Spectra blank filler plate 4X (36, 40 in box)	EDH-GEA-00211	166
APP4S	primary	GEA	Spectra blank filler plate 4X (27, 31 in box)	EDH-GEA-00210	166
APP4W	primary	GEA	Spectra blank filler plate 4X (44 in box)	EDH-GEA-00212	166
APP5	primary	GEA	Spectra blank filler plate 5X (36, 40 in box)	EDH-GEA-00214	167
APP5S	primary	GEA	Spectra blank filler plate 5X (27, 31 in box)	EDH-GEA-00213	167
APP5W	primary	GEA	Spectra blank filler plate 5X (44 in box)	EDH-GEA-00215	167
APP6	primary	GEA	Spectra blank filler plate 6X (36, 40 in box)	EDH-GEA-00217	167
APP6S	primary	GEA	Spectra blank filler plate 6X (27, 31 in box)	EDH-GEA-00216	167
APP6W	primary	GEA	Spectra blank filler plate 6X (44 in box)	EDH-GEA-00218	168
ASP25AD65KA	primary	GEA	A-Series AD 25 to 65 kAIC barrier kit	EDH-GEA-00087	85
ASP2PTFJ3P	primary	GEA	A-Series 2P to 3P SF conversion kit for horizontal subfeed	EDH-GEA-00086	87
ASP2PTQD3P	primary	GEA	A-Series 2P to 3P TQD conversion kit	EDH-GEA-00085	87
ASPAQLEBKT	primary	GEA	A-Series AQ/AL/AE rail bracket	EDH-GEA-00089	85
ASPFB12P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 12 poles	EDH-GEA-00038	82
ASPFB3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type FB - for mounting 3 poles	EDH-GEA-00039	82
ASPP6EY12D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, twelve-pole	EDH-GEA-00009	89
ASPP6EY6D	primary	GEA	A-Series II power panel TEY three-phase circuit breaker kit, six-pole	EDH-GEA-00008	89
ASPP6FB6D	primary	GEA	A-Series II power panel FB three-phase circuit breaker kit, six-pole	EDH-GEA-00005	90
ASPP6QB12D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, twelve-pole	EDH-GEA-00007	90
ASPP6QB6D	primary	GEA	A-Series II power panel THQB three-phase circuit breaker kit, six-pole	EDH-GEA-00006	91
ASPP6QD6D	primary	GEA	A-Series II power panel TQD three-phase circuit breaker kit, six-pole (double-br	EDH-GEA-00001	91
ASPP6SE6D	primary	GEA	A-Series II power panel SE/TED three-phase circuit breaker kit, six-pole	EDH-GEA-00002	92
ASPP6SF3S	primary	GEA	A-Series II power panel SF three-phase circuit breaker kit, three-pole single	EDH-GEA-00003	92
ASPP6SG3S	primary	GEA	A-Series II power panel SG three-phase circuit breaker kit, three-pole	EDH-GEA-00004	93
ASPTED3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TED/THED4/SE	EDH-GEA-00036	82
ASPTQD3P	primary	GEA	A-Series Breaker mounting hardware kit, breaker type TQD/THQD	EDH-GEA-00037	82
BBKB32	primary	SIE	P2/P3 BL/BQD 100A max twin-mount branch strap kit	EDH-SIE-00102	183
BBKEB32	primary	SIE	P3 NEB/HEB 6-pole 3in branch breaker kit	EDH-SIE-00107	195
BBKED32	primary	SIE	P2/P3 ED twin-mount branch strap kit	EDH-SIE-00104	184
BBKGB32	primary	SIE	P2/P3 GB2 (NGB2/HGB2/LGB2) twin-mount branch strap kit	EDH-SIE-00106	184

Number	Type	Mfr	Description	Catalogue ID	Pg
BBKNB32	primary	SIE	P2/P3 xGB (NGB/HGB/LGB) twin-mount branch strap kit	EDH-SIE-00105	185
BBKQ1	primary	SIE	P2 QJ single-mount branch strap kit	EDH-SIE-00110	185
BBKQ2	primary	SIE	P3 branch breaker kit for 2- and 3-pole QJ twin mount	EDH-SIE-00111	195
BBKQR1	primary	SIE	P2 QR 225A max single-mount branch strap kit	EDH-SIE-00108	185
BBKQR2	primary	SIE	P3 twin breaker mounting kit for QR	EDH-SIE-00109	196
BBKQRP1FK	primary	SIE	P2 filler kit for QR	EDH-SIE-00080	194
BBKQRP2FK	primary	SIE	P3 filler kit for QR	EDH-SIE-00081	199
BBKVA4P2P3	primary	SIE	P2/P3 3VA41/xGB 125A max twin-mount strap kit	EDH-SIE-00103	186
BBKVA5262P2HW	primary	SIE	Hardware kit for branch/main horizontal single mount or vertical mount 3VA52/61/	EDH-SIE-00113	193
BBKVA5262P2S	primary	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	186
BBKVA5262S	alias	SIE	P2/P3 250A max 3VA52/61/62 single-mount branch strap kit	EDH-SIE-00112	186
BBKVA52P3HW	primary	SIE	P3 branch breaker hardware kit for 3VA52 twin mount: screw retainers & mounting	EDH-SIE-00115	198
BBKVA52P3T	primary	SIE	P3 strap kit	EDH-SIE-00114	196
BHT	primary	EAT	Type BR loadcenter handle tie bar joining two adjacent single-pole type br break	EDH-EAT-00125	15
BINA	primary	EAT	Type BR loadcenter isolated neutral assembly (computer circuits) (BINA)	EDH-EAT-00123	14
BK1A	primary	SIE	Revised P1 bonding kit including service disconnect label	EDH-SIE-00096	263
BNDKT	primary	GEA	A-Series Service entrance kit 225 A	EDH-GEA-00081	86
BNDKT6	primary	GEA	A-Series Service entrance kit 400/600 A	EDH-GEA-00082	86
BNK2	primary	SIE	Neutral lug kit	EDH-SIE-00116	187
BNK350N	primary	SIE	Neutral lug kit	EDH-SIE-00117	182
BNKP2EX1	primary	SIE	P2 neutral extension (150A max) adding (11) #6 & (3) 1/0 connections near AFCI/G	EDH-SIE-00119	187
BRFP	primary	EAT	Type BR loadcenter filler plate (BRFP)	EDH-EAT-00121	14
BRL200	primary	EAT	Type BR loadcenter main lugs (BRL200)	EDH-EAT-00120	12
BRLW	primary	EAT	Type BR loadcenter padlockable handle lockoff for 1- (BRLW)	EDH-EAT-00126	15
BRLW1	primary	EAT	Type BR loadcenter padlockable handle lockoff for single-pole type br (handle mo	EDH-EAT-00127	15
BRS225	primary	EAT	Type BR loadcenter main and subfeed lug block (BRS225)	EDH-EAT-00117	13
BRSF125	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF125)	EDH-EAT-00115	13
BRSF150	primary	EAT	Type BR loadcenter main and subfeed lug block (BRSF150)	EDH-EAT-00116	13
BWFP	primary	EAT	Type BR loadcenter filler plate for bw main circuit breaker space (with hardware	EDH-EAT-00122	14
CCBFP1	primary	GEA	CCB panelboard filler plate 1X	EDH-GEA-00267	105
CCBFP3	primary	GEA	CCB panelboard filler plate 3X	EDH-GEA-00268	105
CCBFP5	primary	GEA	CCB panelboard filler plate 5X	EDH-GEA-00269	106
CNLK30A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	250
CNLK42A	supersedes	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	250
CNLK42B	primary	SIE	RP1 CU neutral lug kit 42B	EDH-SIE-00038	250
CNLK54A	supersedes	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	250
CNLK54B	primary	SIE	RP1 CU neutral lug kit 54B	EDH-SIE-00039	250
DFFP01A	supersedes	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	258
DFFP01B	primary	SIE	P1 main or subfeed 250A blank filler plate	EDH-SIE-00064	258
DFFP01C	primary	SIE	Revised P1 400A main blank filler plate	EDH-SIE-00065	258
DFFP1	supersedes	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	259
DFFP1A	primary	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	259
DFFP1A	superseded_by	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	280
DFFP3	primary	SIE	Deadfront filler kit	EDH-SIE-00076	191
DFFP6	primary	SIE	Deadfront filler kit	EDH-SIE-00077	191
DFFPED01	supersedes	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	261

Number	Type	Mfr	Description	Catalogue ID	Pg
DFFPED01	primary	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	182
DFFPFD01	primary	SIE	FD main filler plate (plastic) for 1-ph and 3-ph P1 panels	EDH-SIE-00070	259
DFFPJD01	primary	SIE	JD main filler plate (plastic)	EDH-SIE-00071	260
DFFPJD02	primary	SIE	JD main filler plate for Revised P1 400A with large MB opening only	EDH-SIE-00072	260
DFFPQJ01	primary	SIE	QJ main filler plate	EDH-SIE-00073	260
DFFPQJ02	primary	SIE	QJ main filler plate	EDH-SIE-00074	261
DFFPVA41A	primary	SIE	RP1 main/sub-feed filler for 3VA4/BL/BQD/ED/xGB 125A max	EDH-SIE-00066	261
DFFPVA41A	superseded_by	SIE	P1 main filler for 100-125A frames ED	EDH-SIE-00069	182
DFFPVA5262A	primary	SIE	RP1 main or subfeed filler	EDH-SIE-00067	261
DFFPVA5262P2A	primary	SIE	3VA52/61/62 filler for single mount P2/P3 applications	EDH-SIE-00078	192
DFFPVA5262P2B	primary	SIE	3VA52/61/62 (single mount) blank plate with provision barrier (one set for P2 or	EDH-SIE-00079	192
DFFPVA5363A	primary	SIE	RP1 400A main filler for 3VA53/63	EDH-SIE-00068	262
DFK07	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00086	190
DFK08	primary	SIE	P2/P3 deadfront center strip	EDH-SIE-00087	190
DFK1	primary	SIE	P2/P3 deadfront center strip kit	EDH-SIE-00085	191
DFP3AP01	primary	SIE	P3 adapter plate	EDH-SIE-00084	192
EBF1	primary	SIE	NEB/HEB filler plate (EB deadfront filler)	EDH-SIE-00083	197
ECGK	primary	SIE	Copper equipment ground bus kit	EDH-SIE-00099	253
EGK	primary	SIE	Al/Cu equipment ground bus kit	EDH-SIE-00098	253
EGS12	primary	GEA	A-Series Equipment ground, standard isolated/insulated, per 12 branch positions	EDH-GEA-00097	84
EWK1	primary	SIE	End wall kit with knockouts (20in W x 5.75in D) 20in	EDH-SIE-00240	262
EWK1B	primary	SIE	End wall kit without knockouts (20in W x 5.75in D) 20in	EDH-SIE-00243	263
EWK2	primary	SIE	End wall kit with knockouts (24in W x 7.75in D) 24in	EDH-SIE-00241	197
EWK2B	primary	SIE	End wall kit without knockouts (24in W x 7.75in D) 24in	EDH-SIE-00244	198
EWK3	primary	SIE	End wall kit - open center space - ref B74FLR (20in W x 5.75in D) 20in	EDH-SIE-00242	263
ICGK	primary	SIE	Insulated copper ground bus kit	EDH-SIE-00101	254
IGK	primary	SIE	Insulated Al/Cu ground bus kit	EDH-SIE-00100	254
IMK1	primary	SIE	Interior mounting kit with adjustment provisions for P1/P2/P3	EDH-SIE-00095	263
K80522	primary	EAT	Panelboard trim lock — Trim lock for left-handed door (hinged on left side)	EDH-EAT-00067	24
KCDPCA	primary	EAT	CDP breaker connector kit, twin-mount, for CA, CAH, HCA	EDH-EAT-00004	17
KCDPDK	primary	EAT	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	EDH-EAT-00024	26
KCDPED225	primary	EAT	CDP breaker connector kit, twin-mount, for FD, FDB, HFD, FDC, ED, EDH, EDC	EDH-EAT-00002	17
KCDPEHD	primary	EAT	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse E	EDH-EAT-00016	27
KCDPFB100	primary	EAT	CDP breaker connector kit, twin-mount, for EHD, FDB, FD, HFD, FDC (100 A maximum	EDH-EAT-00001	17
KCDPFB100-H	primary	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00013	25
KCDPFBP	primary	EAT	CDP breaker connector kit, twin-mount, for FB-P, FCL	EDH-EAT-00003	18
KCDPFD	primary	EAT	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HF	EDH-EAT-00018	27
KCDPFD100H	alias	EAT	CDP hardware-only kit (mounting brackets, filler plates, hardware) — example of	EDH-EAT-00013	25
KCDPFDB	primary	EAT	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse F	EDH-EAT-00017	28
KCDPHKD	primary	EAT	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse H	EDH-EAT-00020	28
KCDPJD	primary	EAT	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB	EDH-EAT-00021	29

Number	Type	Mfr	Description	Catalogue ID	Pg
KCDPJDB	primary	EAT	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse J	EDH-EAT-00023	29
KCDPKB	primary	EAT	CDP breaker connector kit, twin-mount, for JD, JDB, HJD, JDC	EDH-EAT-00005	18
KCDPKD	primary	EAT	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	EDH-EAT-00019	30
KCDPKDB	primary	EAT	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse J	EDH-EAT-00022	30
KCDPLA400	primary	EAT	CDP breaker connector kit, twin-mount, for LA-P	EDH-EAT-00007	19
KCDPLA600	primary	EAT	CDP breaker connector kit, twin-mount, for LD, HLD, LDC	EDH-EAT-00008	19
KCDPLB	primary	EAT	CDP breaker connector kit, twin-mount, for DK, KD, KDB, HKD, KDC	EDH-EAT-00006	20
KCDPLCL	primary	EAT	CDP breaker connector kit, single-mount, for LCL	EDH-EAT-00009	21
KCDPLD	primary	EAT	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA	EDH-EAT-00025	31
KCDPMC	primary	EAT	CDP breaker connector kit, single-mount, for MDL, HMDL	EDH-EAT-00010	21
KCDPMDL	primary	EAT	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse M	EDH-EAT-00026	31
KCDPNBP	primary	EAT	CDP breaker connector kit, single-mount, for NB-P	EDH-EAT-00012	22
KCDPNC	primary	EAT	CDP breaker connector kit, single-mount, for ND, HND	EDH-EAT-00011	22
KCDPND	primary	EAT	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB	EDH-EAT-00027	32
KCDP_X	primary	EAT	CDP filler cover, any 1X increment (catalog pattern KCDPnX)	EDH-EAT-00014	23
KFDP4XT	primary	EAT	FDP fusible switch connector kit 4X (30, 60)	EDH-EAT-00028	33
KFDP5XT	primary	EAT	FDP fusible switch connector kit 5X (100 A)	EDH-EAT-00029	34
KFDPB6X-2	primary	EAT	FDP fusible switch connector kit 6X (200 A)	EDH-EAT-00030	34
KFDPBS324R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 240 V (switch + connectors)	EDH-EAT-00042	37
KFDPBS364R	primary	EAT	FDP fusible switch retrofit kit, 3P 200 A 600 V (switch + connectors)	EDH-EAT-00043	38
KFDPW11X-6	primary	EAT	FDP fusible switch connector kit 11X (600 A)	EDH-EAT-00032	35
KFDPW11X-8	primary	EAT	FDP fusible switch connector kit 11X (800 A)	EDH-EAT-00033	35
KFDPW15X-12	primary	EAT	FDP fusible switch connector kit 15X (1200 A)	EDH-EAT-00034	36
KFDPW325R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 240 V (switch + connectors)	EDH-EAT-00044	38
KFDPW326R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 240 V (switch + connectors)	EDH-EAT-00046	38
KFDPW365R	primary	EAT	FDP fusible switch retrofit kit, 3P 400 A 600 V (switch + connectors)	EDH-EAT-00045	39
KFDPW366R	primary	EAT	FDP fusible switch retrofit kit, 3P 600 A 600 V (switch + connectors)	EDH-EAT-00047	39
KFDPW367	primary	EAT	FDP fusible switch retrofit kit, 3P 800 A 240/600 V (switch + connectors)	EDH-EAT-00048	39
KFDPW368	primary	EAT	FDP fusible switch retrofit kit, 3P 1200 A 240/600 V (switch + connectors)	EDH-EAT-00049	40
KFDPW9X-4	primary	EAT	FDP fusible switch connector kit 9X (400 A)	EDH-EAT-00031	36
KFDPWT3211R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 240 V (switch + connectors)	EDH-EAT-00036	40
KFDPWT3222R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 240 V (switch + connectors)	EDH-EAT-00038	40
KFDPWT3233R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 240 V (switch + connectors)	EDH-EAT-00040	41
KFDPWT3611R	primary	EAT	FDP fusible switch retrofit kit, 3P 30 A 600 V (switch + connectors)	EDH-EAT-00037	41
KFDPWT3622R	primary	EAT	FDP fusible switch retrofit kit, 3P 60 A 600 V (switch + connectors)	EDH-EAT-00039	41
KFDPWT3633R	primary	EAT	FDP fusible switch retrofit kit, 3P 100 A 600 V (switch + connectors)	EDH-EAT-00041	42
KFDP_X	primary	EAT	FDP filler cover, any 1X increment (catalog pattern KFDPnX)	EDH-EAT-00035	36

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL1BAB	primary	EAT	PRL1 replacement branch connector kit (BAB/QBHW), up to 12 poles	EDH-EAT-00050	43
KPRL2GHB	primary	EAT	PRL2 replacement branch connector kit (GB/GHB), up to 12 poles	EDH-EAT-00051	43
KPRL3CA	primary	EAT	PRL3 replacement connector kit for CA, CAH, HCA	EDH-EAT-00054	47
KPRL3ED	primary	EAT	PRL3 replacement connector kit for ED, EDH, EDC (240 V max)	EDH-EAT-00053	48
KPRL3FD	primary	EAT	PRL3 replacement connector kit for EHD, FDB, FD, HFD, FDC (240/480/600 V)	EDH-EAT-00052	48
KPRL44X	primary	EAT	PRL4F fusible switch connector kit 4X (60 A)	EDH-EAT-00108	50
KPRL45X1	primary	EAT	PRL4F fusible switch connector kit 5X (100 A)	EDH-EAT-00109	50
KPRL4B6XS	primary	EAT	PRL4F fusible switch connector kit 6X (200 A)	EDH-EAT-00110	51
KPRL4B6XT	primary	EAT	PRL4F fusible switch connector kit 6X (200 A)	EDH-EAT-00111	51
KPRL4CA	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X/3X, CA/CAH/HCA	EDH-EAT-00103	51
KPRL4CKD	primary	EAT	PRL4 breaker connector kit, single-mount 4X, for CKD, CHKD (100% rated)	EDH-EAT-00086	52
KPRL4CND	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for CND, CHND (100% rated)	EDH-EAT-00092	52
KPRL4ED	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	EDH-EAT-00081	53
KPRL4ED	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	65
KPRL4ED2	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	EDH-EAT-00078	53
KPRL4ED2	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	65
KPRL4FBP	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for FCL, FB-P, FD/LFD	EDH-EAT-00080	54
KPRL4FD	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00079	54
KPRL4FD	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	65
KPRL4FD1	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EDH-EAT-00076	55
KPRL4FD1	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EDH-EAT-00094	64
KPRL4FD2	primary	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00077	55
KPRL4FD2	supersedes	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	65
KPRL4FDCL	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 3X, FD current limiter (single mo	EDH-EAT-00102	56
KPRL4JDS	primary	EAT	PRL4 breaker connector kit, single-mount 3X, for JD, JDB, HJD, JDC	EDH-EAT-00082	56
KPRL4JDT	primary	EAT	PRL4 breaker connector kit, twin-mount 3X, for JD, JDB, HJD, JDC	EDH-EAT-00083	57
KPRL4KDS	primary	EAT	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00084	57
KPRL4KDT	primary	EAT	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00085	58
KPRL4LAP	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LA-P	EDH-EAT-00088	58
KPRL4LC	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	EDH-EAT-00089	60
KPRL4LC	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA	EDH-EAT-00104	59
KPRL4LCL	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LCL	EDH-EAT-00087	59
KPRL4LD	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for LD, LDB, HLD, LDC, CLD, LC	EDH-EAT-00089	60
KPRL4LD	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, LC/LCY/HLC/LD/HLD/LDC/LDB [LA	EDH-EAT-00104	59
KPRL4LG	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, LHH	EDH-EAT-00105	60

Number	Type	Mfr	Description	Catalogue ID	Pg
KPRL4MC	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	EDH-EAT-00090	61
KPRL4MC	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	EDH-EAT-00100	67
KPRL4MD	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, CMDL/CHMDL (100% rated	EDH-EAT-00107	61
KPRL4NBP	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for NB-P	EDH-EAT-00091	62
KPRL4NC	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, NC/NCY/HNC [NB/HNB]	EDH-EAT-00106	62
KPRL4ND	primary	EAT	PRL4 breaker connector kit, single-mount 6X, for ND, HND	EDH-EAT-00093	63
KPRL4ND	supersedes	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	EDH-EAT-00101	68
KPRL4W11X	primary	EAT	PRL4F fusible switch connector kit 11X (600 A)	EDH-EAT-00113	63
KPRL4W15X	primary	EAT	PRL4F fusible switch connector kit 15X (1200 A)	EDH-EAT-00114	64
KPRL4W9X	primary	EAT	PRL4F fusible switch connector kit 9X (400 A)	EDH-EAT-00112	64
KPRL4X12	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, HFD	EDH-EAT-00076	55
KPRL4X12	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC (PD2)	EDH-EAT-00094	64
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00077	55
KPRL4X22	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 2X, for ED, EDH, EDC	EDH-EAT-00078	53
KPRL4X22	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 2X, EHD/FDB/FD/HFD/FDC/ED/EDH/EDC (	EDH-EAT-00095	65
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 3X, for EHD, FD, FDB, HFD, FDC	EDH-EAT-00079	54
KPRL4X32	superseded_by	EAT	PRL4 breaker connector kit, twin-mount 3X, for ED, EDH, EDC	EDH-EAT-00081	53
KPRL4X32	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 3X, ED/EDH/EDC/EDB/EDS/FDE/HFDE/FDC	EDH-EAT-00096	65
KPRL4X334S	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 400 A frame	EDH-EAT-00097	66
KPRL4X334T	primary	EAT	PRL4X/PRL4 breaker connector kit, twin-mount 4X, PD3 400 A frame	EDH-EAT-00098	66
KPRL4X336	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 4X, PD3 600 A frame	EDH-EAT-00099	67
KPRL4X34	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for MDL, HMDL	EDH-EAT-00090	61
KPRL4X34	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD4	EDH-EAT-00100	67
KPRL4X35	superseded_by	EAT	PRL4 breaker connector kit, single-mount 6X, for ND, HND	EDH-EAT-00093	63
KPRL4X35	primary	EAT	PRL4X/PRL4 breaker connector kit, single-mount 6X, PD5	EDH-EAT-00101	68
LNLK30A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	251
LNLK42A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	252
LNLK4X11B	primary	SIE	RP1 & P3 2/0 neutral lug kit (15 pos) [(4x)2/0 + (11x)#6], 2/0 max neutral strip	EDH-SIE-00035	251
LNLK54A	supersedes	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	253
LNLK5X12A	primary	SIE	RP1 1/0 neutral lug kit [(5x)1/0 + (12x)#6]	EDH-SIE-00033	251
LNLK6X17B	primary	SIE	RP1 & P3 2/0 neutral lug kit (23 pos) [(5x)2/0 + (17x)#6], 8.67in long	EDH-SIE-00036	252
LNLK7X18A	primary	SIE	RP1 1/0 neutral lug kit [(7x)1/0 + (18x)#6]	EDH-SIE-00034	252
LNLK7X20B	primary	SIE	RP1 & P3 2/0 neutral lug kit (27 pos) [(7x)2/0 + (20x)#6], 9.92in long	EDH-SIE-00037	253
LPP2NB01	primary	SIE	Neutral lug kit	EDH-SIE-00118	187
MB133	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133	EDH-GEA-00059	72
MB133WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB133WB	EDH-GEA-00060	73
MB233	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233	EDH-GEA-00051	73
MB2332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332	EDH-GEA-00053	73
MB2332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB2332WB	EDH-GEA-00054	74
MB233WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB233WB	EDH-GEA-00052	74
MB332	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332	EDH-GEA-00045	74

Number	Type	Mfr	Description	Catalogue ID	Pg
MB332WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB332WB	EDH-GEA-00046	75
MB333	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333	EDH-GEA-00055	75
MB333WB	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB333WB	EDH-GEA-00056	75
MB423	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB423	EDH-GEA-00057	76
MB426	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB426	EDH-GEA-00058	76
MB512	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB512	EDH-GEA-00044	76
MB513	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB513	EDH-GEA-00049	77
MB516	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB516	EDH-GEA-00050	77
MB612	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB612	EDH-GEA-00042	77
MB613	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB613	EDH-GEA-00047	78
MB614	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB614	EDH-GEA-00043	78
MB616	primary	GEA	A-Series Pro-Stock main/sub-feed breaker kit MB616	EDH-GEA-00048	78
MBKBC1NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	237
MBKBC3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BQD 15A-100A	EDH-SIE-00045	174
MBKBC3NBA	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	238
MBKBFA	primary	SIE	P1 BL/BQD/NGB back-fed main breaker kit (label/instructions)	EDH-SIE-00014	264
MBKBL1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole BL/BLH/HBL 15A-100A	EDH-SIE-00043	174
MBKBL1A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	237
MBKBL3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole BL/BLH/HBL 15A-100A	EDH-SIE-00044	175
MBKBL3A	supersedes	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	238
MBKED1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole ED4/HED4 50A-125A	EDH-SIE-00048	175
MBKED1A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 1-ph, 125A	EDH-SIE-00003	233
MBKED3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole ED4/HED4 50A-125A	EDH-SIE-00049	175
MBKED3A	primary	SIE	Revised P1 main/subfeed strap kit, ED, 3-ph, 125A	EDH-SIE-00004	233
MBKFD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00052	176
MBKFD1A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 1-ph, 250A	EDH-SIE-00007	234
MBKFD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole F(X)D6/HF(X)D6 70A-250A	EDH-SIE-00053	176
MBKFD3A	primary	SIE	Revised P1 main/subfeed strap kit, FD, 3-ph, 250A	EDH-SIE-00008	234
MBKJD1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00054	176
MBKJD1A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	235
MBKJD3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole JXD2/J(X)D6/HJ(X)D6 200A-400A	EDH-SIE-00055	177
MBKJD3A	supersedes	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	235
MBKJD3B	primary	SIE	RP1 400A JD strap kit 1ph/3ph, 2 fillers	EDH-SIE-00012	235
MBKNB1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00046	177
MBKNB3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole NGB/LGB/HGB 15A-125A	EDH-SIE-00047	177
MBKQR1	primary	SIE	Original P1 main/subfeed strap kit, 2-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00050	178
MBKQR1A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 1-ph, 225A	EDH-SIE-00005	235
MBKQR3	primary	SIE	Original P1 main/subfeed strap kit, 3-pole QR(H)2/HQR2(H) 125A-225A	EDH-SIE-00051	178
MBKQR3A	primary	SIE	Revised P1 main/subfeed strap kit, QR, 3-ph, 225A	EDH-SIE-00006	236
MBKQRFK	primary	SIE	P1 / Revised P1 deadfront filler for 1PH/3PH QR main	EDH-SIE-00075	262

Number	Type	Mfr	Description	Catalogue ID	Pg
MBKVA41A	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 1-ph, 125A	EDH-SIE-00001	237
MBKVA41B	primary	SIE	Revised P1 main/subfeed strap kit, BL/BQD/GB/3VA41, 3-ph, 125A	EDH-SIE-00002	238
MBKVA5262A	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 1-ph, 250A	EDH-SIE-00009	239
MBKVA5262B	primary	SIE	Revised P1 main/subfeed strap kit, 3VA52/61/62, 3-ph, 250A	EDH-SIE-00010	240
MBKVA5363A	primary	SIE	RP1 400A 3VA53/63 main strap kit, 1ph or 3ph	EDH-SIE-00011	240
MBKVA5363JD	primary	SIE	RP1 400A JD-to-3VA53/63 retrofit kit / filler (small deadfront opening)	EDH-SIE-00013	264
MG1	primary	SIE	MG1 connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00149	200
MG1D	primary	SIE	MG1D connecting strap kit - VL MG (8.75in, single)	EDH-SIE-00175	217
MLA1	primary	GEA	A-Series Pro-Stock main lug kit MLA1 (pressure (mechanical), 225 A)	EDH-GEA-00061	79
MLA2	primary	GEA	A-Series Pro-Stock main lug kit MLA2 (pressure, 225 A)	EDH-GEA-00062	79
MLA41	primary	GEA	A-Series Pro-Stock main lug kit MLA41 (pressure, 400 A)	EDH-GEA-00063	79
MLA61	primary	GEA	A-Series Pro-Stock main lug kit MLA61 (pressure, 600 A)	EDH-GEA-00064	80
MLA62	primary	GEA	A-Series Pro-Stock main lug kit MLA62 (pressure, 400/600 A)	EDH-GEA-00065	80
MLKA1	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	244
MLKA1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00025	180
MLKA1A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 1-ph	EDH-SIE-00015	244
MLKA3	equivalent	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	244
MLKA3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00026	180
MLKA3A	primary	SIE	Revised P1 250A AL main/feed-thru lug kit, 3-ph	EDH-SIE-00016	244
MLKC1	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	245
MLKC1	primary	SIE	Original P1 250A main lug kit, 1-ph	EDH-SIE-00027	181
MLKC1A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 1-ph	EDH-SIE-00017	245
MLKC3	equivalent	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	245
MLKC3	primary	SIE	Original P1 250A main lug kit, 3-ph	EDH-SIE-00028	181
MLKC3A	primary	SIE	Revised P1 250A CU main/feed-thru lug kit, 3-ph	EDH-SIE-00018	245
MLR1	primary	GEA	A-Series Pro-Stock main lug kit MLR1 (copper, 225 A)	EDH-GEA-00066	80
MLR2	primary	GEA	A-Series Pro-Stock main lug kit MLR2 (copper, 225 A)	EDH-GEA-00067	80
MLR41	primary	GEA	A-Series Pro-Stock main lug kit MLR41 (copper, 400 A)	EDH-GEA-00068	80
MLR61	primary	GEA	A-Series Pro-Stock main lug kit MLR61 (copper, 400/600 A)	EDH-GEA-00069	81
MLT1	primary	GEA	A-Series Pro-Stock main lug kit MLT1 (compression, 225 A)	EDH-GEA-00070	81
MLT2	primary	GEA	A-Series Pro-Stock main lug kit MLT2 (compression, 225 A)	EDH-GEA-00071	81
MLT41	primary	GEA	A-Series Pro-Stock main lug kit MLT41 (compression, 400 A)	EDH-GEA-00073	81
MLT42	primary	GEA	A-Series Pro-Stock main lug kit MLT42 (compression, 400 A)	EDH-GEA-00072	81
NG1D	primary	SIE	NG1D connecting strap kit - VL NG (10.00in, single)	EDH-SIE-00179	217
NHB150PK	primary	GEA	NHB/NAB twin-mount breaker mounting hardware, 150 A, 3-pole	EDH-GEA-00280	107
NKA	primary	GEA	A-Series 200% neutral kit NKA (225 A)	EDH-GEA-00074	83
NKA42	primary	GEA	A-Series 200% neutral kit NKA42 (400 A)	EDH-GEA-00075	83
NKA4FT	primary	GEA	A-Series 200% neutral kit NKA4FT (400 A)	EDH-GEA-00080	83
NKR	primary	GEA	A-Series 200% neutral kit NKR (225 A)	EDH-GEA-00076	83
NKR4	primary	GEA	A-Series 200% neutral kit NKR4 (400 A)	EDH-GEA-00077	83
NKT	primary	GEA	A-Series 200% neutral kit NKT (225 A)	EDH-GEA-00078	84
NKT4	primary	GEA	A-Series 200% neutral kit NKT4 (400 A)	EDH-GEA-00079	84
NL300	primary	EAT	Type BR loadcenter add-on neutral/ground lug (NL300)	EDH-EAT-00124	14
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00055	44

Number	Type	Mfr	Description	Catalogue ID	Pg
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 100 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00056	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes 30.00 in and above (Westinghouse style number	EDH-EAT-00057	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 225 A neutral bar, boxes less than 30.00 in high (Westinghouse style n	EDH-EAT-00058	44
No Cutler-Hammer K-catalog equivalent published; ordered by Westinghouse style number	style_number	EAT	PRL1/PRL2 400/600 A neutral bar (Westinghouse style number)	EDH-EAT-00059	45
P1CONACPHAL	primary	SIE	RP1 A/C-phase replacement aluminum branch connectors, kit of 6	EDH-SIE-00097	246
P1CONACPHCU	primary	SIE	RP1 A/C-phase replacement copper branch connectors	EDH-SIE-00088	246
P1CONBPHAL	primary	SIE	RP1 B-phase replacement aluminum branch connectors	EDH-SIE-00089	247
P1CONBPHCU	primary	SIE	RP1 B-phase replacement copper branch connectors	EDH-SIE-00090	247
P1DFS250AFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00092	254
P1DFS250ANFT	primary	SIE	P1 250A deadfront support	EDH-SIE-00093	254
P1DFS400A	primary	SIE	P1 400A deadfront support (new for 3VA)	EDH-SIE-00094	255
P1SCRWS	primary	SIE	P1 branch breaker mounting screws	EDH-SIE-00091	264
P2BK1	primary	SIE	P2 250A max horizontal main breaker bonding strap kit	EDH-SIE-00120	193
P2BK2	primary	SIE	P2 125A max main lug bonding strap assembly	EDH-SIE-00121	193
P2BK3	primary	SIE	P2 250-600A MLO and all vertical MB bonding kit	EDH-SIE-00122	194
P2QRFP01	primary	SIE	P2 QR deadfront filler	EDH-SIE-00082	192
P3BK1	primary	SIE	P3 bonding kit 800A max MLO+MB	EDH-SIE-00123	198
QF3	equivalent	SIE	1in branch circuit snap-in blank filler plate (BL/BQD/xGB/ED/3VA41)	EDH-SIE-00062	259
QF3	primary	SIE	QF3 1-pole plastic filler plate (load center / legacy switchboard)	EDH-SIE-00063	280
QMRFP1	primary	GEA	QMR panelboard filler plate 1X	EDH-GEA-00272	106
QMRFP2	primary	GEA	QMR panelboard filler plate 2X	EDH-GEA-00273	106
QMRFP5	primary	GEA	QMR panelboard filler plate 5X	EDH-GEA-00274	106
S3VA41T	primary	SIE	S3VA41T connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00125	200
S3VA41TD	primary	SIE	S3VA41TD connecting strap kit - 3VA41, xGB (3.75in, twin)	EDH-SIE-00151	218
S3VA41TDHD	primary	SIE	S3VA41TDHD connecting strap kit - 3VA41, xGB (7.50in, twin, high density)	EDH-SIE-00152	218
S3VA52PR	primary	SIE	3VA52/61/62 breaker provision hardware kit (twin mount)	EDH-SIE-00205	213
S3VA52T	primary	SIE	S3VA52T connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00129	201
S3VA52TD	primary	SIE	S3VA52TD connecting strap kit - 3VA61; 3VA52, 3VA62 (5.00in, twin)	EDH-SIE-00156	219
S3VA53PR	primary	SIE	3VA53/63/54/64 single-mount breaker provision hardware kit	EDH-SIE-00206	285
S3VA53T	primary	SIE	S3VA53T connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00135	201
S3VA53T2D	primary	SIE	S3VA53T2D connecting strap kit - 3VA53, 3VA63 (6.25in, twin)	EDH-SIE-00182	281
S3VA53TD	primary	SIE	S3VA53TD connecting strap kit - 3VA53 (6.25in, single)	EDH-SIE-00161	219
S3VA54T	primary	SIE	S3VA54T connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00142	202
S3VA54T2D	primary	SIE	S3VA54T2D connecting strap kit - 3VA54, 3VA64 (6.25in, twin)	EDH-SIE-00185	281
S3VA54TD	primary	SIE	S3VA54TD connecting strap kit - 3VA54 (6.25in, single)	EDH-SIE-00168	220
S3VA55TD	primary	SIE	S3VA55TD connecting strap kit - 3VA55, 3VA65; 3VA66 (8.75in, single)	EDH-SIE-00186	282

Number	Type	Mfr	Description	Catalogue ID	Pg
S3VA57TD	primary	SIE	S3VA57TD connecting strap kit - 3VA57, 3VA67 (10.00in, single)	EDH-SIE-00187	282
S3VA63T	primary	SIE	S3VA63T connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00136	202
S3VA63TD	primary	SIE	S3VA63TD connecting strap kit - 3VA63 (6.25in, single)	EDH-SIE-00162	220
S3VA64T	primary	SIE	S3VA64T connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00143	203
S3VA64TD	primary	SIE	S3VA64TD connecting strap kit - 3VA64 (6.25in, single)	EDH-SIE-00169	221
SBL	primary	SIE	SBL connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00124	203
SBLBD	primary	SIE	SBLBD connecting strap kit - BL, BQD (3.75in, twin)	EDH-SIE-00150	221
SCE	primary	SIE	SCE connecting strap kit - CED (3.75in, twin)	EDH-SIE-00128	204
SCED	primary	SIE	SCED connecting strap kit - CED (3.75in, twin)	EDH-SIE-00180	283
SCF	primary	SIE	SCF connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00134	204
SCFD	primary	SIE	SCFD connecting strap kit - Sentron CFD (5.00in, single)	EDH-SIE-00160	222
SCJ	primary	SIE	SCJ connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00139	204
SCJD	primary	SIE	SCJD connecting strap kit - Sentron CJD (8.75in, single)	EDH-SIE-00167	222
SCL	primary	SIE	SCL connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00146	205
SCLD	primary	SIE	SCLD connecting strap kit - Sentron CLD (8.75in, single)	EDH-SIE-00172	223
SCPFP1	primary	GEA	SCP+ panelboard filler plate 1X	EDH-GEA-00276	111
SCPFP2	primary	GEA	SCP+ panelboard filler plate 2X	EDH-GEA-00277	111
SCPFP3	primary	GEA	SCP+ panelboard filler plate 3X	EDH-GEA-00278	112
SCPFP5	primary	GEA	SCP+ panelboard filler plate 5X	EDH-GEA-00279	112
SDGD	primary	SIE	SDGD connecting strap kit - VL DG (5.00in, twin)	EDH-SIE-00130	205
SE6	primary	SIE	SE6 connecting strap kit - ED (3.75in, twin)	EDH-SIE-00127	206
SE6D	primary	SIE	SE6D connecting strap kit - ED (3.75in, twin)	EDH-SIE-00154	223
SEBKP1P2P3V1	primary	SIE	SEB kit (RP1, P1, P2, P3) JD/LD and 3VA53/63 vertical main	EDH-SIE-00231	255
SEBKP2V1	primary	SIE	SEB kit, P2 BL/BQD horizontal main	EDH-SIE-00232	188
SEBKP2V2	primary	SIE	SEB kit, P2 xGB horizontal main	EDH-SIE-00233	188
SEBKP2V3	primary	SIE	SEB kit (P2, P2 with SEM3, P3) FD/QJ/QR horizontal main	EDH-SIE-00234	188
SEBKP2V4	primary	SIE	SEB kit (P2, P2 w/SEM3, P3) FD/QJ/QR vertical main	EDH-SIE-00235	189
SEBKP2V5	primary	SIE	SEB kit (P2, P2 w/SEM3) ED horizontal main	EDH-SIE-00236	189
SEBKP2V6	primary	SIE	SEB kit (P2, P2 w/SEM3) ED vertical main	EDH-SIE-00237	189
SEBKP2V7	primary	SIE	SEB kit, P2/P3 3VA52/61/62 horizontal main	EDH-SIE-00238	190
SEBKP3V1	primary	SIE	Service entrance barrier kit CFD, FD (P3 only)	EDH-SIE-00239	197
SEBKRP1V1	primary	SIE	SEB kit for RP1 with FD, QJ or QR horizontal main	EDH-SIE-00224	255
SEBKRP1V2	primary	SIE	SEB kit for RP1 with ED horizontal main	EDH-SIE-00225	256
SEBKRP1V3	primary	SIE	SEB kit for RP1 with back-fed BL/BQD main in unit space	EDH-SIE-00226	256
SEBKRP1V4	primary	SIE	SEB kit for RP1 with back-fed xGB main in unit space	EDH-SIE-00227	256
SEBKRP1V5	primary	SIE	SEB kit for RP1 with BL/BQD/xGB main - with steel breaker brackets	EDH-SIE-00228	257
SEBKRP1V6	primary	SIE	SEB kit for RP1 with BL/BQD/GB/3VA41 main - with all plastic strap kit	EDH-SIE-00229	257
SEBKRP1V7	primary	SIE	SEB kit for RP1 with 3VA52/61/62 horizontal main	EDH-SIE-00230	257
SEBP4V1	primary	SIE	Service entrance barrier for (S)JD, (S)LD, MG mains	EDH-SIE-00217	210
SEBP4V2	primary	SIE	Service entrance barrier for CJD, CLD	EDH-SIE-00218	211
SEBP4V3	primary	SIE	Service entrance barrier for JG, LG	EDH-SIE-00219	211
SEBP5V1	primary	SIE	Service entrance barrier for (S)MD, (S)ND without shield	EDH-SIE-00220	231
SEBP5V2	primary	SIE	Service entrance barrier for (S)MD, (S)ND with shield	EDH-SIE-00221	231
SEBP5V3	primary	SIE	Service entrance barrier for Vacu-Break switches	EDH-SIE-00222	231
SEBP5V4	primary	SIE	Service entrance barrier for HCP switches	EDH-SIE-00223	231
SF2DPK	primary	GEA	CCB/QMR copper strap mounting kit SF2DPK (SFH/SFL 225 A, dual)	EDH-GEA-00262	102
SF6	primary	SIE	SF6 connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00133	206
SF6D	primary	SIE	SF6D connecting strap kit - Sentron FD (5.00in, twin)	EDH-SIE-00159	224
SFG	primary	SIE	SFG connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00132	206

Number	Type	Mfr	Description	Catalogue ID	Pg
SFGD	primary	SIE	SFGD connecting strap kit - VL FG (5.00in, twin)	EDH-SIE-00158	224
SGB2	primary	SIE	SGB2 connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00126	207
SGB2D	primary	SIE	SGB2D connecting strap kit - xGB2 (3.75in, twin)	EDH-SIE-00153	225
SJ1	primary	SIE	SJ1 connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00138	207
SJ1D	primary	SIE	SJ1D connecting strap kit - Sentron JD (8.75in, single)	EDH-SIE-00165	225
SJ2D	primary	SIE	SJ2D connecting strap kit - Sentron JD (8.75in, twin)	EDH-SIE-00166	226
SJG	primary	SIE	SJG connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00137	207
SJG1D	primary	SIE	SJG1D connecting strap kit - VL JG (6.25in, single)	EDH-SIE-00164	226
SJG2D	primary	SIE	SJG2D connecting strap kit - VL JG (6.25in, twin)	EDH-SIE-00163	227
SK12SPK	primary	GEA	CCB/QMR copper strap mounting kit SK12SPK (SKH12 1200 A, single)	EDH-GEA-00266	102
SK8SPK	primary	GEA	CCB/QMR copper strap mounting kit SK8SPK (SKH8 800 A, single)	EDH-GEA-00265	102
SL6	primary	SIE	SL6 connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00145	208
SL6D	primary	SIE	SL6D connecting strap kit - Sentron LD (8.75in, single)	EDH-SIE-00171	227
SLG	primary	SIE	SLG connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00144	208
SLGD	primary	SIE	SLGD connecting strap kit - VL LG (6.25in, single)	EDH-SIE-00170	228
SLM1D	primary	SIE	SLM1D connecting strap kit - Sentron LMD (8.75in, single)	EDH-SIE-00176	228
SMBKED1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole ED2..., 1-ph	EDH-SIE-00056	265
SMBKED3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole ED2..., 3-ph	EDH-SIE-00057	266
SMBKFD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole FXD6..., 1-ph	EDH-SIE-00058	266
SMBKFD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole FXD6..., 3-ph	EDH-SIE-00059	266
SMBKJD1	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 2-pole JD6..., 1-ph	EDH-SIE-00060	267
SMBKJD3	primary	SIE	S1/S2 (400/600A) & SE main/subfeed strap kit, 3-pole JD6..., 3-ph	EDH-SIE-00061	267
SMND	primary	SIE	SMND connecting strap kit - Sentron MD, CMD; ND (10.00in, single)	EDH-SIE-00177	229
SQR	primary	SIE	SQR connecting strap kit - QR (5.00in, twin)	EDH-SIE-00131	208
SQRC	primary	SIE	QR cover plate for P4/P5/SPP power panels	EDH-SIE-00210	213
SQRD	primary	SIE	SQRD connecting strap kit - QR (5.00in, twin)	EDH-SIE-00181	283
SSCJ	primary	SIE	SSCJ connecting strap kit - Sentron SCJD (8.75in, single)	EDH-SIE-00141	209
SSCJD	primary	SIE	SSCJD connecting strap kit - SCJD (8.75in, single)	EDH-SIE-00184	284
SSCL	primary	SIE	SSCL connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00148	209
SSCLD	primary	SIE	SSCLD connecting strap kit - Sentron SCLD (8.75in, single)	EDH-SIE-00174	229
SSJ1	primary	SIE	SSJ1 connecting strap kit - Sentron SJD (8.75in, single)	EDH-SIE-00140	210
SSJ1D	primary	SIE	SSJ1D connecting strap kit - SJD (8.75in, single)	EDH-SIE-00183	284
SSL6	primary	SIE	SSL6 connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00147	210
SSL6D	primary	SIE	SSL6D connecting strap kit - Sentron SLD (8.75in, single)	EDH-SIE-00173	230
SSMND	primary	SIE	SSMND connecting strap kit - Sentron SMD; SND (10.00in, single)	EDH-SIE-00178	230
TAD3	primary	EAT	TAD3 line-side adapter / spacer kit for Series C K-frame on LB-frame connectors	EDH-EAT-00015	32
TED1DPK	primary	GEA	CCB/QMR copper strap mounting kit TED1DPK (TEB/TED 150 A, dual)	EDH-GEA-00256	103
TEDFP1	primary	GEA	A-Series filler plate for TQD/THQD/TED4/SE/FB	EDH-GEA-00040	85
TEL1DPK	primary	GEA	CCB/QMR copper strap mounting kit TEL1DPK (TEL 150 A, dual)	EDH-GEA-00261	103
TF2DPK	primary	GEA	CCB/QMR copper strap mounting kit TF2DPK (TFJ/TFK/TFL 225 A, dual)	EDH-GEA-00257	103
TGL2	primary	GEA	A-Series Equipment ground, standard bonded to box, per 12 branch positions	EDH-GEA-00096	84

Number	Type	Mfr	Description	Catalogue ID	Pg
TGL20	primary	GEA	A-Series Main lug for equipment ground terminal kits	EDH-GEA-00095	84
TJ4DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ4DPK (TJD/TJJ/TJK 400 A, dual)	EDH-GEA-00259	103
TJ6DPK	primary	GEA	CCB/QMR copper strap mounting kit TJ6DPK (TJK 600 A, dual)	EDH-GEA-00260	104
TK12SPK	primary	GEA	CCB/QMR copper strap mounting kit TK12SPK (TKM12/THKM12 1200 A, single)	EDH-GEA-00264	104
TK8SPK	primary	GEA	CCB/QMR copper strap mounting kit TK8SPK (TKM8/THKM8 800 A, single)	EDH-GEA-00263	104
TQ2DPK	primary	GEA	CCB/QMR copper strap mounting kit TQ2DPK (TQD 225 A, dual)	EDH-GEA-00258	104
TQDFM1	primary	GEA	A-Series 2-3 pole TQD mechanical interlock	EDH-GEA-00088	87
TQLFP1	primary	GEA	A-Series filler plate for THQB/THHQB/THQL/THHQL/TEY	EDH-GEA-00041	85
UPC 782114795996	alias	EAT	PRL4 breaker connector kit, single-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00084	57
UPC 782114796412	alias	EAT	PRL4 breaker connector kit, twin-mount 4X, for DK, KD, KDB, HKD, KDC	EDH-EAT-00085	58
Westinghouse DA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C DK + connector kit) replacing Westinghouse DA	EDH-EAT-00024	26
Westinghouse EB, EHB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C EHD + connector kit) replacing Westinghouse E	EDH-EAT-00016	27
Westinghouse FB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C FDB + connector kit) replacing Westinghouse F	EDH-EAT-00017	28
Westinghouse HFB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C FD + connector kit) replacing Westinghouse HF	EDH-EAT-00018	27
Westinghouse HKA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C HKD + connector kit) replacing Westinghouse H	EDH-EAT-00020	28
Westinghouse JA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C KDB + connector kit) replacing Westinghouse J	EDH-EAT-00022	30
Westinghouse JB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C JDB + connector kit) replacing Westinghouse J	EDH-EAT-00023	29
Westinghouse KA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C KD + connector kit) replacing Westinghouse KA	EDH-EAT-00019	30
Westinghouse KB, HKB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C JD + connector kit) replacing Westinghouse KB	EDH-EAT-00021	29
Westinghouse LA, HLA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C LD + connector kit) replacing Westinghouse LA	EDH-EAT-00025	31
Westinghouse MA, HMA breaker	supersedes	EAT	CDP breaker retrofit kit (Series C MDL + connector kit) replacing Westinghouse M	EDH-EAT-00026	31
Westinghouse NB, HNB breaker	supersedes	EAT	CDP breaker retrofit kit (Series C ND + connector kit) replacing Westinghouse NB	EDH-EAT-00027	32

8.4 Breaker compatibility index

Parts linked to each breaker family. The confidence shown is that of the part's breaker-compatibility claim.

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	186
3VA41 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	259
3VA41 (SIE)	DFFPVA41A	filler-plate	RP1	—	261
3VA41 (SIE)	DFK1	deadfront	P2, P3	—	191
3VA41 (SIE)	DFP3AP01	filler-plate	P2, P3	—	192
3VA41 (SIE)	MBKVA41A	main-breaker-kit	RP1	A	237
3VA41 (SIE)	MBKVA41B	main-breaker-kit	RP1	A	238
3VA41 (SIE)	P1CONACPHAL	connector-strap	RP1	—	246
3VA41 (SIE)	P1CONACPHCU	connector-strap	RP1	B	246
3VA41 (SIE)	P1CONBPHAL	connector-strap	RP1	B	247
3VA41 (SIE)	P1CONBPHCU	connector-strap	RP1	B	247
3VA41 (SIE)	P1SCRWS	fastener	RP1, P1	—	264
3VA41 (SIE)	S3VA41T	branch-connector-kit	P4	A	200

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA41 (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	218
3VA41 (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	218
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9233-0QA00	fastener	SB	—	285
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9243-0QA00	fastener	SB	—	285
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	3VA9473-0QA00	fastener	SB	—	285
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2HW	hardware-kit	P2, P3	A	193
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA5262P2S	branch-connector-kit	P2, P3	A	186
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3HW	hardware-kit	P3	A	198
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	BBKVA52P3T	branch-connector-kit	P3	A	196
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262A	filler-plate	RP1	—	261
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2A	filler-plate	P2, P3	—	192
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5262P2B	filler-plate	P2, P3	—	192
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	DFFPVA5363A	filler-plate	RP1, P2, P3	—	262
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262A	main-breaker-kit	RP1	A	239
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5262B	main-breaker-kit	RP1	A	240

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363A	main-breaker-kit	RP1	A	240
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	264
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52PR	hardware-kit	P4, P5, SB	—	213
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52T	branch-connector-kit	P4	A	201
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA52TD	branch-connector-kit	P5, SB, CDP6	A	219
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53PR	hardware-kit	SB	—	285
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T	branch-connector-kit	P4	A	201
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53T2D	branch-connector-kit	SB	A	281
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA53TD	branch-connector-kit	P5, SB, CDP6	A	219
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T	branch-connector-kit	P4	A	202
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54T2D	branch-connector-kit	SB	A	281
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA54TD	branch-connector-kit	P5, SB, CDP6	A	220
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA55TD	branch-connector-kit	SB	A	282

Breaker family	Part	Component	Equipment family	Cl.	Pg
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA57TD	branch-connector-kit	SB	A	282
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63T	branch-connector-kit	P4	A	202
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA63TD	branch-connector-kit	P5, SB, CDP6	A	220
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64T	branch-connector-kit	P4	A	203
3VA5/3VA6 (3VA52, 3VA53, 3VA54, 3VA55, 3VA57, 3VA61, 3VA62, 3VA63, 3VA64, 3VA65, 3VA66, 3VA67) (SIE)	S3VA64TD	branch-connector-kit	P5, SB, CDP6	A	221
BAB (EAT)	KPRL1BAB	branch-connector-kit	PRL1/PRL2	—	43
BL (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	269
BL (SIE)	BBKB32	branch-connector-kit	P2, P3	A	183
BL (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	259
BL (SIE)	DFFPED01	filler-plate	P1, RP1	—	182
BL (SIE)	DFFPVA41A	filler-plate	RP1	—	261
BL (SIE)	DFK1	deadfront	P2, P3	—	191
BL (SIE)	DFP3AP01	filler-plate	P2, P3	—	192
BL (SIE)	MBKBFA	hardware-kit	RP1	—	264
BL (SIE)	MBKBL1	main-breaker-kit	P1, S1/S2	A	174
BL (SIE)	MBKBL3	main-breaker-kit	P1, S1/S2	A	175
BL (SIE)	MBKVA41A	main-breaker-kit	RP1	A	237
BL (SIE)	MBKVA41B	main-breaker-kit	RP1	A	238
BL (SIE)	P1CONACPHAL	connector-strap	RP1	—	246
BL (SIE)	P1CONACPHCU	connector-strap	RP1	B	246
BL (SIE)	P1CONBPHAL	connector-strap	RP1	B	247
BL (SIE)	P1CONBPHCU	connector-strap	RP1	B	247
BL (SIE)	P1SCRWS	fastener	RP1, P1	—	264
BL (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	280
BL (SIE)	SBL	branch-connector-kit	P4	A	203
BL (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	221
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	6BL2C	branch-connector-kit	CDP6, SB	A	269
BQ / BQH / HBQ (bolt-on, legacy) (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	280
BQD (SIE)	BBKB32	branch-connector-kit	P2, P3	A	183
BQD (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	259
BQD (SIE)	DFFPED01	filler-plate	P1, RP1	—	182
BQD (SIE)	DFFPVA41A	filler-plate	RP1	—	261
BQD (SIE)	DFK1	deadfront	P2, P3	—	191
BQD (SIE)	DFP3AP01	filler-plate	P2, P3	—	192
BQD (SIE)	MBKBC3	main-breaker-kit	P1, S1/S2	A	174
BQD (SIE)	MBKBFA	hardware-kit	RP1	—	264

Breaker family	Part	Component	Equipment family	Cl.	Pg
BQD (SIE)	MBKVA41A	main-breaker-kit	RP1	A	237
BQD (SIE)	MBKVA41B	main-breaker-kit	RP1	A	238
BQD (SIE)	P1CONACPHAL	connector-strap	RP1	—	246
BQD (SIE)	P1CONACPHCU	connector-strap	RP1	B	246
BQD (SIE)	P1CONBPHAL	connector-strap	RP1	B	247
BQD (SIE)	P1CONBPHCU	connector-strap	RP1	B	247
BQD (SIE)	P1SCRWS	fastener	RP1, P1	—	264
BQD (SIE)	SBL	branch-connector-kit	P4	A	203
BQD (SIE)	SBLBD	branch-connector-kit	P5, SB, CDP6	A	221
BR (EAT)	3BRS225	sub-feed-lug-kit	BR	—	13
BR (EAT)	3BRSF150	sub-feed-lug-kit	BR	—	13
BR (EAT)	BHT	handle-lock	BR	—	15
BR (EAT)	BINA	neutral-assembly	BR	—	14
BR (EAT)	BRFP	filler-plate	BR	—	14
BR (EAT)	BRL200	main-lug-kit	BR	—	12
BR (EAT)	BRLW	padlock-attachment	BR	—	15
BR (EAT)	BRLW1	padlock-attachment	BR	—	15
BR (EAT)	BRS225	sub-feed-lug-kit	BR	—	13
BR (EAT)	BRSF125	sub-feed-lug-kit	BR	—	13
BR (EAT)	BRSF150	sub-feed-lug-kit	BR	—	13
BR (EAT)	BWFP	filler-plate	BR	—	14
BR (EAT)	NL300	lug	BR	—	14
CA (EAT)	KCDPCA	branch-connector-kit	CDP	A	17
CA (EAT)	KPRL3CA	branch-connector-kit	PRL3, WEB	A	47
CA (EAT)	KPRL4CA	branch-connector-kit	PRL4	A	51
DA (EAT)	KCDPDK	conversion-kit	CDP	A	26
DA (EAT)	KCDPLB	branch-connector-kit	CDP	A	20
EB (EAT)	KCDPEHD	conversion-kit	CDP	A	27
EB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
ED (EAT)	KCDPED225	branch-connector-kit	CDP	A	17
ED (EAT)	KPRL3ED	branch-connector-kit	PRL3, WEB	A	48
ED (EAT)	KPRL4ED	branch-connector-kit	PRL4	A	53
ED (EAT)	KPRL4ED2	branch-connector-kit	PRL4	A	53
ED (EAT)	KPRL4X22	branch-connector-kit	PRL4	A	65
ED (EAT)	KPRL4X32	branch-connector-kit	PRL4	A	65
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6CLE2	branch-connector-kit	P5, SB, CDP6	A	215
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	6E62	branch-connector-kit	CDP6, SB	A	273
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	BBKED32	branch-connector-kit	P2, P3	A	184
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	259
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPED01	filler-plate	P1, RP1	—	182
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFFPVA41A	filler-plate	RP1	—	261
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFK1	deadfront	P2, P3	—	191

Breaker family	Part	Component	Equipment family	Cl.	Pg
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	DFP3AP01	filler-plate	P2, P3	—	192
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1	main-breaker-kit	P1, S1/S2	A	175
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED1A	main-breaker-kit	RP1	A	233
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3	main-breaker-kit	P1, S1/S2	A	175
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	MBKED3A	main-breaker-kit	RP1	A	233
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	QF3	filler-plate	CDP6, SB, P1, P2, P3	—	280
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCE	branch-connector-kit	P4	A	204
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SCED	branch-connector-kit	SB	A	283
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6	branch-connector-kit	P4	A	206
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SE6D	branch-connector-kit	P5, SB, CDP6	A	223
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED1	main-breaker-kit	S1/S2, SE	A	265
ED (ED2/ED4/ED6/HED4/HHED6) and CED6 (SIE)	SMBKED3	main-breaker-kit	S1/S2, SE	A	266
EHB (EAT)	KCDPEHD	conversion-kit	CDP	A	27
EHB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
EHD (EAT)	KCDPEHD	conversion-kit	CDP	A	27
EHD (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
EHD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	25
EHD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	48
EHD (EAT)	KPRL4FD	branch-connector-kit	PRL4	A	54
EHD (EAT)	KPRL4FD1	branch-connector-kit	PRL4	A	55
EHD (EAT)	KPRL4FD2	branch-connector-kit	PRL4	A	55
EHD (EAT)	KPRL4X12	branch-connector-kit	PRL4	A	64
EHD (EAT)	KPRL4X22	branch-connector-kit	PRL4	A	65
FB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
FB (EAT)	KCDPFDB	conversion-kit	CDP	A	28
FD (EAT)	KCDPED225	branch-connector-kit	CDP	A	17
FD (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
FD (EAT)	KCDPFB100-H	hardware-kit	CDP	—	25
FD (EAT)	KCDPFD	conversion-kit	CDP	A	27
FD (EAT)	KCDPFDB	conversion-kit	CDP	A	28
FD (EAT)	KPRL3FD	branch-connector-kit	PRL3, WEB	A	48
FD (EAT)	KPRL4FBP	branch-connector-kit	PRL4	A	54
FD (EAT)	KPRL4FD	branch-connector-kit	PRL4	A	54
FD (EAT)	KPRL4FD1	branch-connector-kit	PRL4	A	55
FD (EAT)	KPRL4FD2	branch-connector-kit	PRL4	A	55

Breaker family	Part	Component	Equipment family	Cl.	Pg
FD (EAT)	KPRL4FDCL	branch-connector-kit	PRL4	A	56
FD (EAT)	KPRL4X12	branch-connector-kit	PRL4	A	64
FD (EAT)	KPRL4X22	branch-connector-kit	PRL4	A	65
FD (EAT)	KPRL4X32	branch-connector-kit	PRL4	A	65
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6CLF1	branch-connector-kit	CDP6, SB	A	270
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	6F62	branch-connector-kit	CDP6, SB	A	273
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	DFFPFD01	filler-plate	RP1, P1, S1/S2, SE, P2, P3	—	259
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1	main-breaker-kit	P1, S1/S2	A	176
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD1A	main-breaker-kit	RP1	A	234
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3	main-breaker-kit	P1, S1/S2	A	176
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	MBKFD3A	main-breaker-kit	RP1	A	234
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCF	branch-connector-kit	P4	A	204
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SCFD	branch-connector-kit	P5, SB, CDP6	A	222
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6	branch-connector-kit	P4	A	206
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SF6D	branch-connector-kit	P5, SB, CDP6	A	224
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD1	main-breaker-kit	S1/S2, SE	A	266
FD family (FXD6, FD6, HFXD6, HFD6, HHFXD6, HHFD6, CFD6) (SIE)	SMBKFD3	main-breaker-kit	S1/S2, SE	A	266
GB (EAT)	KPRL2GHB	branch-connector-kit	PRL1/PRL2	—	43
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKGB32	branch-connector-kit	P2, P3	A	184
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKNB32	branch-connector-kit	P2, P3	A	185
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	BBKVA4P2P3	branch-connector-kit	P2, P3	A	186
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFP1A	filler-plate	RP1, P1, S1/S2, P2, P3, P4, P5, SB	A	259
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPED01	filler-plate	P1, RP1	—	182
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFFPVA41A	filler-plate	RP1	—	261

Breaker family	Part	Component	Equipment family	Cl.	Pg
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFK1	deadfront	P2, P3	—	191
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	DFP3AP01	filler-plate	P2, P3	—	192
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKBFA	hardware-kit	RP1	—	264
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB1	main-breaker-kit	P1, S1/S2	A	177
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKNB3	main-breaker-kit	P1, S1/S2	A	177
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41A	main-breaker-kit	RP1	A	237
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	MBKVA41B	main-breaker-kit	RP1	A	238
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHAL	connector-strap	RP1	—	246
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONACPHCU	connector-strap	RP1	B	246
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHAL	connector-strap	RP1	B	247
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1CONBPHCU	connector-strap	RP1	B	247
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	P1SCRWS	fastener	RP1, P1	—	264
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41T	branch-connector-kit	P4	A	200
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TD	branch-connector-kit	P5, SB, CDP6	A	218
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	S3VA41TDHD	branch-connector-kit	P5, SB, CDP6	A	218
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2	branch-connector-kit	P4	A	207
GB (NGB/HGB/LGB) and GB2 (NGB2/HGB2/LGB2); 'xGB' (SIE)	SGB2D	branch-connector-kit	P5, SB, CDP6	A	225
HFB (EAT)	KCDPFB100	branch-connector-kit	CDP	A	17
HFB (EAT)	KCDPFD	conversion-kit	CDP	A	27
JA (EAT)	KCDPKDB	conversion-kit	CDP	A	30
JA (EAT)	TAD3	conversion-kit	CDP, PRL4	A	32
JB (EAT)	KCDPJDB	conversion-kit	CDP	A	29
JB (EAT)	KCDPKB	branch-connector-kit	CDP	A	18
JD (EAT)	KCDPJD	conversion-kit	CDP	A	29
JD (EAT)	KCDPJDB	conversion-kit	CDP	A	29
JD (EAT)	KCDPKB	branch-connector-kit	CDP	A	18
JD (EAT)	KPRL4JDS	branch-connector-kit	PRL4	A	56
JD (EAT)	KPRL4JDT	branch-connector-kit	PRL4	A	57

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6CLJ1	branch-connector-kit	CDP6, SB	A	271
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ61	branch-connector-kit	CDP6, SB	A	274
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6JJ62	branch-connector-kit	CDP6, SB	A	274
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCJ1	branch-connector-kit	CDP6, SB	A	277
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SCL61C	branch-connector-kit	CDP6, SB	A	278
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	6SJL1	branch-connector-kit	CDP6, SB	A	279
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD01	filler-plate	RP1, P1, S1/S2, P2, P3	—	260
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	DFFPJD02	filler-plate	RP1	—	260
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD1	main-breaker-kit	P1	A	176
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3	main-breaker-kit	P1	A	177
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKJD3B	main-breaker-kit	RP1	B	235
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	MBKVA5363JD	conversion-kit	RP1	—	264
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJ	branch-connector-kit	P4	A	204
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SCJD	branch-connector-kit	P5, SB, CDP6	A	222
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1	branch-connector-kit	P4	A	207
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ1D	branch-connector-kit	P5, SB, CDP6	A	225
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SJ2D	branch-connector-kit	P5, SB, CDP6	A	226
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD1	main-breaker-kit	S1/S2, SE	A	267
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SMBKJD3	main-breaker-kit	S1/S2, SE	A	267
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJ	branch-connector-kit	P4	A	209
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSCJD	branch-connector-kit	SB	A	284

Breaker family	Part	Component	Equipment family	Cl.	Pg
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1	branch-connector-kit	P4	A	210
JD family (JXD2, JXD6, JD6, HJD6, HJXD6, HHJD6, CJD6, SJD6, SHJD6, SCJD6) (SIE)	SSJ1D	branch-connector-kit	SB	A	284
KA (EAT)	KCDPHKD	conversion-kit	CDP	A	28
KA (EAT)	KCDPKD	conversion-kit	CDP	A	30
KA (EAT)	KCDPLB	branch-connector-kit	CDP	A	20
KB (EAT)	KCDPJD	conversion-kit	CDP	A	29
KB (EAT)	KCDPKB	branch-connector-kit	CDP	A	18
KD (EAT)	KCDPDK	conversion-kit	CDP	A	26
KD (EAT)	KCDPHKD	conversion-kit	CDP	A	28
KD (EAT)	KCDPKD	conversion-kit	CDP	A	30
KD (EAT)	KCDPKDB	conversion-kit	CDP	A	30
KD (EAT)	KCDPLB	branch-connector-kit	CDP	A	20
KD (EAT)	KPRL4CKD	branch-connector-kit	PRL4	A	52
KD (EAT)	KPRL4KDS	branch-connector-kit	PRL4	A	57
KD (EAT)	KPRL4KDT	branch-connector-kit	PRL4	A	58
KD (EAT)	TAD3	conversion-kit	CDP, PRL4	A	32
LA (EAT)	KCDPLA600	branch-connector-kit	CDP	A	19
LA (EAT)	KCDPLD	conversion-kit	CDP	A	31
LA (EAT)	KPRL4LC	branch-connector-kit	PRL4	A	59
LB (EAT)	KCDPKD	conversion-kit	CDP	A	30
LB (EAT)	KCDPKDB	conversion-kit	CDP	A	30
LB (EAT)	KCDPLB	branch-connector-kit	CDP	A	20
LB (EAT)	TAD3	conversion-kit	CDP, PRL4	A	32
LC (EAT)	KCDPLA600	branch-connector-kit	CDP	A	19
LC (EAT)	KCDPLD	conversion-kit	CDP	A	31
LC (EAT)	KPRL4LC	branch-connector-kit	PRL4	A	59
LD (EAT)	KCDPLA600	branch-connector-kit	CDP	A	19
LD (EAT)	KCDPLD	conversion-kit	CDP	A	31
LD (EAT)	KPRL4LC	branch-connector-kit	PRL4	A	59
LD (EAT)	KPRL4LD	branch-connector-kit	PRL4	A	60
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6CLL1	branch-connector-kit	CDP6, SB	A	272
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6LL61	branch-connector-kit	CDP6, SB	A	275
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SCL1	branch-connector-kit	CDP6, SB	A	278
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	6SLL1	branch-connector-kit	CDP6, SB	A	279
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCL	branch-connector-kit	P4	A	205
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SCLD	branch-connector-kit	P5, SB, CDP6	A	223
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6	branch-connector-kit	P4	A	208
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SL6D	branch-connector-kit	P5, SB, CDP6	A	227

Breaker family	Part	Component	Equipment family	Cl.	Pg
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCL	branch-connector-kit	P4	A	209
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSCLD	branch-connector-kit	P5, SB, CDP6	A	229
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6	branch-connector-kit	P4	A	210
LD family (LXD6, LD6, HLD6, HHLD6, CLD6, SLD6, SHLD6, SCLD6) (SIE)	SSL6D	branch-connector-kit	P5, SB, CDP6	A	230
MA (EAT)	KCDPMC	branch-connector-kit	CDP	A	21
MA (EAT)	KCDPMDL	conversion-kit	CDP	A	31
MC (EAT)	KCDPMC	branch-connector-kit	CDP	A	21
MC (EAT)	KCDPMDL	conversion-kit	CDP	A	31
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6M61C	branch-connector-kit	CDP6, SB	A	276
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	6N61C	branch-connector-kit	CDP6, SB	A	276
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	217
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	217
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SLM1D	branch-connector-kit	P5, SB, CDP6	A	228
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SMND	branch-connector-kit	P5, SB, CDP6	A	229
MD / ND family (MXD6, MD6, HMD6, CMD6, SMD6, NXD6, ND6, HND6, CND6, SND6) and LMD6 (SIE)	SSMND	branch-connector-kit	P5, SB, CDP6	A	230
MDL (EAT)	KCDPMC	branch-connector-kit	CDP	A	21
MDL (EAT)	KCDPMDL	conversion-kit	CDP	A	31
MDL (EAT)	KPRL4MC	branch-connector-kit	PRL4	A	61
MDL (EAT)	KPRL4MD	branch-connector-kit	PRL4	A	61
MDL (EAT)	KPRL4X34	branch-connector-kit	PRL4	A	67
NB (EAT)	KCDPNC	branch-connector-kit	CDP	A	22
NB (EAT)	KCDPND	conversion-kit	CDP	A	32
NB (EAT)	KPRL4NC	branch-connector-kit	PRL4	A	62
NC (EAT)	KCDPNC	branch-connector-kit	CDP	A	22
NC (EAT)	KCDPND	conversion-kit	CDP	A	32
NC (EAT)	KPRL4NC	branch-connector-kit	PRL4	A	62
ND (EAT)	KCDPNC	branch-connector-kit	CDP	A	22
ND (EAT)	KCDPND	conversion-kit	CDP	A	32
ND (EAT)	KPRL4CND	branch-connector-kit	PRL4	A	52
ND (EAT)	KPRL4ND	branch-connector-kit	PRL4	A	63
ND (EAT)	KPRL4X35	branch-connector-kit	PRL4	A	68

Breaker family	Part	Component	Equipment family	Cl.	Pg
NEB / HEB (SIE)	BBKEB32	branch-connector-kit	P3	A	195
NEB / HEB (SIE)	EBF1	filler-plate	P3, P4, P5	—	197
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	6QJ2	branch-connector-kit	CDP6, SB	A	277
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ1	branch-connector-kit	P2	A	185
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQ2	branch-connector-kit	P3	A	195
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	194
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	199
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ01	filler-plate	RP1, P1	—	260
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	DFFPQJ02	filler-plate	RP1, P1	—	261
QJ2 / QJH2 / QJ2-H / HQJ2H (SIE)	SQRC	other	P4, P5	—	213
QR2 / QRH2 / HQR2 / HQR2H (SIE)	6QR2	branch-connector-kit	P5, SB, CDP6	A	216
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR1	branch-connector-kit	P2	A	185
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQR2	branch-connector-kit	P3	A	196
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP1FK	conversion-kit	P2	—	194
QR2 / QRH2 / HQR2 / HQR2H (SIE)	BBKQRP2FK	conversion-kit	P3	—	199
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1	main-breaker-kit	P1, S1/S2	A	178
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR1A	main-breaker-kit	RP1	A	235
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3	main-breaker-kit	P1, S1/S2	A	178
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQR3A	main-breaker-kit	RP1	A	236
QR2 / QRH2 / HQR2 / HQR2H (SIE)	MBKQRFK	filler-plate	RP1, P1	—	262
QR2 / QRH2 / HQR2 / HQR2H (SIE)	P2QRFP01	filler-plate	P2	—	192
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQR	branch-connector-kit	P4	A	208
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRC	other	P4, P5	—	213
QR2 / QRH2 / HQR2 / HQR2H (SIE)	SQRD	branch-connector-kit	SB	A	283
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	101
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5700P86	mounting-bracket	A-SERIES-PWR	—	98
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	94
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	94
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	95
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP2FBD	filler-plate	SPECTRA-PP	A	159
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AFP3FBD	filler-plate	SPECTRA-PP	A	161

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AHKBFB1	hardware-kit	SPECTRA-PP	A	169
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMC6FBFP	breaker-mounting-kit	SPECTRA-PP	A	151
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB4FBFP	branch-connector-kit	SPECTRA-PP	A	125
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	AMCB6FBFP	branch-connector-kit	SPECTRA-PP	A	129
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB12P	breaker-mounting-kit	A-SERIES	—	82
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPFB3P	breaker-mounting-kit	A-SERIES	—	82
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	ASPP6FB6D	branch-connector-kit	A-SERIES-PWR	A	90
Record Plus FB (FBV/FBN/FBH/FBL) (GEA)	TEDFP1	filler-plate	A-SERIES	—	85
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKBFD1	hardware-kit	SPECTRA-PP	A	169
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AHKFD1	hardware-kit	SPECTRA-PP	A	170
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDBFP	breaker-mounting-kit	SPECTRA-PP	A	143
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC4FDSFP	breaker-mounting-kit	SPECTRA-PP	A	144
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDBFP	breaker-mounting-kit	SPECTRA-PP	A	151
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMC6FDSPF	breaker-mounting-kit	SPECTRA-PP	A	152
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB4FDBFP	branch-connector-kit	SPECTRA-PP	A	125
Record Plus FC (FCS/FCV/FCN/FCH/FCL) (GEA)	AMCB6FDBFP	branch-connector-kit	SPECTRA-PP	A	130
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGD	filler-plate	SPECTRA-PP	A	162
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AFP4FGS	filler-plate	SPECTRA-PP	A	163
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKBFG1	hardware-kit	SPECTRA-PP	A	169
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AHKFG1	hardware-kit	SPECTRA-PP	A	171
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC2FGMFP	breaker-mounting-kit	SPECTRA-PP	A	135
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC3FGMFP	breaker-mounting-kit	SPECTRA-PP	A	139
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC4FGBFP	breaker-mounting-kit	SPECTRA-PP	A	144
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMC6FGBFP	breaker-mounting-kit	SPECTRA-PP	A	152

Breaker family	Part	Component	Equipment family	Cl.	Pg
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB2FGMFP	branch-connector-kit	SPECTRA-PP	A	118
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB3FGMFP	branch-connector-kit	SPECTRA-PP	A	121
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB4FGBFP	branch-connector-kit	SPECTRA-PP	A	125
Record Plus FG (FGV/FGN/FGH/FGL/FGP) (GEA)	AMCB6FGBFP	branch-connector-kit	SPECTRA-PP	A	130
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1	branch-connector-kit	P4	A	200
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	MG1D	branch-connector-kit	P5, SB, CDP6	A	217
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	NG1D	branch-connector-kit	P5, SB, CDP6	A	217
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SDGD	branch-connector-kit	P4, P5, SB, CDP6	A	205
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFG	branch-connector-kit	P4	A	206
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SFGD	branch-connector-kit	P5, SB, CDP6	A	224
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG	branch-connector-kit	P4	A	207
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG1D	branch-connector-kit	P5, SB, CDP6	A	226
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SJG2D	branch-connector-kit	P5, SB, CDP6	A	227
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLG	branch-connector-kit	P4	A	208
Sentron VL (DG, FG, JG, LG, MG, NG) (SIE)	SLGD	branch-connector-kit	P5, SB, CDP6	A	228
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5500P82	mounting-bracket	A-SERIES-PWR	—	98
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	101
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	94
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	94
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	95
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ACTMKSE	branch-connector-kit	SCP-PLUS	A	110
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AFP3SED	filler-plate	SPECTRA-PP	A	161
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AHKBE1	hardware-kit	SPECTRA-PP	A	168
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4EBSFP	breaker-mounting-kit	SPECTRA-PP	A	143

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC4SEFP	breaker-mounting-kit	SPECTRA-PP	A	149
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMC6EBSFP	breaker-mounting-kit	SPECTRA-PP	A	150
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	AMCB4SEFP	branch-connector-kit	SPECTRA-PP	A	128
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	ASPP6SE6D	branch-connector-kit	A-SERIES-PWR	A	92
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	MB133WB	main-breaker-kit	A-SERIES	A	73
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	NHB150PK	branch-connector-kit	NHB	C	107
Spectra SE (SEDA/SEHA/SELA/SEPA) (GEA)	TEDFP1	filler-plate	A-SERIES	—	85
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5500P84	mounting-bracket	A-SERIES-PWR	—	98
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	101
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702ASFG1	connector-strap	A-SERIES-PWR	—	94
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702BSFG1	connector-strap	A-SERIES-PWR	—	95
Spectra SF (SFHA/SFLA/SFPA) (GEA)	139C5702CSFG1	connector-strap	A-SERIES-PWR	—	95
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ACTMKSF	branch-connector-kit	SCP-PLUS	A	111
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFD	filler-plate	SPECTRA-PP	A	161
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AFP3SFS	filler-plate	SPECTRA-PP	A	162
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKBF1	hardware-kit	SPECTRA-PP	A	169
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AHKF1	hardware-kit	SPECTRA-PP	A	170
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FJFP	breaker-mounting-kit	SPECTRA-PP	A	135
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC2FLSFP	breaker-mounting-kit	SPECTRA-PP	A	136
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FJFP	breaker-mounting-kit	SPECTRA-PP	A	139
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC3FLSFP	breaker-mounting-kit	SPECTRA-PP	A	140
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FJFP	breaker-mounting-kit	SPECTRA-PP	A	145
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC4FLSFP	breaker-mounting-kit	SPECTRA-PP	A	146
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FJFP	breaker-mounting-kit	SPECTRA-PP	A	153
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMC6FLSFP	breaker-mounting-kit	SPECTRA-PP	A	154
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB2FJFP	branch-connector-kit	SPECTRA-PP	A	119
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB3FJFP	branch-connector-kit	SPECTRA-PP	A	121

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB4FJFP	branch-connector-kit	SPECTRA-PP	A	126
Spectra SF (SFHA/SFLA/SFPA) (GEA)	AMCB6FJFP	branch-connector-kit	SPECTRA-PP	A	131
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASP2PTFJ3P	conversion-kit	A-SERIES	—	87
Spectra SF (SFHA/SFLA/SFPA) (GEA)	ASPP6SF3S	branch-connector-kit	A-SERIES-PWR	A	92
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233	main-breaker-kit	A-SERIES	A	73
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332	main-breaker-kit	A-SERIES	A	73
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB2332WB	main-breaker-kit	A-SERIES	A	74
Spectra SF (SFHA/SFLA/SFPA) (GEA)	MB233WB	main-breaker-kit	A-SERIES	A	74
Spectra SF (SFHA/SFLA/SFPA) (GEA)	SF2DPK	branch-connector-kit	CCB-QMR	A	102
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5500P83	mounting-bracket	A-SERIES-PWR	—	98
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	139C5503P103	filler-plate	A-SERIES-PWR	—	100
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P7	connector-strap	A-SERIES-PWR	—	96
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P8	connector-strap	A-SERIES-PWR	—	96
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	315A7046P9	connector-strap	A-SERIES-PWR	—	96
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACSMKSG	branch-connector-kit	SCP-PLUS	A	108
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ACTMKSG	branch-connector-kit	SCP-PLUS	A	111
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGD	filler-plate	SPECTRA-PP	A	163
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AFP4SGS	filler-plate	SPECTRA-PP	A	163
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKBG1	hardware-kit	SPECTRA-PP	A	169
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AHKG1	hardware-kit	SPECTRA-PP	A	171
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC2GMFP	breaker-mounting-kit	SPECTRA-PP	A	137
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC3GMFP	breaker-mounting-kit	SPECTRA-PP	A	141
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC4GBFP	breaker-mounting-kit	SPECTRA-PP	A	147
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMC6GBFP	breaker-mounting-kit	SPECTRA-PP	A	154

Breaker family	Part	Component	Equipment family	Cl.	Pg
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB2GMFP	branch-connector-kit	SPECTRA-PP	A	120
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB3GMFP	branch-connector-kit	SPECTRA-PP	A	122
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB4GBFP	branch-connector-kit	SPECTRA-PP	A	127
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	AMCB6GBFP	branch-connector-kit	SPECTRA-PP	A	132
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	ASPP6SG3S	branch-connector-kit	A-SERIES-PWR	A	93
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332	main-breaker-kit	A-SERIES	A	74
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB332WB	main-breaker-kit	A-SERIES	A	75
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333	main-breaker-kit	A-SERIES	A	75
Spectra SG (SGDA/SGHA/SGLA/SGPA) (GEA)	MB333WB	main-breaker-kit	A-SERIES	A	75
Spectra SK (SKHA/SKLA/SKPA) (GEA)	ACSMKSK	branch-connector-kit	SCP-PLUS	A	108
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP5LCS	filler-plate	SPECTRA-PP	A	163
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AFP6SKS	filler-plate	SPECTRA-PP	A	164
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AHKLB1	hardware-kit	SPECTRA-PP	A	171
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC2KMFP	breaker-mounting-kit	SPECTRA-PP	A	138
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMC3KMFP	breaker-mounting-kit	SPECTRA-PP	A	142
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB2KMFP	branch-connector-kit	SPECTRA-PP	A	120
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3KMFP	branch-connector-kit	SPECTRA-PP	A	123
Spectra SK (SKHA/SKLA/SKPA) (GEA)	AMCB3LBFP	branch-connector-kit	SPECTRA-PP	A	123
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK12SPK	branch-connector-kit	CCB-QMR	A	102
Spectra SK (SKHA/SKLA/SKPA) (GEA)	SK8SPK	branch-connector-kit	CCB-QMR	A	102
TEB / TED / THED / TED4 / TED6 (GEA)	139C5503P77	filler-plate	A-SERIES-PWR	—	101
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702ASEG1	connector-strap	A-SERIES-PWR	—	94
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702BSEG1	connector-strap	A-SERIES-PWR	—	94
TEB / TED / THED / TED4 / TED6 (GEA)	139C5702CSEG1	connector-strap	A-SERIES-PWR	—	95
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB1P	branch-connector-kit	SCP-PLUS	A	108
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB2P	branch-connector-kit	SCP-PLUS	A	109

Breaker family	Part	Component	Equipment family	Cl.	Pg
TEB / TED / THED / TED4 / TED6 (GEA)	ACTMKEB3P	branch-connector-kit	SCP-PLUS	A	109
TEB / TED / THED / TED4 / TED6 (GEA)	AFP2TED	filler-plate	SPECTRA-PP	A	160
TEB / TED / THED / TED4 / TED6 (GEA)	AHKE1	hardware-kit	SPECTRA-PP	A	170
TEB / TED / THED / TED4 / TED6 (GEA)	AHKEL1	hardware-kit	SPECTRA-PP	A	170
TEB / TED / THED / TED4 / TED6 (GEA)	AMC4EBFP	breaker-mounting-kit	SPECTRA-PP	A	142
TEB / TED / THED / TED4 / TED6 (GEA)	AMC6EBFP	breaker-mounting-kit	SPECTRA-PP	A	149
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB4EBFP	branch-connector-kit	SPECTRA-PP	A	124
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6EBFP	branch-connector-kit	SPECTRA-PP	A	128
TEB / TED / THED / TED4 / TED6 (GEA)	AMCB6TEDL	filler-plate	SPECTRA-PP	—	164
TEB / TED / THED / TED4 / TED6 (GEA)	ASPTED3P	breaker-mounting-kit	A-SERIES	—	82
TEB / TED / THED / TED4 / TED6 (GEA)	MB133	main-breaker-kit	A-SERIES	A	72
TEB / TED / THED / TED4 / TED6 (GEA)	NHB150PK	branch-connector-kit	NHB	C	107
TEB / TED / THED / TED4 / TED6 (GEA)	TED1DPK	branch-connector-kit	CCB-QMR	A	103
TEB / TED / THED / TED4 / TED6 (GEA)	TEDFP1	filler-plate	A-SERIES	—	85
TEB / TED / THED / TED4 / TED6 (GEA)	TEL1DPK	branch-connector-kit	CCB-QMR	A	103
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	139C5503P129	filler-plate	A-SERIES-PWR	—	100
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	97
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	97
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	911E347P3	insulator	A-SERIES-PWR	—	99
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AFP3EYD	filler-plate	SPECTRA-PP	A	160
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMC6EYFP	breaker-mounting-kit	SPECTRA-PP	A	150
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB4EYFP	branch-connector-kit	SPECTRA-PP	A	124
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	AMCB6EYFP	branch-connector-kit	SPECTRA-PP	A	129
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY12D	branch-connector-kit	A-SERIES-PWR	A	89
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	ASPP6EY6D	branch-connector-kit	A-SERIES-PWR	A	89
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB423	main-breaker-kit	A-SERIES	A	76
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	MB426	main-breaker-kit	A-SERIES	A	76
TEY / TEYF / TEYD / TEYH / TEYL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	85
TFJ / TFK / THFK / TFL (GEA)	139C5503P90	filler-plate	A-SERIES-PWR	—	101
TFJ / TFK / THFK / TFL (GEA)	AFP3TFD	filler-plate	SPECTRA-PP	A	162
TFJ / TFK / THFK / TFL (GEA)	AFP3TFS	filler-plate	SPECTRA-PP	A	162
TFJ / TFK / THFK / TFL (GEA)	AMC2FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	136

Breaker family	Part	Component	Equipment family	Cl.	Pg
TFJ / TFK / THFK / TFL (GEA)	AMC3FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	140
TFJ / TFK / THFK / TFL (GEA)	AMC4FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	146
TFJ / TFK / THFK / TFL (GEA)	AMC6FJFPTF	breaker-mounting-kit	SPECTRA-PP	A	153
TFJ / TFK / THFK / TFL (GEA)	AMCB2FJFPTF	branch-connector-kit	SPECTRA-PP	A	119
TFJ / TFK / THFK / TFL (GEA)	AMCB3FJFPTF	branch-connector-kit	SPECTRA-PP	A	122
TFJ / TFK / THFK / TFL (GEA)	AMCB4FJFPTF	branch-connector-kit	SPECTRA-PP	A	126
TFJ / TFK / THFK / TFL (GEA)	AMCB6FJFPTF	branch-connector-kit	SPECTRA-PP	A	131
TFJ / TFK / THFK / TFL (GEA)	TF2DPK	branch-connector-kit	CCB-QMR	A	103
THQB / THHQB / TXQB (GEA)	139C5362P2	filler-plate	A-SERIES-PWR	—	99
THQB / THHQB / TXQB (GEA)	315A7048P20	connector-strap	A-SERIES-PWR	—	97
THQB / THHQB / TXQB (GEA)	315A7049P10	connector-strap	A-SERIES-PWR	—	97
THQB / THHQB / TXQB (GEA)	911E347P3	insulator	A-SERIES-PWR	—	99
THQB / THHQB / TXQB (GEA)	AMC6QBFP	breaker-mounting-kit	SPECTRA-PP	A	155
THQB / THHQB / TXQB (GEA)	ASPP6QB12D	branch-connector-kit	A-SERIES-PWR	A	90
THQB / THHQB / TXQB (GEA)	ASPP6QB6D	branch-connector-kit	A-SERIES-PWR	A	91
THQB / THHQB / TXQB (GEA)	MB612	main-breaker-kit	A-SERIES	A	77
THQB / THHQB / TXQB (GEA)	MB613	main-breaker-kit	A-SERIES	A	78
THQB / THHQB / TXQB (GEA)	MB614	main-breaker-kit	A-SERIES	A	78
THQB / THHQB / TXQB (GEA)	MB616	main-breaker-kit	A-SERIES	A	78
THQB / THHQB / TXQB (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	85
THQL / THHQL / TXQL (GEA)	TQLFP1	filler-plate	A-SERIES, A-SERIES-COL	—	85
TJD / TJJ / TJK / THJK (GEA)	ACTMKJD	branch-connector-kit	SCP-PLUS	A	109
TJD / TJJ / TJK / THJK (GEA)	AHKJ1	hardware-kit	SPECTRA-PP	A	171
TJD / TJJ / TJK / THJK (GEA)	AMC2JKFP	breaker-mounting-kit	SPECTRA-PP	A	138
TJD / TJJ / TJK / THJK (GEA)	AMC3JKFP	breaker-mounting-kit	SPECTRA-PP	A	141
TJD / TJJ / TJK / THJK (GEA)	AMC4JKFP	breaker-mounting-kit	SPECTRA-PP	A	147
TJD / TJJ / TJK / THJK (GEA)	AMC6JKFP	breaker-mounting-kit	SPECTRA-PP	A	155
TJD / TJJ / TJK / THJK (GEA)	TJ4DPK	branch-connector-kit	CCB-QMR	A	103
TJD / TJJ / TJK / THJK (GEA)	TJ6DPK	branch-connector-kit	CCB-QMR	A	104
TKM / THKM (GEA)	TK12SPK	branch-connector-kit	CCB-QMR	A	104
TKM / THKM (GEA)	TK8SPK	branch-connector-kit	CCB-QMR	A	104
TQD / THQD (GEA)	139C5500P81	mounting-bracket	A-SERIES-PWR	—	97
TQD / THQD (GEA)	139C5503P64	filler-plate	A-SERIES-PWR	—	100
TQD / THQD (GEA)	139C5702AQDG1	connector-strap	A-SERIES-PWR	—	93
TQD / THQD (GEA)	139C5702BQDG1	connector-strap	A-SERIES-PWR	—	94
TQD / THQD (GEA)	139C5702CQDG1	connector-strap	A-SERIES-PWR	—	95
TQD / THQD (GEA)	ACTMKQD2P	branch-connector-kit	SCP-PLUS	A	110
TQD / THQD (GEA)	ACTMKQD3P	branch-connector-kit	SCP-PLUS	A	110
TQD / THQD (GEA)	AFP2QDD	filler-plate	SPECTRA-PP	A	160
TQD / THQD (GEA)	AFP3QDD	filler-plate	SPECTRA-PP	A	161
TQD / THQD (GEA)	AHKBQ1	hardware-kit	SPECTRA-PP	A	169
TQD / THQD (GEA)	AHKQ1	hardware-kit	SPECTRA-PP	A	172
TQD / THQD (GEA)	AMC4QDFP	breaker-mounting-kit	SPECTRA-PP	A	148
TQD / THQD (GEA)	AMC6QDFP	breaker-mounting-kit	SPECTRA-PP	A	156

Breaker family	Part	Component	Equipment family	Cl.	Pg
TQD / THQD (GEA)	AMCB4QDFP	branch-connector-kit	SPECTRA-PP	A	127
TQD / THQD (GEA)	AMCB6QDFP	branch-connector-kit	SPECTRA-PP	A	132
TQD / THQD (GEA)	ASP2PTQD3P	conversion-kit	A-SERIES	—	87
TQD / THQD (GEA)	ASPP6QD6D	branch-connector-kit	A-SERIES-PWR	A	91
TQD / THQD (GEA)	ASPTQD3P	breaker-mounting-kit	A-SERIES	—	82
TQD / THQD (GEA)	MB512	main-breaker-kit	A-SERIES	A	76
TQD / THQD (GEA)	MB513	main-breaker-kit	A-SERIES	A	77
TQD / THQD (GEA)	MB516	main-breaker-kit	A-SERIES	A	77
TQD / THQD (GEA)	TEDFP1	filler-plate	A-SERIES	—	85
TQD / THQD (GEA)	TQ2DPK	branch-connector-kit	CCB-QMR	A	104
TQD / THQD (GEA)	TQDFM1	breaker-accessory	A-SERIES	—	87
Tri-Pac (EAT)	KCDPFBP	branch-connector-kit	CDP	A	18
Tri-Pac (EAT)	KCDPLA400	branch-connector-kit	CDP	A	19
Tri-Pac (EAT)	KCDPNBP	branch-connector-kit	CDP	A	22
Tri-Pac (EAT)	KPRL4FBP	branch-connector-kit	PRL4	A	54
Tri-Pac (EAT)	KPRL4LAP	branch-connector-kit	PRL4	A	58
Tri-Pac (EAT)	KPRL4NBP	branch-connector-kit	PRL4	A	62

8.5 Component-type index

Component type	Parts (OEM PN → page)
main-breaker-kit	MB133 (GEA, 72), MB133WB (GEA, 73), MB233 (GEA, 73), MB2332 (GEA, 73), MB2332WB (GEA, 74), MB233WB (GEA, 74), MB332 (GEA, 74), MB332WB (GEA, 75), MB333 (GEA, 75), MB333WB (GEA, 75), MB423 (GEA, 76), MB426 (GEA, 76), MB512 (GEA, 76), MB513 (GEA, 77), MB516 (GEA, 77), MB612 (GEA, 77), MB613 (GEA, 78), MB614 (GEA, 78), MB616 (GEA, 78), MBKBC3 (SIE, 174), MBKBL1 (SIE, 174), MBKBL3 (SIE, 175), MBKED1 (SIE, 175), MBKED1A (SIE, 233), MBKED3 (SIE, 175), MBKED3A (SIE, 233), MBKFD1 (SIE, 176), MBKFD1A (SIE, 234), MBKFD3 (SIE, 176), MBKFD3A (SIE, 234), MBKJD1 (SIE, 176), MBKJD3 (SIE, 177), MBKJD3B (SIE, 235), MBKNB1 (SIE, 177), MBKNB3 (SIE, 177), MBKQR1 (SIE, 178), MBKQR1A (SIE, 235), MBKQR3 (SIE, 178), MBKQR3A (SIE, 236), MBKVA41A (SIE, 237), MBKVA41B (SIE, 238), MBKVA5262A (SIE, 239), MBKVA5262B (SIE, 240), MBKVA5363A (SIE, 240), SMBKED1 (SIE, 265), SMBKED3 (SIE, 266), SMBKFD1 (SIE, 266), SMBKFD3 (SIE, 266), SMBKJD1 (SIE, 267), SMBKJD3 (SIE, 267)
main-lug-kit	BRL200 (EAT, 12), AML3120CFP (GEA, 113), AML3120FP (GEA, 113), AML3250CFP (GEA, 114), AML3250FP (GEA, 114), AML3250SFP (GEA, 114), AML3400CFP (GEA, 114), AML3400FP (GEA, 115), AML3400SFP (GEA, 115), AML3600CFP (GEA, 115), AML3600FP (GEA, 115), AML3600SFP (GEA, 116), AML3800CFP (GEA, 116), AML3800FP (GEA, 116), MLA1 (GEA, 79), MLA2 (GEA, 79), MLA41 (GEA, 79), MLA61 (GEA, 80), MLA62 (GEA, 80), MLR1 (GEA, 80), MLR2 (GEA, 80), MLR41 (GEA, 80), MLR61 (GEA, 81), MLT1 (GEA, 81), MLT2 (GEA, 81), MLT41 (GEA, 81), MLT42 (GEA, 81), 4MLKA1 (SIE, 179), 4MLKA1A (SIE, 241), 4MLKA1B (SIE, 241), 4MLKA3 (SIE, 179), 4MLKA3A (SIE, 242), 4MLKA3B (SIE, 242), 4MLKC1 (SIE, 179), 4MLKC1A (SIE, 243), 4MLKC3 (SIE, 180), 4MLKC3A (SIE, 243), MLKA1 (SIE, 180), MLKA1A (SIE, 244), MLKA3 (SIE, 180), MLKA3A (SIE, 244), MLKC1 (SIE, 181), MLKC1A (SIE, 245), MLKC3 (SIE, 181), MLKC3A (SIE, 245)
sub-feed-lug-kit	3BRS225 (EAT, 13), 3BRSF150 (EAT, 13), BRS225 (EAT, 13), BRSF125 (EAT, 13), BRSF150 (EAT, 13)
through-feed-lug-kit	AFL120 (GEA, 117), AFL600 (GEA, 117)
lug-kit	BNK350N (SIE, 182)
lug	NL300 (EAT, 14)

Component type	Parts (OEM PN → page)
branch-connector-kit	KCDPCA (EAT, 17), KCDPED225 (EAT, 17), KCDPFB100 (EAT, 17), KCDPFBP (EAT, 18), KCDPKB (EAT, 18), KCDPLA400 (EAT, 19), KCDPLA600 (EAT, 19), KCDPLB (EAT, 20), KCDPLCL (EAT, 21), KCDPMC (EAT, 21), KCDPNBP (EAT, 22), KCDPNC (EAT, 22), KFDP4XT (EAT, 33), KFDP5XT (EAT, 34), KFDPB6X-2 (EAT, 34), KFDPW11X-6 (EAT, 35), KFDPW11X-8 (EAT, 35), KFDPW15X-12 (EAT, 36), KFDPW9X-4 (EAT, 36), KPRL1BAB (EAT, 43), KPRL2GHB (EAT, 43), KPRL3CA (EAT, 47), KPRL3ED (EAT, 48), KPRL3FD (EAT, 48), KPRL44X (EAT, 50), KPRL45X1 (EAT, 50), KPRL4B6XS (EAT, 51), KPRL4B6XT (EAT, 51), KPRL4CA (EAT, 51), KPRL4CKD (EAT, 52), KPRL4CND (EAT, 52), KPRL4ED (EAT, 53), KPRL4ED2 (EAT, 53), KPRL4FBP (EAT, 54), KPRL4FD (EAT, 54), KPRL4FD1 (EAT, 55), KPRL4FD2 (EAT, 55), KPRL4FDCL (EAT, 56), KPRL4JDS (EAT, 56), KPRL4JDT (EAT, 57), KPRL4KDS (EAT, 57), KPRL4KDT (EAT, 58), KPRL4LAP (EAT, 58), KPRL4LC (EAT, 59), KPRL4LCL (EAT, 59), KPRL4LD (EAT, 60), KPRL4LG (EAT, 60), KPRL4MC (EAT, 61), KPRL4MD (EAT, 61), KPRL4NBP (EAT, 62), KPRL4NC (EAT, 62), KPRL4ND (EAT, 63), KPRL4W11X (EAT, 63), KPRL4W15X (EAT, 64), KPRL4W9X (EAT, 64), KPRL4X12 (EAT, 64), KPRL4X22 (EAT, 65), KPRL4X32 (EAT, 65), KPRL4X334S (EAT, 66), KPRL4X334T (EAT, 66), KPRL4X336 (EAT, 67), KPRL4X34 (EAT, 67), KPRL4X35 (EAT, 68), ACSMKSG (GEA, 108), ACSMKSK (GEA, 108), ACTMKEB1P (GEA, 108), ACTMKEB2P (GEA, 109), ACTMKEB3P (GEA, 109), ACTMKJD (GEA, 109), ACTMKQD2P (GEA, 110), ACTMKQD3P (GEA, 110), ACTMKSE (GEA, 110), ACTMKSF (GEA, 111), ACTMKSG (GEA, 111), AMCB2FGMFP (GEA, 118), AMCB2FJFP (GEA, 119), AMCB2FJFPTF (GEA, 119), AMCB2GMFP (GEA, 120), AMCB2KMFP (GEA, 120), AMCB3FGMFP (GEA, 121), AMCB3FJFP (GEA, 121), AMCB3FJFPTF (GEA, 122), AMCB3GMFP (GEA, 122), AMCB3KMFP (GEA, 123), AMCB3LBFP (GEA, 123), AMCB4EBFP (GEA, 124), AMCB4EYFP (GEA, 124), AMCB4FBFP (GEA, 125), AMCB4FDBFP (GEA, 125), AMCB4FGBFP (GEA, 125), AMCB4FJFP (GEA, 126), AMCB4FJFPTF (GEA, 126), AMCB4GBFP (GEA, 127), AMCB4QDFP (GEA, 127), AMCB4SEFP (GEA, 128), AMCB6EBFP (GEA, 128), AMCB6EYFP (GEA, 129), AMCB6FBFP (GEA, 129), AMCB6FDBFP (GEA, 130), AMCB6FGBFP (GEA, 130), AMCB6FJFP (GEA, 131), AMCB6FJFPTF (GEA, 131), AMCB6GBFP (GEA, 132), AMCB6QDFP (GEA, 132), ASPP6EY12D (GEA, 89), ASPP6EY6D (GEA, 89), ASPP6FB6D (GEA, 90), ASPP6QB12D (GEA, 90), ASPP6QB6D (GEA, 91), ASPP6QD6D (GEA, 91), ASPP6SE6D (GEA, 92), ASPP6SF3S (GEA, 92), ASPP6SG3S (GEA, 93), NHB150PK (GEA, 107), SF2DPK (GEA, 102), SK12SPK (GEA, 102), SK8SPK (GEA, 102), TED1DPK (GEA, 103), TEL1DPK (GEA, 103), TF2DPK (GEA, 103), TJ4DPK (GEA, 103), TJ6DPK (GEA, 104), TK12SPK (GEA, 104), TK8SPK (GEA, 104), TQ2DPK (GEA, 104), 6BL2C (SIE, 269), 6CLE2 (SIE, 215), 6CLF1 (SIE, 270), 6CLJ1 (SIE, 271), 6CLL1 (SIE, 272), 6E62 (SIE, 273), 6F62 (SIE, 273), 6JJ61 (SIE, 274), 6JJ62 (SIE, 274), 6LL61 (SIE, 275), 6M61C (SIE, 276), 6N61C (SIE, 276), 6QJ2 (SIE, 277), 6QR2 (SIE, 216), 6SCJ1 (SIE, 277), 6SCL1 (SIE, 278), 6SCL61C (SIE, 278), 6SJL1 (SIE, 279), 6SLL1 (SIE, 279), BBKB32 (SIE, 183), BBKEB32 (SIE, 195), BBKED32 (SIE, 184), BBKGB32 (SIE, 184), BBKNB32 (SIE, 185), BBKQ1 (SIE, 185), BBKQ2 (SIE, 195), BBKQR1 (SIE, 185), BBKQR2 (SIE, 196), BBKVA4P2P3 (SIE, 186), BBKVA5262P2S (SIE, 186), BBKVA52P3T (SIE, 196), MG1 (SIE, 200), MG1D (SIE, 217), NG1D (SIE, 217), S3VA41T (SIE, 200), S3VA41TD (SIE, 218), S3VA41TDHD (SIE, 218), S3VA52T (SIE, 201), S3VA52TD (SIE, 219), S3VA53T (SIE, 201), S3VA53T2D (SIE, 281), S3VA53TD (SIE, 219), S3VA54T (SIE, 202), S3VA54T2D (SIE, 281), S3VA54TD (SIE, 220), S3VA55TD (SIE, 282), S3VA57TD (SIE, 282), S3VA63T (SIE, 202), S3VA63TD (SIE, 220), S3VA64T (SIE, 203), S3VA64TD (SIE, 221), SBL (SIE, 203), SBLBD (SIE, 221), SCE (SIE, 204), SCED (SIE, 283), SCF (SIE, 204), SCFD (SIE, 222), SCJ (SIE, 204), SCJD (SIE, 222), SCL (SIE, 205), SCLD (SIE, 223), SDGD (SIE, 205), SE6 (SIE, 206), SE6D (SIE, 223), SF6 (SIE, 206), SF6D (SIE, 224), SFG (SIE, 206), SFGD (SIE, 224), SGB2 (SIE, 207), SGB2D (SIE, 225), SJ1 (SIE, 207), SJ1D (SIE, 225), SJ2D (SIE, 226), SJG (SIE, 207), SJG1D (SIE, 226), SJG2D (SIE, 227), SL6 (SIE, 208), SL6D (SIE, 227), SLG (SIE, 208), SLGD (SIE, 228), SLM1D (SIE, 228), SMND (SIE, 229), SQR (SIE, 208), SQRD (SIE, 283), SSCJ (SIE, 209), SSCJD (SIE, 284), SSCL (SIE, 209), SSCLD (SIE, 229), SSJ1 (SIE, 210), SSJ1D (SIE, 284), SSL6 (SIE, 210), SSL6D (SIE, 230), SSMND (SIE, 230)
breaker-mounting-kit	AMC2FGMFP (GEA, 135), AMC2FJFP (GEA, 135), AMC2FJFPTF (GEA, 136), AMC2FLSFP (GEA, 136), AMC2GMFP (GEA, 137), AMC2JKFP (GEA, 138), AMC2KMFP (GEA, 138), AMC3FGMFP (GEA, 139), AMC3FJFP (GEA, 139), AMC3FJFPTF (GEA, 140), AMC3FLSFP (GEA, 140), AMC3GMFP (GEA, 141), AMC3JKFP (GEA, 141), AMC3KMFP (GEA, 142), AMC4EBFP (GEA, 142), AMC4EBSFP (GEA, 143), AMC4FDBFP (GEA, 143), AMC4FDSFP (GEA, 144), AMC4FGBFP (GEA, 144), AMC4FJFP (GEA, 145), AMC4FJFPTF (GEA, 146), AMC4FLSFP (GEA, 146), AMC4GBFP (GEA, 147), AMC4JKFP (GEA, 147), AMC4QDFP (GEA, 148), AMC4SEFP (GEA, 149), AMC6EBFP (GEA, 149), AMC6EBSFP (GEA, 150), AMC6EYFP (GEA, 150), AMC6FBFP (GEA, 151), AMC6FDBFP (GEA, 151), AMC6FDSPF (GEA, 152), AMC6FGBFP (GEA, 152), AMC6FJFP (GEA, 153), AMC6FJFPTF (GEA, 153), AMC6FLSFP (GEA, 154), AMC6GBFP (GEA, 154), AMC6JKFP (GEA, 155), AMC6QBFP (GEA, 155), AMC6QDFP (GEA, 156), ASPFB12P (GEA, 82), ASPFB3P (GEA, 82), ASPTED3P (GEA, 82), ASPTQD3P (GEA, 82)
connector-strap	139C5702AQDG1 (GEA, 93), 139C5702ASEG1 (GEA, 94), 139C5702ASFG1 (GEA, 94), 139C5702BQDG1 (GEA, 94), 139C5702BSEG1 (GEA, 94), 139C5702BSFG1 (GEA, 95), 139C5702CQDG1 (GEA, 95), 139C5702CSEG1 (GEA, 95), 139C5702CSFG1 (GEA, 95), 315A7046P7 (GEA, 96), 315A7046P8 (GEA, 96), 315A7046P9 (GEA, 96), 315A7048P20 (GEA, 97), 315A7049P10 (GEA, 97), P1CONACPHAL (SIE, 246), P1CONACPHCU (SIE, 246), P1CONBPHAL (SIE, 247), P1CONBPHCU (SIE, 247)
neutral-assembly	5158C03G01 (EAT, 44), 5158C03G02 (EAT, 44), 5158C03G03 (EAT, 44), 5158C03G04 (EAT, 44), 5158C04G01 (EAT, 45), BINA (EAT, 14), ANK120D (GEA, 156), ANK800D (GEA, 156), ANKN120 (GEA, 157), ANKN400 (GEA, 157), NKA (GEA, 83), NKA42 (GEA, 83), NKA4FT (GEA, 83), NKR (GEA, 83), NKR4 (GEA, 83), NKT (GEA, 84), NKT4 (GEA, 84), 2NLK42B (SIE, 248), 2NLK54B (SIE, 249), 42NLK54B (SIE, 249), BNK2 (SIE, 187), BNKP2EX1 (SIE, 187), CNLK42B (SIE, 250), CNLK54B (SIE, 250), LNLK4X11B (SIE, 251), LNLK5X12A (SIE, 251), LNLK6X17B (SIE, 252), LNLK7X18A (SIE, 252), LNLK7X20B (SIE, 253), LPP2NB01 (SIE, 187)
ground-bar	5158C05G01 (EAT, 45), 5158C05G02 (EAT, 45), 5158C05G05 (EAT, 45), 5158C05G06 (EAT, 46), AEG10 (GEA, 157), AEG21 (GEA, 157), AEG21S (GEA, 157), AEG31S (GEA, 158), AEG47 (GEA, 158), AEG47S (GEA, 158), EGS12 (GEA, 84), TGL2 (GEA, 84), TGL20 (GEA, 84), ECGK (SIE, 253), EGK (SIE, 253), ICGK (SIE, 254), IGK (SIE, 254)
mounting-bracket	139C5500P81 (GEA, 97), 139C5500P82 (GEA, 98), 139C5500P83 (GEA, 98), 139C5500P84 (GEA, 98), 139C5700P86 (GEA, 98), ASPAQLEBKT (GEA, 85), P1DFS250AFT (SIE, 254), P1DFS250ANFT (SIE, 254), P1DFS400A (SIE, 255)

Component type	Parts (OEM PN → page)
insulator	911E347P3 (GEA, 99)
barrier	ASP25AD65KA (GEA, 85), SEBKP1P2P3V1 (SIE, 255), SEBKP2V1 (SIE, 188), SEBKP2V2 (SIE, 188), SEBKP2V3 (SIE, 188), SEBKP2V4 (SIE, 189), SEBKP2V5 (SIE, 189), SEBKP2V6 (SIE, 189), SEBKP2V7 (SIE, 190), SEBKP3V1 (SIE, 197), SEBKRP1V1 (SIE, 255), SEBKRP1V2 (SIE, 256), SEBKRP1V3 (SIE, 256), SEBKRP1V4 (SIE, 256), SEBKRP1V5 (SIE, 257), SEBKRP1V6 (SIE, 257), SEBKRP1V7 (SIE, 257), SEBP4V1 (SIE, 210), SEBP4V2 (SIE, 211), SEBP4V3 (SIE, 211), SEBP5V1 (SIE, 231), SEBP5V2 (SIE, 231), SEBP5V3 (SIE, 231), SEBP5V4 (SIE, 231)
deadfront	DFK07 (SIE, 190), DFK08 (SIE, 190), DFK1 (SIE, 191)
filler-plate	3456B35H01 (EAT, 46), 3456B99H01 (EAT, 46), 3456B99H05 (EAT, 46), BRFP (EAT, 14), BWFP (EAT, 14), KCDP_X (EAT, 23), KFDP_X (EAT, 36), 139C5362P2 (GEA, 99), 139C5503P103 (GEA, 100), 139C5503P129 (GEA, 100), 139C5503P64 (GEA, 100), 139C5503P77 (GEA, 101), 139C5503P90 (GEA, 101), 75C145005G703 (GEA, 105), 75C145005G711 (GEA, 105), 75C145005G715 (GEA, 105), AFP2FBD (GEA, 159), AFP2QDD (GEA, 160), AFP2TED (GEA, 160), AFP3EYD (GEA, 160), AFP3FBD (GEA, 161), AFP3QDD (GEA, 161), AFP3SED (GEA, 161), AFP3SFD (GEA, 161), AFP3SFS (GEA, 162), AFP3TFD (GEA, 162), AFP3TFS (GEA, 162), AFP4FGD (GEA, 162), AFP4FGS (GEA, 163), AFP4SGD (GEA, 163), AFP4SGS (GEA, 163), AFP5LCS (GEA, 163), AFP6SKS (GEA, 164), AMCB6TEDL (GEA, 164), APP1 (GEA, 164), APP1S (GEA, 164), APP1W (GEA, 165), APP2 (GEA, 165), APP2S (GEA, 165), APP2W (GEA, 165), APP3 (GEA, 165), APP3S (GEA, 166), APP3W (GEA, 166), APP4 (GEA, 166), APP4S (GEA, 166), APP4W (GEA, 166), APP5 (GEA, 167), APP5S (GEA, 167), APP5W (GEA, 167), APP6 (GEA, 167), APP6S (GEA, 167), APP6W (GEA, 168), CCBFP1 (GEA, 105), CCBFP3 (GEA, 105), CCBFP5 (GEA, 106), QMRFP1 (GEA, 106), QMRFP2 (GEA, 106), QMRFP5 (GEA, 106), SCPFP1 (GEA, 111), SCPFP2 (GEA, 111), SCPFP3 (GEA, 112), SCPFP5 (GEA, 112), TEDFP1 (GEA, 85), TQLFP1 (GEA, 85), 6FPB01 (SIE, 211), 6FPB02 (SIE, 212), 6FPB03 (SIE, 212), 6FPB05 (SIE, 212), 6FPB10 (SIE, 213), 6FPB15 (SIE, 284), DFFP01B (SIE, 258), DFFP01C (SIE, 258), DFFP1A (SIE, 259), DFFP3 (SIE, 191), DFFP6 (SIE, 191), DFFPED01 (SIE, 182), DFFPFD01 (SIE, 259), DFFPJD01 (SIE, 260), DFFPJD02 (SIE, 260), DFFPQJ01 (SIE, 260), DFFPQJ02 (SIE, 261), DFFPVA41A (SIE, 261), DFFPVA5262A (SIE, 261), DFFPVA5262P2A (SIE, 192), DFFPVA5262P2B (SIE, 192), DFFPVA5363A (SIE, 262), DFP3AP01 (SIE, 192), EBF1 (SIE, 197), MBKQRFK (SIE, 262), P2QRFP01 (SIE, 192), QF3 (SIE, 280)
trim	0080429 (EAT, 23), 114C247G01 (EAT, 23), 3457B16G01 (EAT, 24), 5155C81G01 (EAT, 24), 8450C62H39 (EAT, 24), K80522 (EAT, 24)
box/enclosure	EWK1 (SIE, 262), EWK1B (SIE, 263), EWK2 (SIE, 197), EWK2B (SIE, 198), EWK3 (SIE, 263)
hardware-kit	KCDPFB100-H (EAT, 25), 139C5720G3 (GEA, 86), 139C5720G6 (GEA, 86), 139C5720G9 (GEA, 86), AHKBE1 (GEA, 168), AHKBF1 (GEA, 169), AHKBFB1 (GEA, 169), AHKBFD1 (GEA, 169), AHKBFG1 (GEA, 169), AHKBG1 (GEA, 169), AHKBQ1 (GEA, 169), AHKE1 (GEA, 170), AHKEL1 (GEA, 170), AHKF1 (GEA, 170), AHKFD1 (GEA, 170), AHKFG1 (GEA, 171), AHKG1 (GEA, 171), AHKJ1 (GEA, 171), AHKLB1 (GEA, 171), AHKQ1 (GEA, 172), BNDKT (GEA, 86), BNDKT6 (GEA, 86), BBKVA5262P2HW (SIE, 193), BBKVA52P3HW (SIE, 198), BK1A (SIE, 263), IMK1 (SIE, 263), MBKBFA (SIE, 264), P2BK1 (SIE, 193), P2BK2 (SIE, 193), P2BK3 (SIE, 194), P3BK1 (SIE, 198), S3VA52PR (SIE, 213), S3VA53PR (SIE, 285)
fastener	414A380G01 (EAT, 47), 414A380G02 (EAT, 25), 8712C73H01 (EAT, 47), 3VA9233-0QA00 (SIE, 285), 3VA9243-0QA00 (SIE, 285), 3VA9473-0QA00 (SIE, 285), P1SCRWS (SIE, 264)
conversion-kit	KCDPDK (EAT, 26), KCDPEHD (EAT, 27), KCDPFD (EAT, 27), KCDPFDB (EAT, 28), KCDPHKD (EAT, 28), KCDPJD (EAT, 29), KCDPJDB (EAT, 29), KCDPKD (EAT, 30), KCDPKDB (EAT, 30), KCDPLD (EAT, 31), KCDPMDL (EAT, 31), KCDPND (EAT, 32), KFDPBS324R (EAT, 37), KFDPBS364R (EAT, 38), KFDPW325R (EAT, 38), KFDPW326R (EAT, 38), KFDPW365R (EAT, 39), KFDPW366R (EAT, 39), KFDPW367 (EAT, 39), KFDPW368 (EAT, 40), KFDPWT3211R (EAT, 40), KFDPWT3222R (EAT, 40), KFDPWT3233R (EAT, 41), KFDPWT3611R (EAT, 41), KFDPWT3622R (EAT, 41), KFDPWT3633R (EAT, 42), TAD3 (EAT, 32), APHBL (GEA, 86), APHBQ (GEA, 87), ASP2PTFJ3P (GEA, 87), ASP2PTQD3P (GEA, 87), BBKQRP1FK (SIE, 194), BBKQRP2FK (SIE, 199), MBKVA5363JD (SIE, 264)
breaker-accessory	TQDFM1 (GEA, 87)
handle-lock	BHT (EAT, 15)
padlock-attachment	BRLW (EAT, 15), BRLW1 (EAT, 15)
other	APN48 (GEA, 87), APN84 (GEA, 88), SQRC (SIE, 213)

8.6 Rating and pole index

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00004	KCDPCA	225 A frame	3	—	17
EDH-EAT-00002	KCDPED225	225 A frame	3	—	17
EDH-EAT-00001	KCDPFB100	100 A maximum	3	—	17
EDH-EAT-00003	KCDPFBP	100 A (FB-P 15-100 A)	3	—	18
EDH-EAT-00005	KCDPKB	250 A frame	3	—	18
EDH-EAT-00007	KCDPLA400	400 A (LA-P 70-400 A)	3	—	19
EDH-EAT-00008	KCDPLA600	600 A frame	3	—	19
EDH-EAT-00006	KCDPLB	400 A frame	3	—	20
EDH-EAT-00009	KCDPLCL	LCL 125-400 A	3	—	21
EDH-EAT-00010	KCDPMC	800 A frame	3	—	21
EDH-EAT-00012	KCDPNBP	800 A (NB-P 300-800 A)	3	—	22

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00011	KCDPNC	1200 A frame; not rated for 100 percent breakers	3	—	22
EDH-EAT-00028	KFDP4XT	—	3	—	33
EDH-EAT-00029	KFDP5XT	—	3	—	34
EDH-EAT-00030	KFDPB6X-2	—	3	—	34
EDH-EAT-00042	KFDPBS324R	200 A	3	240 V	37
EDH-EAT-00043	KFDPBS364R	200 A	3	600 V	38
EDH-EAT-00032	KFDPW11X-6	—	3	—	35
EDH-EAT-00033	KFDPW11X-8	—	3	—	35
EDH-EAT-00034	KFDPW15X-12	—	3	—	36
EDH-EAT-00044	KFDPW325R	400 A	3	240 V	38
EDH-EAT-00046	KFDPW326R	600 A	3	240 V	38
EDH-EAT-00045	KFDPW365R	400 A	3	600 V	39
EDH-EAT-00047	KFDPW366R	600 A	3	600 V	39
EDH-EAT-00048	KFDPW367	800 A	3	240/600 V	39
EDH-EAT-00049	KFDPW368	1200 A	3	240/600 V	40
EDH-EAT-00031	KFDPW9X-4	—	3	—	36
EDH-EAT-00036	KFDPWT3211R	30 A	3	240 V	40
EDH-EAT-00038	KFDPWT3222R	60 A	3	240 V	40
EDH-EAT-00040	KFDPWT3233R	100 A	3	240 V	41
EDH-EAT-00037	KFDPWT3611R	30 A	3	600 V	41
EDH-EAT-00039	KFDPWT3622R	60 A	3	600 V	41
EDH-EAT-00041	KFDPWT3633R	100 A	3	600 V	42
EDH-EAT-00050	KPRL1BAB	Maximum amperes connected to any one connector cannot exceed 140 A	—	—	43
EDH-EAT-00051	KPRL2GHB	Maximum 140 A connected to any one connector	—	—	43
EDH-EAT-00103	KPRL4CA	—	2, 3	—	51
EDH-EAT-00086	KPRL4CKD	—	2, 3	—	52
EDH-EAT-00092	KPRL4CND	—	3	—	52
EDH-EAT-00081	KPRL4ED	—	3	—	53
EDH-EAT-00078	KPRL4ED2	—	2	—	53
EDH-EAT-00080	KPRL4FBP	—	3	—	54
EDH-EAT-00079	KPRL4FD	—	3	—	54
EDH-EAT-00076	KPRL4FD1	—	1 (two sets of twin-mounted single-pole)	—	55
EDH-EAT-00077	KPRL4FD2	—	2	—	55
EDH-EAT-00102	KPRL4FDCL	—	3	—	56
EDH-EAT-00082	KPRL4JDS	—	2, 3	—	56
EDH-EAT-00083	KPRL4JDT	—	2, 3	—	57
EDH-EAT-00084	KPRL4KDS	—	2, 3	—	57
EDH-EAT-00085	KPRL4KDT	—	2, 3	—	58
EDH-EAT-00088	KPRL4LAP	—	2, 3	—	58
EDH-EAT-00104	KPRL4LC	—	3	—	59
EDH-EAT-00087	KPRL4LCL	—	2, 3	—	59
EDH-EAT-00089	KPRL4LD	—	2, 3	—	60
EDH-EAT-00105	KPRL4LG	—	3	—	60
EDH-EAT-00090	KPRL4MC	—	2, 3	—	61
EDH-EAT-00107	KPRL4MD	—	3	—	61
EDH-EAT-00091	KPRL4NBP	—	2, 3	—	62
EDH-EAT-00106	KPRL4NC	—	3	—	62
EDH-EAT-00093	KPRL4ND	—	2, 3	—	63

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-EAT-00094	KPRL4X12	—	1 (two sets of twin-mounted single-pole)	—	64
EDH-EAT-00095	KPRL4X22	—	2	—	65
EDH-EAT-00096	KPRL4X32	—	3	—	65
EDH-EAT-00097	KPRL4X334S	—	3	—	66
EDH-EAT-00098	KPRL4X334T	—	3	—	66
EDH-EAT-00099	KPRL4X336	—	3	—	67
EDH-EAT-00100	KPRL4X34	—	3	—	67
EDH-EAT-00101	KPRL4X35	—	3	—	68
EDH-GEA-00027	315A7049P10	200 A (per description)	—	—	97
EDH-GEA-00254	ACSMKSG	400/800 A max	—	—	108
EDH-GEA-00255	ACSMKSK	800/1200 A max	—	—	108
EDH-GEA-00246	ACTMKEB1P	150 A max	—	—	108
EDH-GEA-00247	ACTMKEB2P	150 A max	—	—	109
EDH-GEA-00248	ACTMKEB3P	150 A max	—	—	109
EDH-GEA-00252	ACTMKJD	400 A max	—	—	109
EDH-GEA-00250	ACTMKQD2P	225 A max	—	—	110
EDH-GEA-00251	ACTMKQD3P	225 A max	—	—	110
EDH-GEA-00245	ACTMKSE	150 A max	—	—	110
EDH-GEA-00249	ACTMKSF	250 A max	—	—	111
EDH-GEA-00253	ACTMKSG	400/600 A max	—	—	111
EDH-GEA-00243	AFL120	800/1200 A	—	—	117
EDH-GEA-00242	AFL600	250/400/600 A	—	—	117
EDH-GEA-00181	AMC2FGMFP	600 A max breaker	—	—	135
EDH-GEA-00179	AMC2FJFP	250 A max breaker	—	—	135
EDH-GEA-00178	AMC2FJFPTF	225 A max breaker	—	—	136
EDH-GEA-00184	AMC2FLSFP	250 A max breaker	—	—	136
EDH-GEA-00182	AMC2GMFP	600 A max breaker	—	—	137
EDH-GEA-00180	AMC2JKFP	400/600 A max breaker	—	—	138
EDH-GEA-00183	AMC2KMFP	1200 A max breaker	—	—	138
EDH-GEA-00162	AMC3FGMFP	600 A max breaker	—	—	139
EDH-GEA-00160	AMC3FJFP	250 A max breaker	—	—	139
EDH-GEA-00159	AMC3FJFPTF	225 A max breaker	—	—	140
EDH-GEA-00165	AMC3FLSFP	250 A max breaker	—	—	140
EDH-GEA-00163	AMC3GMFP	600 A max breaker	—	—	141
EDH-GEA-00161	AMC3JKFP	400/600 A max breaker	—	—	141
EDH-GEA-00164	AMC3KMFP	1200 A max breaker	—	—	142
EDH-GEA-00167	AMC4EBFP	150 A max breaker	—	—	142
EDH-GEA-00176	AMC4EBSFP	150 A max breaker	—	—	143
EDH-GEA-00166	AMC4FDBFP	100 A max breaker	—	—	143
EDH-GEA-00175	AMC4FDSFP	100 A max breaker	—	—	144
EDH-GEA-00173	AMC4FGBFP	600 A max breaker	—	—	144
EDH-GEA-00171	AMC4FJFP	250 A max breaker	—	—	145
EDH-GEA-00170	AMC4FJFPTF	225 A max breaker	—	—	146
EDH-GEA-00177	AMC4FLSFP	250 A max breaker	—	—	146
EDH-GEA-00174	AMC4GBFP	600 A max breaker	—	—	147
EDH-GEA-00172	AMC4JKFP	400/600 A max breaker	—	—	147
EDH-GEA-00169	AMC4QDFP	225 A max breaker	—	—	148
EDH-GEA-00168	AMC4SEFP	150 A max breaker	—	—	149
EDH-GEA-00149	AMC6EBFP	150 A max breaker	—	—	149
EDH-GEA-00157	AMC6EBSFP	150 A max breaker	—	—	150
EDH-GEA-00146	AMC6EYFP	100 A max breaker	—	—	150

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00147	AMC6FBFP	100 A max breaker	—	—	151
EDH-GEA-00148	AMC6FDBFP	100 A max breaker	—	—	151
EDH-GEA-00156	AMC6FDSPF	100 A max breaker	—	—	152
EDH-GEA-00154	AMC6FGBFP	600 A max breaker	—	—	152
EDH-GEA-00152	AMC6FJFP	250 A max breaker	—	—	153
EDH-GEA-00151	AMC6FJFPTF	225 A max breaker	—	—	153
EDH-GEA-00158	AMC6FLSFP	250 A max breaker	—	—	154
EDH-GEA-00155	AMC6GBFP	600 A max breaker	—	—	154
EDH-GEA-00153	AMC6JKFP	400/600 A max breaker	—	—	155
EDH-GEA-00145	AMC6QBFP	100 A max breaker	—	—	155
EDH-GEA-00150	AMC6QDFP	225 A max breaker	—	—	156
EDH-GEA-00119	AMCB2FGMFP	—	2	—	118
EDH-GEA-00117	AMCB2FJFP	—	2	—	119
EDH-GEA-00118	AMCB2FJFPTF	—	2	—	119
EDH-GEA-00120	AMCB2GMFP	—	2	—	120
EDH-GEA-00126	AMCB2KMFP	—	2	—	120
EDH-GEA-00123	AMCB3FGMFP	—	3	—	121
EDH-GEA-00121	AMCB3FJFP	—	3	—	121
EDH-GEA-00122	AMCB3FJFPTF	—	3	—	122
EDH-GEA-00124	AMCB3GMFP	—	3	—	122
EDH-GEA-00127	AMCB3KMFP	—	3	—	123
EDH-GEA-00125	AMCB3LBFP	—	2	—	123
EDH-GEA-00098	AMCB4EBFP	—	2	—	124
EDH-GEA-00099	AMCB4EYFP	—	2	—	124
EDH-GEA-00100	AMCB4FBFP	—	2	—	125
EDH-GEA-00101	AMCB4FDBFP	—	2	—	125
EDH-GEA-00113	AMCB4FGBFP	—	2	—	125
EDH-GEA-00109	AMCB4FJFP	—	2	—	126
EDH-GEA-00111	AMCB4FJFPTF	—	2	—	126
EDH-GEA-00114	AMCB4GBFP	—	2	—	127
EDH-GEA-00102	AMCB4QDFP	—	2	—	127
EDH-GEA-00103	AMCB4SEFP	—	2	—	128
EDH-GEA-00104	AMCB6EBFP	—	3	—	128
EDH-GEA-00105	AMCB6EYFP	—	3	—	129
EDH-GEA-00106	AMCB6FBFP	—	3	—	129
EDH-GEA-00107	AMCB6FDBFP	—	3	—	130
EDH-GEA-00115	AMCB6FGBFP	—	3	—	130
EDH-GEA-00110	AMCB6FJFP	—	3	—	131
EDH-GEA-00112	AMCB6FJFPTF	—	3	—	131
EDH-GEA-00116	AMCB6GBFP	—	3	—	132
EDH-GEA-00108	AMCB6QDFP	—	3	—	132
EDH-GEA-00231	AML3120CFP	1200 A	—	—	113
EDH-GEA-00226	AML3120FP	1200 A	—	—	113
EDH-GEA-00227	AML3250CFP	250 A	—	—	114
EDH-GEA-00220	AML3250FP	250 A	—	—	114
EDH-GEA-00219	AML3250SFP	250 A	—	—	114
EDH-GEA-00228	AML3400CFP	400 A	—	—	114
EDH-GEA-00222	AML3400FP	400 A	—	—	115
EDH-GEA-00221	AML3400SFP	400 A	—	—	115
EDH-GEA-00229	AML3600CFP	600 A	—	—	115
EDH-GEA-00224	AML3600FP	600 A	—	—	115
EDH-GEA-00223	AML3600SFP	600 A	—	—	116

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00230	AML3800CFP	800 A	—	—	116
EDH-GEA-00225	AML3800FP	800 A	—	—	116
EDH-GEA-00235	ANK120D	1200 A	—	—	156
EDH-GEA-00234	ANK800D	800 A	—	—	156
EDH-GEA-00233	ANKN120	600-1200 A	—	—	157
EDH-GEA-00232	ANKN400	250/400 A	—	—	157
EDH-GEA-00059	MB133	150 A	3	—	72
EDH-GEA-00060	MB133WB	150 A	3	—	73
EDH-GEA-00051	MB233	225 A	3	—	73
EDH-GEA-00053	MB2332	400 A	6	—	73
EDH-GEA-00054	MB2332WB	400 A	6	—	74
EDH-GEA-00052	MB233WB	225 A	3	—	74
EDH-GEA-00045	MB332	400/600 A	2	—	74
EDH-GEA-00046	MB332WB	600 A	2	—	75
EDH-GEA-00055	MB333	400/600 A	3	—	75
EDH-GEA-00056	MB333WB	600 A	3	—	75
EDH-GEA-00057	MB423	100 A	3	—	76
EDH-GEA-00058	MB426	100 A	6	—	76
EDH-GEA-00044	MB512	225 A	2	—	76
EDH-GEA-00049	MB513	225 A	3	—	77
EDH-GEA-00050	MB516	400 A	6	—	77
EDH-GEA-00042	MB612	100 A	2	—	77
EDH-GEA-00047	MB613	100 A	3	—	78
EDH-GEA-00043	MB614	100 A	4	—	78
EDH-GEA-00048	MB616	100 A	6	—	78
EDH-GEA-00061	MLA1	225 A	—	—	79
EDH-GEA-00062	MLA2	225 A	—	—	79
EDH-GEA-00063	MLA41	400 A	—	—	79
EDH-GEA-00064	MLA61	600 A	—	—	80
EDH-GEA-00065	MLA62	400/600 A	—	—	80
EDH-GEA-00066	MLR1	225 A	—	—	80
EDH-GEA-00067	MLR2	225 A	—	—	80
EDH-GEA-00068	MLR41	400 A	—	—	80
EDH-GEA-00069	MLR61	400/600 A	—	—	81
EDH-GEA-00070	MLT1	225 A	—	—	81
EDH-GEA-00071	MLT2	225 A	—	—	81
EDH-GEA-00073	MLT41	400 A	—	—	81
EDH-GEA-00072	MLT42	400 A	—	—	81
EDH-GEA-00074	NKA	225 A	—	—	83
EDH-GEA-00075	NKA42	400 A	—	—	83
EDH-GEA-00080	NKA4FT	400 A	—	—	83
EDH-GEA-00076	NKR	225 A	—	—	83
EDH-GEA-00077	NKR4	400 A	—	—	83
EDH-GEA-00078	NKT	225 A	—	—	84
EDH-GEA-00079	NKT4	400 A	—	—	84
EDH-GEA-00262	SF2DPK	225 A	—	—	102
EDH-GEA-00266	SK12SPK	1200 A	—	—	102
EDH-GEA-00265	SK8SPK	800 A	—	—	102
EDH-GEA-00256	TED1DPK	150 A	—	—	103
EDH-GEA-00261	TEL1DPK	150 A	—	—	103
EDH-GEA-00257	TF2DPK	225 A	—	—	103
EDH-GEA-00259	TJ4DPK	400 A	—	—	103

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-GEA-00260	TJ6DPK	600 A	—	—	104
EDH-GEA-00264	TK12SPK	1200 A	—	—	104
EDH-GEA-00263	TK8SPK	800 A	—	—	104
EDH-GEA-00258	TQ2DPK	225 A	—	—	104
EDH-SIE-00040	2NLK42B	250A (18, 30, 42 ckt)	—	—	248
EDH-SIE-00041	2NLK54B	250A (54, 66 ckt)	—	—	249
EDH-SIE-00042	42NLK54B	all 400A (30, 54, 66 ckt)	—	—	249
EDH-SIE-00029	4MLKA1	400A	—	—	179
EDH-SIE-00019	4MLKA1A	400A	—	—	241
EDH-SIE-00023	4MLKA1B	400A	—	—	241
EDH-SIE-00030	4MLKA3	400A	—	—	179
EDH-SIE-00020	4MLKA3A	400A	—	—	242
EDH-SIE-00024	4MLKA3B	400A	—	—	242
EDH-SIE-00031	4MLKC1	400A	—	—	179
EDH-SIE-00021	4MLKC1A	400A	—	—	243
EDH-SIE-00032	4MLKC3	400A	—	—	180
EDH-SIE-00022	4MLKC3A	400A	—	—	243
EDH-SIE-00155	6CLE2	125A max (table max-amp rating)	—	—	215
EDH-SIE-00157	6QR2	225A max (table max-amp rating)	—	—	216
EDH-SIE-00102	BBKB32	100A max	—	—	183
EDH-SIE-00108	BBKQR1	225A max	—	—	185
EDH-SIE-00109	BBKQR2	225A max	—	—	196
EDH-SIE-00103	BBKVA4P2P3	125A max	—	—	186
EDH-SIE-00112	BBKVA5262P2S	250A max	—	—	186
EDH-SIE-00114	BBKVA52P3T	250A max	—	—	196
EDH-SIE-00038	CNLK42B	250A (18, 30, 42 ckt)	—	—	250
EDH-SIE-00039	CNLK54B	all 400A (30, 54, 66) and 250A 54/66 ckt	—	—	250
EDH-SIE-00035	LNLK4X11B	250A & 400A	—	—	251
EDH-SIE-00033	LNLK5X12A	250A & 400A	—	—	251
EDH-SIE-00036	LNLK6X17B	250A & 400A	—	—	252
EDH-SIE-00034	LNLK7X18A	250A & 400A	—	—	252
EDH-SIE-00037	LNLK7X20B	250A & 400A	—	—	253
EDH-SIE-00045	MBKBC3	100A max	—	—	174
EDH-SIE-00043	MBKBL1	100A max	—	—	174
EDH-SIE-00044	MBKBL3	100A max	—	—	175
EDH-SIE-00048	MBKED1	125A max	—	—	175
EDH-SIE-00003	MBKED1A	125A max	2-pole (1-phase)	—	233
EDH-SIE-00049	MBKED3	125A max	—	—	175
EDH-SIE-00004	MBKED3A	125A max	3-pole (3-phase)	—	233
EDH-SIE-00052	MBKFD1	250A max	—	—	176
EDH-SIE-00007	MBKFD1A	250A max	2-pole (1-phase)	—	234
EDH-SIE-00053	MBKFD3	250A max	—	—	176
EDH-SIE-00008	MBKFD3A	250A max	3-pole (3-phase)	—	234
EDH-SIE-00054	MBKJD1	400A max	—	—	176
EDH-SIE-00055	MBKJD3	400A max	—	—	177
EDH-SIE-00012	MBKJD3B	400A max	—	—	235
EDH-SIE-00046	MBKNB1	125A max	—	—	177
EDH-SIE-00047	MBKNB3	125A max	—	—	177
EDH-SIE-00050	MBKQR1	225A max	—	—	178

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00005	MBKQR1A	225A max	2-pole (1-phase)	—	235
EDH-SIE-00051	MBKQR3	225A max	—	—	178
EDH-SIE-00006	MBKQR3A	225A max	3-pole (3-phase)	—	236
EDH-SIE-00001	MBKVA41A	125A max	2-pole (1-phase)	—	237
EDH-SIE-00002	MBKVA41B	125A max	3-pole (3-phase)	—	238
EDH-SIE-00009	MBKVA5262A	250A max	2-pole (1-phase)	—	239
EDH-SIE-00010	MBKVA5262B	250A max	3-pole (3-phase)	—	240
EDH-SIE-00011	MBKVA5363A	400A max	—	—	240
EDH-SIE-00149	MG1	800A max (table max-amp rating)	—	—	200
EDH-SIE-00175	MG1D	800A max (table max-amp rating)	—	—	217
EDH-SIE-00025	MLKA1	250A	—	—	180
EDH-SIE-00015	MLKA1A	250A	—	—	244
EDH-SIE-00026	MLKA3	250A	—	—	180
EDH-SIE-00016	MLKA3A	250A	—	—	244
EDH-SIE-00027	MLKC1	250A	—	—	181
EDH-SIE-00017	MLKC1A	250A	—	—	245
EDH-SIE-00028	MLKC3	250A	—	—	181
EDH-SIE-00018	MLKC3A	250A	—	—	245
EDH-SIE-00179	NG1D	1200A max (table max-amp rating)	—	—	217
EDH-SIE-00125	S3VA41T	125A max (table max-amp rating)	—	—	200
EDH-SIE-00151	S3VA41TD	125A max (table max-amp rating)	—	—	218
EDH-SIE-00152	S3VA41TDHD	125A max (table max-amp rating)	—	—	218
EDH-SIE-00129	S3VA52T	150/250A max (table max-amp rating)	—	—	201
EDH-SIE-00156	S3VA52TD	150/250A max (table max-amp rating)	—	—	219
EDH-SIE-00135	S3VA53T	400A max (table max-amp rating)	—	—	201
EDH-SIE-00182	S3VA53T2D	400A max (table max-amp rating)	—	—	281
EDH-SIE-00161	S3VA53TD	400A max (table max-amp rating)	—	—	219
EDH-SIE-00142	S3VA54T	600A max (table max-amp rating)	—	—	202
EDH-SIE-00185	S3VA54T2D	600A max (table max-amp rating)	—	—	281
EDH-SIE-00168	S3VA54TD	600A max (table max-amp rating)	—	—	220
EDH-SIE-00186	S3VA55TD	800/1000A max (table max-amp rating)	—	—	282
EDH-SIE-00187	S3VA57TD	1200A max (table max-amp rating)	—	—	282
EDH-SIE-00136	S3VA63T	400A max (table max-amp rating)	—	—	202
EDH-SIE-00162	S3VA63TD	400A max (table max-amp rating)	—	—	220
EDH-SIE-00143	S3VA64T	600A max (table max-amp rating)	—	—	203
EDH-SIE-00169	S3VA64TD	600A max (table max-amp rating)	—	—	221
EDH-SIE-00124	SBL	100A max (table max-amp rating)	—	—	203
EDH-SIE-00150	SBLBD	100A max (table max-amp rating)	—	—	221
EDH-SIE-00128	SCE	125A max (table max-amp rating)	—	—	204
EDH-SIE-00180	SCED	125A max (table max-amp rating)	—	—	283
EDH-SIE-00134	SCF	250A max (table max-amp rating)	—	—	204
EDH-SIE-00160	SCFD	250A max (table max-amp rating)	—	—	222
EDH-SIE-00139	SCJ	400A max (table max-amp rating)	—	—	204
EDH-SIE-00167	SCJD	400A max (table max-amp rating)	—	—	222
EDH-SIE-00146	SCL	600A max (table max-amp rating)	—	—	205
EDH-SIE-00172	SCLD	600A max (table max-amp rating)	—	—	223
EDH-SIE-00130	SDGD	150A max (table max-amp rating)	—	—	205
EDH-SIE-00127	SE6	125A max (table max-amp rating)	—	—	206

Catalogue ID	OEM PN	Current rating	Poles	Voltage	Pg
EDH-SIE-00154	SE6D	125A max (table max-amp rating)	—	—	223
EDH-SIE-00133	SF6	250A max (table max-amp rating)	—	—	206
EDH-SIE-00159	SF6D	250A max (table max-amp rating)	—	—	224
EDH-SIE-00132	SFG	250A max (table max-amp rating)	—	—	206
EDH-SIE-00158	SFGD	250A max (table max-amp rating)	—	—	224
EDH-SIE-00126	SGB2	125A max (table max-amp rating)	—	—	207
EDH-SIE-00153	SGB2D	125A max (table max-amp rating)	—	—	225
EDH-SIE-00138	SJ1	400A max (table max-amp rating)	—	—	207
EDH-SIE-00165	SJ1D	400A max (table max-amp rating)	—	—	225
EDH-SIE-00166	SJ2D	400A max (table max-amp rating)	—	—	226
EDH-SIE-00137	SJG	400A max (table max-amp rating)	—	—	207
EDH-SIE-00164	SJG1D	400A max (table max-amp rating)	—	—	226
EDH-SIE-00163	SJG2D	400A max (table max-amp rating)	—	—	227
EDH-SIE-00145	SL6	600A max (table max-amp rating)	—	—	208
EDH-SIE-00171	SL6D	600A max (table max-amp rating)	—	—	227
EDH-SIE-00144	SLG	600A max (table max-amp rating)	—	—	208
EDH-SIE-00170	SLGD	600A max (table max-amp rating)	—	—	228
EDH-SIE-00176	SLM1D	800A max (table max-amp rating)	—	—	228
EDH-SIE-00056	SMBKED1	125A max	—	—	265
EDH-SIE-00057	SMBKED3	125A max	—	—	266
EDH-SIE-00058	SMBKFD1	250A max	—	—	266
EDH-SIE-00059	SMBKFD3	250A max	—	—	266
EDH-SIE-00060	SMBKJD1	400A max	—	—	267
EDH-SIE-00061	SMBKJD3	400A max	—	—	267
EDH-SIE-00177	SMND	800/1200A max (table max-amp rating)	—	—	229
EDH-SIE-00131	SQR	225A max (table max-amp rating)	—	—	208
EDH-SIE-00181	SQRD	225A max (table max-amp rating)	—	—	283
EDH-SIE-00141	SSCJ	400A max (table max-amp rating)	—	—	209
EDH-SIE-00184	SSCJD	400A max (table max-amp rating)	—	—	284
EDH-SIE-00148	SSCL	600A max (table max-amp rating)	—	—	209
EDH-SIE-00174	SSCLD	600A max (table max-amp rating)	—	—	229
EDH-SIE-00140	SSJ1	400A max (table max-amp rating)	—	—	210
EDH-SIE-00183	SSJ1D	400A max (table max-amp rating)	—	—	284
EDH-SIE-00147	SSL6	600A max (table max-amp rating)	—	—	210
EDH-SIE-00173	SSL6D	600A max (table max-amp rating)	—	—	230
EDH-SIE-00178	SSMND	800/1200A max (table max-amp rating)	—	—	230

8.7 Physical dimension and hole-pattern index

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00001	KCDPFB100	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	17
EDH-EAT-00002	KCDPED225	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	17
EDH-EAT-00003	KCDPFBP	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	18
EDH-EAT-00004	KCDPCA	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	17
EDH-EAT-00005	KCDPKB	Occupies 4.13 in (104.9 mm) = 3X of CDP chassis height (Twin mounting) **A**	—	18
EDH-EAT-00006	KCDPLB	Occupies 5.50 in (139.7 mm) = 4X of CDP chassis height (Twin mounting) **A**	—	20
EDH-EAT-00007	KCDPLA400	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting) **A**	—	19

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00008	KCDPLA600	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Twin mounting) A	—	19
EDH-EAT-00009	KCDPLCL	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) A	—	21
EDH-EAT-00010	KCDPMC	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) A	—	21
EDH-EAT-00011	KCDPNC	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) A	—	22
EDH-EAT-00012	KCDPNBP	Occupies 8.25 in (209.6 mm) = 6X of CDP chassis height (Single mounting) A	—	22
EDH-EAT-00014	KCDP_X	Height = n x 1.38 in (35.1 mm) A	—	23
EDH-EAT-00028	KFDP4XT	Occupies 5.50 in (139.7 mm) = 4X A	—	33
EDH-EAT-00029	KFDP5XT	Occupies 6.88 in (174.8 mm) = 5X A	—	34
EDH-EAT-00030	KFDPB6X-2	Occupies 8.25 in (209.6 mm) = 6X A	—	34
EDH-EAT-00031	KFDPW9X-4	Occupies 12.38 in (314.5 mm) = 9X A	—	36
EDH-EAT-00032	KFDPW11X-6	Occupies 15.13 in (384.3 mm) = 11X A	—	35
EDH-EAT-00033	KFDPW11X-8	Occupies 15.13 in (384.3 mm) = 11X A	—	35
EDH-EAT-00034	KFDPW15X-12	Occupies 20.63 in (524.0 mm) = 15X A	—	36
EDH-EAT-00036	KFDPWT3211R	4X of chassis height A	—	40
EDH-EAT-00037	KFDPWT3611R	4X of chassis height A	—	41
EDH-EAT-00038	KFDPWT3222R	4X of chassis height A	—	40
EDH-EAT-00039	KFDPWT3622R	4X of chassis height A	—	41
EDH-EAT-00040	KFDPWT3233R	4X of chassis height A	—	41
EDH-EAT-00041	KFDPWT3633R	5X of chassis height A	—	42
EDH-EAT-00042	KFDPBS324R	6X of chassis height A	—	37
EDH-EAT-00043	KFDPBS364R	6X of chassis height A	—	38
EDH-EAT-00044	KFDPW325R	9X of chassis height A	—	38
EDH-EAT-00045	KFDPW365R	9X of chassis height A	—	39
EDH-EAT-00046	KFDPW326R	11X of chassis height A	—	38
EDH-EAT-00047	KFDPW366R	11X of chassis height A	—	39
EDH-EAT-00048	KFDPW367	11X of chassis height A	—	39
EDH-EAT-00049	KFDPW368	15X of chassis height A	—	40
EDH-EAT-00064	3456B99H05	Height 15.00 in (381.0 mm) A	—	46
EDH-EAT-00065	3456B99H01	Height 3.00 in (76.2 mm) A	—	46
EDH-EAT-00066	3456B35H01	Height 6.00 in (152.4 mm) A	—	46
EDH-EAT-00067	K80522	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing C	—	24
EDH-EAT-00068	8450C62H39	3.00 x 1.38 in (76.2 x 35.1 mm) per drawing C	—	24
EDH-EAT-00069	0080429	approx. 2.50 in (63.5 mm) per drawing C	—	23
EDH-EAT-00073	414A380G02	Overall length 2.50 in (63.5 mm) A	—	25
EDH-EAT-00074	414A380G01	Overall length 3.13 in (79.5 mm); used on B10B and PRL1, 2, 3 C	—	47
EDH-EAT-00076	KPRL4FD1	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	55
EDH-EAT-00077	KPRL4FD2	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	55
EDH-EAT-00078	KPRL4ED2	Occupies 2.75 in (69.9 mm) = 2X of chassis height; twin mounting A	—	53
EDH-EAT-00079	KPRL4FD	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	54
EDH-EAT-00080	KPRL4FBP	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	54
EDH-EAT-00081	KPRL4ED	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting A	—	53
EDH-EAT-00082	KPRL4JDS	Occupies 4.13 in (104.9 mm) = 3X of chassis height; single mounting A	—	56

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-EAT-00083	KPRL4JDT	Occupies 4.13 in (104.9 mm) = 3X of chassis height; twin mounting **A**	—	57
EDH-EAT-00084	KPRL4KDS	Spec sheet: 25.5 in L x 9.3 in W x 3.2 in H, 9.25 lb; occupies 5.50 in (4X) **A**	—	57
EDH-EAT-00085	KPRL4KDT	Occupies 5.50 in (139.7 mm) = 4X of chassis height; twin mounting **A**	—	58
EDH-EAT-00086	KPRL4CKD	Occupies 5.50 in (139.7 mm) = 4X of chassis height; single mounting **A**	—	52
EDH-EAT-00087	KPRL4LCL	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	59
EDH-EAT-00088	KPRL4LAP	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	58
EDH-EAT-00089	KPRL4LD	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	60
EDH-EAT-00090	KPRL4MC	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	61
EDH-EAT-00091	KPRL4NBP	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	62
EDH-EAT-00092	KPRL4CND	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	52
EDH-EAT-00093	KPRL4ND	Occupies 8.25 in (209.5 mm) = 6X of chassis height; single mounting **A**	—	63
EDH-EAT-00094	KPRL4X12	2.75 in (69.9 mm) = 2X; twin mounting **A**	—	64
EDH-EAT-00095	KPRL4X22	2.75 in (69.9 mm) = 2X; twin mounting **A**	—	65
EDH-EAT-00096	KPRL4X32	4.13 in (104.9 mm) = 3X; twin mounting **A**	—	65
EDH-EAT-00097	KPRL4X334S	5.50 in (139.7 mm) = 4X; single mounting **A**	—	66
EDH-EAT-00098	KPRL4X334T	5.50 in (139.7 mm) = 4X; twin mounting **A**	—	66
EDH-EAT-00099	KPRL4X336	5.50 in (139.7 mm) per Table 46 (Table 47 prints 8.25 in / 6X for LG frames) = 4X; single mounting **A**	—	67
EDH-EAT-00100	KPRL4X34	8.25 in (209.6 mm) = 6X; single mounting **A**	—	67
EDH-EAT-00101	KPRL4X35	8.25 in (209.6 mm) = 6X; single mounting **A**	—	68
EDH-EAT-00102	KPRL4FDCL	4.13 in (104.9 mm) = 3X; single mounting **A**	—	56
EDH-EAT-00103	KPRL4CA	2.75 in (2P, 2X) or 4.13 in (3P, 3X) = 2X/3X; twin mounting **A**	—	51
EDH-EAT-00104	KPRL4LC	8.25 in (209.6 mm) = 6X; single mounting **A**	—	59
EDH-EAT-00105	KPRL4LG	5.50 in (139.7 mm) = 4X; single mounting **A**	—	60
EDH-EAT-00106	KPRL4NC	8.25 in (209.6 mm) = 6X; single mounting **A**	—	62
EDH-EAT-00107	KPRL4MD	8.25 in (209.6 mm) = 6X; single mounting **A**	—	61
EDH-EAT-00108	KPRL44X	4X switch height **A**	—	50
EDH-EAT-00109	KPRL45X1	5X switch height **A**	—	50
EDH-EAT-00110	KPRL4B6XS	6X switch height **A**	—	51
EDH-EAT-00111	KPRL4B6XT	6X switch height **A**	—	51
EDH-EAT-00112	KPRL4W9X	9X switch height **A**	—	64
EDH-EAT-00113	KPRL4W11X	11X switch height **A**	—	63
EDH-EAT-00114	KPRL4W15X	15X switch height **A**	—	64
EDH-GEA-00029	911E347P3	3X vertical (1X = 1-3/8 in per GE convention) **B**	—	99
EDH-GEA-00098	AMCB4EBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	124
EDH-GEA-00099	AMCB4EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	124
EDH-GEA-00100	AMCB4FBFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	125
EDH-GEA-00101	AMCB4FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in **A**	—	125
EDH-GEA-00102	AMCB4QDFP	Vertical space 2X (1X = 1-3/8 in); box width 27-44 in **A**	—	127

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00103	AMCB4SEFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	128
EDH-GEA-00104	AMCB6EBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	128
EDH-GEA-00105	AMCB6EYFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	129
EDH-GEA-00106	AMCB6FBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	129
EDH-GEA-00107	AMCB6FDBFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	130
EDH-GEA-00108	AMCB6QDFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	132
EDH-GEA-00109	AMCB4FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	126
EDH-GEA-00110	AMCB6FJFP	Vertical space 3X (1X = 1-3/8 in); box width 31-44 in A	—	131
EDH-GEA-00111	AMCB4FJFPTF	Vertical space 2X (1X = 1-3/8 in); box width 36-44 in A	—	126
EDH-GEA-00112	AMCB6FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 36-44 in A	—	131
EDH-GEA-00113	AMCB4FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	125
EDH-GEA-00114	AMCB4GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	127
EDH-GEA-00115	AMCB6FGBFP	Vertical space 4X (1X = 1-3/8 in); box width 40, 44 in A	—	130
EDH-GEA-00116	AMCB6GBFP	Vertical space 4X (1X = 1-3/8 in); box width 40-44 in A	—	132
EDH-GEA-00117	AMCB2FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	119
EDH-GEA-00118	AMCB2FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	119
EDH-GEA-00119	AMCB2FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	118
EDH-GEA-00120	AMCB2GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	120
EDH-GEA-00121	AMCB3FJFP	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	121
EDH-GEA-00122	AMCB3FJFPTF	Vertical space 3X (1X = 1-3/8 in); box width 27-44 in A	—	122
EDH-GEA-00123	AMCB3FGMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	121
EDH-GEA-00124	AMCB3GMFP	Vertical space 4X (1X = 1-3/8 in); box width 27-44 in A	—	122
EDH-GEA-00125	AMCB3LBFP	Vertical space 6X (1X = 1-3/8 in); box width 27-44 in A	—	123
EDH-GEA-00126	AMCB2KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	120
EDH-GEA-00127	AMCB3KMFP	Vertical space 6X (1X = 1-3/8 in); box width 40-44 in A	—	123
EDH-GEA-00128	AFP2QDD	2X vertical; box width 27-44 in A	—	160
EDH-GEA-00129	AFP2TED	2X vertical; box width 27-44 in A	—	160
EDH-GEA-00130	AFP3EYD	3X vertical; box width 27-44 in A	—	160
EDH-GEA-00131	AFP2FBD	2X vertical; box width 27-44 in A	—	159
EDH-GEA-00132	AFP3FBD	3X vertical; box width 27-44 in A	—	161
EDH-GEA-00133	AFP3QDD	3X vertical; box width 27-44 in A	—	161
EDH-GEA-00134	AFP3SED	3X vertical; box width 27-44 in A	—	161
EDH-GEA-00135	AFP3SFD	3X vertical; box width 31-44 in A	—	161
EDH-GEA-00136	AFP3TFD	2X, 3X vertical; box width 36-44 in A	—	162

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00137	AFP4FGD	4X vertical; box width 40, 44 in A	—	162
EDH-GEA-00138	AFP4SGD	4X vertical; box width 40-44 in A	—	163
EDH-GEA-00139	AFP3SFS	3X vertical; box width 27-44 in A	—	162
EDH-GEA-00140	AFP3TFS	3X vertical; box width 27-44 in A	—	162
EDH-GEA-00141	AFP4FGS	4X vertical; box width 27-44 in A	—	163
EDH-GEA-00142	AFP4SGS	4X vertical; box width 27-44 in A	—	163
EDH-GEA-00143	AFP5LCS	6X vertical; box width 27-44 in A	—	163
EDH-GEA-00144	AFP6SKS	6X vertical; box width 44 in A	—	164
EDH-GEA-00145	AMC6QBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	155
EDH-GEA-00146	AMC6EYFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	150
EDH-GEA-00147	AMC6FBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	151
EDH-GEA-00148	AMC6FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	151
EDH-GEA-00149	AMC6EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	149
EDH-GEA-00150	AMC6QDFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	156
EDH-GEA-00151	AMC6FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	153
EDH-GEA-00152	AMC6FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	153
EDH-GEA-00153	AMC6JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in A	—	155
EDH-GEA-00154	AMC6FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	152
EDH-GEA-00155	AMC6GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	154
EDH-GEA-00156	AMC6FDSPF	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	152
EDH-GEA-00157	AMC6EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	150
EDH-GEA-00158	AMC6FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	154
EDH-GEA-00159	AMC3FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	140
EDH-GEA-00160	AMC3FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	139
EDH-GEA-00161	AMC3JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	141
EDH-GEA-00162	AMC3FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	139
EDH-GEA-00163	AMC3GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	141
EDH-GEA-00164	AMC3KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in A	—	142
EDH-GEA-00165	AMC3FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in A	—	140
EDH-GEA-00166	AMC4FDBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	143
EDH-GEA-00167	AMC4EBFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	142
EDH-GEA-00168	AMC4SEFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	149
EDH-GEA-00169	AMC4QDFP	2X vertical (1X = 1-3/8 in); box width range 27-44 in A	—	148
EDH-GEA-00170	AMC4FJFPTF	3X vertical (1X = 1-3/8 in); box width range 31-44 in A	—	146

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00171	AMC4FJFP	3X vertical (1X = 1-3/8 in); box width range 31-44 in **A**	—	145
EDH-GEA-00172	AMC4JKFP	6X vertical (1X = 1-3/8 in); box width range 44 in **A**	—	147
EDH-GEA-00173	AMC4FGBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	144
EDH-GEA-00174	AMC4GBFP	4X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	147
EDH-GEA-00175	AMC4FDSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	144
EDH-GEA-00176	AMC4EBSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	143
EDH-GEA-00177	AMC4FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	146
EDH-GEA-00178	AMC2FJFPTF	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	136
EDH-GEA-00179	AMC2FJFP	3X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	135
EDH-GEA-00180	AMC2JKFP	6X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	138
EDH-GEA-00181	AMC2FGMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	135
EDH-GEA-00182	AMC2GMFP	4X vertical (1X = 1-3/8 in); box width range 27-44 in **A**	—	137
EDH-GEA-00183	AMC2KMFP	6X vertical (1X = 1-3/8 in); box width range 40, 44 in **A**	—	138
EDH-GEA-00184	AMC2FLSFP	4X vertical (1X = 1-3/8 in); box width range 36, 44 in **A**	—	136
EDH-GEA-00201	APP1S	1X = 1 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	164
EDH-GEA-00202	APP1	1X = 1 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	164
EDH-GEA-00203	APP1W	1X = 1 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	165
EDH-GEA-00204	APP2S	2X = 2 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	165
EDH-GEA-00205	APP2	2X = 2 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	165
EDH-GEA-00206	APP2W	2X = 2 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	165
EDH-GEA-00207	APP3S	3X = 3 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	166
EDH-GEA-00208	APP3	3X = 3 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	165
EDH-GEA-00209	APP3W	3X = 3 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	166
EDH-GEA-00210	APP4S	4X = 4 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	166
EDH-GEA-00211	APP4	4X = 4 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	166
EDH-GEA-00212	APP4W	4X = 4 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	166
EDH-GEA-00213	APP5S	5X = 5 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	167
EDH-GEA-00214	APP5	5X = 5 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	167
EDH-GEA-00215	APP5W	5X = 5 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in **A**	—	167
EDH-GEA-00216	APP6S	6X = 6 x 1-3/8 in vertical; box width 27, 31 in; switchboard section width 35 in **A**	—	167
EDH-GEA-00217	APP6	6X = 6 x 1-3/8 in vertical; box width 36, 40 in; switchboard section width 40 in **A**	—	167

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-GEA-00218	APP6W	6X = 6 x 1-3/8 in vertical; box width 44 in; switchboard section width 45 in A	—	168
EDH-GEA-00219	AML3250SFP	4X module height; box width 27, 36 in A	—	114
EDH-GEA-00220	AML3250FP	6X module height; box width 36 in A	—	114
EDH-GEA-00221	AML3400SFP	4X module height; box width 27, 36, 44 in A	—	115
EDH-GEA-00222	AML3400FP	6X module height; box width 36, 44 in A	—	115
EDH-GEA-00223	AML3600SFP	4X module height; box width 27, 36, 44 in A	—	116
EDH-GEA-00224	AML3600FP	6X module height; box width 36, 44 in A	—	115
EDH-GEA-00225	AML3800FP	6X module height; box width 36, 44 in A	—	116
EDH-GEA-00226	AML3120FP	6X module height; box width 36, 44 in A	—	113
EDH-GEA-00227	AML3250CFP	6X module height; box width 36 in A	—	114
EDH-GEA-00228	AML3400CFP	6X module height; box width 36, 44 in A	—	114
EDH-GEA-00229	AML3600CFP	6X module height; box width 36, 44 in A	—	115
EDH-GEA-00230	AML3800CFP	6X module height; box width 36, 44 in A	—	116
EDH-GEA-00231	AML3120CFP	6X module height; box width 36, 44 in A	—	113
EDH-GEA-00242	AFL600	9X; box width 27, 36, 44 in A	—	117
EDH-GEA-00243	AFL120	12X; box width 36, 44 in A	—	117
EDH-GEA-00244	AMCB6TEDL	3X = 4.125 in vertical; fits 36W/40W/44W panelboards and 40W/45W switchboards A	—	164
EDH-SIE-00033	LNLK5X12A	strip length 5.80 in A	—	251
EDH-SIE-00034	LNLK7X18A	strip length 8.14 in A	—	252
EDH-SIE-00035	LNLK4X11B	strip length 6.17 in A	—	251
EDH-SIE-00036	LNLK6X17B	strip length 8.67 in A	—	252
EDH-SIE-00037	LNLK7X20B	strip length 9.92 in A	—	253
EDH-SIE-00076	DFFP3	3in high (P3 plate 2.97in) A	—	191
EDH-SIE-00077	DFFP6	6in high (P3 plate 5.97in) A	—	191
EDH-SIE-00102	BBKB32	Unit space: 3in / 6 circuits A	—	183
EDH-SIE-00103	BBKVA4P2P3	Unit space: 3in / 6 circuits A	—	186
EDH-SIE-00104	BBKED32	Unit space: 3in / 6 circuits A	—	184
EDH-SIE-00105	BBKNB32	Unit space: 3in / 6 circuits A	—	185
EDH-SIE-00106	BBKGB32	Unit space: 3in / 6 circuits A	—	184
EDH-SIE-00107	BBKEB32	Unit space: 3in / 6 circuits A	—	195
EDH-SIE-00108	BBKQR1	Unit space: 6in / 1 breaker A	—	185
EDH-SIE-00109	BBKQR2	Unit space: 6in / 2 breakers A	—	196
EDH-SIE-00110	BBKQ1	Unit space: 6in / 1 breaker A	—	185
EDH-SIE-00112	BBKVA5262P2S	Unit space: 6in / 1 breaker A	—	186
EDH-SIE-00114	BBKVA52P3T	Unit space: 6in / 2 breakers A	—	196
EDH-SIE-00124	SBL	Unit height 3.75 in A	—	203
EDH-SIE-00125	S3VA41T	Unit height 3.75 in A	—	200
EDH-SIE-00126	SGB2	Unit height 3.75 in A	—	207
EDH-SIE-00127	SE6	Unit height 3.75 in A	—	206
EDH-SIE-00128	SCE	Unit height 3.75 in A	—	204
EDH-SIE-00129	S3VA52T	Unit height 5.00 in A	—	201
EDH-SIE-00130	SDGD	Unit height 5.00 in A	—	205
EDH-SIE-00131	SQR	Unit height 5.00 in A	—	208
EDH-SIE-00132	SFG	Unit height 5.00 in A	—	206
EDH-SIE-00133	SF6	Unit height 5.00 in A	—	206
EDH-SIE-00134	SCF	Unit height 5.00 in A	—	204
EDH-SIE-00135	S3VA53T	Unit height 6.25 in A	—	201
EDH-SIE-00136	S3VA63T	Unit height 6.25 in A	—	202
EDH-SIE-00137	SJG	Unit height 6.25 in A	—	207
EDH-SIE-00138	SJ1	Unit height 8.75 in A	—	207
EDH-SIE-00139	SCJ	Unit height 8.75 in A	—	204

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00140	SSJ1	Unit height 8.75 in A	—	210
EDH-SIE-00141	SSCJ	Unit height 8.75 in A	—	209
EDH-SIE-00142	S3VA54T	Unit height 6.25 in A	—	202
EDH-SIE-00143	S3VA64T	Unit height 6.25 in A	—	203
EDH-SIE-00144	SLG	Unit height 6.25 in A	—	208
EDH-SIE-00145	SL6	Unit height 8.75 in A	—	208
EDH-SIE-00146	SCL	Unit height 8.75 in A	—	205
EDH-SIE-00147	SSL6	Unit height 8.75 in A	—	210
EDH-SIE-00148	SSCL	Unit height 8.75 in A	—	209
EDH-SIE-00149	MG1	Unit height 8.75 in A	—	200
EDH-SIE-00150	SBLBD	Unit height 3.75 in A	—	221
EDH-SIE-00151	S3VA41TD	Unit height 3.75 in A	—	218
EDH-SIE-00152	S3VA41TDHD	Unit height 7.50 in A	—	218
EDH-SIE-00153	SGB2D	Unit height 3.75 in A	—	225
EDH-SIE-00154	SE6D	Unit height 3.75 in A	—	223
EDH-SIE-00155	6CLE2	Unit height 3.75 in A	—	215
EDH-SIE-00156	S3VA52TD	Unit height 5.00 in A	—	219
EDH-SIE-00157	6QR2	Unit height 5 / 5.00 in A	—	216
EDH-SIE-00158	SFGD	Unit height 5.00 in A	—	224
EDH-SIE-00159	SF6D	Unit height 5.00 in A	—	224
EDH-SIE-00160	SCFD	Unit height 5.00 in A	—	222
EDH-SIE-00161	S3VA53TD	Unit height 6.25 in A	—	219
EDH-SIE-00162	S3VA63TD	Unit height 6.25 in A	—	220
EDH-SIE-00163	SJG2D	Unit height 6.25 in A	—	227
EDH-SIE-00164	SJG1D	Unit height 6.25 in A	—	226
EDH-SIE-00165	SJ1D	Unit height 8.75 in A	—	225
EDH-SIE-00166	SJ2D	Unit height 8.75 in A	—	226
EDH-SIE-00167	SCJD	Unit height 8.75 in A	—	222
EDH-SIE-00168	S3VA54TD	Unit height 6.25 in A	—	220
EDH-SIE-00169	S3VA64TD	Unit height 6.25 in A	—	221
EDH-SIE-00170	SLGD	Unit height 6.25 in A	—	228
EDH-SIE-00171	SL6D	Unit height 8.75 in A	—	227
EDH-SIE-00172	SCLD	Unit height 8.75 in A	—	223
EDH-SIE-00173	SSL6D	Unit height 8.75 in A	—	230
EDH-SIE-00174	SSCLD	Unit height 8.75 in A	—	229
EDH-SIE-00175	MG1D	Unit height 8.75 in A	—	217
EDH-SIE-00176	SLM1D	Unit height 8.75 in A	—	228
EDH-SIE-00177	SMND	Unit height 10 / 10.00 in A	—	229
EDH-SIE-00178	SSMND	Unit height 10 / 10.00 in A	—	230
EDH-SIE-00179	NG1D	Unit height 10 / 10.00 in A	—	217
EDH-SIE-00180	SCED	Unit height 3.75 in A	—	283
EDH-SIE-00181	SQRD	Unit height 5.00 in A	—	283
EDH-SIE-00182	S3VA53T2D	Unit height 6.25 in A	—	281
EDH-SIE-00183	SSJ1D	Unit height 8.75 in A	—	284
EDH-SIE-00184	SSCJD	Unit height 8.75 in A	—	284
EDH-SIE-00185	S3VA54T2D	Unit height 6.25 in A	—	281
EDH-SIE-00186	S3VA55TD	Unit height 8.75 in A	—	282
EDH-SIE-00187	S3VA57TD	Unit height 10.00 in A	—	282
EDH-SIE-00188	6E62	Unit height 3.75 in A	—	273
EDH-SIE-00189	6QJ2	Unit height 5 in A	—	277
EDH-SIE-00190	6F62	Unit height 5 in A	—	273
EDH-SIE-00191	6CLF1	Unit height 5 in A	—	270

Catalogue ID	OEM PN	Dimensions	Hole pattern	Pg
EDH-SIE-00192	6JJ61	Unit height 8.75 in **A**	—	274
EDH-SIE-00193	6JJ62	Unit height 8.75 in **A**	—	274
EDH-SIE-00194	6CLJ1	Unit height 8.75 in **A**	—	271
EDH-SIE-00195	6SJL1	Unit height 8.75 in **A**	—	279
EDH-SIE-00196	6SCJ1	Unit height 8.75 in **A**	—	277
EDH-SIE-00197	6LL61	Unit height 8.75 in **A**	—	275
EDH-SIE-00198	6CLL1	Unit height 8.75 in **A**	—	272
EDH-SIE-00199	6SLL1	Unit height 8.75 in **A**	—	279
EDH-SIE-00200	6SCL1	Unit height 8.75 in **A**	—	278
EDH-SIE-00201	6BL2C	Unit height 3.75 in **A**	—	269
EDH-SIE-00202	6SCL61C	Unit height 8.75 in **A**	—	278
EDH-SIE-00203	6M61C	Unit height 10 in **A**	—	276
EDH-SIE-00204	6N61C	Unit height 10 in **A**	—	276
EDH-SIE-00211	6FPB01	1.25in unit height **A**	—	211
EDH-SIE-00212	6FPB02	2.5in unit height **A**	—	212
EDH-SIE-00213	6FPB03	3.75in unit height **A**	—	212
EDH-SIE-00214	6FPB05	5in unit height **A**	—	212
EDH-SIE-00215	6FPB10	10in unit height **A**	—	213
EDH-SIE-00216	6FPB15	15.00in (381mm) **A**	—	284
EDH-SIE-00240	EWK1	20in W x 5.75in D **A**	—	262
EDH-SIE-00241	EWK2	24in W x 7.75in D **A**	—	197
EDH-SIE-00242	EWK3	20in W x 5.75in D **A**	—	263
EDH-SIE-00243	EWK1B	20in W x 5.75in D **A**	—	263
EDH-SIE-00244	EWK2B	24in W x 7.75in D **A**	—	198

Appendix A Documentation Library

OEM and supporting documents, grouped by manufacturer lineage and document type. 'Local' identifies documents preserved in docs/library/ (see docs/DOCUMENT_INDEX.csv for checksums). Documents not preserved are cited by URL; inaccessible documents are listed as research leads.

Eaton lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S43	CA08104001E Tab 21 (TB01500003E)	Switchboards—Low Voltage (Consulting Application Guide Tab 21) 2018-04	catalog	Local	18
S47	IB015002EN	Eaton Pow-R-Line CS switchboards instruction manual 2021-11	instruction	ok	0
S48	IM01500001E	Pow-R-Line switchboards instruction manual 2021-05	instruction	blocked	0
S38	CA08100014E	Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions 2018-06	renewal_parts	Local	14
S46	CA08100014E Tab 5	Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt 2016-10	renewal_parts	Local	13
S42	RP01400001E	Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards 2022-05	renewal_parts	Local	39
S41	RP01400001E (2017)	Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P) 2017-10	renewal_parts	Local	39
S39	RP01400002E	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP) 2013-02	renewal_parts	Local	75
S40	RP01400002E (2009)	Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition) 2009-04	renewal_parts	Local	32
S44	KPRL4KDS spec sheet	Eaton product specifications — KPRL4KDS	web	Local	1
S45	KPRL4KDT spec sheet	Eaton product specifications — KPRL4KDT	web	Local	1

GE / ABB lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S31	1SXU900191B0201	ReliaGear neXT Power Panelboards (brochure) 2022-01	catalog	ok	0
S16	BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014)	BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts) 2014-07	catalog	Local	242
S17	BuyLog p.11-10 Rev. 11/13	GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts 2013-11	catalog	Local	6
S34		BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)	catalog	blocked	0
S27	DEH065 R02	Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD) 2001-09	instruction	ok	32
S30	DEH212 R02	Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S 2001-04	instruction	ok	2
S18	DEH40150 Rev.No.03	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S19	DEH40151 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits unknown	instruction	Local	6

Ref	Doc no.	Title / date	Type	Avail.	Entries
S20	DEH40152 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S21	DEH40153 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S22	DEH40154 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S23	DEH40155 Rev.No.02	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole) unknown	instruction	Local	5
S24	DEH40156 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits unknown	instruction	Local	6
S25	DEH40157 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S26	DEH40158 Rev.No.01	A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole) unknown	instruction	Local	5
S29	DEH40392 R01	Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL 2001-04	instruction	ok	1
S28	GEH5674 R03	Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM) 2001-07	instruction	ok	41

Siemens lineage

Ref	Doc no.	Title / date	Type	Avail.	Entries
S8	SI-LP-1633	NextGen P1 panelboard brochure (Siemens Canada) unknown (c.2020)	bulletin	Local	3
S5	SIE_CS_P1 / Siemens SIOS 109799956	Type P1 Panelboard data sheet (SIE_CS_P1) 2021-10	bulletin	Local	10
S6		Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf) 2021	bulletin	Local	14
S7		New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf) c.2015-2019	bulletin	Local	22
S3	Discount Schedule A, page 8-13	2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits 2005	catalog	Local	26
S2	Power Product Catalogue Section 11	Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS) 2025-05	catalog	Local	53
S10	SIE Selection And Application Guide Panelboards (SIOS 109792056)	Panelboards Selection and Application Guide 2016	catalog	Local	48
S4	SPEEDFAX 2007-2008 pp.10-17..10-22	SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22 2007	catalog	Local	0
S1	SPEEDFAX Section 11 (last modified 06/24/21)	SPEEDFAX Product Catalog - Section 11 Panelboards 2021-06	catalog	Local	214
S9	US2:MBKBFA	Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER 2021-01-06	web	Local	1

Appendix B Bibliography and Source Register

S1 [SRC-00001] Siemens Industry, Inc.. *SPEEDFAX Product Catalog - Section 11 Panelboards*. SPEEDFAX Section 11 (last modified 06/24/21). 2021-06. Type: oem_catalog. URL: https://media.distributordatasolutions.com/siemenscomplete/2021q3/documents/4c3c521171b400657d1e4257e047beee1a99295b.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/speedfax_sec11_2021q3.pdf Note: 132 pages. Distributor-hosted (DDS syndication) copy of OEM PDF. Key pages: 11-7 (UPB coding), 11-13/11-14 (Revised P1 kits), 11-15 (Original P1 / S1-S2-SE kits), 11-20..11-23 (spare parts, filler chart), 11-53/11-54 (P2/P3 spare parts), 11-66/11-67 (P3 kits), 11-96 (P4 strap kits), 11-110 (P5 strap kits). Individual pages carry their own 'Revised on' dates (2019-2021).

S2 [SRC-00002] Siemens Canada Limited. *Siemens Canada Power Product Catalogue - Section 11 Switchboards (SB1, SB2, SB3, SMP, FCI/FCII, IPS)*. Power Product Catalogue Section 11. 2025-05. Type: oem_catalog. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:ac958a69-a1ee-45e7-95f6-152fe9153d31/s11-switchboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/s11-switchboards.pdf Note: PDF metadata creation 2025-05-30. p.11-5: SB1/SB2/SB3 connection strap kit table; p.11-14: S3VA52PR/S3VA53PR provision kits, nut keeper kits, 6FPB blank plates; p.11-15: CSA SMP/Series 6 strap kits (6BL2C, 6E62, 6F62, 6JJ62, 6M61C, 6N61C etc.).

S3 [SRC-00003] Siemens Energy & Automation. *2005 Electrical Distribution Products price list - Switchboard Replacement and Modification Kits*. Discount Schedule A, page 8-13. 2005. Type: oem_catalog. URL: https://assets.usesi.com/product-media/brochures/USESI_93250_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/USESI_93250_brochure.pdf Note: Single catalog page hosted by distributor (USESI). Strap kits 'for Series 5 or 6 CDP Circuit Breaker Panelboards or FC20, FCI, FCII, CDP-6, VB-6, SB1, SB2, and SB3 Switchboards ... for switchboards manufactured since 1974'. Includes list prices (2005).

S4 [SRC-00004] Siemens Power Distribution & Control. *SPEEDFAX 2007-2008 Product Catalog - Section 10 Panelboards, Type P1 pages 10-17 to 10-22*. SPEEDFAX 2007-2008 pp.10-17..10-22. 2007. Type: oem_catalog. URL: https://www.nooutage.com/pdf/Siemens-PanelboardsP1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens-PanelboardsP1.pdf Note: Original (pre-revision) P1 pages; lists P1 branch breakers BL/BLH/HBL/BQD/NGB, subfeed QJ2/ED4/FXD6. No kit tables on these pages.

S5 [SRC-00005] Siemens Industry, Inc.. *Type P1 Panelboard data sheet (SIE_CS_P1)*. SIE_CS_P1 / Siemens SIOS 109799956. 2021-10. Type: oem_bulletin. URL: https://cache.industry.siemens.com/dl/files/956/109799956/att_1147894/v1/SIE_CS_P1.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_CS_P1.pdf Note: (c) 10.2021. Revised P1 specification + main strap kit list; states 'Revised P1 kits cannot be used with original P1'.

S6 [SRC-00006] Siemens Industry, Inc.. *Type P3 Panelboard data sheet (distributor-hosted, file 30WD80V.pdf)*. 2021. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/30WD80V.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/30WD80V.pdf Note: Lists P2/P3 branch unit-space strap kits BBKB32, BBKVA4P2P3, BBKQR2, BBKVA5262S (sic; SpeedFax spells BBKVA5262P2S), BBKVA52P3T; strap kit for 1in frame breakers uses 3in unit space.

S7 [SRC-00007] Siemens Industry, Inc.. *New Revised Type P1 Kits and Accessories (flyer; distributor file MBKQR3150HA.pdf)*. c.2015-2019. Type: oem_bulletin. URL: https://michaelsforms.eastus2.cloudapp.azure.com/prod_image/MBKQR3150HA.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/MBKQR3150HA.pdf Note: Earlier (pre-April-2020 neutral update) Revised P1 kit list: MBK..A breaker kits, CNLK30A/42A/54A, LNLK30A/42A/54A, 2NLK..A, 42NLK..A, MBKDFA back-fed label kit, DFFP1.

S8 [SRC-00008] Siemens Canada Limited. *NextGen P1 panelboard brochure (Siemens Canada)*. SI-LP-1633. unknown (c.2020). Type: oem_bulletin. URL: https://assets.new.siemens.com/siemens/assets/api/uuid:f264c377-e970-40b2-b60d-155bc2e52f40/ca-si-lv-en-NextGen-P1-brochure-SI-LP-1633.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/NextGen-P1-brochure-SI-LP-1633.pdf Note: Canadian Revised P1 kit table; references MBKBFA back-fed main label kit and Canadian kit numbers (e.g. MBKQR12225A, MBKFD33250A, MBKJD33400A).

S9 [SRC-00009] Siemens. *Data sheet US2:MBKBFA - KIT P1 BL/BQD/NGB BACK FED MAIN BREAKER*. US2:MBKBFA. 2021-01-06. Type: oem_web. URL: https://res.cloudinary.com/wholesale-plumbing/image/upload/Documents2/Siemens_MBKBFA_Specification_Sheet.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/Siemens_MBKBFA_Specification_Sheet.pdf Note: Minimal data sheet (title + 'Field installable kit').

S10 [SRC-00010] Siemens Industry, Inc.. *Panelboards Selection and Application Guide*. SIE Selection And Application Guide Panelboards (SIOS 109792056). 2016. Type: oem_catalog. URL: https://cache.industry.siemens.com/dl/files/056/109792056/att_1049678/v1/SIE_Selection_And_Application_Guide_Panelboards.pdf (accessed 2026-10-21) Local copy: docs/library/SIE/SIE_Selection_And_Application_Guide_Panelboards.pdf Note: (c) 2016. Only cross-checked by part-number grep in this batch (BBKB32, BBKED32, BBKNB32, BBKQR1, BBKQR2, BBKQRP1FK, BBKQRP2FK, DFFP3, DFFP6, LNLK30A/42A/54A, SEB kits, SF6/SF6D, SJ1/SJ1D, SE6/SE6D, SQR/SQRC/SQRD, 6FPB01..10). Not fully mined.

S11 [SRC-00011] Lumen. *Lumen (Canada) product listing - Siemens 6BL2C switchboards breaker mounting kit copper 3 ph 240 V 100 A*. Type: distributor. URL: https://lumen.ca/en/products/20-power-distribution/08-panelboards/01-main-breaker-kits/p-U0lFNkJMMkM=-sie6bl2c-siemens-6bl2c-switchboards-breaker-mounting-kit-copper-3-ph-240-v-100-a (accessed 2026-10-21) Note: Seen via search summary only; breaker list varies between distributors (BL/BLH/HBL/BQD/BQD6 vs BQ/BQH/HB).

S12 [SRC-00012] various. *Distributor listings for Siemens SBL (sydist.com SIEM-SBL-50631; superbreakers.com/products/sbl; steinerelectric 'BL BKR MTG KIT FOR P4/S4/SPP PNLBD')*. Type: distributor. URL: https://www.sydist.com/Product/SIEM-SBL-50631 (accessed 2026-10-21) Note: Search-summary only. Distributor descriptions are inconsistent (one wrongly calls it a padlock kit / QR frame); SpeedFax p.11-96 is authoritative.

S13 [SRC-00013] Crescent Electric Supply. *Crescent Electric listing - QF3 Load Center Filler Plate (sub no. 12-1800-01), for QP/BQ/ED2/EQL/SEQ/EQG*. Type: distributor. URL: https://crescentelectric.com/product/47056/qpbqed2-filler-plate-sub-no-12-1800-01 (accessed 2026-10-21) Note: Search-summary only.

S14 [SRC-00014] Mike Holt Enterprises forum. *Mike Holt forum thread - Gould panels and switchboards*. Type: forum. URL: https://forums.mikeholt.com/goto/post?id=1425085 (accessed 2026-10-21) Note: Anecdotal: ITE/Gould lineage, Bulldog Pushmatic not supported by Siemens.

S15 [SRC-00015] Franklin Empire. *Franklin Empire listing - Siemens 6F62 Connecting Strap Kit, For Use With SPP/FPP/S5/F2 Panelboards, 600 VAC, 70 to 250 A, Copper, 5 in H*. Type: distributor. URL: https://franklinempire.com/en/6f62-4114-6f62.html (accessed 2026-10-21) Note: Search-summary only.

S16 [SRC-00016] GE Industrial Solutions. *BuyLog Catalog Section 11: Panelboards (A-Series Panelboards; Spectra Series Panelboards; Renewal Parts)*. BuyLog Section 11 (pages Rev. 11/13; section updated 07/2014). 2014-07. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_18438_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_18438_catalog.pdf Note: 52-page OEM PDF (PDF title 'GE BuyLog - Section 11: Panelboards') mirrored by distributor US Electrical Services (USESI). OEM original URL https://electrification.us.abb.com/catalog/buylog/GE%20Products%20BuyLog%202019/11_GE%20Products%20BuyLog_Panelboards.pdf returned HTTP/2 INTERNAL_ERROR / 503 from this container. Text extracted to buylog11.txt.

S17 [SRC-00017] GE Industrial Solutions. *GE BuyLog page 11-10: A-Series II Panelboards Column - Field Installed Kits/Replacement Parts*. BuyLog p.11-10 Rev. 11/13. 2013-11. Type: oem_catalog. URL: https://assets.usesi.com/product-media/specification-sheets/USESI_49199_specification_sheets.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/USESI_49199_specification_sheets.pdf Note: Single-page extract of BuyLog p.11-10 mirrored by USESI; heading reads 'A-Series II Panelboards'.

S18 [SRC-00018] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SG Three-Phase Circuit Breaker Kits*. DEH40150 Rev.No.03. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/rYlgoZ/DEH40150rev03.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40150rev03.pdf Note: Distributor mirror (Carbon Controls). Original yodify mirror links now 404.

S19 [SRC-00019] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SF Three-Phase Circuit Breaker Kits*. DEH40151 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/vYA1QZ/DEH40151.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40151.pdf

S20 [SRC-00020] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TQD Three-Phase Circuit Breaker Kits*. DEH40152 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/BnbG3Z/DEH40152.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40152.pdf Note: Same file also mirrored at https://cdn.lsicloud.net/kendall/Resources/AD/GE_ASPP6QD6D_Manual.pdf

S21 [SRC-00021] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - SE/TED Three-Phase Circuit Breaker Kits*. DEH40153 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/lYWwVZ/DEH40153.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40153.pdf

S22 [SRC-00022] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (12-pole)*. DEH40154 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/LeQrBZ/DEH40154.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40154.pdf

S23 [SRC-00023] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (12-pole)*. DEH40155 Rev.No.02. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/YjVDgZ/DEH40155.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40155.pdf

S24 [SRC-00024] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - FB Three-Phase Circuit Breaker Kits*. DEH40156 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/KOrvrZ/DEH40156.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40156.pdf Note: Also rendered as text at https://www.manualsdir.com/manuals/295079/ge-industrial-solutions-a-series-ii-panelboards-fb.html

S25 [SRC-00025] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Power Panel - TEY Three-Phase Circuit Breaker Kits (6-pole)*. DEH40157 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/AelGOZ/DEH40157.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40157.pdf

S26 [SRC-00026] GE Industrial Systems. *A-Series II Panelboards AD/AE/AQ Type P & N Panel - THQB Three-Phase Circuit Breaker Kits (6-pole)*. DEH40158 Rev.No.01. unknown. Type: oem_instruction. URL: https://catalog.carboncontrolsltd.com/Documentation/Document/mDAggZ/DEH40158.pdf (accessed 2026-10-21) Local copy: docs/library/GEA/DEH40158.pdf

S27 [SRC-00027] GE Industrial Systems. *Spectra Series Power Panelboards - Bolt-On Circuit Breaker Kits (AMCB6QD, AMCB4QD)*. DEH065 R02. 2001-09. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295540/ge-industrial-solutions-spectra-series-power-panelboards-amcb4qd-and-amcb6qd.html (accessed 2026-10-21) Note: Text rendering on manualsdir.com (4 pages); footer 'DEH065 R02 0901 (c) 2001 General Electric Company'. Table 1 quantities not captured in the text rendering.

S28 [SRC-00028] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breakers and Modules (AMC2GM, AMC3GM)*. GEH5674 R03. 2001-07. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294735/ge-industrial-solutions-spectra-series-power-panelboards-amc2gm-and-amc3gm.html (accessed 2026-10-21) Note: Footer 'GEH5674 R03 0701'.

S29 [SRC-00029] GE Industrial Systems. *Spectra Series Power Panelboards - Circuit Breaker Cover Kit, Catalog Number AMCB6TEDL*. DEH40392 R01. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/295049/ge-industrial-solutions-spectra-series-power-panelboards.html (accessed 2026-10-21)

S30 [SRC-00030] GE Industrial Systems. *Spectra Series Power Panelboards - Equipment Grounds Catalog Numbers AEG47 and AEG47S*. DEH212 R02. 2001-04. Type: oem_instruction. URL: https://www.manualsdir.com/manuals/294723/ge-industrial-solutions-spectra-series-power-panelboards-aeg47-and-aeg47s.html (accessed 2026-10-21)

S31 [SRC-00031] ABB. *ReliaGear neXT Power Panelboards (brochure)*. 1SXU900191B0201. 2022-01. Type: oem_catalog. URL: https://simplebooklet.com/abbreliagearnextpanelboards?textonly=1 (accessed 2026-10-21) Note: Read via simplebooklet text-only rendering; no kit catalog numbers present.

S32 [SRC-00032] Relectric. *NHB150PK General Electric / GE Mounting Hardware (product page)*. Type: surplus. URL: https://www.relectric.com/nhb150pk (accessed 2026-10-21)

S33 [SRC-00033] SuperBreakers. *General Electric NHB150PK Twin Mount Mounting Hardware (product page)*. Type: surplus. URL: https://www.superbreakers.com/collections/mounting-kits-panels-accessories/products/general-electric-nhb150pk-mounting-hardware (accessed 2026-10-21) Note: Content seen only via search-engine summary; page not fetched directly.

S34 [SRC-00034] ABB. *BuyLog Section 11 Panelboards (ABB, 2021/2022 edition incl. ReliaGear neXT and 'Spectra (obsoleted)' bolt-on mounting hardware)*. Type: oem_catalog. URL: https://electrification.us.abb.com/catalog/buylog/11_BuyLog_Panelboards.pdf (accessed 2026-10-21) Status: blocked. Note: curl: empty reply; WebFetch: HTTP 503. Contents known only from search-engine summary (TOC mentions ReliaGear neXT nomenclature and 'Spectra (obsoleted) bolt-on panelboard mounting hardware'; 'Retrofit kit for Spectra panelboards').

S35 [SRC-00035] manualmachine.com (mirror of GE documents). *GE Industrial Solutions manuals on manualmachine.com (DEH061 AMCB3KM/AMCB2KM; DEH042 cover supports SE/SF/TE/TF/TQ/TEL; GEH5589 APN/APNB interiors; AMCB4GB/AMCB6GB; AMCB2GM/AMCB3GM; A-Series II TQD)*. Type: archive. URL: https://manualmachine.com/ge/amcb3km/12960805-user-manual/ (accessed 2026-10-21) Status: blocked. Note: HTTP 403 to both curl and WebFetch. Existence/titles known only from search results.

S36 [SRC-00036] Stanion Wholesale Electric. *TQ2DPK GE product page*. Type: distributor. URL: https://www.stanion.com/Product/tq2dpkge (accessed 2026-10-21) Status: 404. Note: Description known only from search-engine summary; direct fetch returned 404.

S37 [SRC-00037] Surplus Record. *Surplus Record listings: General Electric AV-Line switchboards (800/1200/1600 A)*. Type: surplus. URL: https://surplusrecord.com/listing/1600-amp-general-electric-av-line-switchboard-480-volts-3ph-4w-10-breaker-power-break-dist-main-1086962/ (accessed 2026-10-21) Note: Seen via search-engine summary only.

S38 [SRC-00038] Eaton. *Volume 12—Aftermarket, Renewal Parts and Life Extension Solutions*. CA08100014E. 2018-06. Type: oem_renewal_parts. URL: https://www.revereelectric.com/ASSETS/DOCUMENTS/ITEMS/EN/EATON_1MMMSB_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_CA08100014E_revereelectric_EATON_1MMMSB_Catalog.pdf Note: Full 734-page Volume 12 hosted by distributor Revere Electric (mirror of OEM PDF). Tabs carry mixed dates: Tab 4 Panelboards dated June 2018; Tab 3 MCCB, Tab 5 Loadcenters and Tab 15 Distribution Switchboards dated October 2016. Key pages: V12-T4-1..T4-23 (panelboards: replacement charts, CDP/FDP/PRL layouts, renewal-parts doc index), V12-T15-1..T15-6 (switchboards incl. WF/WRP, ES, Pow-R-Line C history), V12-T3-10..T3-12 (Westinghouse breaker dimensions, last-manufactured dates), V12-T3-80..87 (panelboard-only replacement breakers RE/REH/RHF...). Eaton-hosted tab copy: https://www.eaton.com/content/dam/eaton/support/poweredge/aftermarket/vol12-tab04.pdf (eaton.com fetch failed from container).

S39 [SRC-00039] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (PRL1-LX, PRL1/PRL2, PRL3, CDP/HCDP, FDP)*. RP01400002E. 2013-02. Type: oem_renewal_parts. URL: https://www.farnell.com/datasheets/2307937.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2013_farnell.pdf Note: 20 pages, Publication No. RP01400002E / Z13209, effective February 2013, supersedes April 2009. Distributor (Farnell) mirror of OEM PDF. Contains CDP connector kits (Table 19 p.14), CDP retrofit kits (Tables 16-18 pp.12-13), FDP connector/retrofit kits (Tables 20-21 pp.17-18), PRL1/2/3 replacement connectors, neutral/ground bars, trim locks and clamps. Pricing in PL01400002E (not found).

S40 [SRC-00040] Eaton. *Renewal Parts RP01400002E — Vintage Westinghouse panelboards (April 2009 edition)*. RP01400002E (2009). 2009-04. Type: oem_renewal_parts. URL: https://assets.usesi.com/product-media/brochures/USESI_501159_brochure.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400002E_2009_usesi.pdf Note: Earlier edition hosted by distributor US Electrical Services. Kit catalog numbers identical to 2013 edition except the hardware-only example: 2009 shows 'KCDPFD100H', 2013 shows 'KCDPFB100-H'.

S41 [SRC-00041] Eaton. *Renewal Parts RP01400001E — Current Eaton panelboards (PRL1a, PRL2a, PRL3a, PRL4B, PRL4F, PRL5P)*. RP01400001E (2017). 2017-10. Type: oem_renewal_parts. URL: https://www.elliottelectric.com/Media/5155C62H01-CHS-2-1-SpecificationSheet.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/RP01400001E_2017_elliott.pdf Note: 36 pages, effective October 2017, supersedes February 2009. Distributor (Elliott Electric) mirror. PRL4 breaker connector kits Table 37 p.24, fusible connector kits Table 38 p.25, retrofit kits Tables 39-40 p.26, PRL4 blank covers Table 36 p.24.

S42 [SRC-00042] Eaton. *Renewal Parts RP01400001E — Pow-R-Line Xpert and legacy panelboards*. RP01400001E. 2022-05. Type: oem_renewal_parts. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/rp01400001e_2022_cl.pdf Note: 40 pages, effective May 2022, supersedes April 2021. eaton.com URL timed out from container; identical file path retrieved from Eaton Chile mirror http://www.eatontransmisiones.cl/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/panelboards/pow-r-line-renewal-parts-rp01400001e.pdf . PRL4X/PRL4 breaker connector kits Tables 46-47 pp.32-33 (new KPRL4X.. numbers), fusible kits Table 48 p.34.

S43 [SRC-00043] Eaton. *Switchboards—Low Voltage (Consulting Application Guide Tab 21)*. CA08104001E Tab 21 (TB01500003E). 2018-04. Type: oem_catalog. URL: https://assets.usesi.com/product-media/catalogs/USESI_515260_catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/USESI_515260_catalog_CA08104001E_Tab21.pdf Note: Distributor-hosted copy of Eaton Consulting Application Guide Section 21 (April 2018). Pow-R-Line C description p.21.0-8/21.0-9, Pow-R-Line i p.21.0-11, PRLC distribution layout guide with device X-space Figure 21.1-9 p.21.1-12, main lug space Table 21.1-11 p.21.1-11, Integrated Facility System p.21.6-1.

S44 [SRC-00044] Eaton. *Eaton product specifications — KPRL4KDS*. KPRL4KDS spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDS-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDS-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114795996; 25.5 x 9.3 x 3.2 in; 9.25 lb; UL Listed.

S45 [SRC-00045] Eaton. *Eaton product specifications — KPRL4KDT*. KPRL4KDT spec sheet. Type: oem_web. URL: https://www.elliottelectric.com/Media/KPRL4KDT-CHD-1021-3-Attachment.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/KPRL4KDT-specsheet.pdf Note: Eaton-generated product specification sheet (distributor-hosted). UPC 782114796412; 9.85 lb; 'UL 67'; '44-inch box width required'. Listed dimensions 9 x 2 x 3.2 in look like packaging/data error.

S46 [SRC-00046] Eaton. *Volume 12 Tab 5 Loadcenters (BR Renovation and CH Loadcenters) excerpt*. CA08100014E Tab 5. 2016-10. Type: oem_renewal_parts. URL: https://media.suthlbr.com/images/downloads/vendor/18446/EATON_102581945_Catalog.pdf (accessed 2026-10-21) Local copy: docs/library/EAT/Vol12_Tab5_2016_suthlbr_EATON_102581945_Catalog.pdf Note: 30-page excerpt; BR history (Bryant, Bridgeport CT; Challenger 1988; Jackson MS; Lincoln IL) p.V12-T5-2; BR replacement parts pp.V12-T5-14..16.

S47 [SRC-00047] Eaton. *Eaton Pow-R-Line CS switchboards instruction manual*. IB015002EN. 2021-11. Type: oem_instruction. URL: https://www.manualslib.com/manual/2585212/Eaton-Pow-R-Line-Cs.html (accessed 2026-10-21) Note: Read via ManualsLib web view (pages 3, 8, 17). Eaton-hosted PDF https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/canada/eaton-pow-r-line-cs-switchboards-instruction-manual-ib015002en-ca.pdf could not be downloaded (timeout). Appendix A Table 2 busbar torque p.17.

S48 [SRC-00048] Eaton. *Pow-R-Line switchboards instruction manual*. IM01500001E. 2021-05. Type: oem_instruction. URL: https://www.eaton.com/content/dam/eaton/products/low-voltage-power-distribution-controls-systems/switchboards/pow-r-line-switchboard-manual-im01500001e.pdf (accessed 2026-10-21) Status: blocked. Note: Download from eaton.com and eaton.com.cn failed (timeout). Known only from search snippet (effective May 2021, supersedes Feb 2020).

S49 [SRC-00049] eBay seller (surplus). *eBay listing: EATON KPRL4KDS POW-R-LINE C einzelne Montage Panelboard Stecker Kit 400A 3P*. Type: surplus. URL: https://www.ebay.de/itm/187106607578 (accessed 2026-10-21) Note: Seen only as search-result title/snippet; page not opened. Listing title associates KPRL4KDS with 'Pow-R-Line C'.

S50 [SRC-00050] various distributors. *Distributor listings for Eaton PRL4 connector kits (Crescent Electric, Rexel, Platt, Elliott, Gexpro, Dixon)*. Type: distributor. URL: https://crescentelectric.com/product/57375/eaton-panelboard-connector-kit-copper-connectors-mounting-brackets-covers-hardware-and-instructions-for-ehd-fd-fdb-hfd-fdc-breakers-three-phase-three-pole-225a (accessed 2026-10-21) Note: Seen as search snippets: KPRL4FD described 'for EHD, FD, FDB, HFD, FDC breakers three-phase three-pole 225A'; Elliott marks KPRL4FD inactive; Dixon lists KPRL4LFD3 'CON KIT FD+LFD PRL4'; Gexpro lists KPRL4MC as single-mount kit for MDL/HMDL; Crescent lists KPRL4ND 'PRL4 connector kit for ND/HND breakers'.

S51 [SRC-00051] Surplus Record. *Surplus Record listing: Westinghouse Pow-R-Line C 4000 A 240 V 3PH3W 2-section switchboard*. Type: surplus. URL: https://surplusrecord.com/listing/westinghouse-pow-r-line-c-4000-amp-240v-3ph3w-2-section-switchboard-367548/ (accessed 2026-10-21) Note: Search snippet only: 'PROVISIONS FOR (2) KD, (4) LD, (2) ND, 3 POLE CIRCUIT BREAKERS' — shows Westinghouse-branded PRLC with Series C group-mounted provisions.

Appendix C Research Status and Open Questions

Evidence class	Part claims
A OEM Verified	3982
B Strongly Corroborated	183
C Tentative	45
D Unverified	18

Most frequent documentation gaps

Field	Parts lacking it
Material	590
OEM instruction document	449
Finish / plating	322
Torque values	297
Dimensions	294
Mounting-hole pattern	292
Status	275
bus clip/connector part numbers	40
Kit contents	39
hole pattern	30
strap dimensions	30
separate orderability	26
Aftermarket / reproduction	23
field-installation into factory-assembled (non Pro-Stock) panels	19
width	18
exact plate dimensions per box width	17
Fasteners	13
lug count	13
bus connection hole pattern	13
date of instruction	9
key_code	6
lug_count	5
which A-Series types (AQ/AE/AD) each fits	4
number of terminals	2
Identification features	1
OEM confirmation	1

Open research leads (priority 1–2)

Lead	Pri.	Topic / detail
LEAD-0001	1	**Legacy ITE / Gould-ITE lighting panelboard renewal parts (pre-Siemens S1/S2)** — No OEM ITE, ITE Imperial or Gould-ITE panelboard renewal-parts catalogue was found online. Type designations in the scope (ITE NQB/NLAB/NHB, EQ panelboards, 'CDP' early series) were NOT confirmed in any document reached. Need scanned ITE 'Distribution Products' catalogues (1960s-1980s) or Siemens-Allis price lists; try archive.org, worldradiohistory, eBay catalogue scans, and Siemens legacy support (1-800-333-7421).
LEAD-0002	1	**SpeedFax Section 12 (Switchboards) page 12-32 branch device mounting kits** — SpeedFax Sec.11 p.11-15 says: 'For Series 5, Series 6, CDP6 and VB6 panels as well as FC20, FCI, FCII, SB1, SB2 and SB3 distribution switchboards, see page 12-32 for branch device mounting kits.' US Section 12 PDF not retrieved; try media.distributordatasolutions.com siemenscomplete documents or usa.siemens.com/speedfax. Docs: SPEEDFAX Section 12 p.12-32
LEAD-0010	1	**Current ABB BuyLog Section 11 (2021/2022) - ReliaGear neXT kit numbers and Spectra retrofit kits** — Contains ReliaGear neXT catalog nomenclature, single breaker-installation-kit catalog number, 'Retrofit kit for Spectra panelboards' and 'Spectra (obsoleted) bolt-on mounting hardware'. Host electrification.us.abb.com returns 503/empty reply from this container; try another network or distributor mirror. Docs: BuyLog Section 11 (ABB)
LEAD-0011	1	**Spectra bolt-on strap instruction leaflets DEH-047, DEH-059, DEH-060, DEH-061, DEH-062 and DEH042 cover supports** — Would give strap part numbers, kit contents and torques for AMCB EB/SE, SF, SG, SK/KM and EY kits, plus cover-support catalog numbers by panel width. Copies exist on manualmachine.com (HTTP 403 here) - e.g. DEH061 AMCB3KM/AMCB2KM, DEH042 SE/SF/TE/TF/TQ/TEL cover supports, AMCB4GB/AMCB6GB, AMCB2GM/AMCB3GM. Docs: DEH-047, DEH-059, DEH-060, DEH-061, DEH-062, DEH042

Lead	Pri.	Topic / detail
LEAD-0019	1	**Pow-R-Line C switchboard branch provision / connector kit catalog numbers** — Vol 12 p. V12-T15-5 says provisions/connectors are available for all PRLC ratings, but no catalog numbers are public. Obtain the PRLC distribution chassis renewal-parts/price list (Sumter) or a PRLC field-installation IL for adding group-mounted FD/JD/KD/LD/MDL/ND devices; confirm whether KPRL4/KPRL4X kits are the same parts. Docs: IM01500001E, CA08100003E Tab 4
LEAD-0020	1	**WF/WRP switchboard distribution-section connector and retrofit kits** — RP01400002E p.20 lists 'Retrofit kits for WF and WRP distribution sections' and 'Connector kits for WF and WRP distribution sections' from Sumter but gives no numbers. Check whether KCDP/KFDP kits are used, since WF/WRP feeders were CDP-type breakers and FDP switches. Docs: RP01400002E, PL01400002E
LEAD-0003	2	**Installation instructions for P1/P2/P3/P4/P5 strap kits** — SpeedFax references Installation Instructions for S3VA41T(D) accommodating xGB/xGB2, and drawing refs (11-D-2267-01 BBKB32, 11-D-2894-01 BBKVA5262P2S, 11-A-2010-01 P1SCRWS, etc.). Siemens SIOS (support.industry.siemens.com) likely hosts these as PDFs; search by kit number. Needed for torque, fastener and dimension data (currently unknown for nearly all parts). Docs: 11-D-2267-01, 11-D-2894-01, 11-D-2895-61, 13-D-2011-13, 11-D-2572-02, 11-D-2573-01, 11-D-2573-02
LEAD-0004	2	**Original P1 / S1 / S2 branch connector replacement parts** — 2021 SpeedFax lists only Revised P1 branch connectors (P1CONACPHCU, P1CONBPHAL, P1CONBPHCU). Whether these fit original P1 or S1/S2 interiors is not stated (table column marks Revised P1 only). Older SpeedFax editions (2010-2014) should be checked for original P1 connector kits.
LEAD-0005	2	**Revised P1 main breaker kits with breaker (MBK...A with amp rating)** — SpeedFax p.11-14 lists ~47 factory kits with breaker included (MBKED3100A, MBKQR1125A..MBKQR3225HA, MBKVAM3150A..MBKVAH3400A, MBKFD3150A..MBKFD3250A, MBKJD1300A..MBKJD32400A). These are referenced in 'replacement' notes on strap-kit records but not catalogued individually in this batch. Canadian equivalents (MBKQR12225A, MBKFD33250A, MBKJD33400A, MBKHF33250A, MBKED33100A) in SI-LP-1633. Docs: SPEEDFAX p.11-14, SI-LP-1633
LEAD-0012	2	**Spectra plug-in module instructions GEH-5623/5624/5625/5626/5643/5673/5675/5677 and hardware kits GEH-5913** — Module-level torques and bus-clip part numbers; GEH-5913 should confirm AHK/AHKB kit contents and the module-to-AHK mapping (PDF text column alignment on BuyLog p.11-44 is ambiguous). Docs: GEH-5623, GEH-5624, GEH-5625, GEH-5626, GEH-5643, GEH-5673, GEH-5675, GEH-5677, GEH-5913
LEAD-0013	2	**GEH5589 APN/APNB interiors installation** — Install of Spectra interiors into APB boxes; listed on manualmachine (blocked). Docs: GEH5589
LEAD-0014	2	**Main lug kit instructions GEH-5588 / GEH-5630 and AMB-numbered main lug kits (p.11-28)** — BuyLog p.11-28 lists a second main-lug numbering (AMB3600MAF, AMB3120MAF, AMB3120DMAF, AMB3250CAF, AMB3600CAF, AMB3800CAF, AMB3120CAF, AMB3120NF, cover plates AFPML4X/6X/6XW) apparently for factory-installed/merchandise panels; relationship to AML modules (p.11-45) unresolved. Not yet catalogued as parts. Docs: GEH-5588, GEH-5630
LEAD-0015	2	**Spectra ANK neutral kit full table (p.11-27) and ADS switch load bases 331A1519Gxx / 331A1545Gx / 331A1543G1** — About 70 ANK/ANKT neutral kit numbers by box width/main config and ~30 ADS load base renewal numbers are in the BuyLog but were not individually catalogued in this batch. Docs: BuyLog p.11-27, BuyLog p.11-44
LEAD-0021	2	**Price list PL01400002E (CDP/HCDP, FDP, PRL1-LX, PRL1, PRL2, PRL3) and PL01400001E** — Price lists would confirm full catalog-number sets (e.g. all KCDP retrofit permutations, KCDPnX fillers) and current availability. Docs: PL01400002E, PL01400001E
LEAD-0022	2	**RP01400003E renewal parts for Cutler-Hammer MP40, MP-200, PB, PH, PH-L, EP, EE panelboards** — Referenced in Vol 12 Tab 4 for branch-device retrofit kits for Cutler-Hammer legacy panelboards (also plug-in power panels/switchboards EE/EP). Not retrieved. Docs: RP01400003E, PL01400003E
LEAD-0023	2	**RP01414001E Panelboard Renewal Parts Supplement** — Referenced with RP01400001E in Vol 12 Tab 4 pp. V12-T4-15..19. Not found. Docs: RP01414001E
LEAD-0024	2	**PRL4 kit renumbering 2017 -> 2022 (KPRL4FD/ED/LD/MC/ND -> KPRL4X32/X22/LC/X34/X35)** — Comparison of RP01400001E Oct 2017 Table 37 and May 2022 Tables 46-47 suggests renumbering with Pow-R-Line Xpert (PD2-PD5 frames). Need explicit OEM supersession statement (April 2021 / Dec 2020 editions, Eaton product pages). Docs: RP01400001E

The complete backlog is maintained in research/BACKLOG.md.